


G3 to north to be cut back and managed as a hedge and supplemented with additional native species if required.

Do not scale from drawings unless by agreement with HTA. Use figured dimensions only. Check all dimensions on site prior to commencing the works. Drawing to be read in conjunction with other relevant consultant information.

This drawing is the copyright of HTA Design LLP and must not be copied or reproduced in part, or in whole, without the express permission of HTA Design LLP. Drawing to be read in conjunction with specification.



Soiling Conditions

HEDGE/SHRUB PLANTING: 300mm depth approved imported topsoil to BS 3882 over 300mm depth free draining approved imported subsoil to BS 8601.

TREE PITS IN PLANTING OR AMENITY GRASS: 400mm depth approved imported topsoil BS 3882 over 400mm depth free draining approved imported subsoil to BS 8601.

TREE PITS IN FLOWERING MEADOWS: 150mm depth low fertility topsoil, over 250mm depth approved imported topsoil BS 3882 over 400mm depth free draining approved imported subsoil to BS 8601.

AMENITY GRASS (NEW): 150mm depth approved imported topsoil to BS 3882 over 150mm depth free draining approved imported subsoil to BS 8601.

FLOWERING MEADOWS: remove existing grass, topdress with 100-150mm depth approved imported low fertility topsoil to BS 3882 (or site won topsoil if suitable) over existing topsoil/subsoil. Where no topsoil/ subsoil exists import 150mm subsoil prior to topdressing.

RAINGARDENS: 400mm depth approved imported topsoil to BS 3882 over 400mm depth free draining approved imported subsoil to BS 8601.

No Dig Buildup Pedestrian - Cellweb TRP 75mm depth as supplied by Geosynthetics or approved equal filled with clean angular stone Type 4/20. Refer to Arboricultural Method Statement.

No Dig Buildup Vehicular - Cellweb TRP 200mm depth as supplied by Geosynthetics or approved equal filled with clean angular stone Type 4/20. Refer to Arboricultural Method Statement.

Within the Root Protection Areas (RPA's) of existing trees, the existing soil profile should be maintained where possible with no disturbance of the existing soils. Therefore in this situation there are no imported soils.


P17 - soil cells. Refer to Outline Specification.

Root Barrier 600mm depth (directs roots to soil cells) Extends to be coordinated with Engineer


Root Barrier 1500mm depth (contains roots within tree pit) Extends to be coordinated with Engineer

NOTE: Areas within Root Protection Areas (RPA's) of existing trees, and areas with No Dig Buildup, are to be supervised by Arboriculturalist during construction. Refer to softworks GAs and schedule for planting information.


Existing Trees

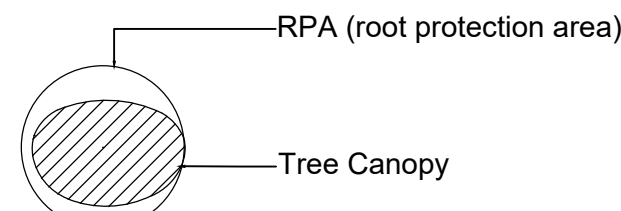

Refer to Arboricultural Impact Assessment for further details on existing trees, and Arboricultural Method Statement for details of proposed works within tree RPAs.

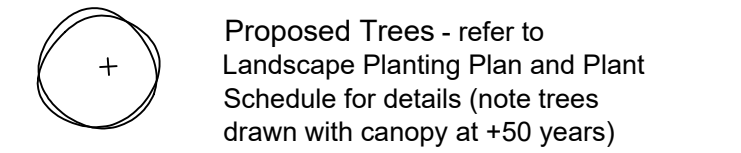

Proposed Trees - refer to Landscape Planting Plan and Plant Schedule for details (note trees drawn with canopy at +50 years)



01.11.23 RBL Issued for Planning

Rev Date Drawn Description

Status

FOR PLANNING

Client / project

**Reading Borough Council
Amethyst Lane**

Drawing title

Soil Plan

Drawing number

RBC-ALR HTA-L_DR_0901

scale @ A1

1:200

HTA Design LLP
www.hta.co.uk

London | Edinburgh | Manchester | Bristol

revision

-

project code

RBC-ALR

