

listed.

Part 2 of 2

frost.

Schedule of Works
1-15 Queen Victoria Street & 147-148 Friar Street

5.2 Schedule of Works - Second Floor

147.2.A	Floor	Retain existing floorboards.
		Form riser.
		Demolish existing stair tower. External wall rebuilt in construction to match existing. New window openings formed.
		Construct new partitions to form new rooms. New skirting and architrave to match existing.
	Walls	Existing walls retained. Plaster repaired where required.
		Exsiting lath and plaster ceiling repaired.
		Existing skirtings previously removed. New skirting in style to match samples elsewhere.
		Existing stair and lift removed from stair tower.
	Ceiling	Existing surface mounted services stripped out.
		New services to new fitted kitchenette and en-suite.
147.2.B	Floor	Retain existing floorboards.
		Construct new steps up to level of no.148.
		Demolish existing stair tower. External wall rebuilt in construction to match existing. New window openings formed.
		Construct new partitions to form new rooms. New skirting and architrave to match existing.
	Walls	Existing walls retained. Plaster repaired where required.
		Exsiting lath and plaster ceiling repaired.
		Existing skirtings previously removed. New skirting in style to match samples elsewhere.
		Existing stair and lift removed from stair tower.
	Ceiling	Existing surface mounted services stripped out.
		New services to new fitted en-suite.
147.2.C	Floor	Retain existing floorboards.
		Form riser.
		Construct new partitions to form new rooms. New skirting and architrave to match existing.
		Existing walls retained. Plaster repaired where required.
	Walls	Exsiting lath and plaster ceiling repaired.
		Existing skirtings previously removed. New skirting in style to match samples elsewhere.
		Existing stair and lift removed from stair tower.
		Existing surface mounted services stripped out.
	Ceiling	Existing surface mounted services stripped out.
		New services to new fitted en-suite and kitchenette.

147.2.D	Floor	Retain existing floorboards.
		Form riser.
		Construct new partitions to form new rooms. New skirting and architrave to match existing.
		Existing walls retained. Plaster repaired where required.
	Walls	Exsiting lath and plaster ceiling repaired.
		Existing skirtings previously removed. New skirting in style to match samples elsewhere.
		Existing surface mounted services stripped out.
		New services to new fitted en-suite and kitchenette.
	Ceiling	Remove existing floor coverings. Retain existing floorboards.
		Demolish all existing parititons.
148.2.A	Floor	Remove existing floor coverings. Retain existing floorboards.
		Demolish all existing parititons.
		Construct new wall to form apartment.
		Construct new partitions to form bedroom, en-suite and riser.
	Walls	Existing suspended grid ceiling removed.
		No evidence of existing cornices above ceiling, however if in place existing cornice retained and repaired where damaged. Further investigations will confirm.
		Existing plastic trunking removed. New skirting required throughout.
		Existing surface mounted services stripped out.
	Ceiling	New services to fitted en-suite and kitchenette.
		Remove existing floor coverings. Retain existing floorboards.
1.2.A	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
		Demolish all existing parititons.
		Construct new walls to form apartment.
	Walls	Construct new partitions to form bedroom, en-suite and riser.
		Form new opening in party wall with no.147 to form new corridor.
		Existing suspended grid ceiling removed.
		No evidence of existing cornices above ceiling, however if in place existing cornice retained and repaired where damaged. Further investigations will confirm.
	Ceiling	Existing plastic trunking removed. New skirting required throughout.
		Existing rooflight removed and blocked up.

3.2.A	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Demolish all existing parititons.
		Construct new walls to form apartment.
		Construct new partitions to form bedroom, en-suite and riser.
		Block up existing window in rear wall. Infill to be recessed to retain shape and position of window opening.
	Ceiling	Existing suspended grid ceiling removed.
3.2.B		No evidence of existing cornices above ceiling, however if in place existing cornice retained and repaired where damaged. Further investigations will confirm.
	Features	Existing plastic trunking removed. New skirting required throughout.
	Services	Existing surface mounted services stripped out.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		New floor infill where stair removed. Construction to match floor adjacent.
	Walls	Demolish all existing parititons.
		Construct new walls to form apartment.
5.2.A		Construct new partitions to form bedroom, en-suite and riser.
		Block up existing window in rear wall. Infill to be recessed to retain shape and position of window opening.
	Ceiling	Existing suspended grid ceiling removed.
		No evidence of existing cornices above ceiling, however if in place existing cornice retained and repaired where damaged. Further investigations will confirm.
	Features	Existing plastic trunking removed. New skirting required throughout.
		Existing staircase removed.
	Services	Existing surface mounted services stripped out.
5.2.B		New services to new fitted en-suite and kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Existing walls retained. Plaster repaired where required.
	Ceiling	Existing lath and plaster ceiling repaired.
	Features	Architrave and skirtings retained and repaired where applicable.
		Existing office style door replaced.
	Services	Existing surface mounted services stripped out.

5.2.B	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Existing walls retained. Plaster repaired where required.
		Existing door opening to be blocked up to existing internal stair wall.
		Existing window to be altered to form a door opening. Existing window frame and architrave removed. New door frame with obscured fan light above. New architrave to match.
		Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
	Ceiling	Existing lath and plaster ceiling repaired.
7.2.A	Features	Architrave and skirtings retained and repaired where applicable.
		Existing staircase retained and repaired. Plastic stair nosings removed and broken step/stringer repaired.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Remove existing door in party wall and block up opening. Remove architrave.
	Ceiling	Existing suspended grid ceiling removed.
7.2.B		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
		New floor infill where stair removed. Construction to match adjacent.
7.2.B	Walls	Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
		Construct new wall to form corridor.
		Construct new partitions to form ensuite and riser.
		Form new opening in the existing party wall to form corridor. Form new opening in the existing rear wall to form new doorway to apartments adjacent.
		Remove door and block up opening in existing party wall.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
7.2.B	Features	Architrave and skirtings retained and repaired where applicable.
		Existing staircase removed and floor repaired.
	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite.

9.2.A	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Remove existing door in party wall and block up opening. Remove architrave.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave and skirtings retained and repaired where applicable.
9.2.B		Existing office style door replaced.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
9.2.B		New floor infill where stair removed. Construction to match adjacent.
	Walls	Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
		Remove walls that form stair and wc's.
		Construct new wall to form corridor.
		Construct new partitions to form ensuite and riser.
9.2.B		Form new opening in the existing party wall to form corridor.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave and skirtings retained and repaired where applicable.
		Existing staircase removed and floor/ceiling repaired.
9.2.B	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite.
		Existing WC's and sanitaryware removed.
	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Remove existing door and enlarge opening in existing internal wall.
9.2.B		Construct new partitions to form en-suite.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
9.2.B		New services to new fitted kitchenette and en-suite.

11.2.B	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Existing window in rear wall to be altered to form a door opening. Existing window frame and architrave removed. New door frame with obscured fan light above. New architrave to match.
		Existing window to be blocked up in rear wall. Window to be removed. Infill to be recessed to retain shape and location of window.
		Block up existing openings in party walls.
11.2.B		Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave, dado and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
13.2.A		New services to new fitted kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Remove existing door in party wall and block up opening. Remove architrave.
		Form opening in existing internal wall.
	Ceiling	Existing suspended grid ceiling removed.
13.2.A		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
13.2.B		Form new service riser.
		New floor infill where stair removed. Construction to match adjacent.
	Walls	Existing window to be altered to form corridor. Existing window frame and architrave removed.
		Remove walls that form stair and wc's.
		Construct new wall to form corridor.
13.2.B		Construct new partitions to form ensuite and riser.
		Form new opening in rear wall to provide access to new stair and corridor.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave, dado and skirtings retained and repaired where applicable.
13.2.B		Existing staircase removed and floor/ceiling repaired.
	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite.

15.2.A	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Remove existing door in party wall and block up opening. Remove architrave.
		Construct partitions to form riser and en-suites.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave and skirtings retained and repaired where applicable.
		Plastic trunking removed.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette and en-suite.
15.2.B	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Construct partitions to form riser and en-suites.
	Ceiling	Existing suspended grid ceiling removed.
		Assumed existing cornice retained and repaired where damaged. Further investigations to confirm.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette and en-suite.

5.3 Photographic Record - Second Floor



Photo 87



Photo 88

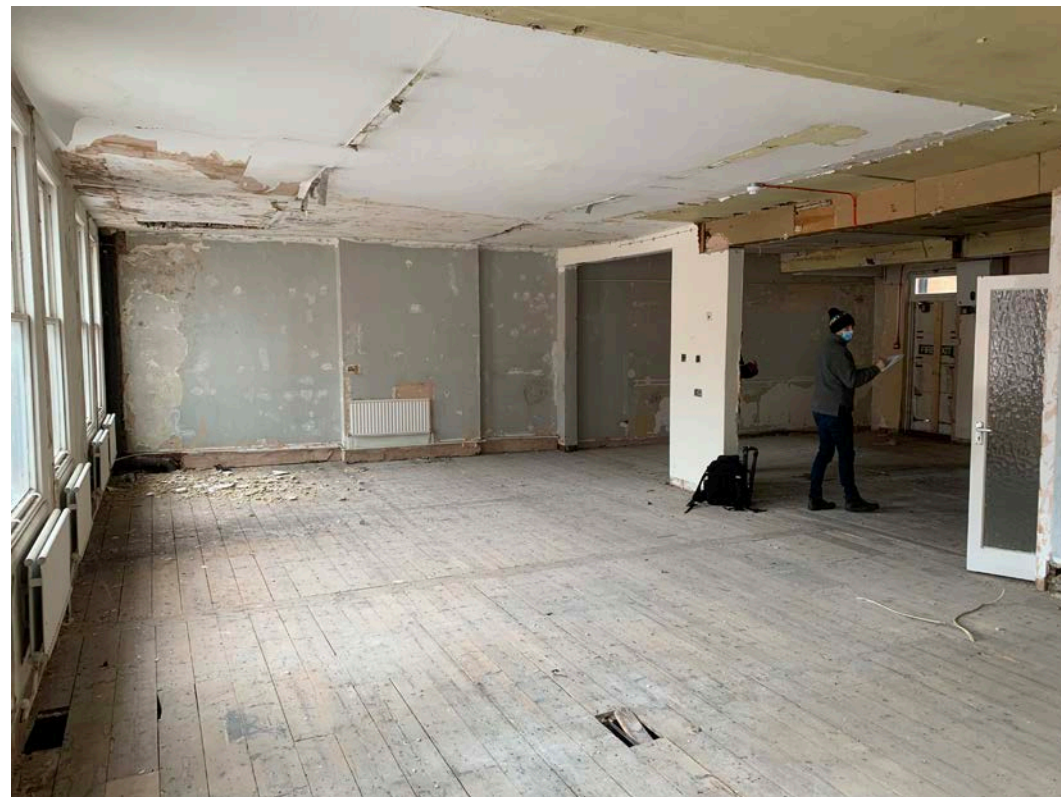


Photo 89



Photo 90

frost.

Schedule of Works



Photo 91



Photo 92



Photo 93

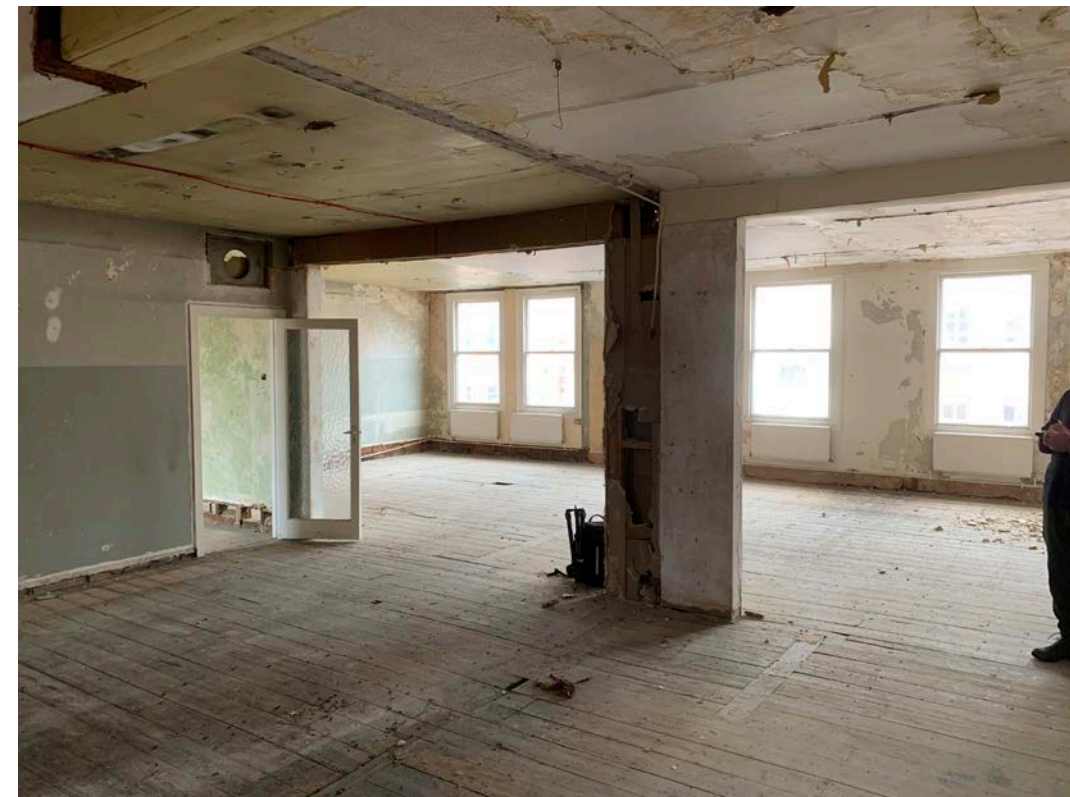


Photo 94

frost.

Schedule of Works

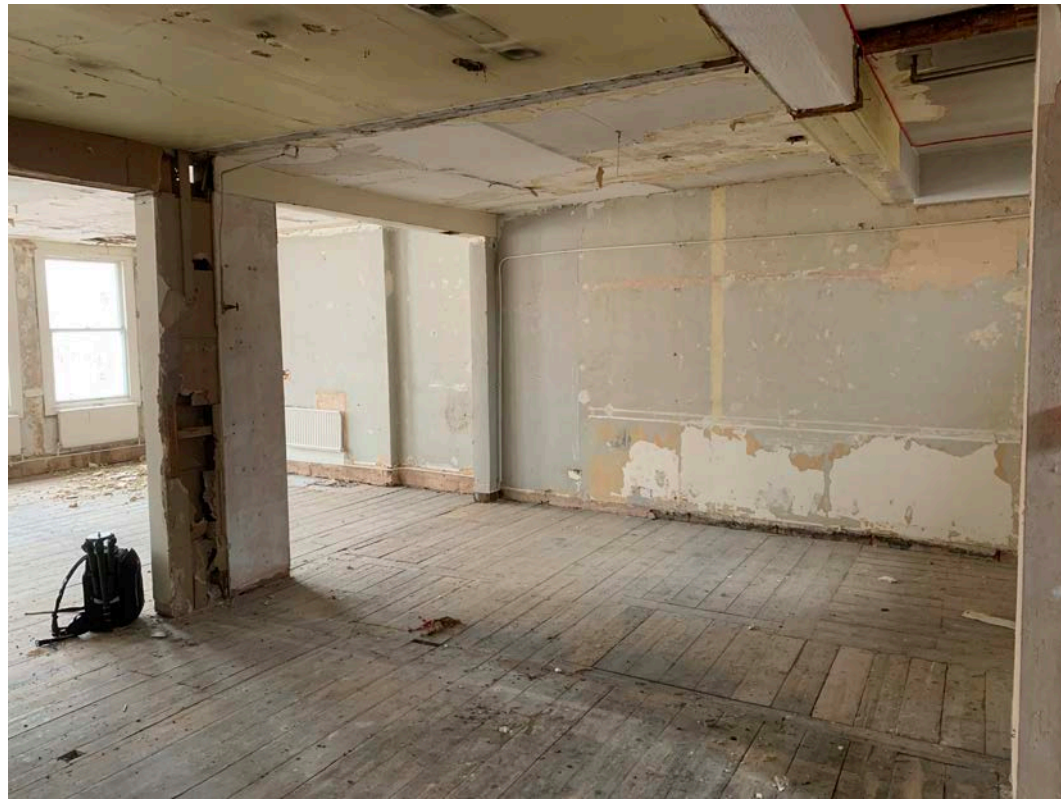


Photo 95



Photo 96



Photo 97

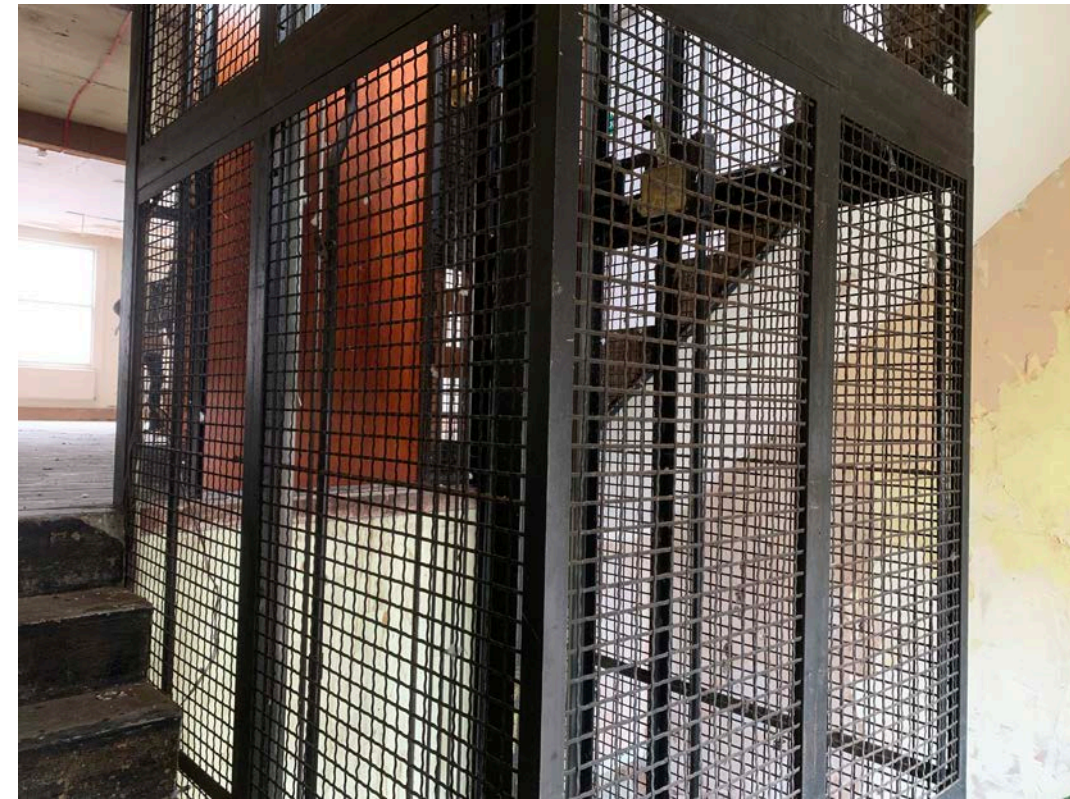


Photo 98

frost.

Schedule of Works



Photo 99



Photo 100

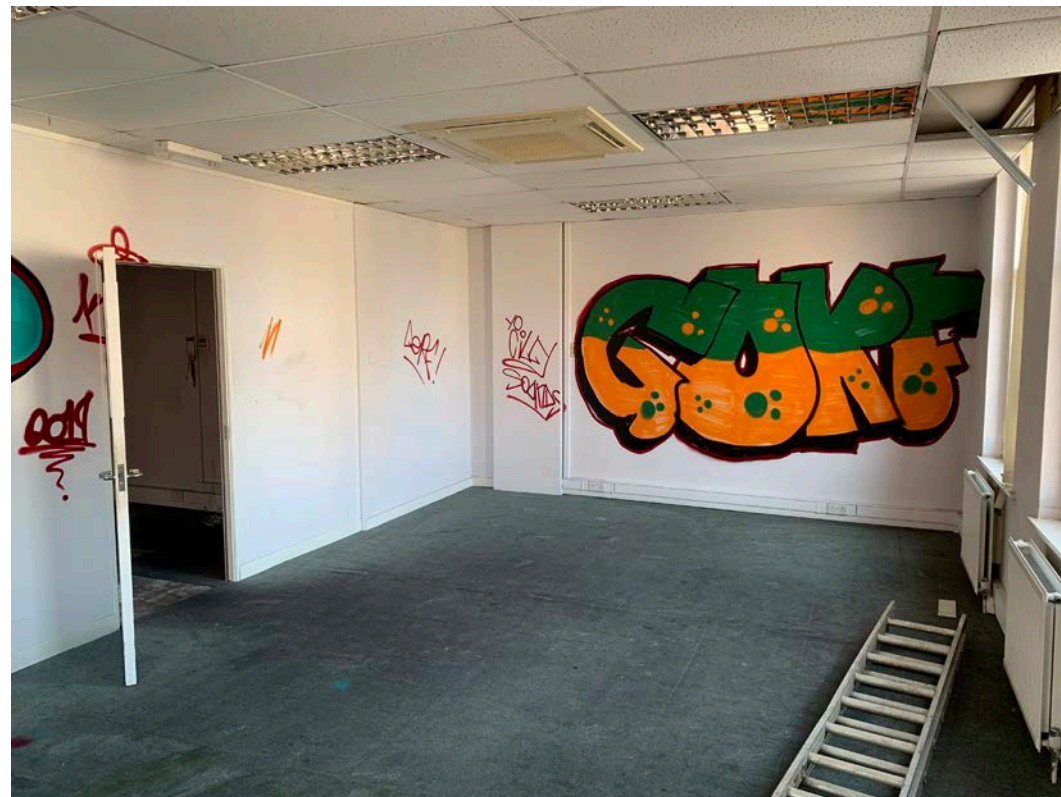


Photo 101

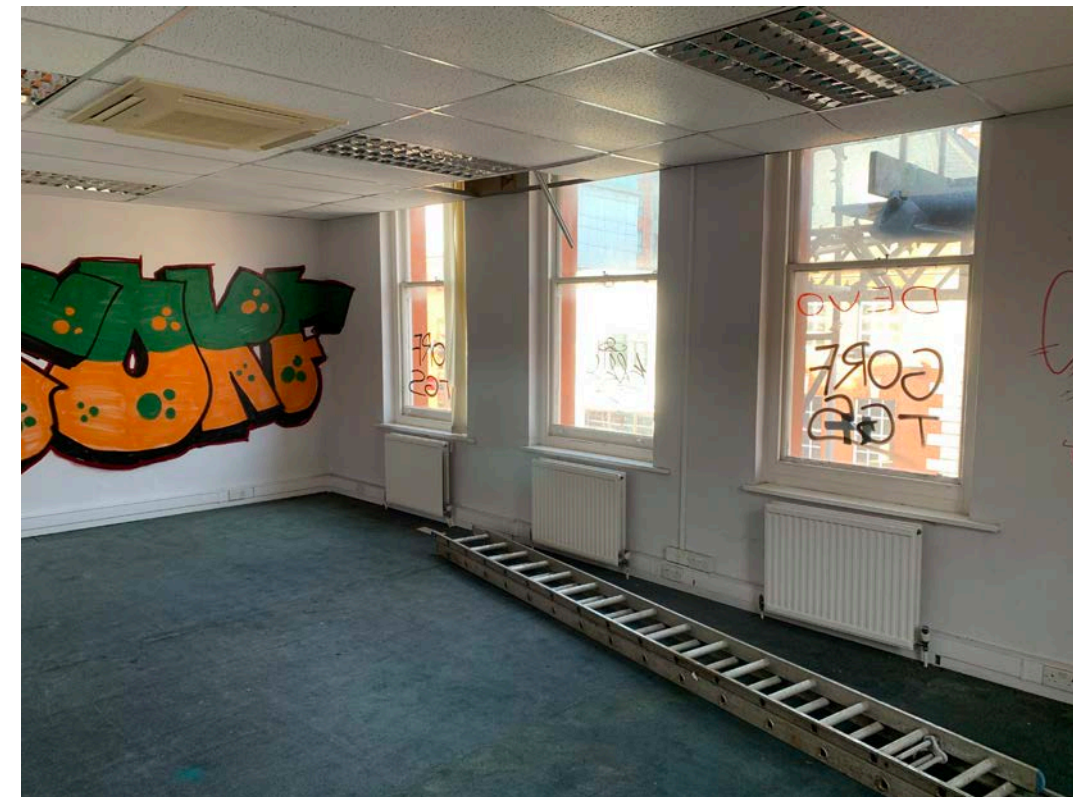


Photo 102

frost.



Photo 103

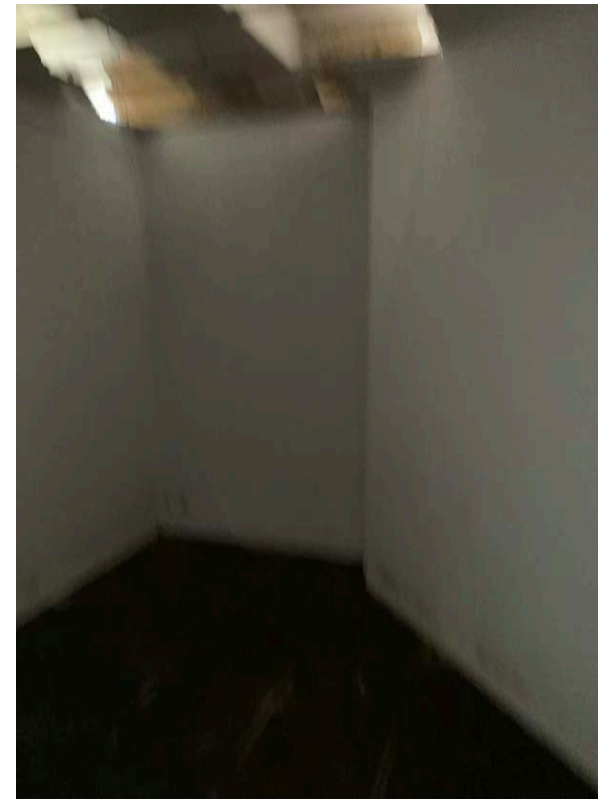


Photo 104



Photo 105



Photo 106

frost.

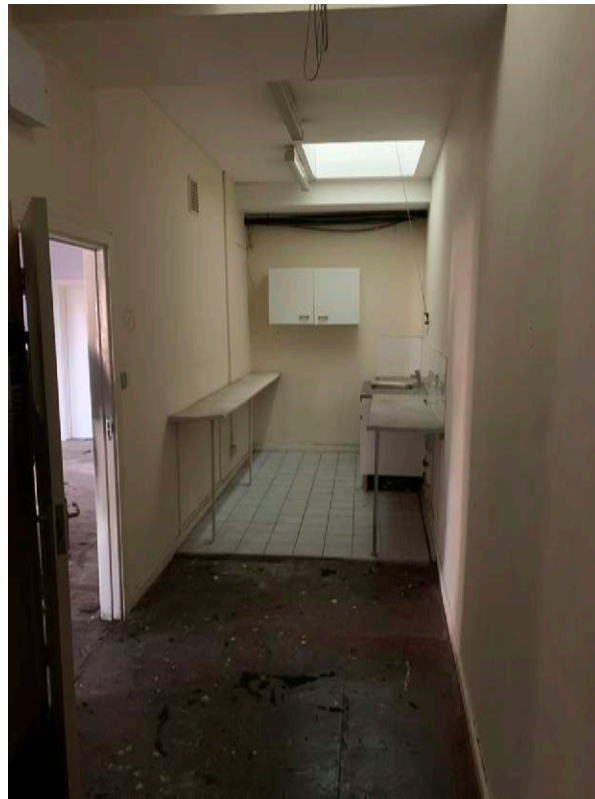


Photo 107

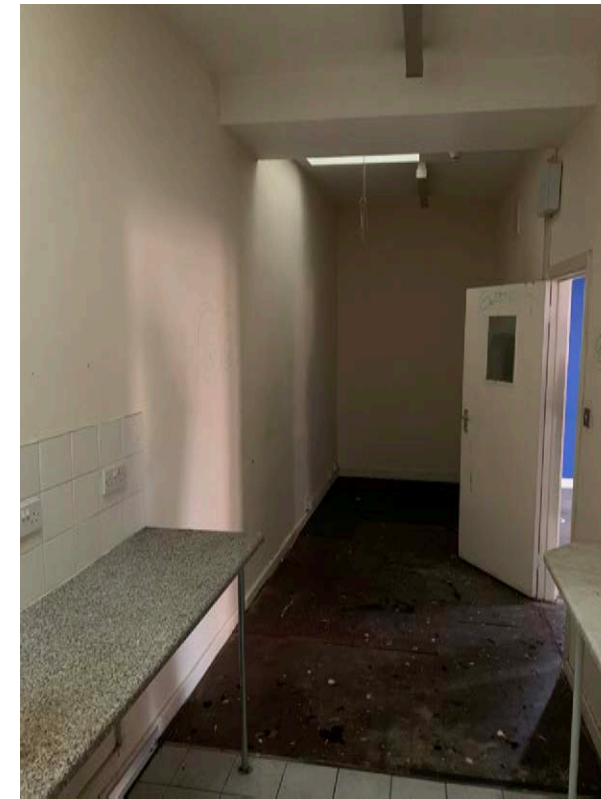


Photo 108



Photo 109



Photo 110



Photo 111



Photo 112



Photo 113

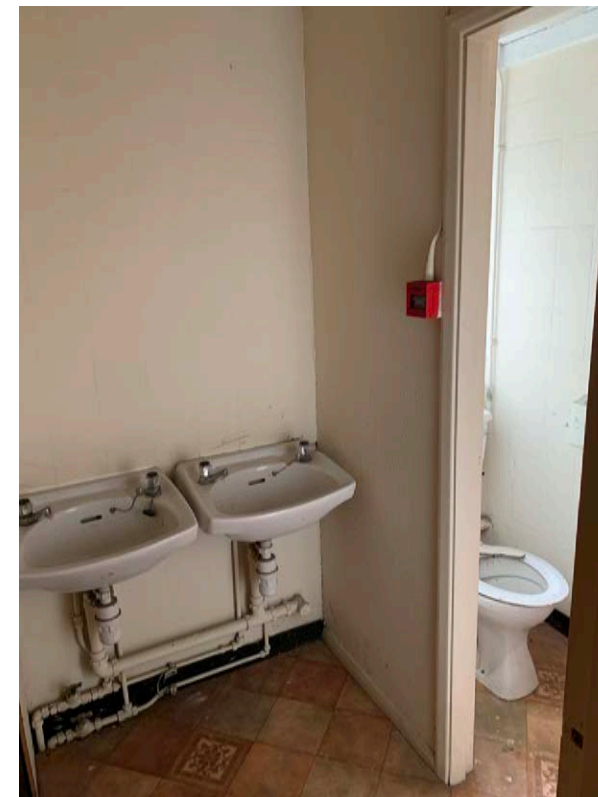


Photo 114



Photo 115



Photo 116



Photo 117



Photo 118



Photo 119

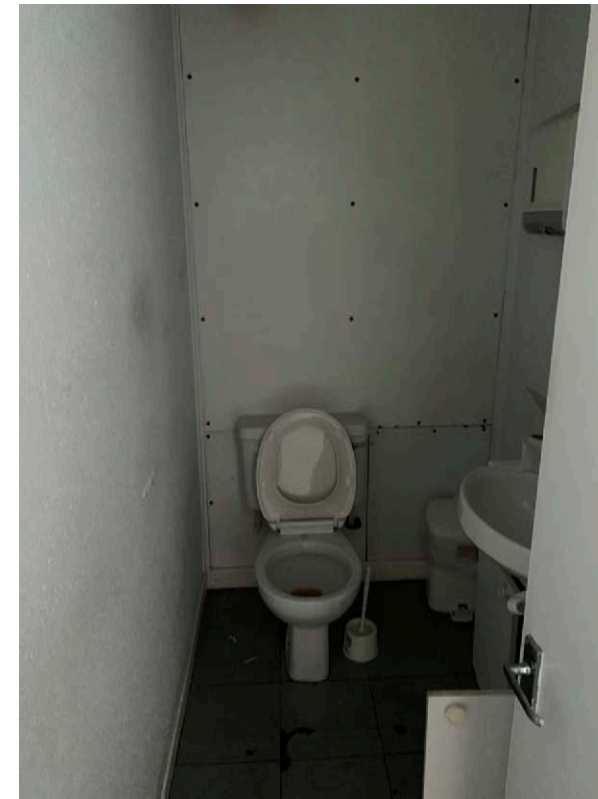


Photo 120



Photo 121



Photo 122



Photo 123



Photo 124



Photo 125



Photo 126

frost.

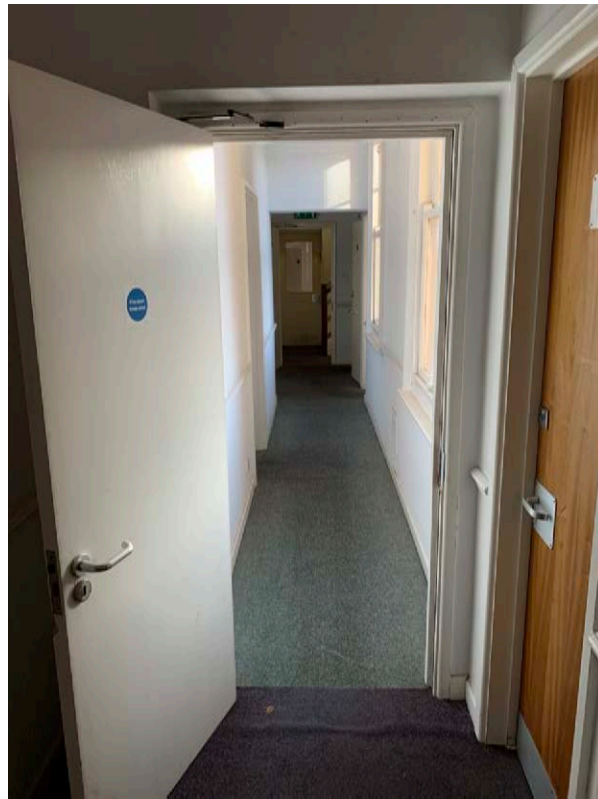


Photo 127



Photo 128



Photo 129

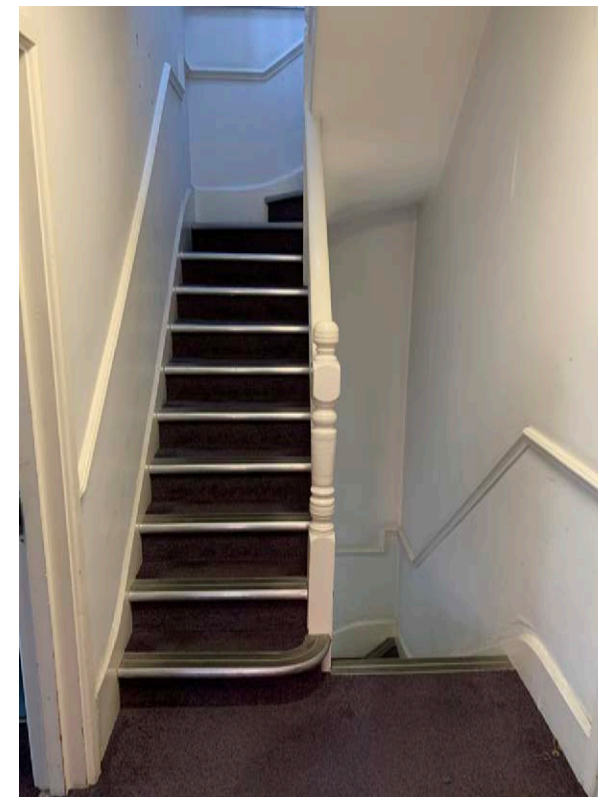


Photo 130

frost.



Photo 131



Photo 132



Photo 133



Photo 134



Photo 135

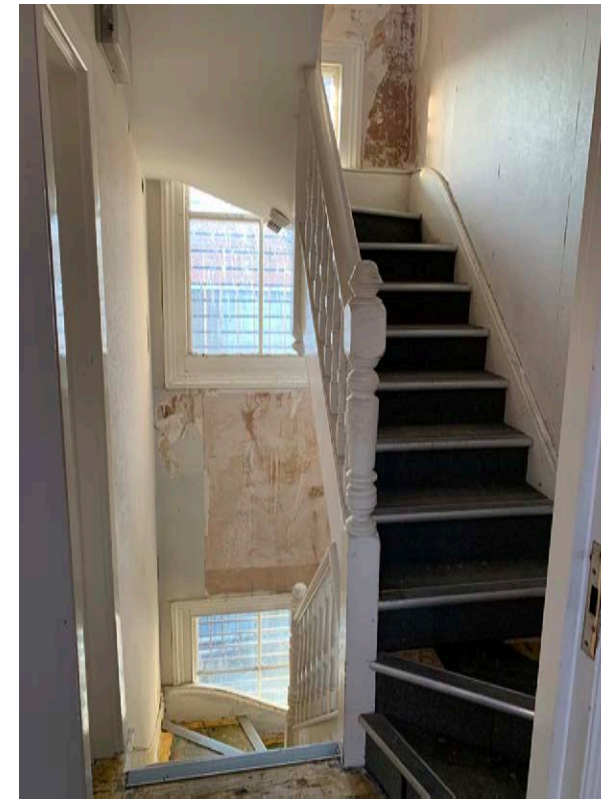


Photo 136



Photo 137



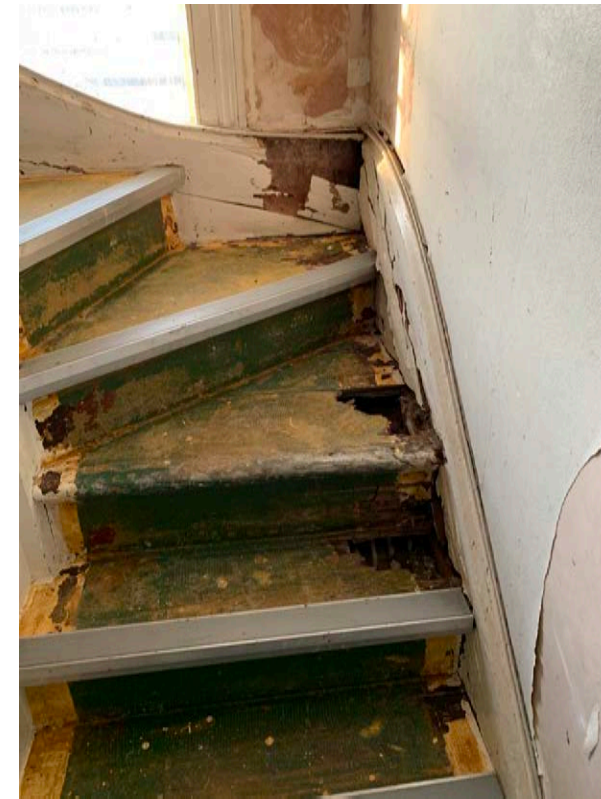



Photo 138

frost.

6.1 Plans - Third Floor

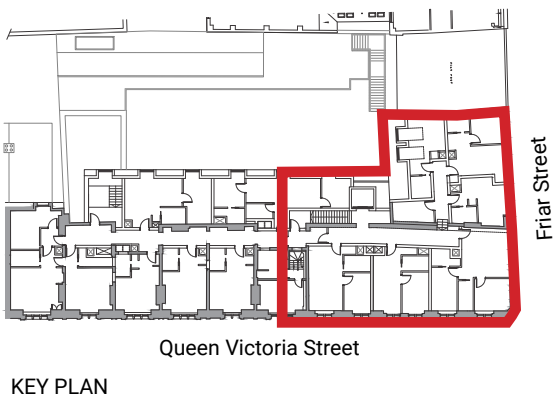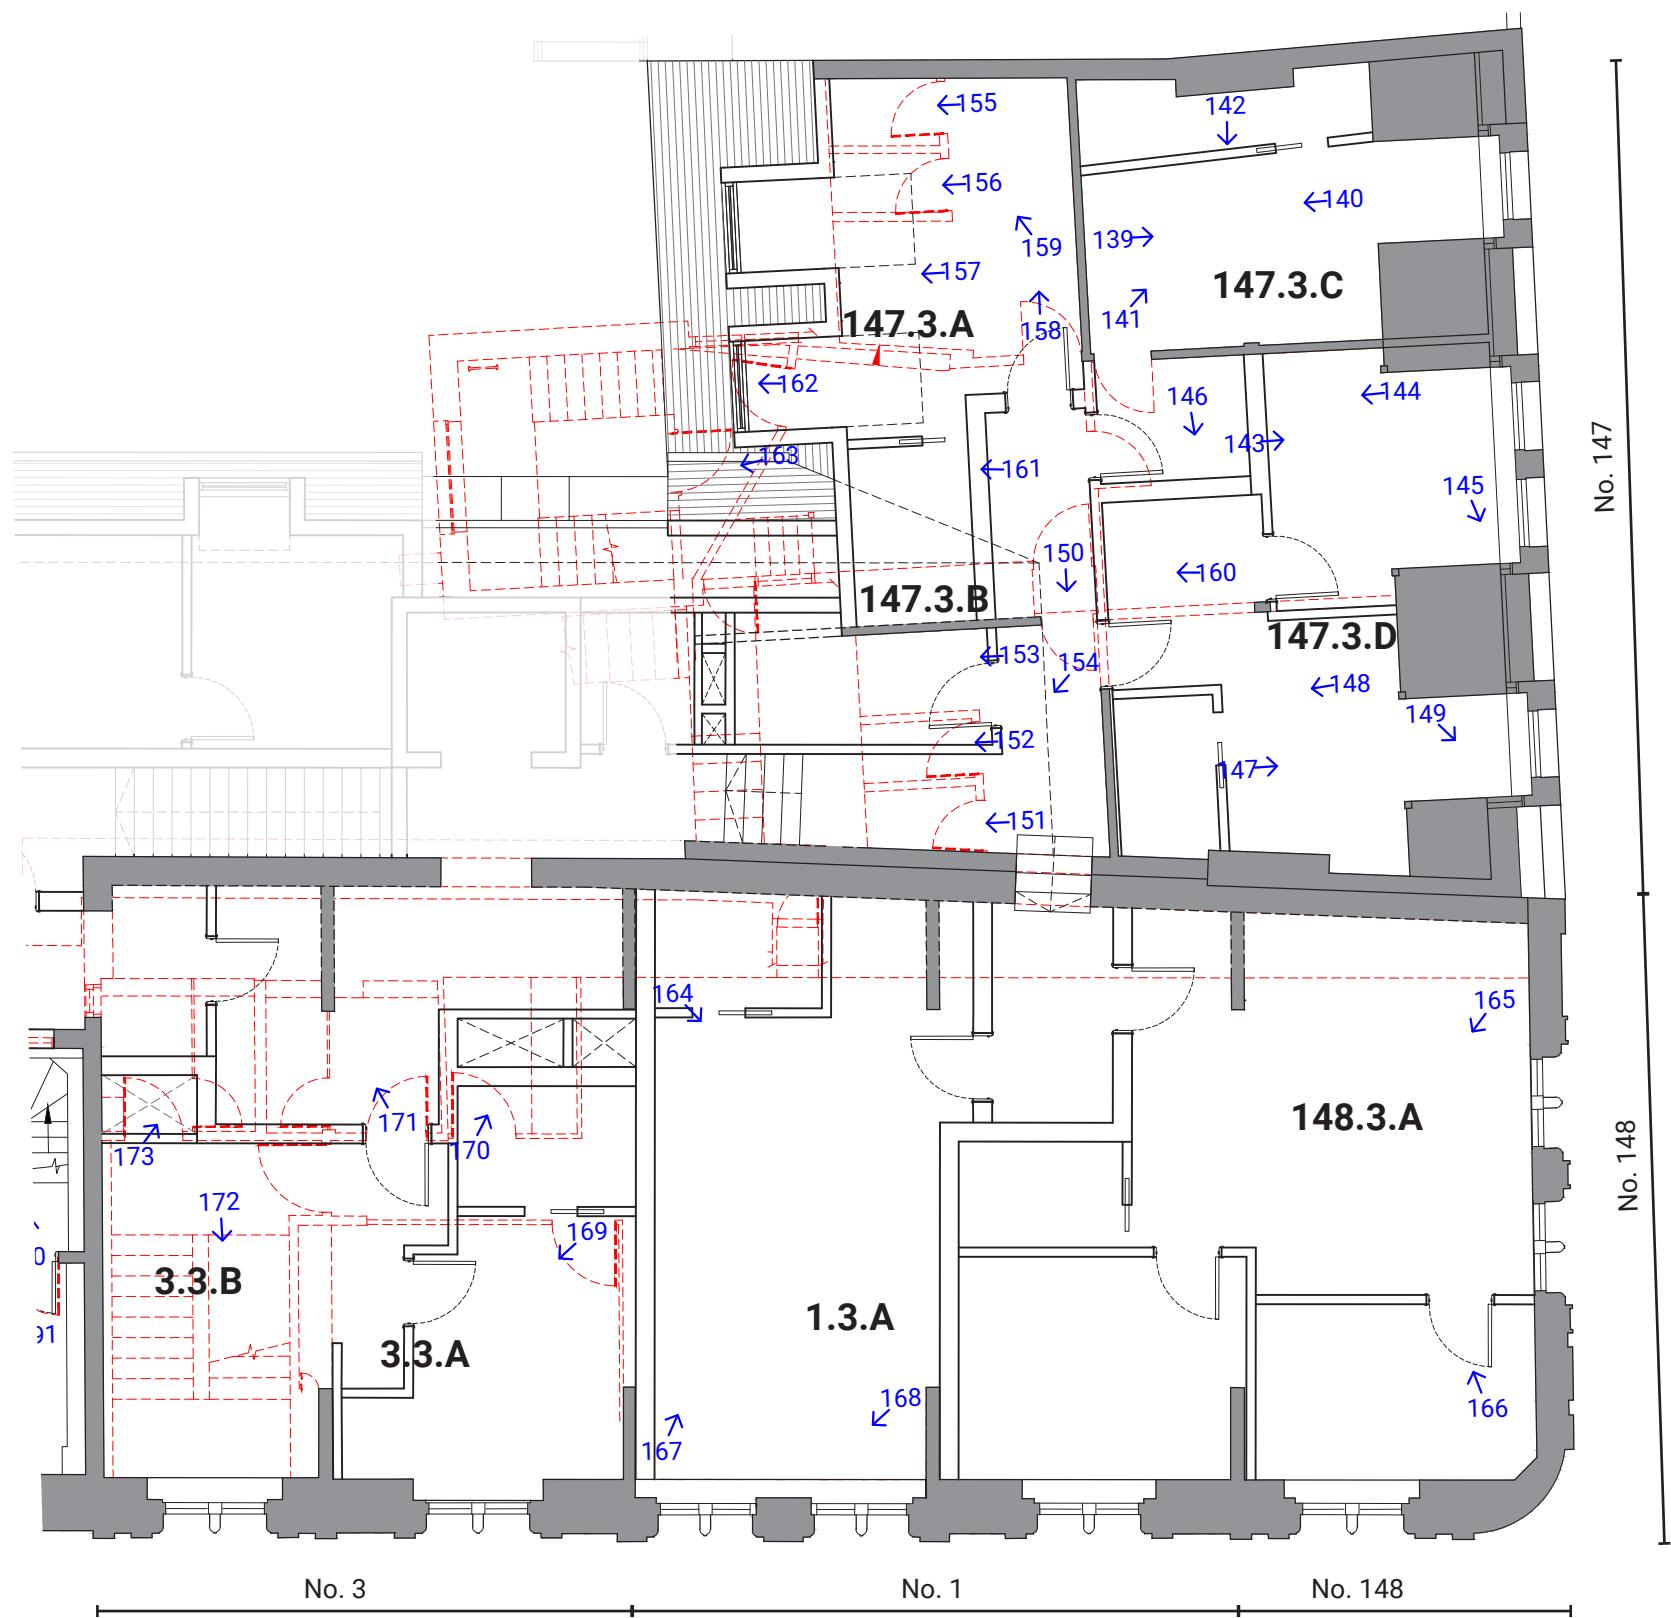

Third Floor Plan
Scale 1:100 @ A3

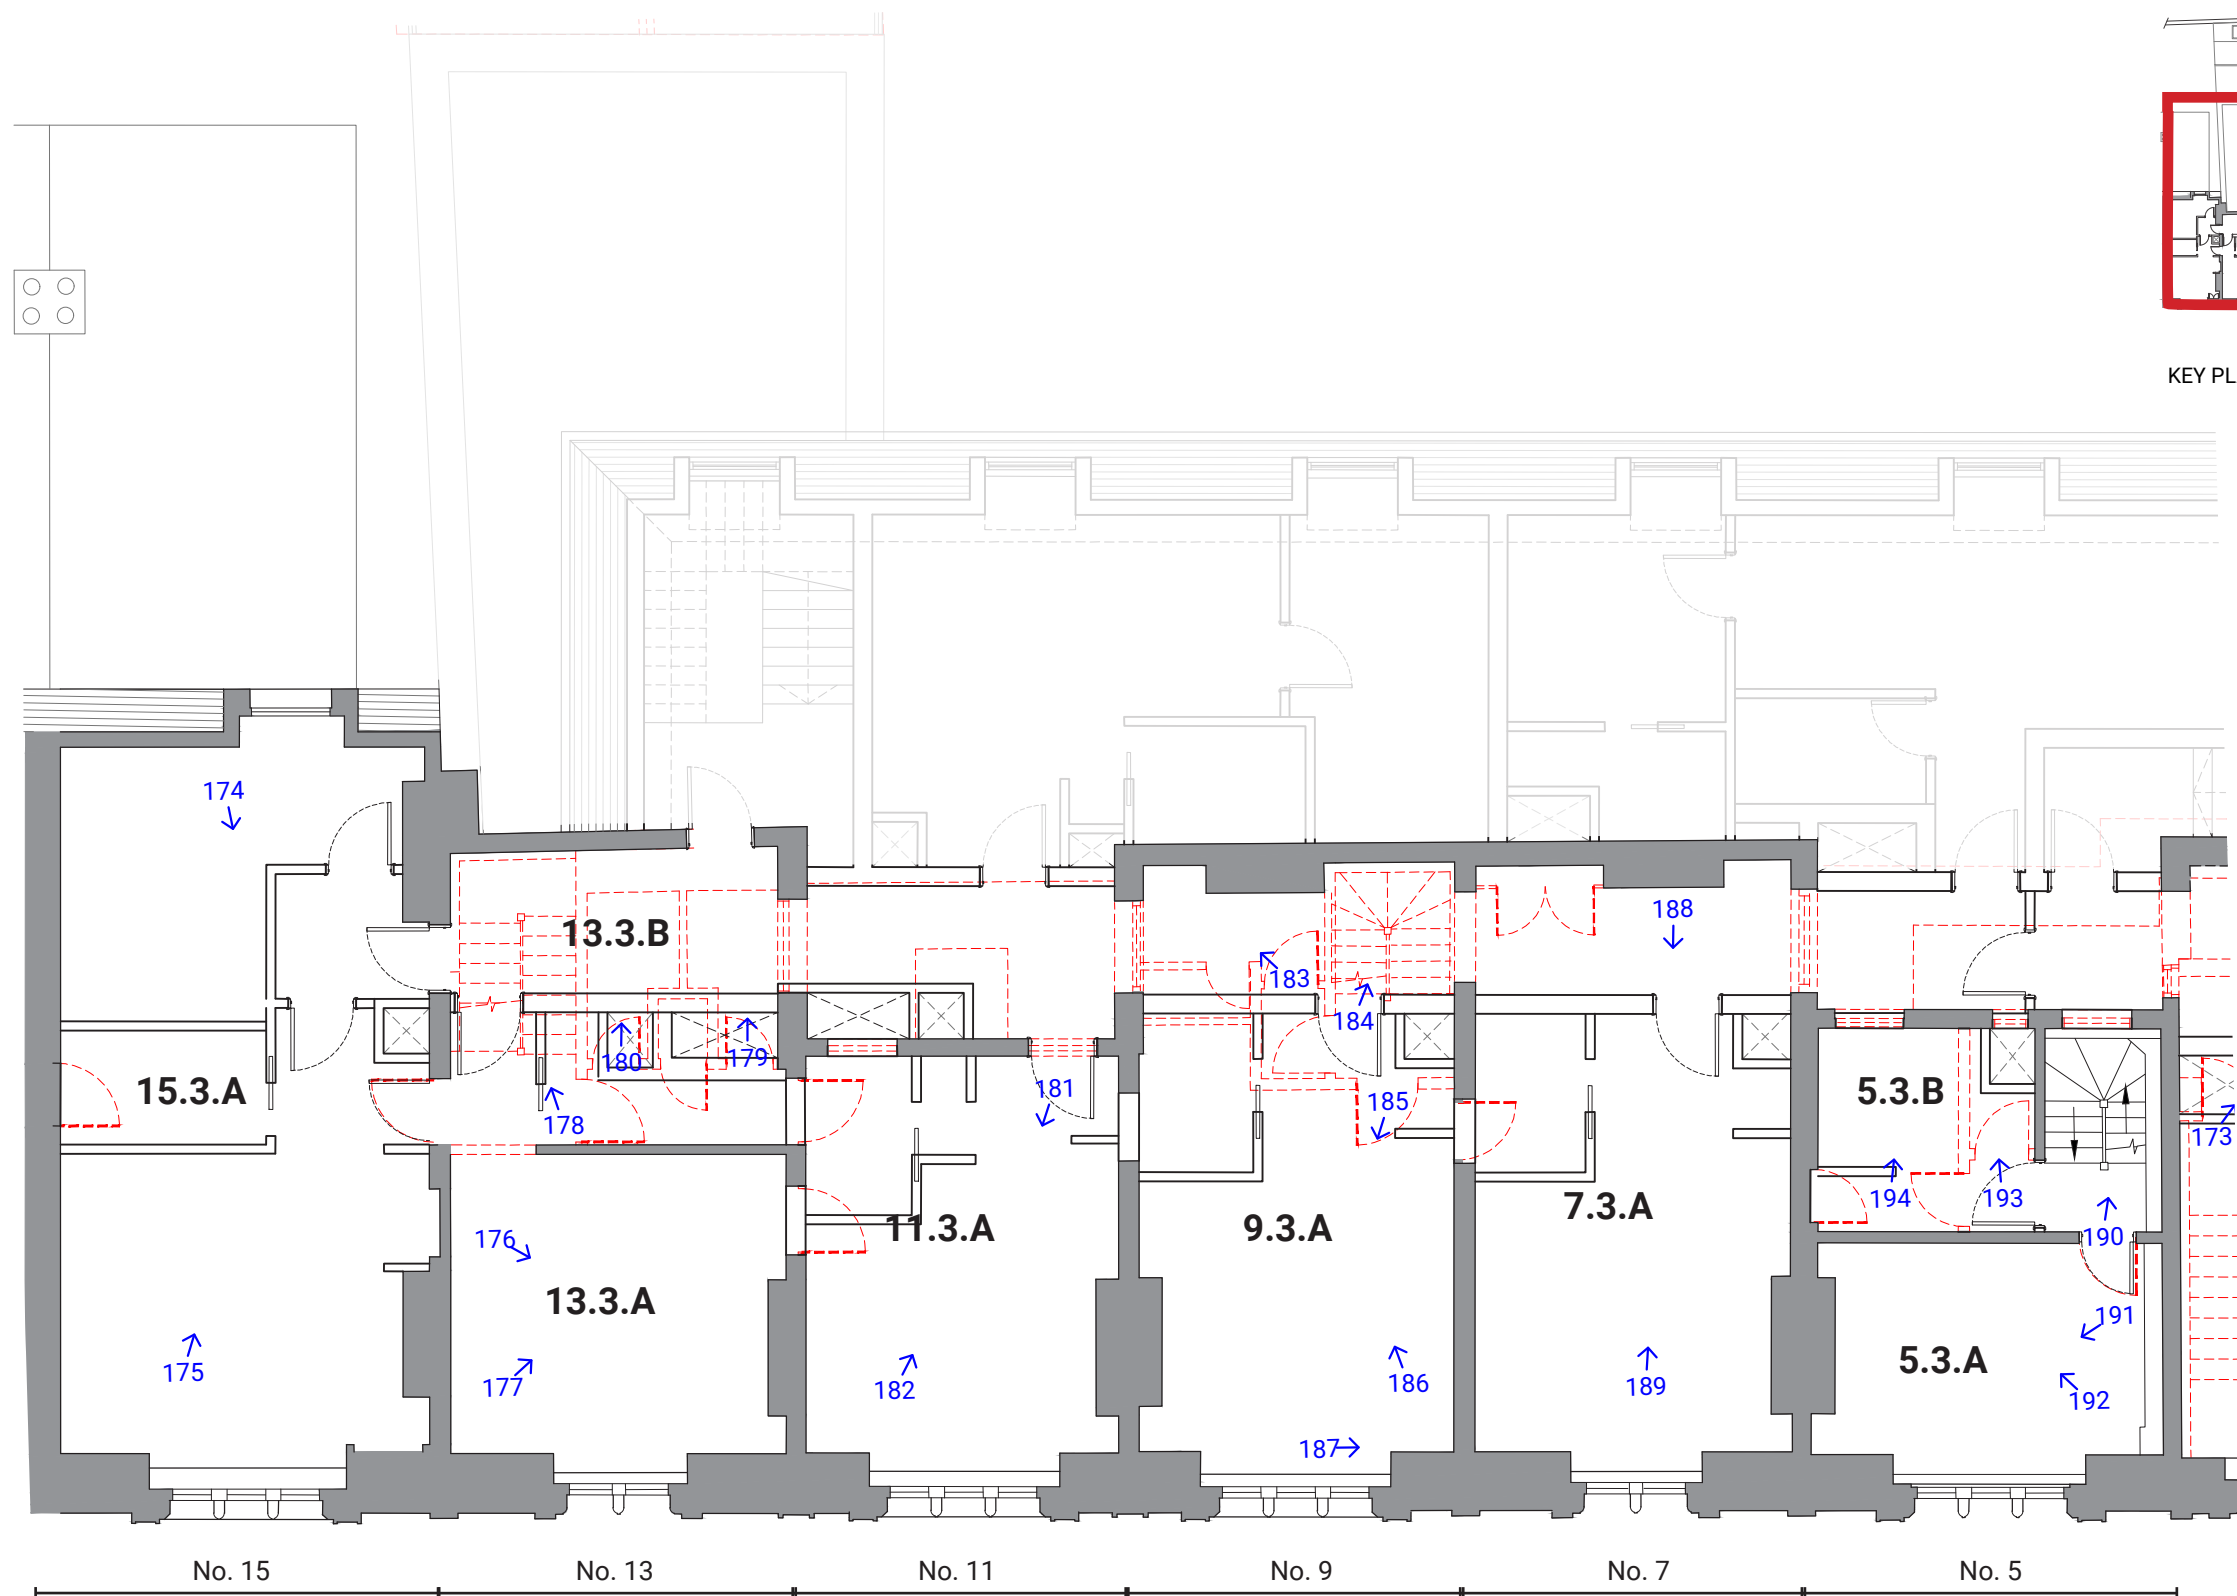

Third Floor Plan
Scale 1:100 @ A3

6.2 Schedule of Works - Third Floor

147.3.A	Floor	Retain existing floorboards.
		Form riser.
	Walls	Demolish existing stair tower. External wall rebuilt in construction to match existing. New window openings formed.
		Construct new partitions to form new rooms. New skirting and architrave to match existing.
		Existing walls retained. Plaster repaired where required.
		Demolish existing WC partitions
	Ceiling /Roof	Existing ceiling repaired.
		New roof infill where stair tower removed, structure and slates to match existing.
		Construct new lead dormers.
		Remove existing rooflights.
147.3.B		New insulated plasterboard to vaulted soffit.
	Features	Cornice, architrave and skirtings retained and repaired where applicable.
		Existing stair and lift removed from stair tower.
	Services	Existing surface mounted services stripped out.
		New services to fitted en-suite and kitchenette.
	Floor	Retain existing floorboards.
		Form riser.
	Walls	Demolish existing stair tower. External wall rebuilt in construction to match existing. New window openings formed.
		Construct new partitions to form new rooms. New skirting and architrave to match existing.
		Existing walls retained. Plaster repaired where required.
147.3.C		Demolish existing WC partitions
	Ceiling	Existing ceiling repaired.
		Existing exposed trusses retained and repaired as required.
		New insulated plasterboard to vaulted soffit.
	Features	Cornice, architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite.
	Floor	Retain existing floorboards.
	Walls	Construct new partitions to form new rooms. New skirting and architrave to match existing.
		Existing walls retained. Plaster repaired where required.
147.3.D		Existing walls retained. Plaster repaired where required.
	Ceiling	Existing ceiling repaired.
		Existing exposed trusses retained and repaired as required.
		New insulated plasterboard to vaulted soffit.
	Features	Cornice, architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite and kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Demolish all existing parititons and encasement of existing trusses.
148.3.A		Construct new wall to form apartment.
		Construct new partitions to form bedroom, en-suite and riser.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to fitted en-suite and kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Demolish all existing parititons and encasement of existing trusses.
		Construct new wall to form apartment.
1.3.A		Construct new partitions to form bedroom, en-suite and riser.
		Form new opening in party wall with no.147 to form new corridor.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite and kitchenette.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Demolish all existing parititons and encasement of existing trusses.
		Construct new wall to form apartment.

3.3.A	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Demolish all existing parititons and encasement of existing trusses.
		Construct new wall to form apartment.
		Construct new partitions to form bedroom, en-suite and riser.
		New opening in existing rear wall for lift access.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite and kitchenette.
3.3.B	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
		New floor infill where stair removed. Construction to match adjacent.
	Walls	Demolish all existing parititons and encasement of existing trusses.
		Construct new wall to form apartment.
		Construct new partitions to form bedroom, en-suite and riser.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing stair removed.
		Existing surface mounted services stripped out.
		New services to new fitted en-suite and kitchenette.
5.3.A	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Existing walls retained. Plaster repaired where required.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.

5.3.B	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Remove walls forming WC.
		Existing walls retained. Plaster repaired where required.
		Existing window in rear wall to be blocked up. Infill to be recessed to identify shape and position of window opening.
		Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
		Existing staircase retained and repaired. Plastic stair nosings removed and broken step/stringer repaired.
		Existing surface mounted services stripped out.
		New services to new fitted kitchenette.
7.3.A	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
		Construct new wall to form corridor.
		Construct new partitions to form ensuite and riser.
	Services	Form new opening in the existing party wall to form corridor. Form new opening in the existing rear wall to form new doorway to apartments adjacent.
		Remove door and block up opening in existing party wall.
		Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette.

9.3.A	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
		New floor infill where stair removed. Construction to match adjacent.
	Walls	Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
		Remove walls that form stair and wc's.
		Construct new wall to form corridor.
		Construct new partitions to form ensuite and riser.
		Form new opening in the existing party wall to form corridor.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
11.3.A		Existing staircase removed and floor/ceiling repaired.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette and en-suite.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Existing window in rear wall to be altered to form a door opening. Existing window frame and architrave removed. New door frame with obscured fan light above. New architrave to match.
		Existing window to be blocked up in rear wall. Window to be removed. Infill to be recessed to retain shape and location of window.
		Block up existing openings in party walls.
		Existing windows to be altered to form corridor. Existing window frame and architrave removed. Externally, brickwork head and jam to window to be retained.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
13.3.A	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette and en-suite.
	Floor	Remove existing floor coverings. Retain existing floorboards.
	Walls	Form new opening in existing internal wall.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette.

13.3.B	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
		New floor infill where stair removed. Construction to match adjacent.
	Walls	Existing window to be altered to form corridor. Existing window frame and architrave removed.
		Remove walls that form stair and wc's.
		Construct new wall to form corridor.
		Construct new partitions to form ensuite and riser.
		Form new opening in rear wall to provide access to new stair.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave, dado and skirtings retained and repaired where applicable.
15.3.A		Existing staircase removed and floor/ceiling repaired.
	Services	Existing surface mounted services stripped out.
		New services to new fitted en-suite.
	Floor	Remove existing floor coverings. Retain existing floorboards.
		Form new service riser.
	Walls	Remove existing door in party wall and block up opening. Remove architrave.
		Construct partitions to form riser and en-suites.
	Ceiling	Existing trusses exposed. Ceiling removed to reveal vaulted ceiling above. New insulated plasterboard to vaulted soffit.
	Features	Architrave and skirtings retained and repaired where applicable.
		Plastic trunking removed.
	Services	Existing surface mounted services stripped out.
		New services to new fitted kitchenette and en-suite.

6.3 Photographic Record - Third Floor



Photo 139



Photo 140



Photo 141



Photo 142

frost.

Schedule of Works



Photo 143



Photo 144



Photo 145



Photo 146

frost.

Schedule of Works

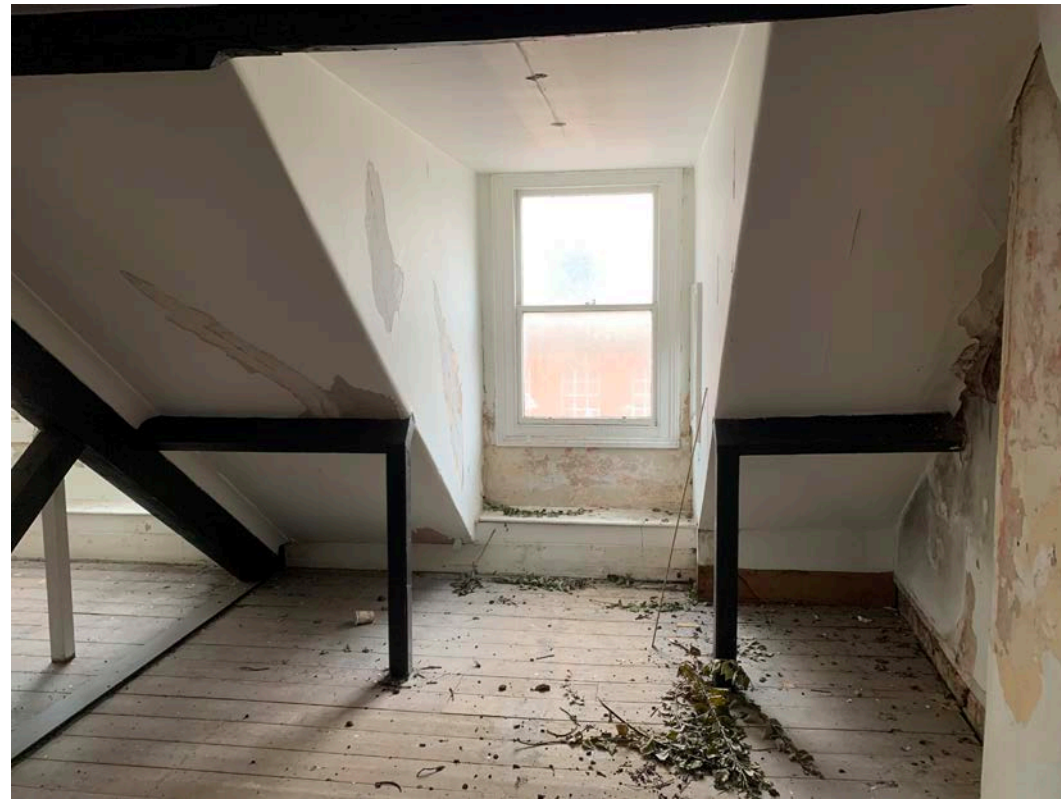


Photo 147

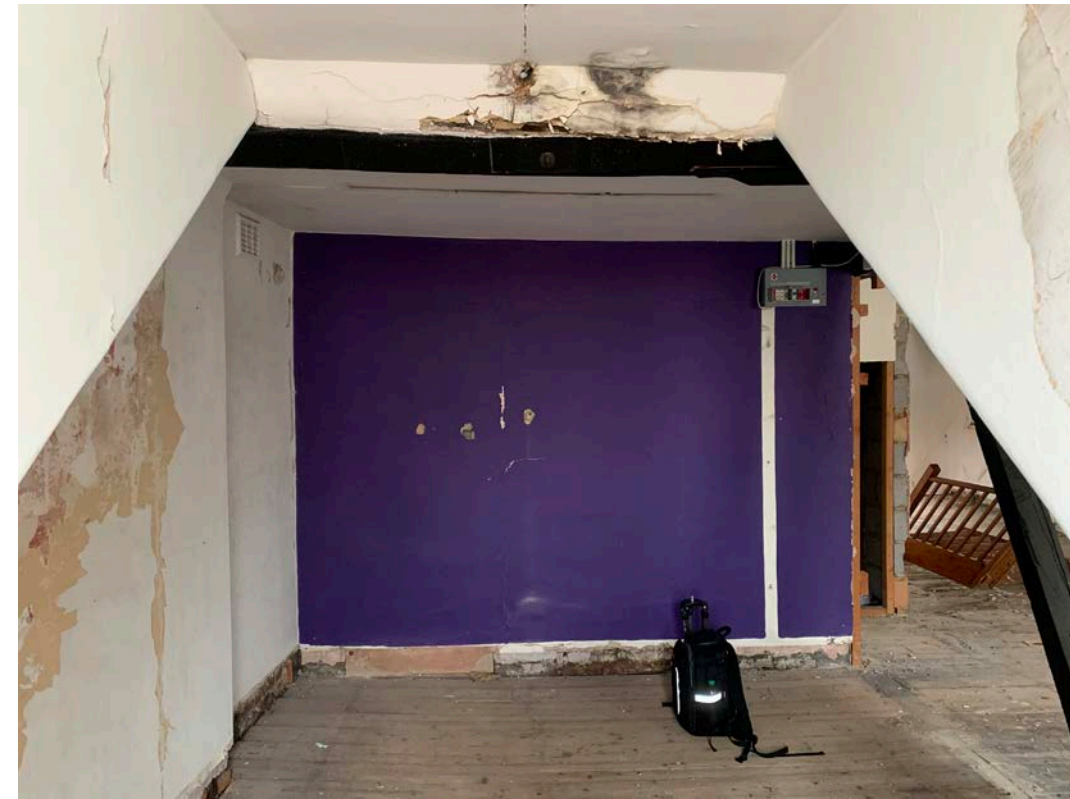


Photo 148



Photo 149



Photo 150

frost.



Photo 151

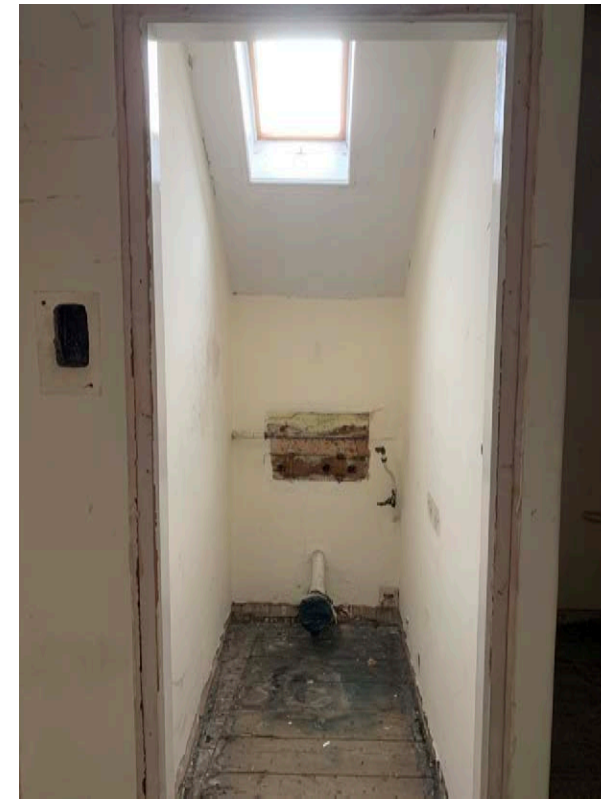


Photo 152



Photo 153

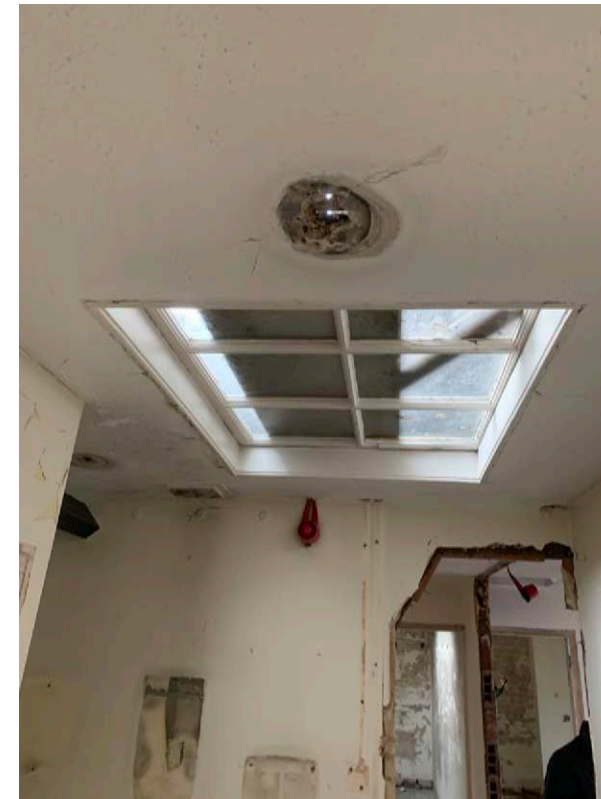


Photo 154

frost.



Photo 155



Photo 156

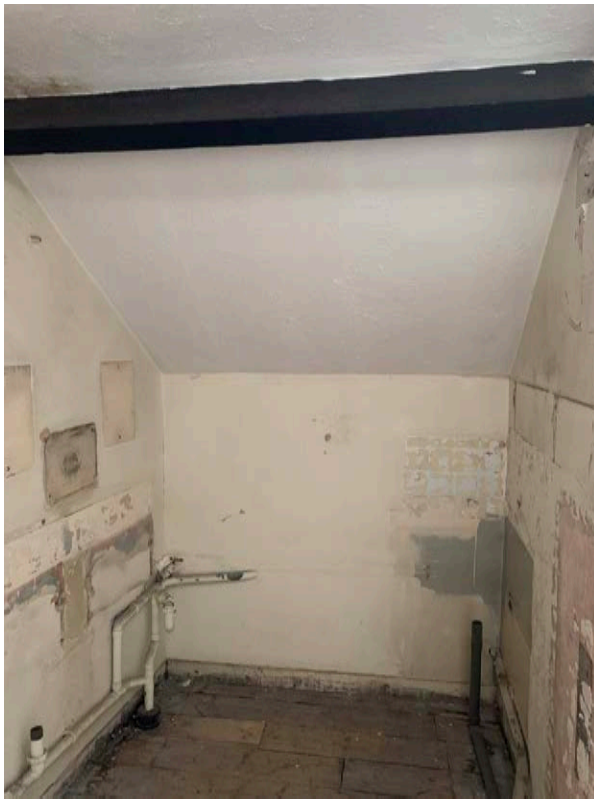


Photo 157



Photo 158



Photo 159

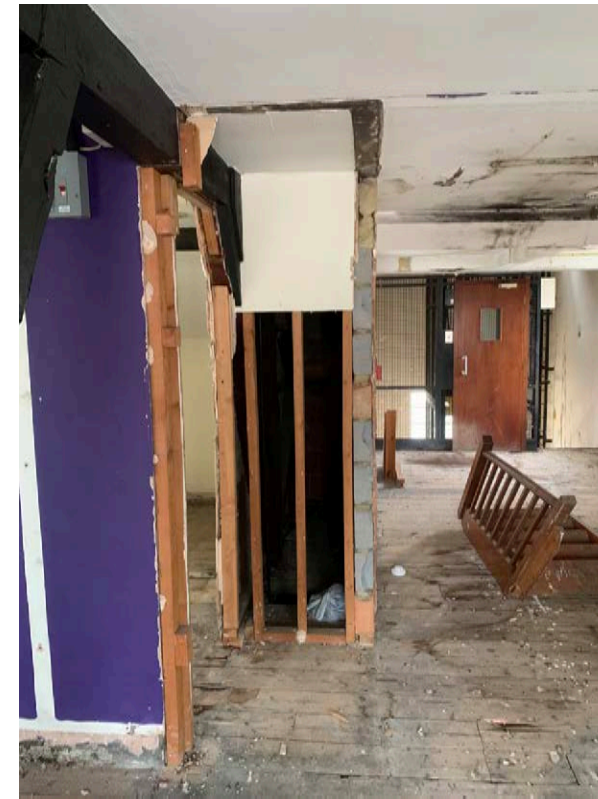


Photo 160

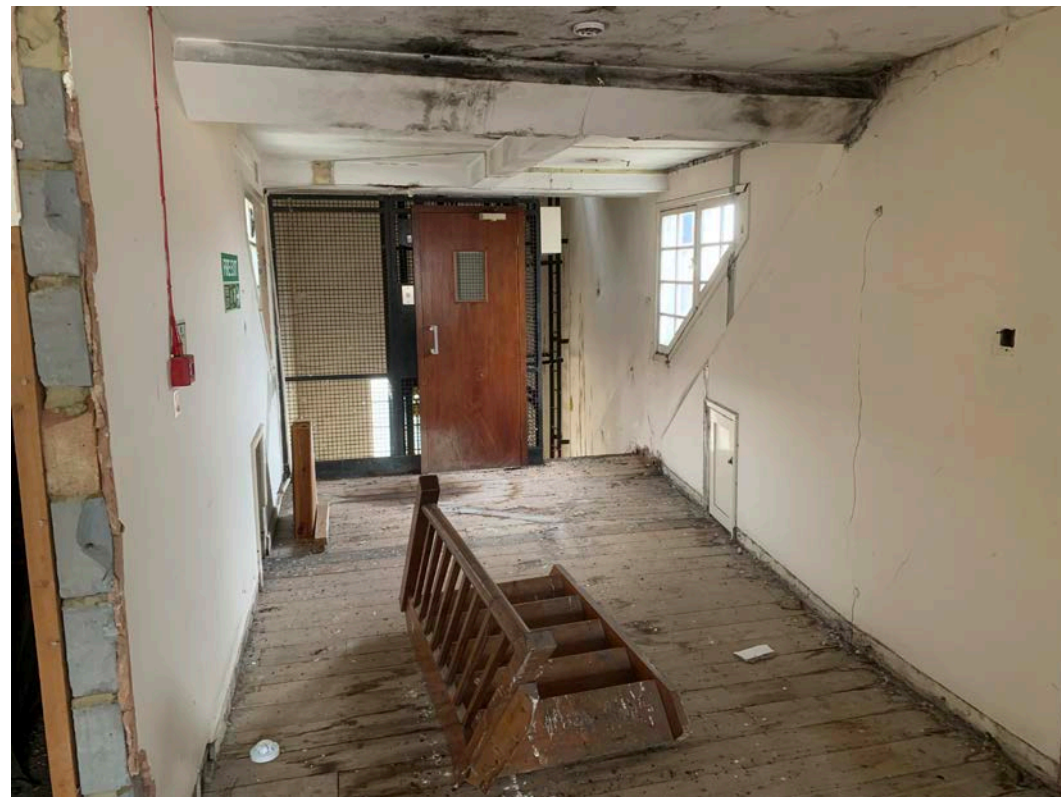


Photo 161



Photo 162

frost.

Schedule of Works

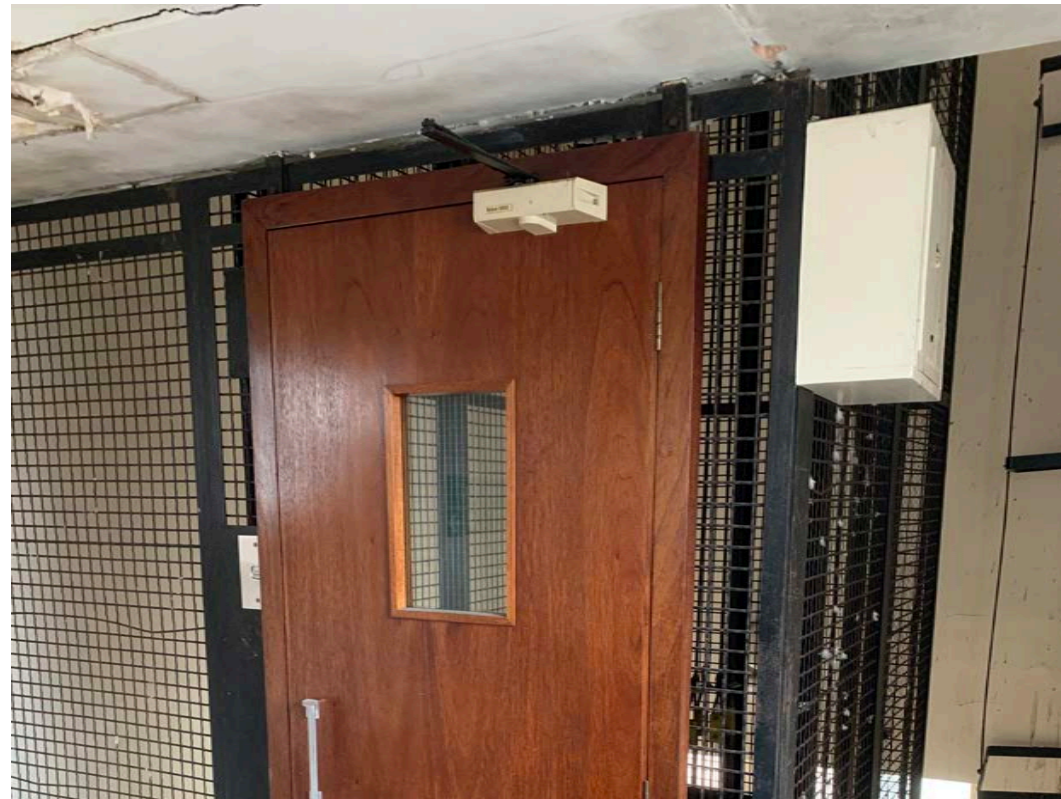


Photo 163



Photo 164



Photo 165



Photo 166



Photo 167



Photo 168



Photo 169

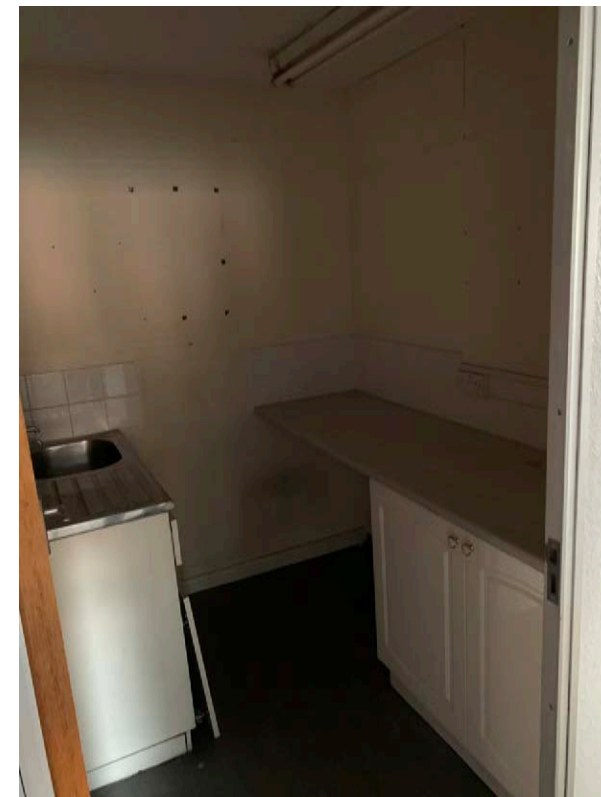


Photo 170

frost.



Photo 171



Photo 172

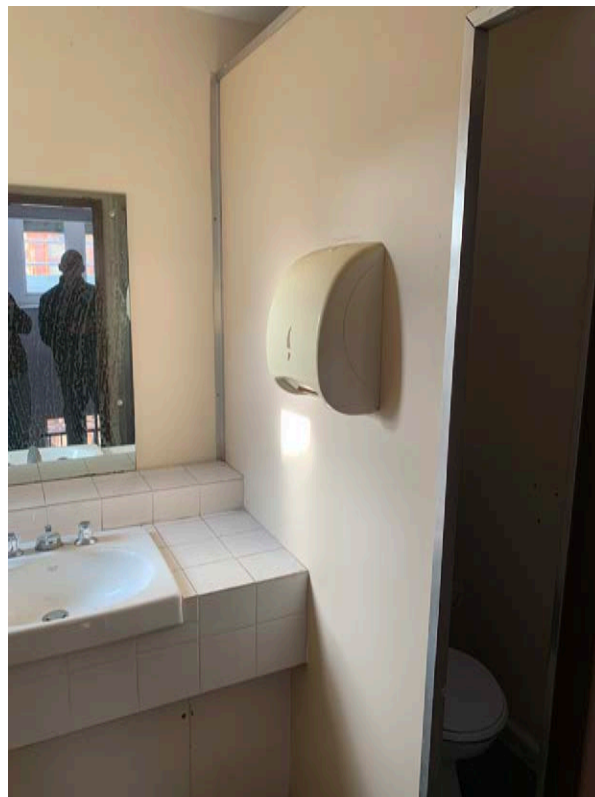


Photo 173



Photo 174

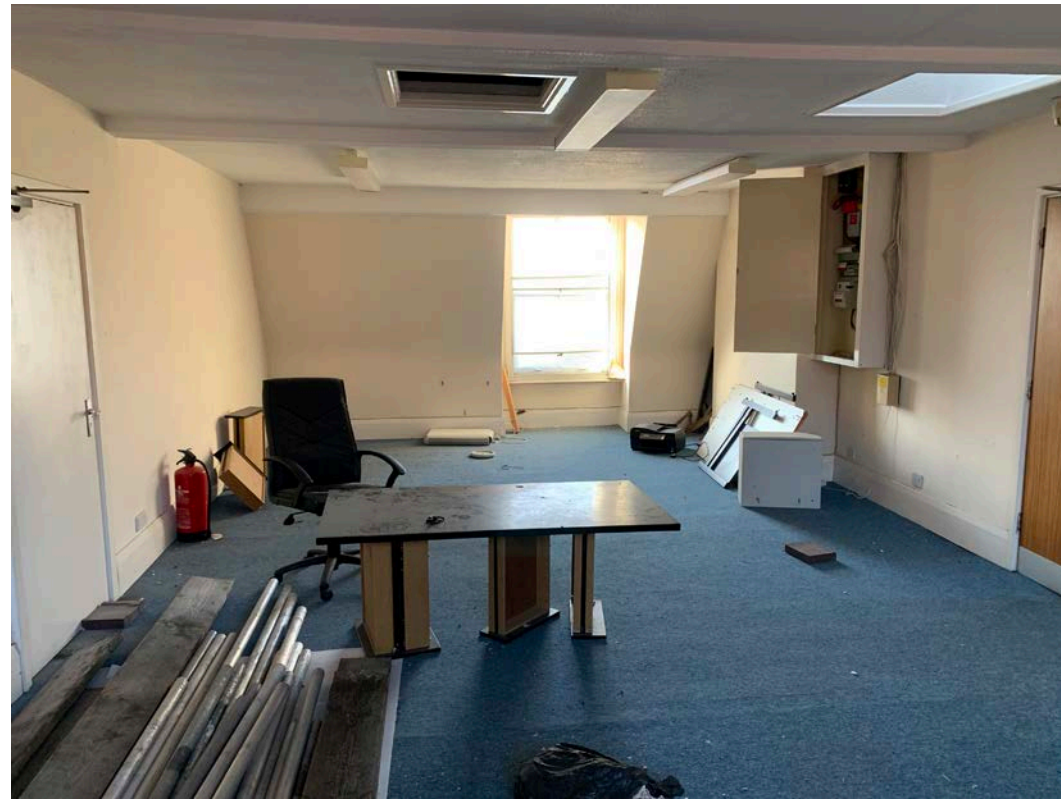


Photo 175



Photo 176



Photo 177

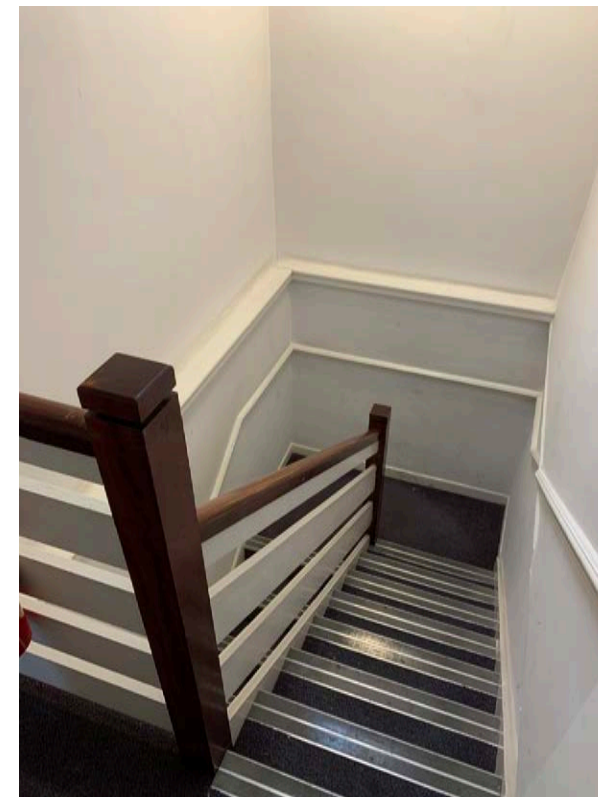


Photo 178

frost.

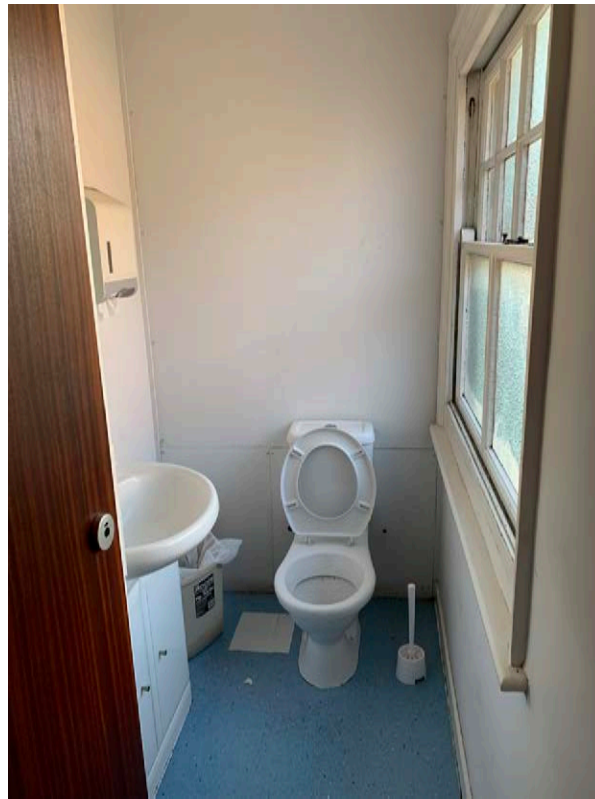


Photo 179



Photo 180



Photo 181



Photo 182

frost.

Schedule of Works

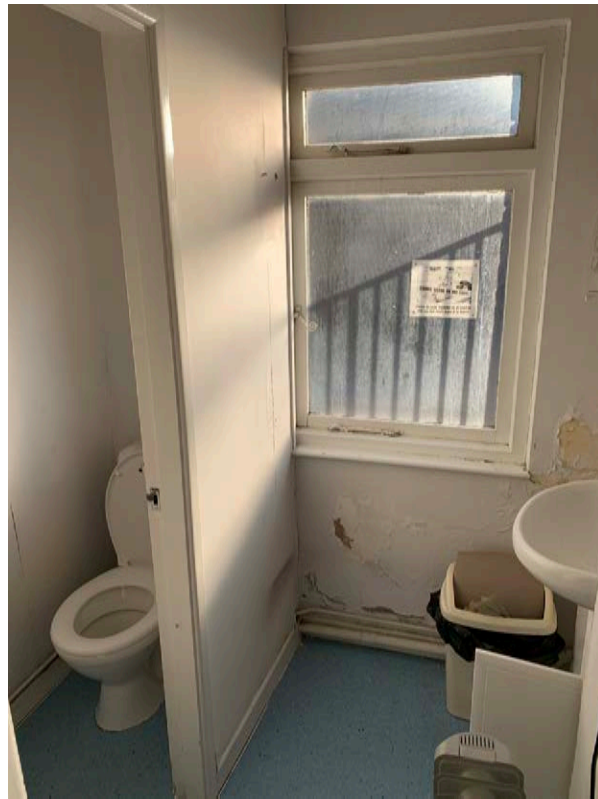


Photo 183

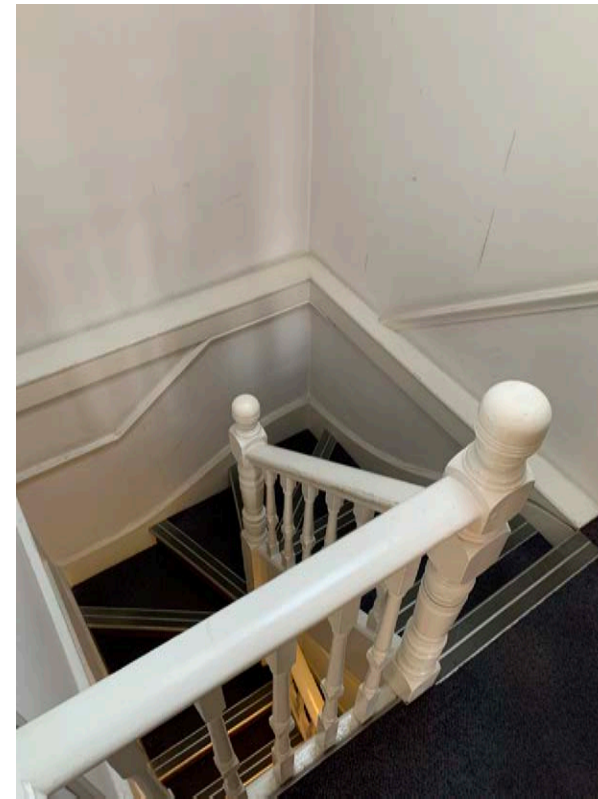


Photo 184



Photo 185



Photo 186

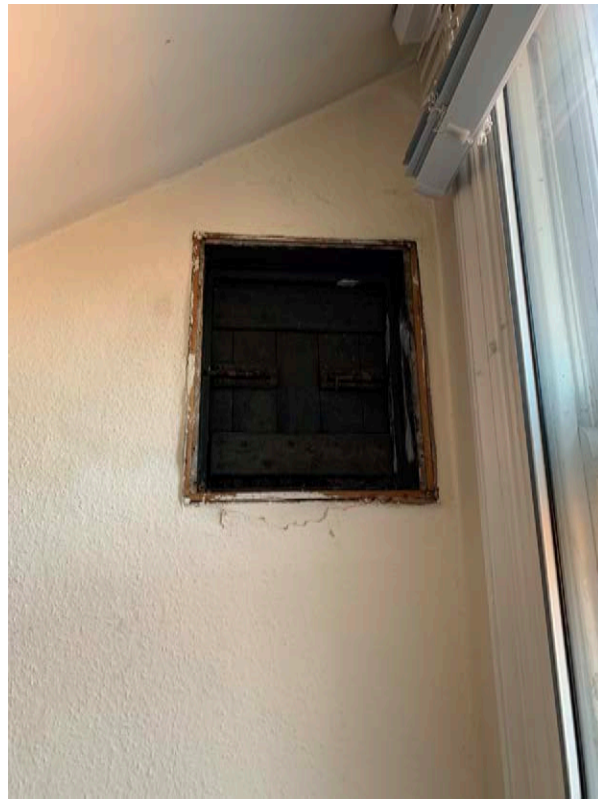


Photo 187



Photo 188



Photo 189

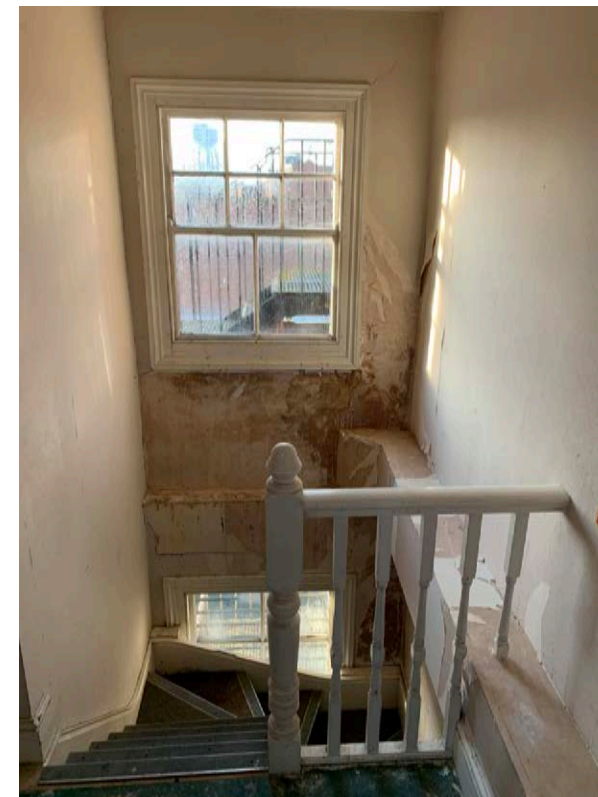


Photo 190

frost.

Schedule of Works



Photo 191



Photo 192

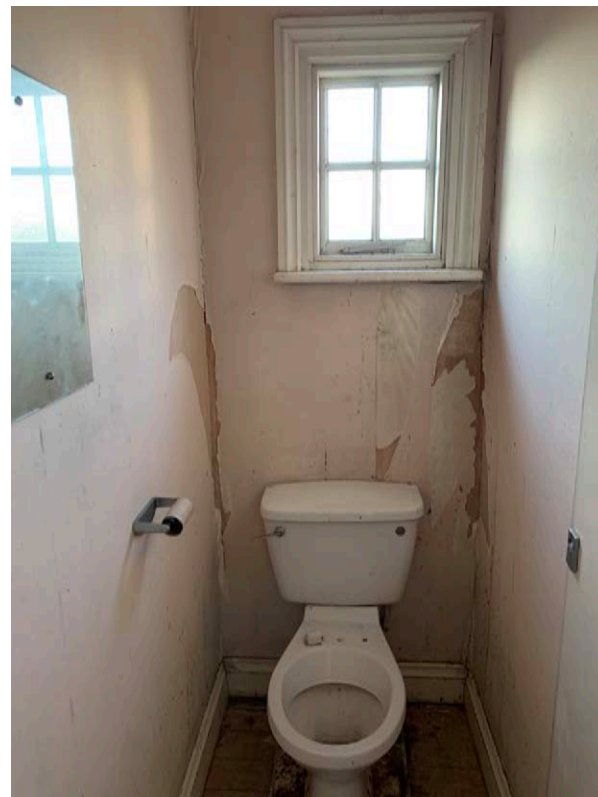


Photo 193


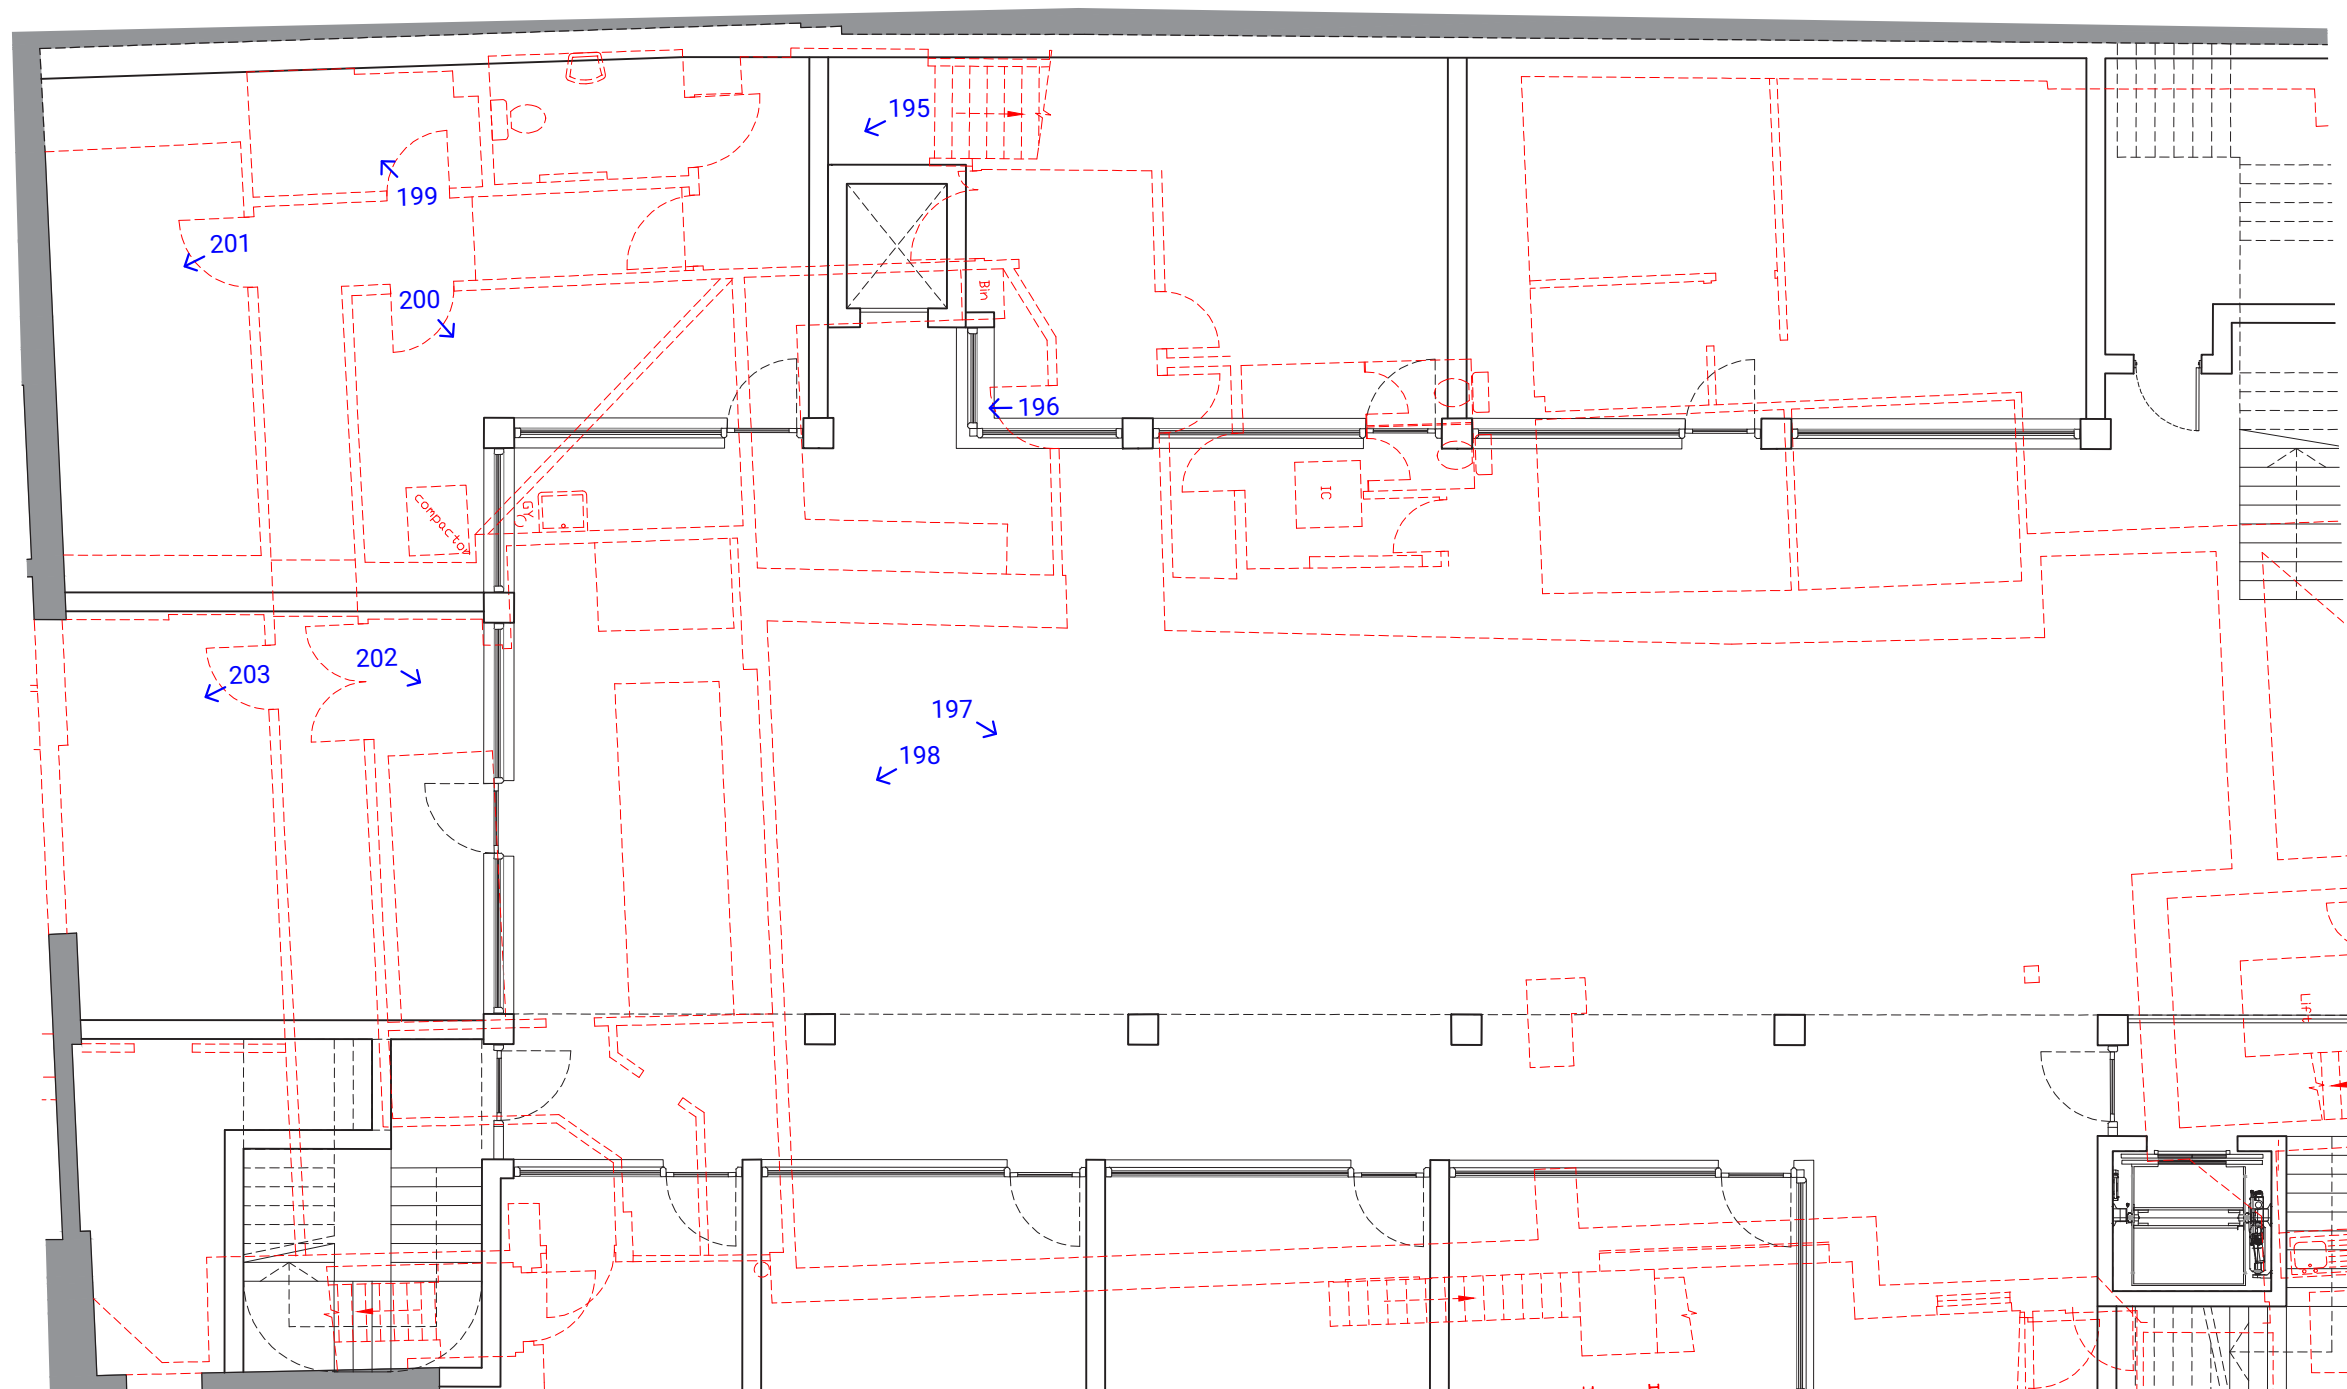


Photo 194

frost.



7.1 Plans - Outbuildings

All outbuildings are due to be demolished. See demolition plans. Photographic schedule included here for reference.

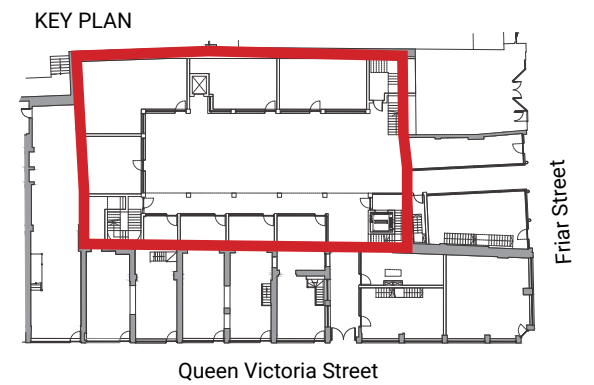

Ground Floor Plan
Scale 1:100 @ A3

All outbuildings are due to be demolished. See demolition plans. Photographic schedule included here for reference.

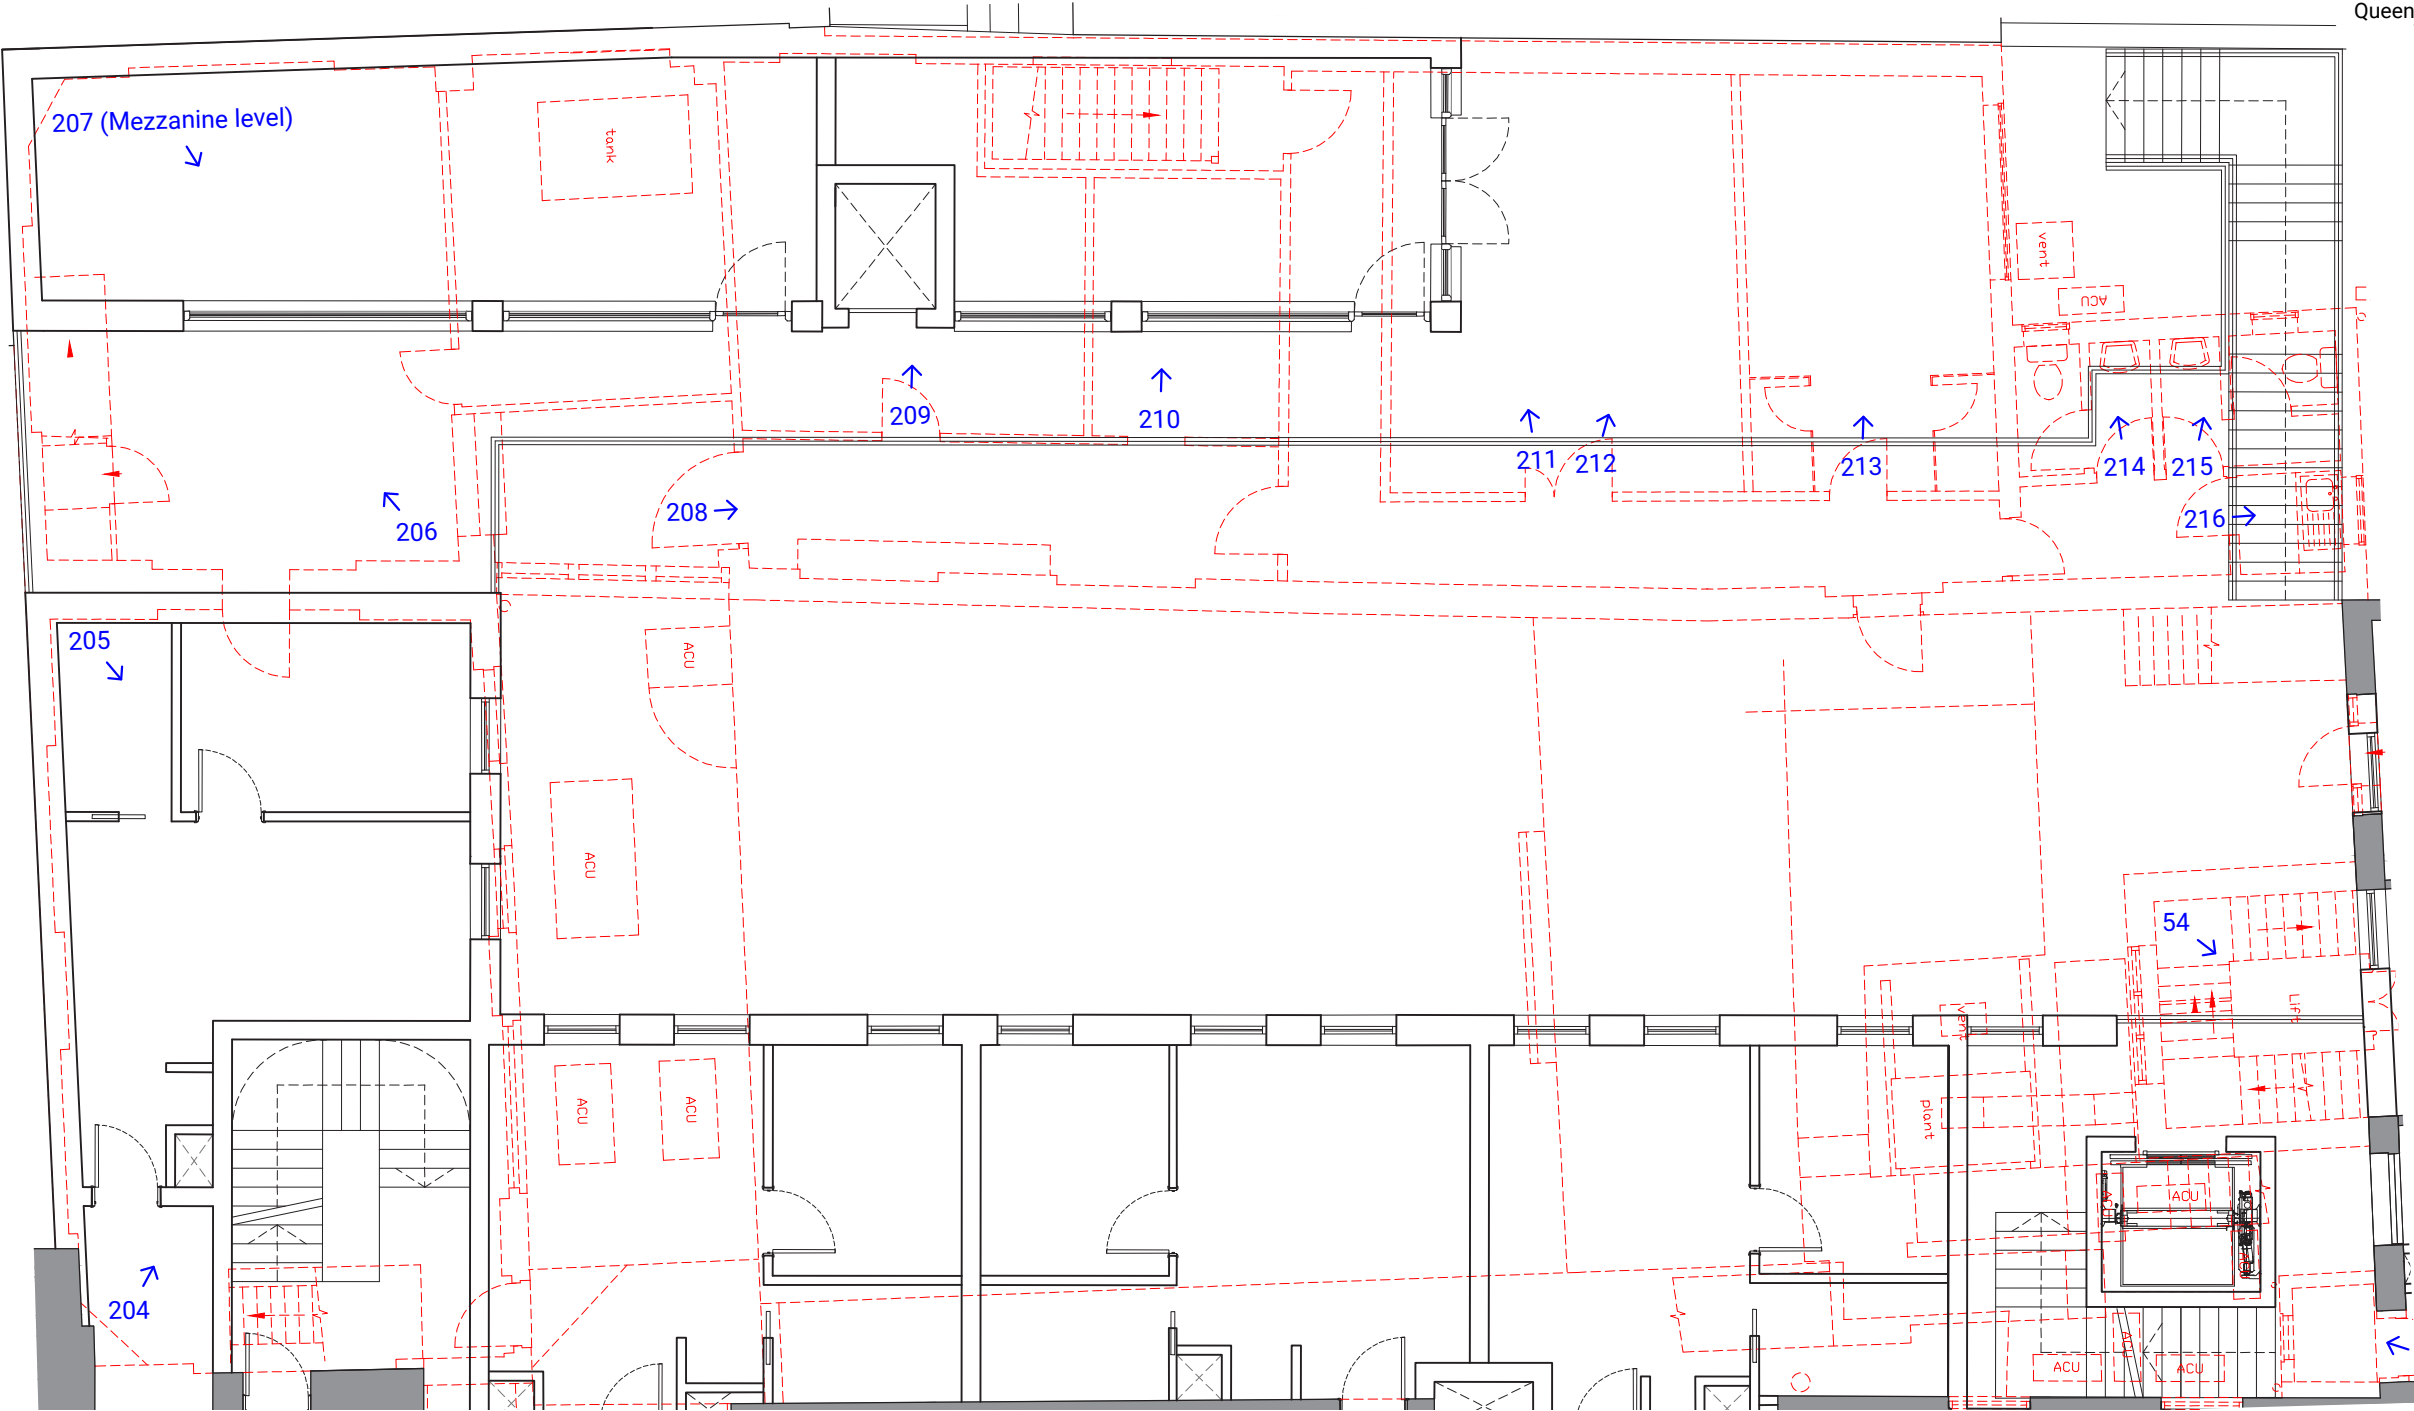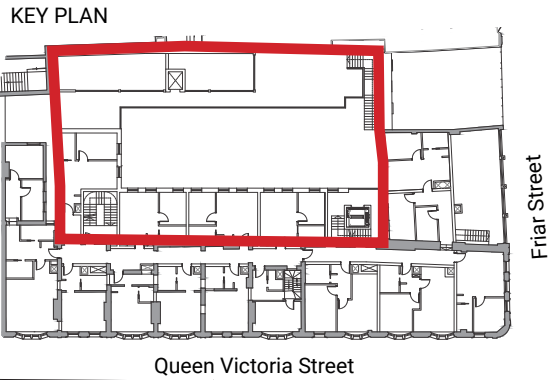

First Floor Plan
Scale 1:100 @ A3

7.2 Outbuildings - Photographic Record

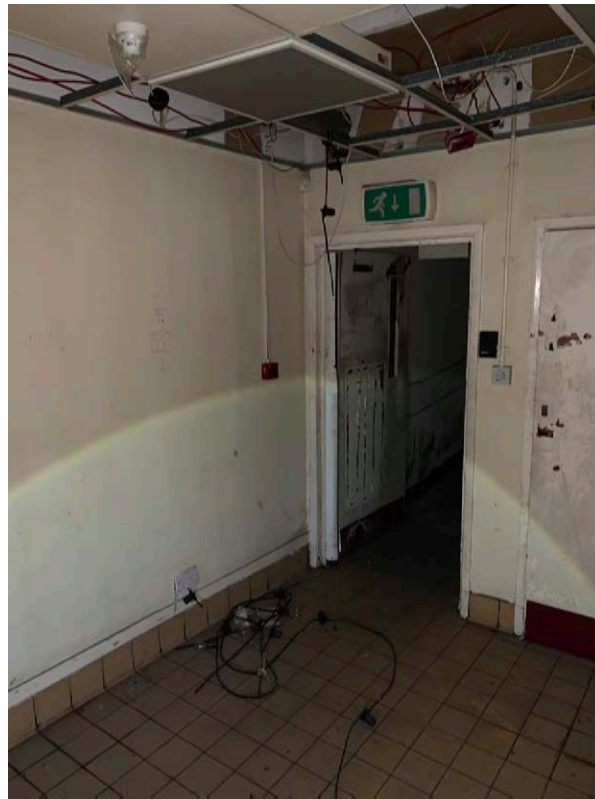


Photo 195



Photo 196



Photo 197



Photo 198

frost.



Photo 199

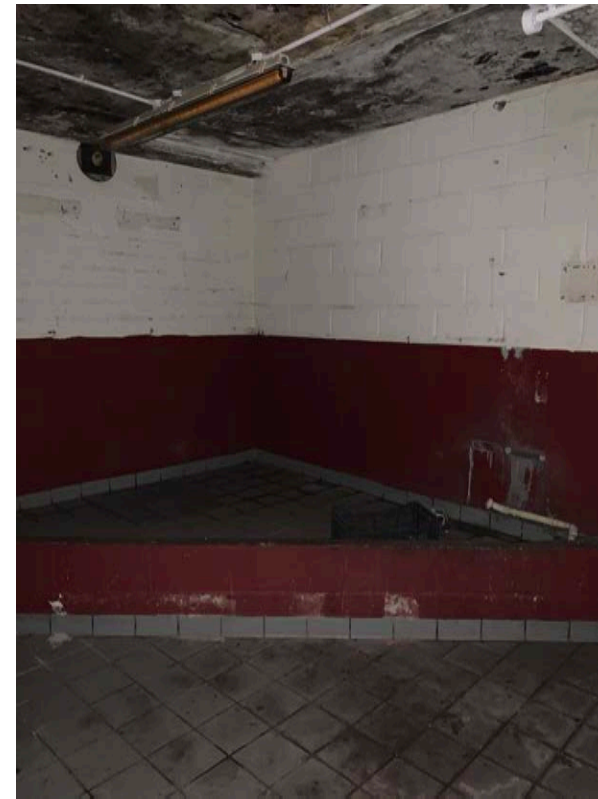


Photo 200

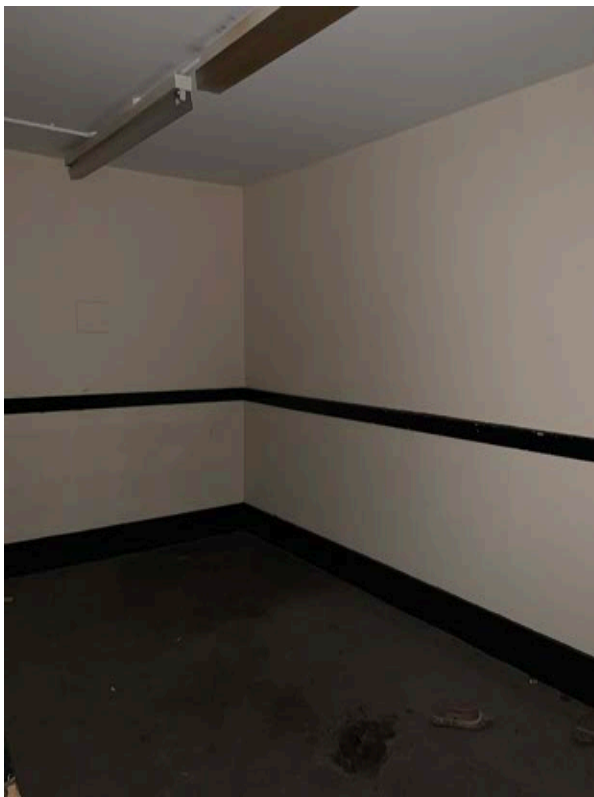


Photo 201



Photo 202

frost.



Photo 203



Photo 204



Photo 205



Photo 206

frost.

Schedule of Works



Photo 207



Photo 208



Photo 209



Photo 210

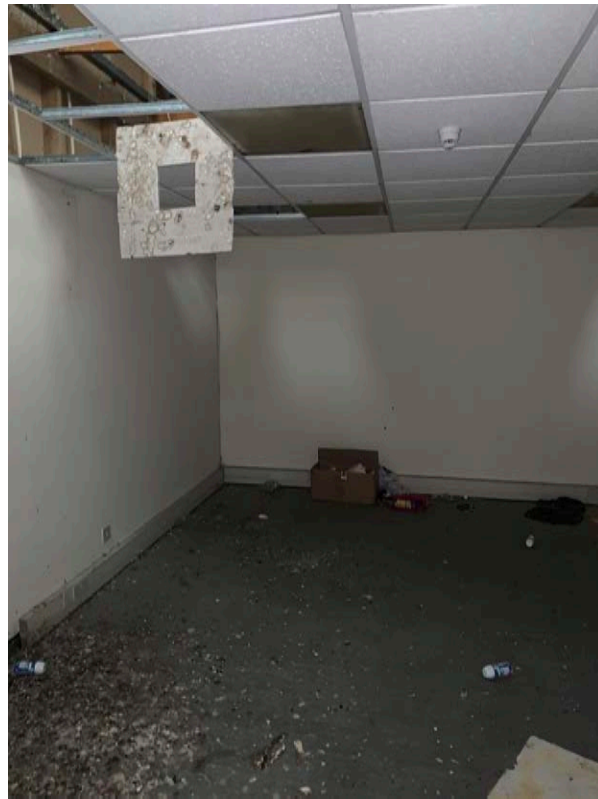


Photo 211

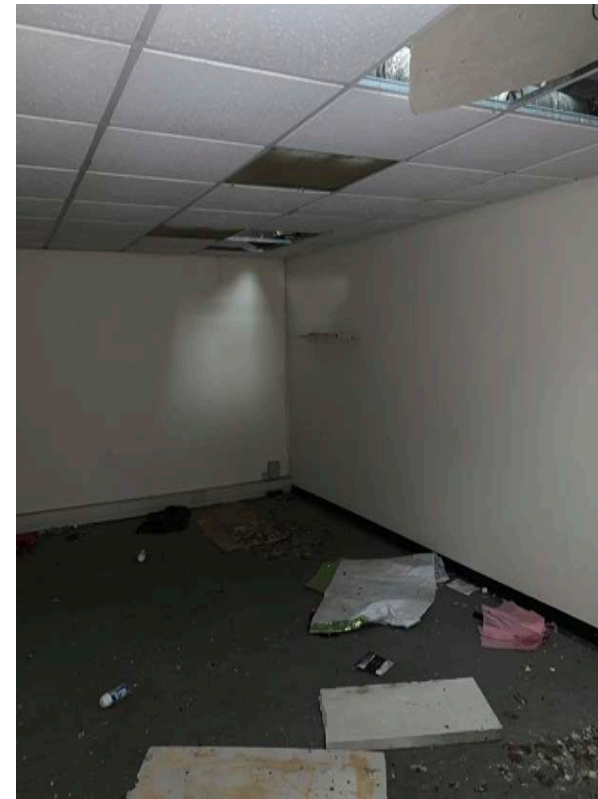


Photo 212



Photo 213



Photo 214



Photo 215



Photo 216