Air Conditioning | Product Information

MITSUBISHI ELECTRIC

PURY-EM-YNW-A1

CITY MULTI

R32

R2 SERIES HIGH EFFICIENCY HEAT RECOVERY

Throughout the year, many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets these requirements by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings up to 30% over conventional systems.

Key Features:

- Highest specification, highest efficiency heat recovery system available
- Delivers the highest levels of comfort, both thermally and acoustically
- Flexible design, installation and maintenance
- Lower GWP R32 refrigerant

Air Conditioning | **Product Information**

CITY MULTI

PURY-EM-YNW-A1

R2 SERIES HIGH EFFICIENCY HEAT RECOVERY

R32

PURY-EM-YNW-A1 OUTDOOR UNITS		PURY-EM200YNW-A1	PURY-EM250YNW-A1	PURY-EM300YNW-A1
CAPACITY (kW)	Heating (nominal)	25.0	31.5	37.5
	Cooling (nominal)	22.4	28.0	33.5
	High Performance Heating (UK)	25.0	31.5	35.6
	COP Priority Heating (UK)	22.8	28.7	34.1
	Cooling (UK)	20.1	25.1	30.0
POWER INPUT (kW)	Heating (nominal)	5.23	7.30	9.37
	Cooling (nominal)	4.43	6.68	7.82
	High Performance Heating (UK)	6.59	9.20	12.46
	COP Priority Heating (UK)	5.23	7.30	9.37
	Cooling (UK)	2.57	3.87	4.54
COP / EER (nominal)		4.78 / 5.05	4.31 / 4.19	4.00 / 4.28
MAX NO. OF CONNECTABLE INDOOR UNITS		9 (8*1)	11 (10*1)	14 (12*1)
MAX CONNECTABLE CAPACITY		50~150% OU Capacity	50~150% OU Capacity	50~150% OU Capacity
AIRFLOW (m^3/min)	High	170	185	240
PIPE SIZE mm (in)	Gas	19.05 (3/4")	22.2 (7/8")	22.2 (7/8")
	Liquid	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
SOUND PRESSURE LEVEL (dBA) @ 1m	Heating / Cooling	59.0 / 59.0	61.0 / 60.5	67.0 / 61.0
SOUND POWER LEVEL (dBA) @ 100% Capacity	Heating / Cooling	78.0 / 76.0	80.0 / 78.5	86.5 / 80.0
WEIGHT (kg)		231	231	231
DIMENSIONS (mm)	Width	920	920	920
	Depth	740	740	740
(1798mm without legs)	Height	1858	1858	1858
ELECTRICAL SUPPLY		380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz
PHASE		Three	Three	Three
STARTING CURRENT (A)		8	8	8
NOMINAL SYSTEM RUNNING CURRENT (A)	Heating / Cooling [Max]	8.3 / 7.1 [16.1]	11.7 / 10.7 [21.8]	15.0 / 12.5 [23.9]
GUARANTEED OPERATING RANGE (ºC)	Heating / Cooling	-20~15.5 / -5~52	-20~15.5 / -5~52	-20~15.5 / -5~52
FUSE RATING (MCB sizes BS EN 60947-2) - (A)		1 x 20	1 x 25	1 x 25
MAINS CABLE No. Cores		4	4	4
CHARGE REFRIGERANT (kg) / CO_2 EQUIVALENT (t)	R32 (GWP 675)	5.2 / 3.5	5.2 / 3.5	5.2 / 3.5
MAX ADDITIONAL REFRIGERANT (kg) / CO_2 EQUIVALENT (t)	R32 (GWP 675)	21.3 / 14.4	22.3 / 15.1	22.8 / 15.4

Notes: *SEER/SCOP available separately in the 'City Multi VRF Seasonal Efficiency' document. Based on Ecodesign Lot 21/6 to EN14825 standard.

*1 If a model PEFY-M 20 or 25 indoor unit is connected.

PURY-EM200/250/300YNW-A1 DIMENSIONS

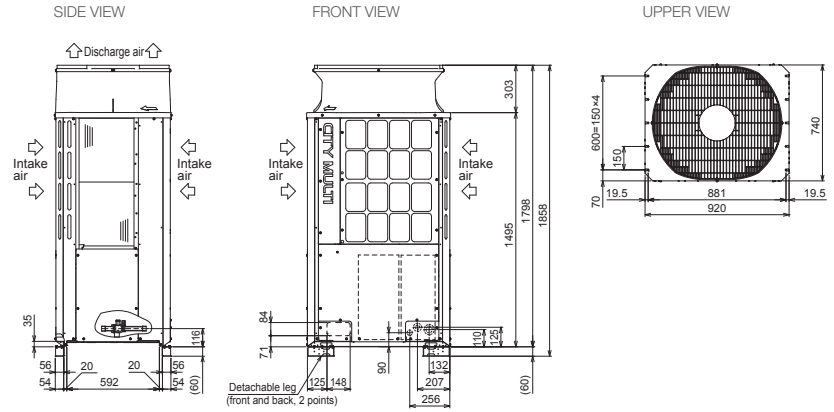

MITSUBISHI ELECTRIC
Changes for the Better

Telephone: **01707 282880**
email: **air.conditioning@meuk.mee.com**
les.mitsubishielectric.co.uk

@meuk_les
@green_gateway

Mitsubishi Electric Living Environmental Systems UK

Mitsubishi Electric Cooling and Heating UK

mitsubishielectricuk_les

Mitsubishi Electric Living Environmental Systems UK

BLOG thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2019. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of November 2019

Green Gateway greengateway.mitsubishielectric.co.uk