



357 Basingstoke Road, Reading, RG2 0JA

Removal of existing rear workshop and the erection of a new workshop.

Schedule of materials

Author:

Dariusz Kusyk BA BEng MSc - 1 Right Plan




Schedule of materials

1. Internal sound-proof solutions 'Gyproc Soundbloc 15mm TE Plasterboard' – technical details submitted in separate file.
2. External elevations – red brick


The existing property includes a consistent red bricks. The approved application included external materials that would be matching the existing outbuilding and the adjacent dwellings.

The Sterling Red Multi brick

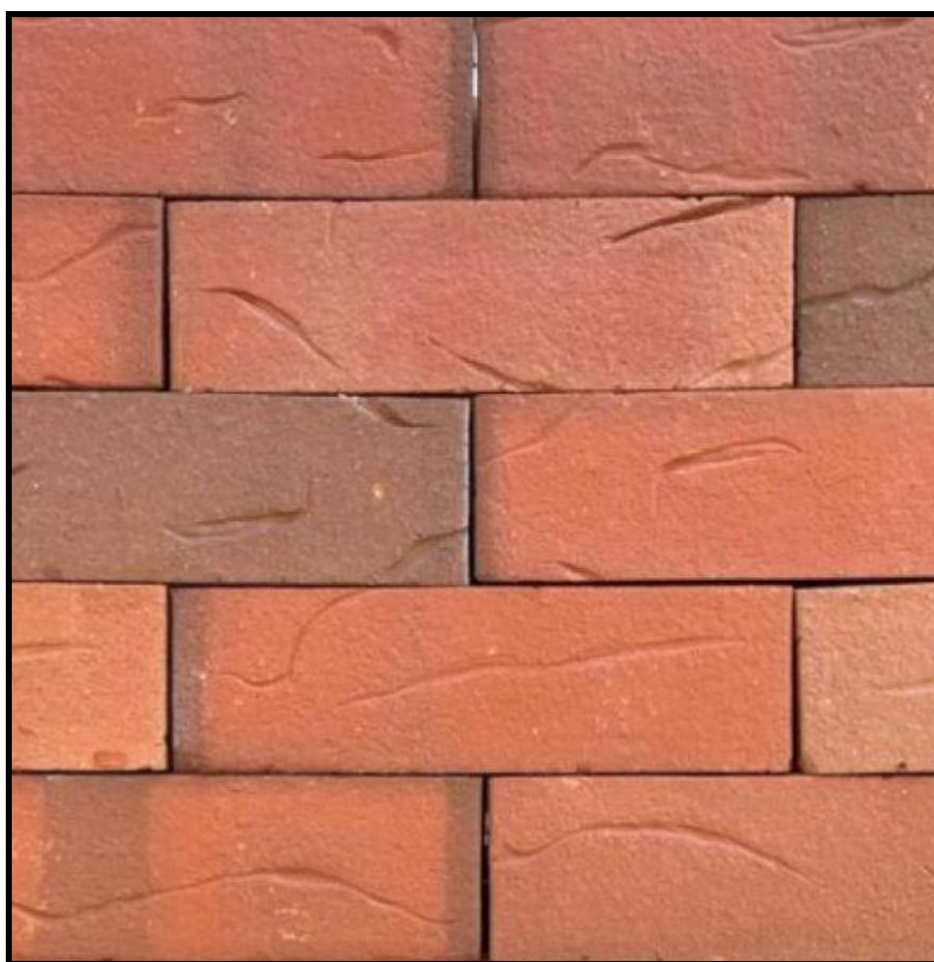

3. Roof and cladding – Zinc insulated cladding

Roof PIR LPCB certified Trapezoidal Insulated Roof Panel (technical specs submitted)

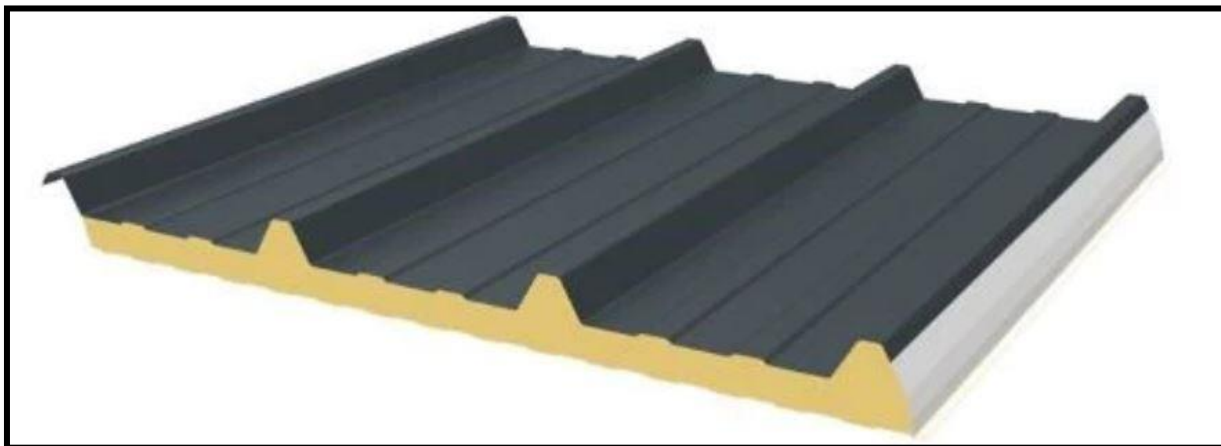

4. Fenestration:

Crystal UPVC Side Hung Double Glazed Window Next to Fixed Anthracite Grey 1040H x 1190W Double-Glazed Casement Anthracite Grey UPVC



Crystal UPVC Right Hand Opening Double Glazed Window Anthracite Grey



ECO+ RESET Fixed Triple Glazed Roof Window With Universal Flashing 78x98cm



Latham's Acoustic Steel Door (technical specs submitted)



Steel Commercial Electric Roller Shutter (technical specs submitted)



Copyright

