


Window + Door Schedule

- D1 - Replace with solid door and fix shut
- D2 - Replace entrance door
- WG01 - Replace casements
- WG02 - Repair and redecorate
- WG03 - Repair and redecorate
- WG04 - Replace casements
- WG05 - Replace casements
- WG06 - Replace casements
- WG07 - Replace casements
- WG08 - Replace casements
- WG09 - Replace casements
- WG10 - Replace casements
- WG11 - Replace casements
- WF01 - Replace windows
- WF02 - Replace windows
- WF03 - Replace casements

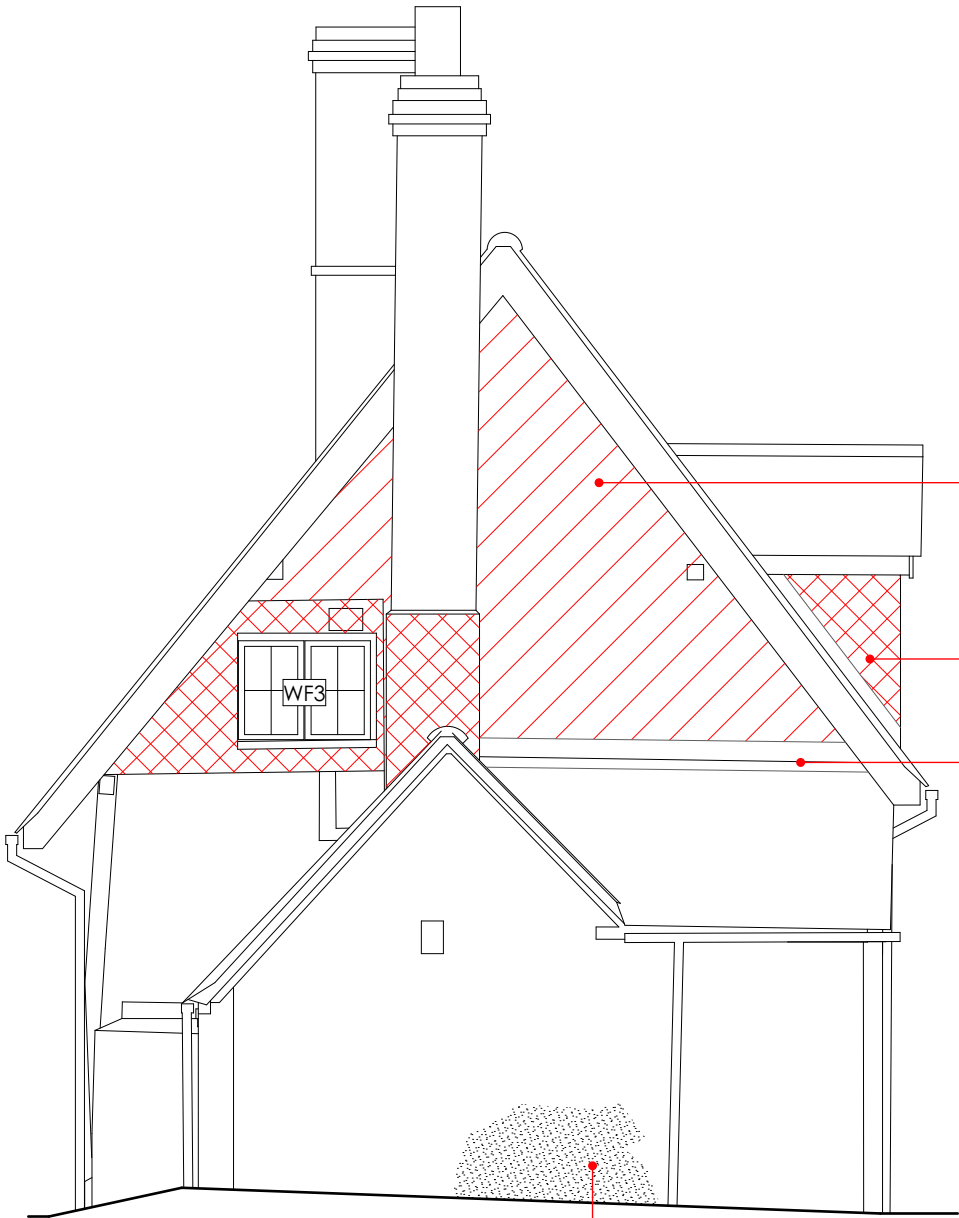

Allow to investigate cracked render to ascertain substrate. Allow to replace in cork/lime render

Remove dormer cheeks, check for lead soakers. Re-finish cheeks.

New lead flashing required to tiled roof

Damp - check RWP below ground level, alter the ground levels and gradient to fall away from building

Key

- carefully remove existing render and replace with cork/lime plaster
- carefully remove bracket and make good
- allow for timber fillet or lime mortar repair

This document and its design content is copyright © and is the property of T2 Architects. It may not be reproduced without their expressed permission. It shall be read in conjunction with all other associated project information including models, specifications, schedules and related consultants drawings and documentation. Do not scale from this drawing unless for Planning purposes. Figured dimensions only are to be used. All dimensions must be checked on site by the Contractor prior to the commencement of any fabrication or building works. Immediately report any discrepancies, errors or omissions to T2 Architects prior to the commencement of any fabrication or building works. If in doubt please ASK.

General Notes

Where movement has occurred between timber and infill panels allow to repair and make good.


Allow to strip paint and redecorate.

Allow for heli bar repairs where required by structural engineer.

Inspect previous repairs & make good.

Remove dormer cheeks, check for lead soakers. Re-finish cheeks.

Remove, re-docarate and refit gutters. (allow to replace any plastic with cast iron)



Current Revision Description

B - 24/06/2022
Tender Issue

Rev	Date	Drawn By	Checked by
B	24/06/2022		



23 City Business Centre
Hyde Street
Winchester
SO23 7TA

T 01962 856255
E info@t2architects.com
www.t2architects.com

project

Gravel Hill Cottage
Blagrove Lane
Caversham
RG4 7DY

client

Mapledurham Estate

drawing

South West Elevation
Proposed

stage	date
Planning	24/06/2022
scale	sheet size
1:50	A3

job no._drwg typ._drwg no. revision

2212_PR_301_B

South West Elevation