


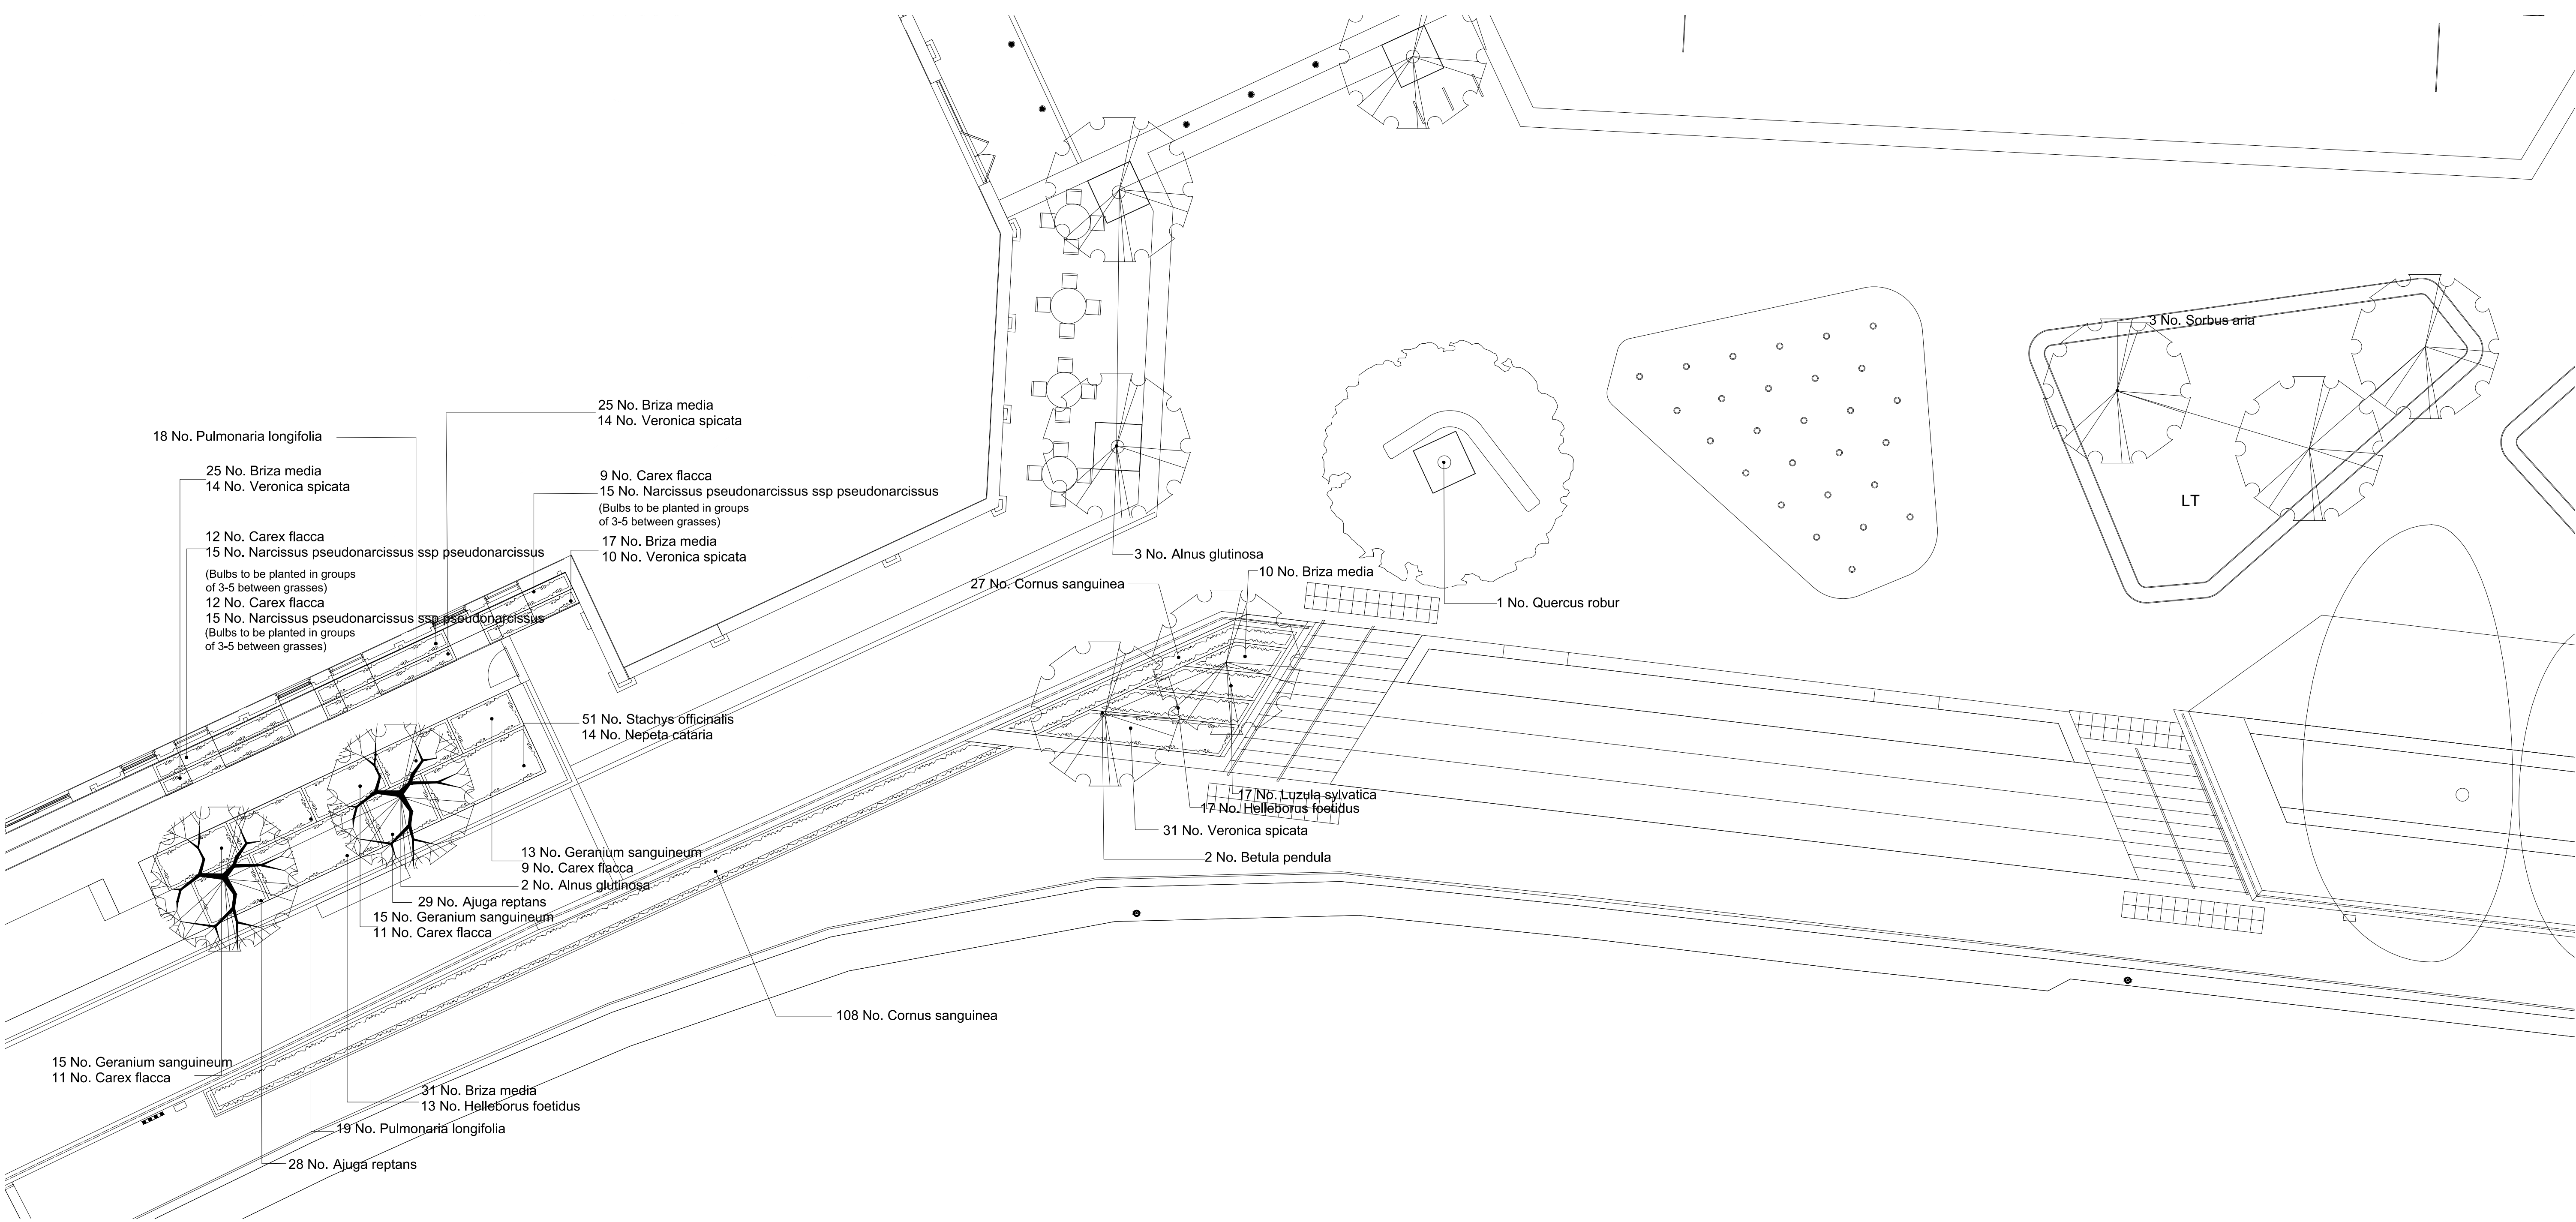

Trees				
No.	Species Name	Girth	Specification	
3 -	Alnus glutinosa	20-25cm	Heavy Standard:Clear Stem min. 200:3.5-4m high	
2 -	Alnus glutinosa	20-25cm	Heavy Standard:Clear Stem min. 200:4-5m high	
2 -	Betula pendula	20-25cm	Multi-Stemmed :3 brks :RB: min 3.5-4 m high	
1 -	Quercus robur	30-35cm	Semi-Mature :Clear Stem min. 200 :RB: min 4-5m high	
3 -	Sorbus aria	30-35cm	Heavy Standard:Clear Stem min. 200:4-5m high	
Total :11 -				

Shrubs					
No.	Species Name	Height	Pot Size	Specification	Density
27 -	Cornus sanguinea	40-60cm	5L	Branched: 4 brks: C	5/m²
Total :27 -					

Herbaceous				
No.	Species Name	Pot Size	Specification	Density
57 -	Ajuga reptans	3L	3 Buds :C :Full Pot	9/m²
43 -	Geranium sanguineum	3L	3 Buds :C :Full Pot	5/m²
30 -	Helleborus foetidus	5L	Full Pot: C	5/m²
14 -	Nepeta cataria	3L	3 Buds :C :Full Pot	5/m²
37 -	Pulmonaria longifolia	3L	3 Buds :C :Full Pot	6/m²
51 -	Stachys officinalis	3L	Full Pot	9/m²
69 -	Veronica spicata	3L	3 Buds :C :Full Pot	6/m²
Total :301 -				

Bulbs

Bulbs			
No.	Species Name	Specification	Density
45 -	Narcissus pseudonarcissus ssp pseudonarcissus	Firm bulb	No.
Total :45 -			

Grasses				
No.	Species Name	Pot Size	Specification	Density
41 -	Briza media	3L	Full Pot	5/m²
67 -	Briza media	3L	Full Pot	0.3Ctr
64 -	Carex flacca	3L	Full Pot	5/m²
17 -	Luzula sylvatica	3L	Full Pot	6/m²
Total :189 -				

Notes:

1. This drawing is to be read in conjunction with the written specification, if provided and all relevant contract documentation from the design team, with any conflicting information to be brought to the attention of PRP in writing before commencing on site.
2. The contractor is to check and verify all levels and dimensions before construction. Any discrepancies are to be brought to the attention of PRP in writing before commencing on site.
3. All sub base and concrete design and specification to Engineer's details.
4. Waterproofing of any element to be specified by others, unless specifically noted.
5. All proprietary products shall be installed in accordance with manufacturers written instructions.
6. Plant numbers are an indication only and plants should be ordered to suit site areas in accordance with scheduled plant densities.
7. Any proposed plant substitution shall be agreed with the Landscape Architect prior to ordering.
8. Samples of all exterior metal work to be approved by Landscape Architect.
9. All drainage inspection chambers to Engineers requirements.
10. All dimensions in mm unless otherwise stated.
11. Do not scale from this drawing.
12. All sub bases and concrete foundation to Engineers design. Information given here is indicative only.
13. Lighting to Engineers layout and detail.
14. Water points to Engineer's detail

TURF: LT


Lawn areas on ground level are to be hardwearing amenity turf LT8 festival plus Supplier: Lindum Turf

Reinforced grass: RG

Reinforced grass at ground level to ABG advanced turf laid on reinforced root zone and to Palmers Street

Wildflower turf: WFT

Lawn area to Kenavon Drive are Wildflower turf species rich 26 Supplier Wildflower turf



CDM REGULATIONS 2015. All current drawings and specifications for the project must be read in conjunction with the Designer's Hazard and Environment Assessment Record. All intellectual property rights reserved.

Designed with reference to the surveys, information and reports listed:
XXXXXXXXXXXX XXXXXXXXXXXXXXX, XXXXXXXXXXX XXXXXXXXXX, XXXXXXXXXXX
XXXXXXXXXXXX, XXXXXXXXXXXXXXX XXXXXXXXXXXXXXX, XXXXXXXXXXX XXXXXXXXXX.

Rev	Date	Description
06	27/04/21	Tree species 'frans fontaine' changed to Lucas
07	06/08/21	Planting to river frontage changed to include more native species
08	12/08/21	CAD layers updated
08A	28/03/22	Species along the riverside updated to be native.

	Rev	Date	Description	
MQ	AGF	-	14/06/19	Issued to Discharge Planning Condition 38
MQ	AGF	01	28/06/19	Landscape 100% Stage 4
		02	05/08/20	Layout and Planting Updated
MQ	AGF	03	17/11/20	Species updated
MT	MG	04	11/02/21	Tree species close to buildings amended
		05	23/04/21	Oak size reduced

Dwn	Ckd	Drawn	SC
SC	AJ	Checked	AJ
SC	AJ		
MY	AJ	Date	May 2019
MY	AJ		
MQ	AGF	Scale @ A1	1-100
MQ	AGF		

KENAVON DRIVE

Planting plan
Sheet 5

F367-AL6086C-SW-GF-L-3055
REV 08A

PLANNING

