



Tilt-In Balanced Vertical Slider (HTBVS)


Heavy duty units with self-supporting panes. Tilt-in facility enables each secondary sash (panel) to be independently released from the outer frame and pivoted inwards through almost 180°.

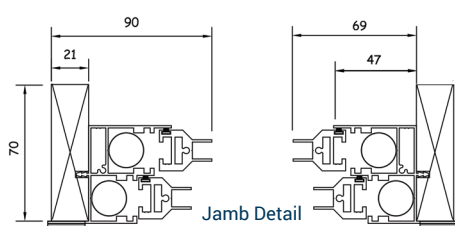


Head Detail



Interlock



Cill Detail



Features

- Slim, unobtrusive aluminium profile
- Smooth sliding action utilising spring balances to ensure ease of use and to support the weight of panel
- Both panels tilt-in to allow easy access for cleaning and maintenance
- Improved noise and thermal installation
- Suitable for arched applications
- Suitable to have bevelled timber subframe to fix in to bays / splayed reveals
- Can be coupled or stacked with other units in the range to treat large areas of glazing or long runs of windows

Variations of Basic Unit

- Goal post subframe and aluminium available
- Locking Fitch Catch available
- Standard and acoustic trickle vents are available
- Tilt-in balanced vertical slider can be coupled and stacked using a heavy duty frame coupling section or timber to timber
- Larger trims and timber trims available at additional costs
- Variety of stock colours available, including all RAL options
- Can accept flyscreen mesh


Specification

- Glazing options: 4mm - 8.8mm
- Choice of timber subframes
- Pre-drilled and countersunk to suit either face fix or reveal fix
- Woolpile inserted in to panel section groove to create outer frame seal
- Gasket colour option of black or white
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour white high gloss - RAL 9910
- Fitch catch located centrally on mid rail

Heritage

Configurations

HTBVS



Based on 4mm Glass

Max width: 1,500mm

or Max height: 3,000mm



Optimum Noise Reduction: 49dB (Rw)

Using 6.4mm acoustic laminate glazing, with 200mm glass-to-glass



Optimum U Value: 1.868 W/m²K

Using 4mm toughened Low E glazing, with 80mm glass-to-glass