





NOISE SOLUTIONS

INLINE ATTENUATION

AVAILABLE IN 0.5M, 1M & 1.5M LENGTHS

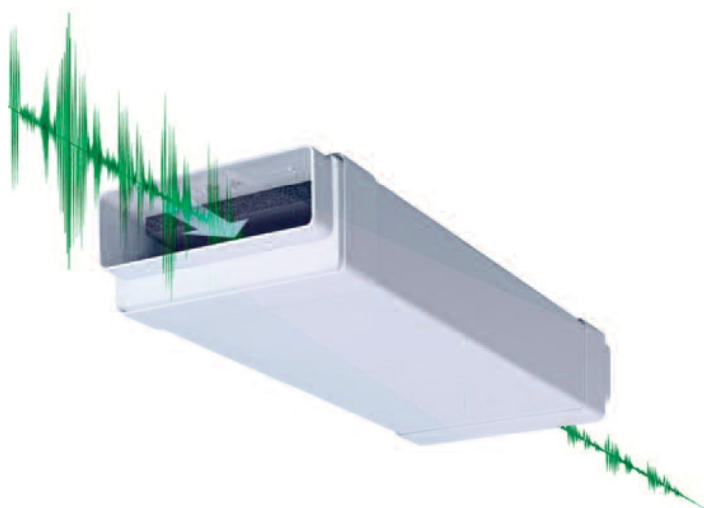

- **Regulation driven** - to reduce duct noise for designers "Domestic Compliance Guide 2010" and noise requirements Part F 2010
- **Corrosion proof** - lightweight PVC removes the risk of corrosion
- **Reduce cross talk** - room to room noise
- **Prevents noise ingress** - for inner city development
- **Space saving** - slimline, low profile design for integration within your ducting system

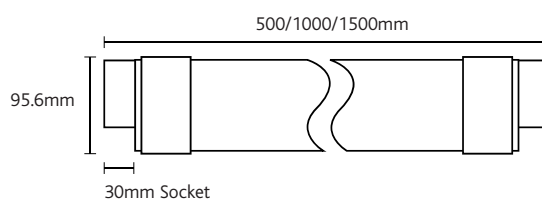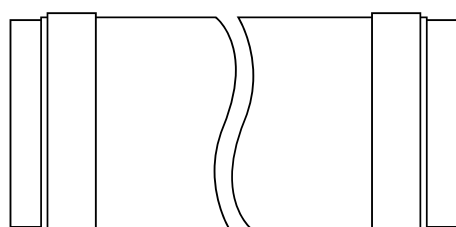

SOUND ABSORPTION CHART

Silencer Code	125 Hz	250 Hz	500 Hz	1k Hz	2k Hz	4k Hz	8k Hz
PVCSIL-500	10.8	5.6	6.2	7.5	18.9	34.3	31.7
PVCSIL-1000	10.1	6.6	8.3	11.6	40	49.8	51.4
PVCSIL-1500	9.9	8.2	11.4	16.1	44	53.5	53

Tested by SRL Test Report No. C/08/51/20594/R02