


Tornado Stock

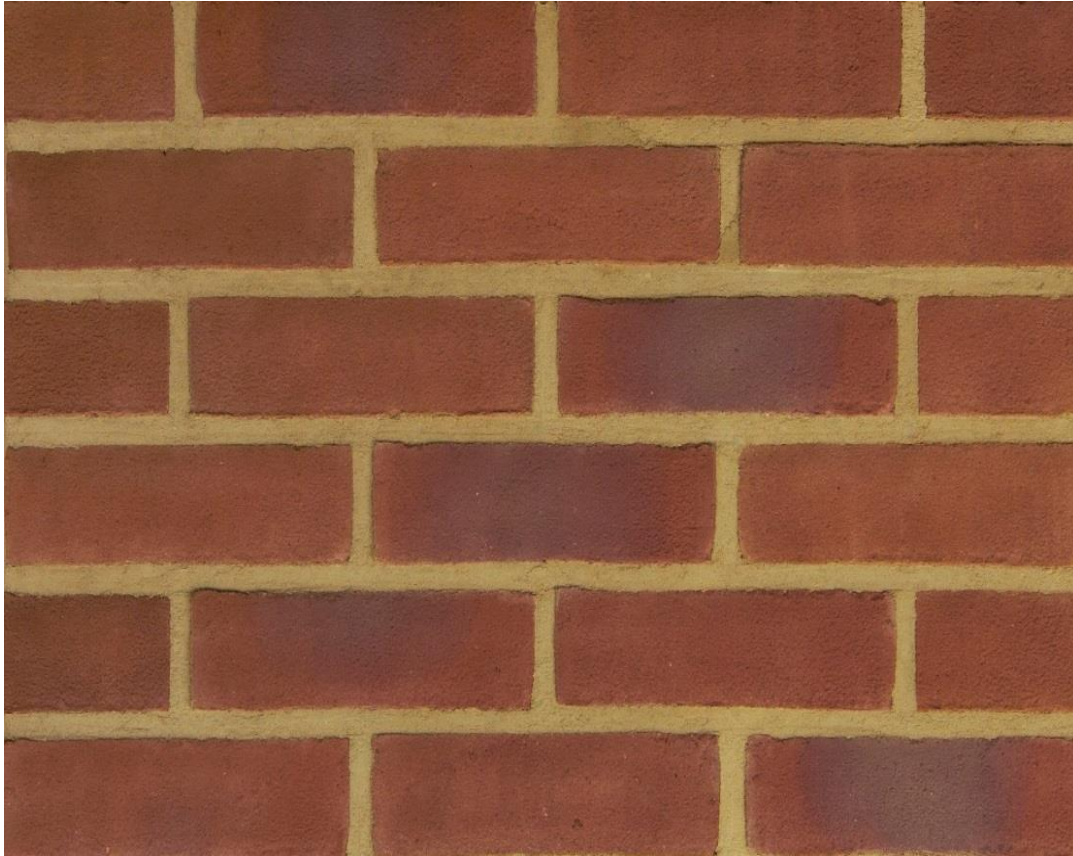

Product Information

Pack Code	DVMA
Type	Stock
Packaging	Palletised & shrink-wrapped

Technical Specification

Brick Dimensions (L x W x H mm)	215 x 102.5 x 65mm
Size Tolerances Mean & Range	T2 R1
Configuration	Single Frog
Voids (%)	<20
Compressive Strength (N/mm ²)	≥ 15
Active Soluble Salts	S2
Water Absorption	≤ 14%
Durability	F2
Gross Dry Density (Sound Insulation) (Kg/m ³)	1780
Equivalent Thermal Conductivity "K" Value 5% Exposed	0.52
Initial Rate of Absorption (Suction Rate) (Kg/m ² /min)	IW3 1.5-4.0

