




A vertical sliding unit with panels that can tilt-in; useful when windows have unequal pane sizes or if frames need to be fitted close together. Sashes are supported on spring balances and have stay arms to allow safe tilting for cleaning or access.

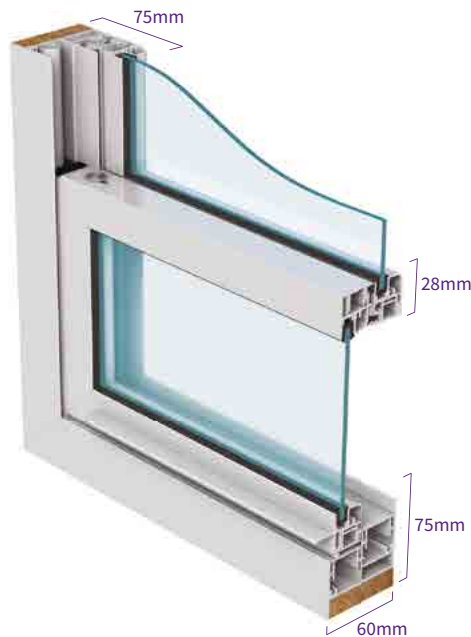

FEATURES

- Sprung release catches allow sashes to tilt in
- Stainless steel stay arms safely hold the sash in the open position
- Friction brake mechanism prevents the sashes sliding in the tilt position
- Integral projecting finger pull to lower sash
- Twin seals ensure good sealing efficiency
- Fixings concealed within the frame - trims not required
- Frames may be linked with a colour matched aluminium transom/mullion section

DIMENSIONS

Recommended maximum frame

Format	Height (mm)	Width (mm)
2 PANES	3000	1500

Maximum sash (h)1500mm x (w)1500mm, minimum sash (h)400mm x (w)400mm

Overall dimensions are subject to a maximum sash weight of 20kg

Sash height to width ratio should not normally exceed 1:3



FRAME COLOUR

Stock finish is white HIPCA 9910 semi-gloss

Any standard powder paint, wood grain finish or anodised finish to order

OPTIONS

Glazing	4mm to 6.8mm
Ironmongery	H17 Cranked 'D' handle to upper sash
(see page 44/45)	L2 Lockable fitch catch