


SCALE



All timber to be treated (tanalised)
Fixtures and fitting to be galvanised

Fence attached to posts with
U or L brackets (fencefix or similar)

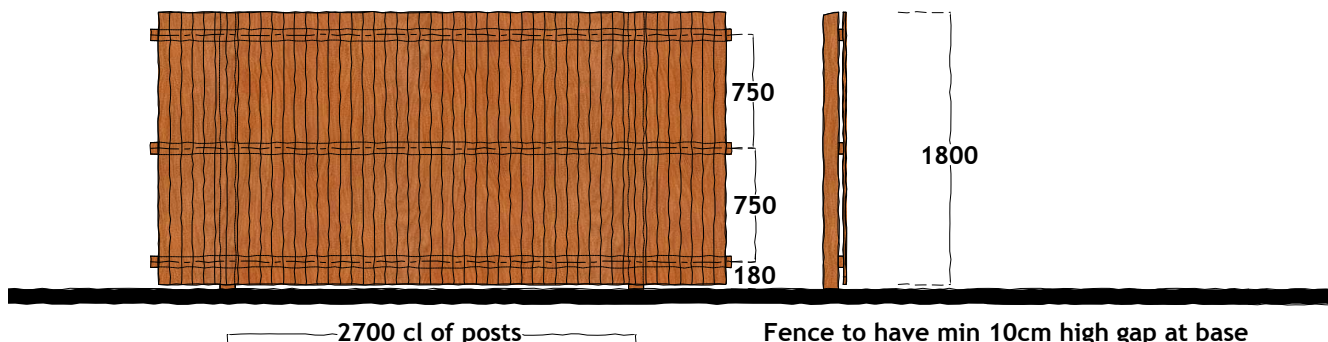

Fence to have min 10cm high gap at base
(min 1 per length of fence) to facilitate
the movement of small mammals across the site

1800mm high Timber Fence.

REVISIONS

Rev:	Description:	Date:	By:
A	Scale Bar added	29.06.16	PNH
B	Gap at base note added	15.11.16	PNH



PLANNING

LAND TO REAR
282 HENLEY ROAD
CAVERSHAM
BERKS

FENCE DETAIL

13-054/07 Rev B

JAN 2016

1:50 @ A4

