



R2L2

A complete road lantern family at the forefront of LED technology to offer excellent lighting performance and cover all applications

- Comprehensive range available in two sizes with extensive optical, lumen and light distribution choice for all road applications
- Efficient (up to 120lm/W) R-PEC optic offering 12 types of light distribution for precise light placement with no waste light
- Maximises energy savings with a wide range of intelligent lighting control solutions from stand alone dimming to fully remote control via central monitoring system
- Attractive, universal and integrated spigot offering flexibility through top and side entry as well as tilt adjustment



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

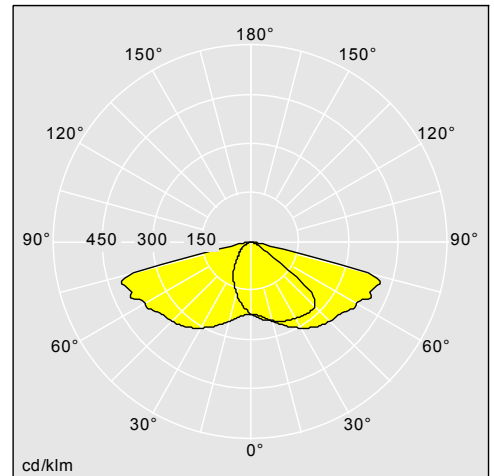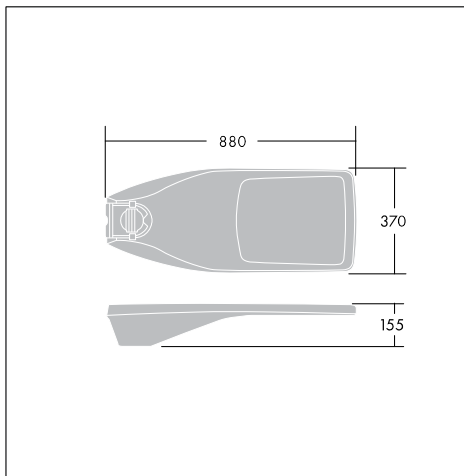

96266446

Material/Finish

Housing, canopies, spigot: die-cast aluminium with powder coating and min 1000hrs salt fog resistance
Glass: extra-white tempered, 4mm thick
Screws: Ecolubric® treated

Powder coating texturised light grey as standard. Other RAL or AKZO colours available on request. Other special treatment on request.

Installation/Mounting

Post-top mounting: Ø60-76mm
Side-entry mounting: Ø48-60mm or Ø32-42-48-60mm (CL1 as standard)
Operating temperature: $-25^{\circ}\text{C} < T_a < +35^{\circ}\text{C}$
Suitable for use up to $+50^{\circ}\text{C}$ through the use of heat regulation system
Recommended mounting height: 4m to 14m
Adjustable tilt angle side: $0^{\circ} / -5^{\circ} / -10^{\circ} / -15^{\circ}$
Adjustable tilt angle top $0^{\circ} / +5^{\circ} / +10^{\circ}$