



APOLED50

Polaris AC LED Floodlight Cool white 50W Graphite



Features

Slim profile die-cast aluminium architectural floodlight.

No driver required.

IK10 rated.

50W LED comparable light output to 70W HQL.

Pre-wired with 1 metre of rubber insulated cable for ease of installation.

LED lifespan L70 40,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Warranty (Years)	3
CE Mark	Yes
Height / Depth	65
Length / Diameter	215
Width	265


Technical Information

Wattage	50W
Lumens Delivered	4158lm
Lm/W	80 Lm/W
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-40°C to 40°C

Technical Data - ETIM 6 - Downlight/spot/floodlight (EC001744)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
With light source	Yes
Material housing	Aluminium
Colour housing	Black
Suitable for number of lamps	1
Voltage type	AC
Nominal voltage	230-230 V
Type of control gear	Not required
Control gear included	No
Type of dimming	Not dimmable
Degree of protection (IP)	IP65
Impact strength	IK10
Protection class	I
Rated luminous flux acc. IEC 62722-2-1	4158 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Length	215 mm
Width	265 mm
Suitable for ceiling mounting	No
Adjustability	Swivelling
Suitable for lamp power	50-50 W
With light sensor	No
With movement sensor	No

Max. system power	50 W
Light sharing	Symmetric
Height/depth	65 mm
Suitable for light-track mounting	No

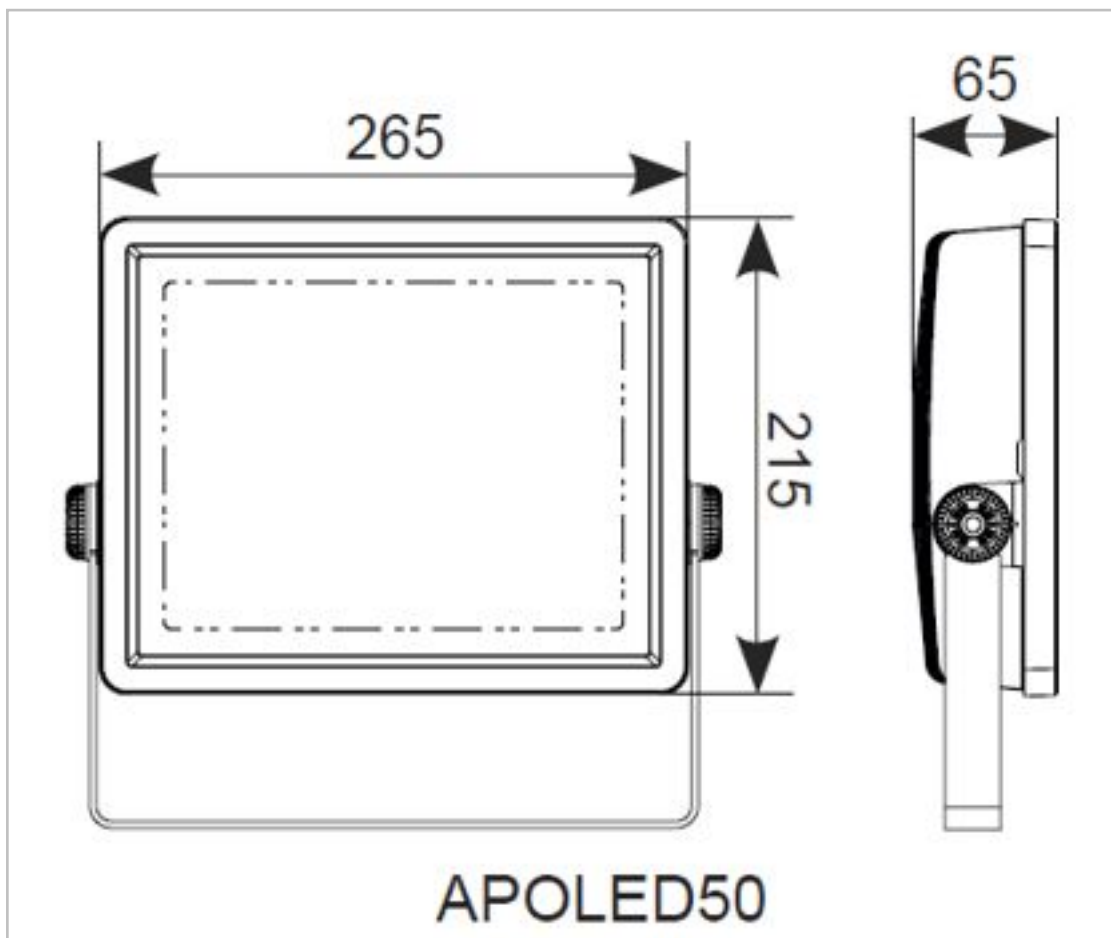

Datasheet generated from <http://www.electrika.com> last updated Thursday, December 7, 2017 12:00:15 PM