


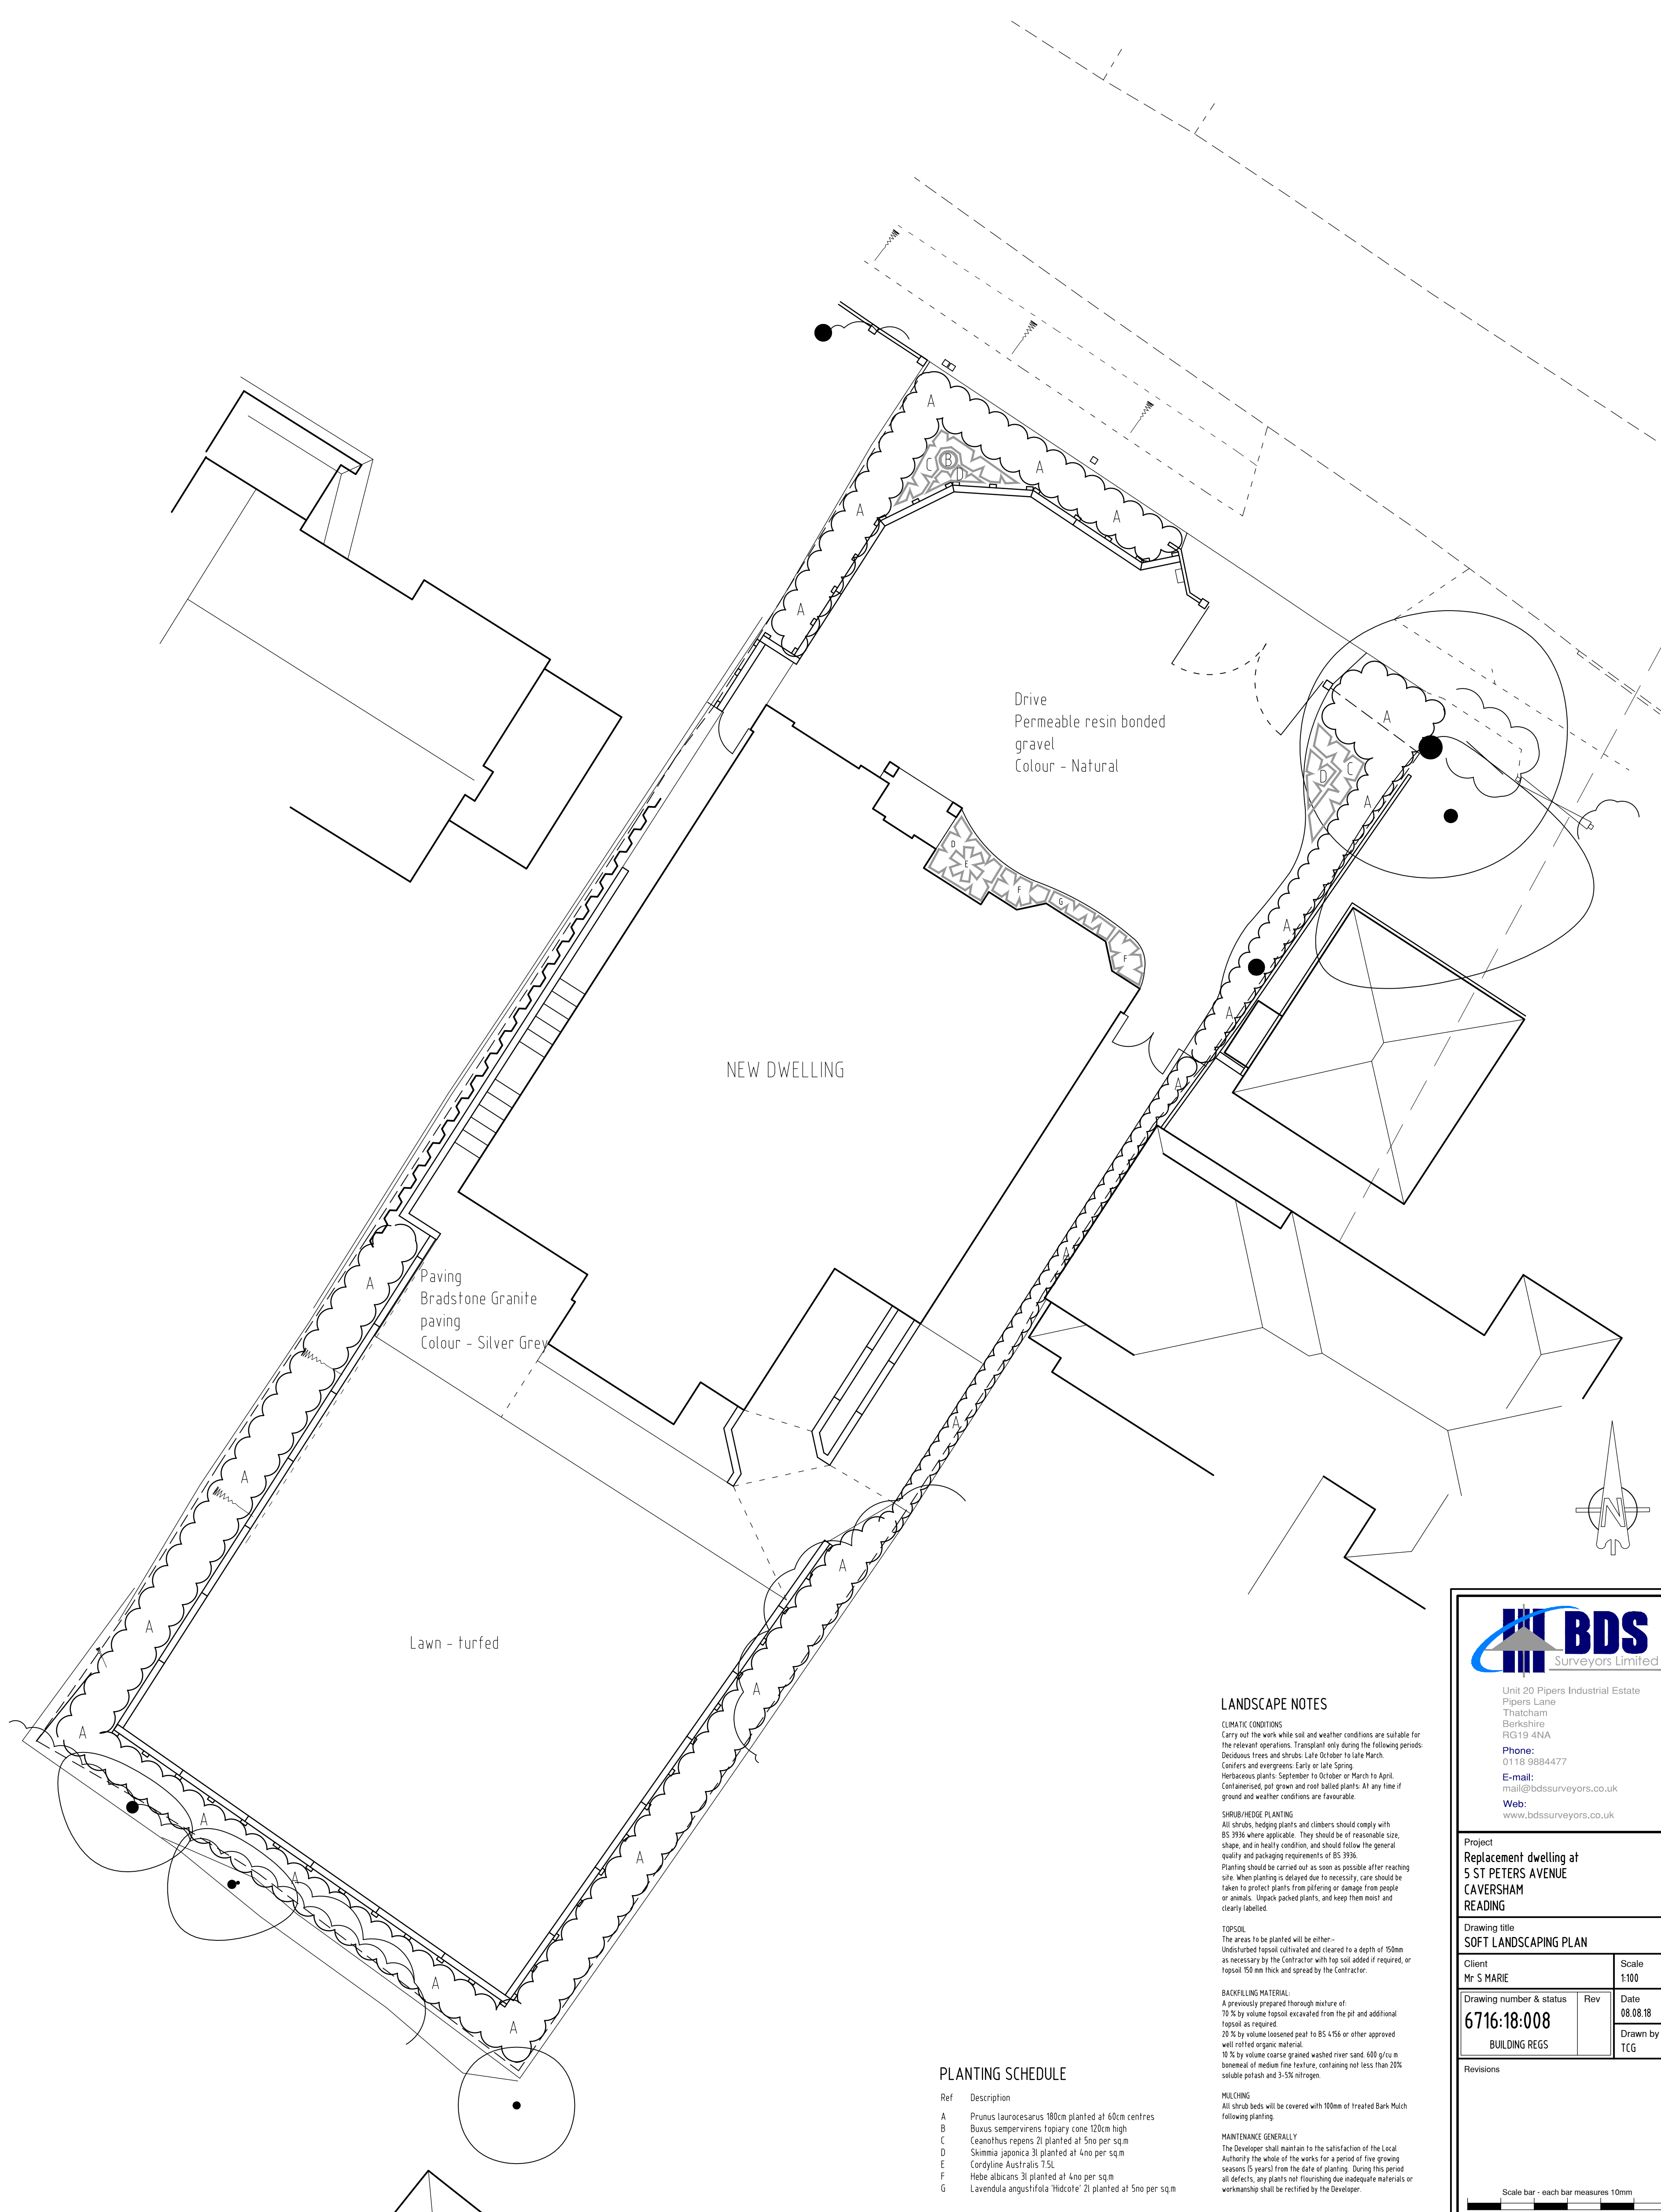

PLANTING SCHEDULE

Ref	Description
A	Prunus laurocerasus 180cm planted at 60cm centres
B	Buxus sempervirens topiary cone 120cm high
C	Ceanothus repens 2l planted at 5no per sqm
D	Skimmia japonica 3l planted at 4no per sqm
E	Cordyline Australis 7.5l
F	Hebe albicans 3l planted at 4no per sqm
G	Lavendula angustifolia 'Hidcote' 2l planted at 5no per sqm

LANDSCAPE NOTES

CLIMATIC CONDITIONS
Carry out the work while soil and weather conditions are suitable for the relevant operations. Transplant only during the following periods:
Deciduous trees and shrubs: Late October to late March.
Conifers and evergreens: Early or late Spring.
Herbaceous plants: September to October or March to April.
Containerised, pot grown and root balled plants: At any time if ground and weather conditions are favourable.

SHRUB/HEDGE PLANTING
All shrubs, hedging plants and climbers should comply with BS 3936 where applicable. They should be of reasonable size, shape, and in healthy condition, and should follow the general quality and packaging requirements of BS 3936.
Planting should be carried out as soon as possible after reaching site. When planting is delayed due to necessity, care should be taken to protect plants from pilfering or damage from people or animals. Unpack packed plants, and keep them moist and clearly labelled.

TOPSOIL
The areas to be planted will be either:-
Undisturbed topsoil cultivated and cleared to a depth of 150mm as necessary by the Contractor with top soil added if required, or
topsoil 150 mm thick and spread by the Contractor.

BACKFILLING MATERIAL:
A previously prepared thorough mixture of:
70 % by volume topsoil excavated from the pit and additional topsoil as required.
20 % by volume loosened peat to BS 4356 or other approved well rotted organic material.
10 % by volume coarse grained washed river sand 600 g/cu m
boremeal of medium fine texture, containing not less than 20% soluble potash and 3-5% nitrogen.

MULCHING
All shrub beds will be covered with 100mm of treated Bark Mulch following planting.

MAINTENANCE GENERALLY
The Developer shall maintain to the satisfaction of the Local Authority the whole of the works for a period of five growing seasons (5 years) from the date of planting. During this period all defects, any plants not flourishing due to inadequate materials or workmanship shall be rectified by the Developer.



Unit 20 Pipers Industrial Estate
Pipers Lane
Thatcham
Berkshire
RG19 4NA
Phone:
0118 9884477
E-mail:
mail@bdssurveyors.co.uk
Web:
www.bdssurveyors.co.uk

Project
**Replacement dwelling at
5 ST PETERS AVENUE
CAVERSHAM**

Reading

Drawing title SOFT LANDSCAPING PLAN	
Client Mr S MARIE	Scale 1:100
Drawing number & status 6716:18-008	Rev 1
Date 08.08.18	
Drawn by TCG	

Revisions

Scale bar - each bar measures 10mm

Drawing Copyright © BDS Surveyors Ltd - A1 594 x 841mm