

1. This drawing must **NOT** be scaled - all dimensions MUST be checked on site.
2. Floor dimensions, levels, etc. only, are to be used.
3. Any inaccuracies, must be notified to NWP Ltd.
4. This drawing is subject to copyright and is not to be reproduced in part or without approval.
5. This drawing shall be read in conjunction with project specifications and all other contract documentation.
6. Detail drawings and larger scale drawings take precedence over smaller scale drawings.
7. Positions of equipment marked on drawings are indicative only and must be checked on site before installation due to building fabric anomalies.

PRELIMINARY		
Drug Status		
Rev	Date	Revision Description
P1	01.08.18	INITIAL RELEASE
		Auth
		—

Legend

VENTILATION	
SYMBOL	DESCRIPTION
	Supply Air Valve
	Extract Air Valve
	Wall Mounted MWH Fan

MVHR Schedule

SYMBOL		DESCRIPTION
MYHR 01		Vedaire MAXIBY
MYHR 02		Vedaire MAXI +

Notes:

Design based on System 4 of Building Regulation Part F : Continuous ventilation via MVHR
Purge provided by MVHR at 4 ACH with local boost facility
Internal door to be undercut to allow free movement of air as per Building Regulation Part F requirements

THAMES QUARTER,
READING

TYPICAL APARTMENT VENTILATION


NWP
 ELECTRICAL, MECHANICAL
 & UTILITY SERVICES


Employee House
 The United Industrial Park
 Kinnaird Way, Conny
 LL18 5JA

Telephone: 01745 351351
 Fax: 01745 356455
 email: info@nwp-tel.com
www.nwp-tel.com


Drawn by:	Ref:
<i>S.Evans</i>	<i>JM-----</i>

ORIGINATOR:	01.08.18
<i>R.Hughes</i>	



XREF Based on

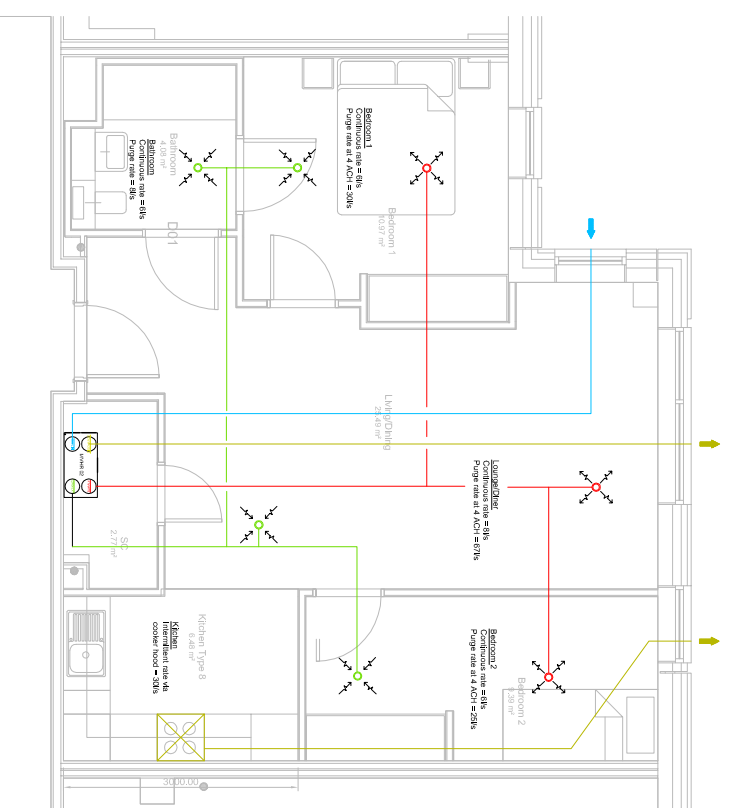

APARTMENT TYPE 2B

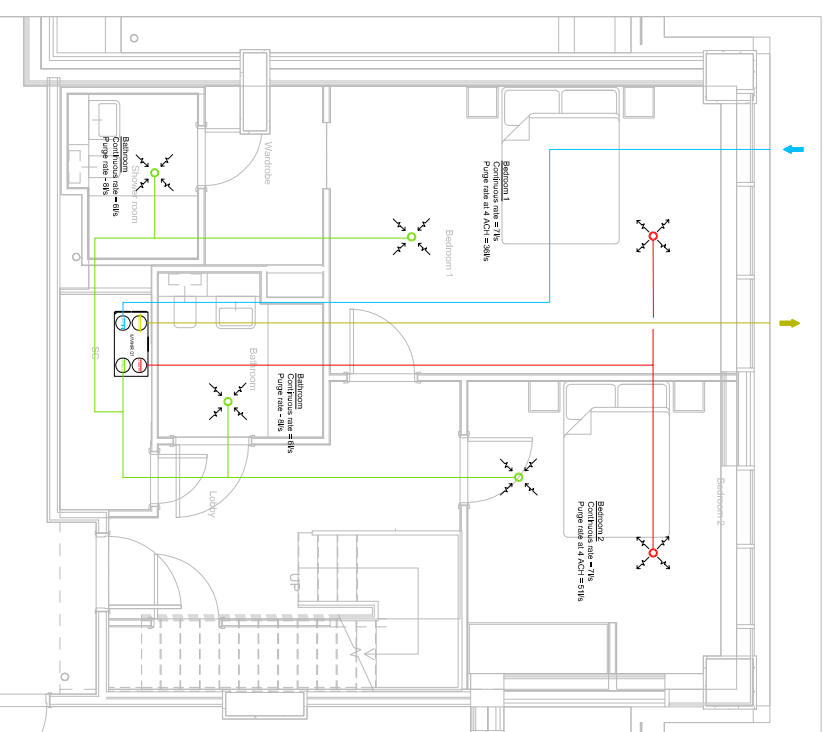

APARTMENT TYPE DE

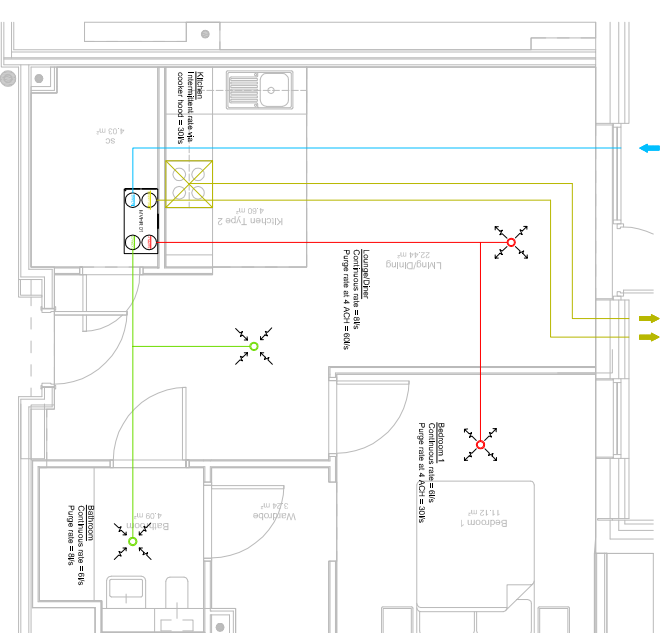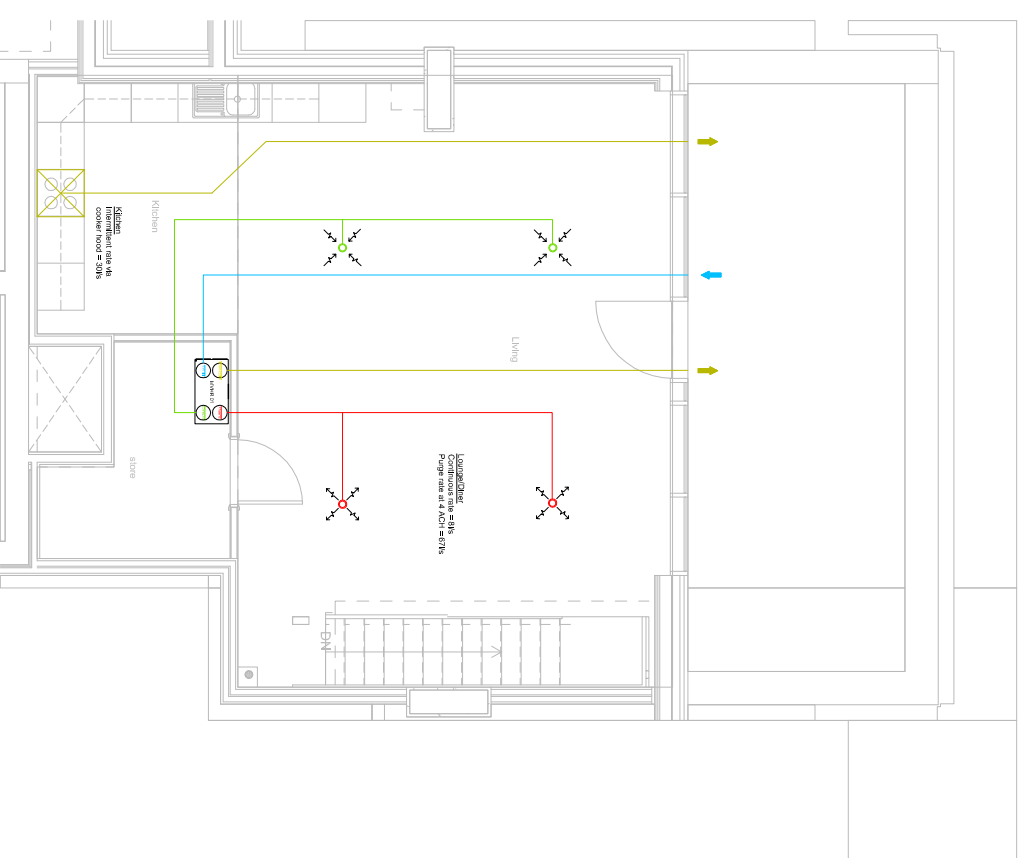

APARTMENT TYPE 1B