

Intended for
St Edward Homes Limited

Document type
Report

Date
June 2017

GREEN PARK VILLAGE GROUND CONTAMINATION INTERPRETATIVE REPORT - PHASE 5

GREEN PARK VILLAGE GROUND CONTAMINATION INTERPRETATIVE REPORT - PHASE 5

Revision -
Date **02/06/2017**
Made by **Jørn Pace**
Checked by **Tom Smith**
Approved by **Paul Stubbington**
Description **Ground Contamination Interpretative Report – Phase 5**

Ref 1620000492/RPT/014

CONTENTS

EXECUTIVE SUMMARY	1
1. INTRODUCTION	2
1.1 Brief	2
1.2 Planning Context	2
1.3 Information Sources	3
1.4 Earthworks and Proposed Development	3
1.5 Objectives	4
1.6 Constraints and Limitations	4
2. SITE SETTING	5
2.1 Site Location and Description	5
2.2 Site History	5
2.3 Previous Works	5
2.4 Anticipated Ground Conditions, Hydrogeology, Hydrology	7
2.5 Conceptual Site Model	7
3. GROUND INVESTIGATION	9
3.1 Design	9
3.2 Site Investigation Activities	9
3.3 Laboratory Analysis	10
3.4 Groundwater and Ground Gas Monitoring	10
4. GROUND CONDITIONS	12
4.1 Ground Conditions Encountered	12
4.2 Groundwater	12
4.3 Visual and Olfactory Evidence of Potential Contamination	13
5. GROUND CONTAMINATION – GENERIC QUANTITATIVE RISK ASSESSMENT	14
5.1 Introduction	14
5.2 Data Quality and Site Coverage	14
5.3 Human Health Assessment	15
5.4 Soil Screening Analysis	15
6. CONTROLLED WATERS ASSESSMENT	17
6.1 Methodology	17
6.2 Soil Leachate Assessment	17
6.3 Groundwater Assessment	17
7. GROUND GAS ASSESSMENT	20
7.1 Methodology	20
7.2 Results and Discussion	20
8. GROUND CONTAMINATION RISK EVALUATION	22
8.1 Proposed Development Considerations	22
8.2 Conceptual Site Model	22
9. CONCLUSIONS AND RECOMMENDATIONS	26
9.1 Conclusions	26
9.2 Recommendations for Further Works	27

FIGURES

- Figure 1 Site Location Plan
- Figure 2 Trial Pit Location Plan
- Figure 3 Exploratory Hole Plan

APPENDICES

Appendix 1

Terramech Draft Factual Information

Appendix 2

Legislative Context and Methodologies

Appendix 3

Laboratory Results

Appendix 4

Soil and Groundwater Data Assessments

Appendix 5

Gas and Groundwater Monitoring Data

Appendix 6

Report Reliance

EXECUTIVE SUMMARY

Ramboll UK has been instructed by St Edward Homes Limited to undertake a ground contamination interpretative report in relation to its proposed redevelopment at Phase 5 of the Green Park Village development in Reading.

Early Ordnance Survey mapping (1883) indicates that Phase 5 was undeveloped open land known as "Smallmead Common". By the 1990s Phase 5A was a vehicle storage area belonging to Pingemead Industrial Estate to the south. Phase 5B has historically been undeveloped open land with evidence of re-profiling of the ground and stockpiling. Phase 5A and 5B were formerly split by a drainage ditch which was infilled during 2016.

A ground investigation was undertaken to close out the soil sampling of Phase 5B and provide groundwater and ground gas data across the entire Phase 5. The ground investigation, undertaken in March/April 2017, comprised the advancement of seven windowless sample boreholes to depths between 5m and 8m which supplemented 30 machine excavated trial pits that were excavated to depths of between 0.8m and 2.7m in July and August 2016. The ground investigation encountered Made Ground overlying (in sequence) Alluvium, River Terrace Deposits and the Lambeth Group. The White Chalk Subgroup underlies the Lambeth Group however was not encountered on Phase 5. The River Terrace Deposits and Lambeth Group are classified as Secondary A Aquifers whilst the Chalk is a Principal Aquifer. A trout lake (part of Phase 3C) lines the western boundary of Phase 5 however groundwater flow within the superficial aquifer is understood to be north-west towards a drainage ditch at the northern extent of the site which feeds Foundry Brook.

Made Ground soils within Phase 5A were identified to be impacted with asbestos containing materials in 2016 and have subsequently been remediated and capped with inert materials imported under the sites Environmental Permit. Contaminants of concern within the remainder of the phase (5B) are limited to asbestos containing materials in one isolated location to the northern extent of Phase 5A in an area which is yet to be filled. This area is located away from proposed gardens and buildings and therefore disturbance of these soils are likely to be limited.

Leachable contaminants of concern including lead and arsenic are not considered to be significant and there is limited evidence that the Made Ground is impacting the underlying groundwater. Inorganic contaminants of concern in groundwater are also not considered to be significant due to their marginal exceedences of adopted assessment criteria and are likely to be attributed to background chemistry rather than being representative of an on-site source of contamination. Heavy end aliphatic petroleum hydrocarbons have been recorded above assessment criteria in groundwater however these are considered to be of low mobility and risk. The potential sources of the hydrocarbons have since been removed or remediated and it is considered that suitable dilution and dispersion will occur prior to impacting sensitive receptors.

Elevated concentrations of carbon dioxide and methane have been recorded during the monitoring period and as such ground gas protection measures will be required at the site. The performance requirements of these should be detailed in a remediation strategy for the site. However, it may be possible to reduce the need for ground gas protection measures within buildings through additional detailed assessment.

Overall, the assessments undertaken herein have resulted in the identification of a limited number of plausible pollutant linkages. Following this report the immediate next steps are recommended to comprise the preparation of a foundation works risk assessment and a remediation strategy specific to ground gas risks for the phase.

1. INTRODUCTION

1.1 Brief

Ramboll UK Limited (hereafter referred to as Ramboll) has been appointed by St Edward Homes Limited to undertake a ground contamination interpretative report to support the redevelopment of Phase 5 of the proposed Green Park Village development (GPV), located on the southern fringe of Reading (hereafter referred to as the site).

The GPV site is divided into a number of phases, each of which will be redeveloped separately. This report only assesses Phase 5 which is proposed for predominantly residential end uses. This ground contamination interpretative report has been prepared to assist design and support the discharge of Planning Condition 42 parts (1) and (2) as outlined in Section 1.2.

This report follows the site wide Ground Contamination Interpretative Report which was prepared by Ramboll in March 2016 ref 1620000492/RPT/003, which provided a review of previously collated geoenvironmental information by Peter Brett Associates (PBA). From review of the PBA information, a number of areas of potential contamination risk were identified which were not previously investigated. This report addresses the gaps in information including any potential implications upon the development. This report does not constitute a geotechnical assessment of the site.

1.2 Planning Context

The site was granted Outline Planning Permission in 2011 under Application No 10/01461/OUT which comprised a hybrid application with full planning permission with no matters reserved for Phase 1 of the development and outline planning permission with all matters reserved for the subsequent phases of the development.

Planning permission included a number of conditions in relation to ground contamination. These are summarised below.

- Condition 42. Prior to the commencement of each phase of development approved by this planning permission (or such other date or stage in development as may be agreed in writing by the local planning authority), the following components of a scheme to deal with the risks associated with contamination in relation to that phase of development shall be submitted to and approved, in writing, by the local planning authority:
 1. A site investigation scheme, based on Phase I desk top study to provide information for detailed assessment of the risk to all receptors that may be affected, including those offsite.
 2. The investigation results and detailed risk assessment and, based on these, an options appraisal and remediation strategy giving full details of the remediation measures required and how they will be undertaken. The remediation measures shall include an implementation timetable and remediation verification methodology. The remedial scheme must be carried out before the development commences unless otherwise agreed in writing by the local planning authority.
- Condition 43. Should any unforeseen contamination be encountered during the development, of any phase of the scheme no further development (unless agreed in writing with the local Planning authority) of that phase of the scheme shall be carried out until the developer has submitted, and obtained written approval from the local planning authority for an amendment to the remediation strategy for that phase of the scheme detailing how this unsuspected contamination shall be dealt with. Any further investigation/remedial/protective works shall be carried out to agreed timescales and approved by the local planning authority in writing.

- Condition 44. Within one month of the completion of any required remediation being carried out for each phase of development, a Site Completion Report shall be submitted to an approved in writing by the local planning authority for that phase. The report must include:
 1. Confirmation that all remediation measures have been carried out fully in accordance with the approved remediation scheme. An appropriately qualified person shall oversee the implementation of all remediation.
 2. A long term monitoring and maintenance plan for longer term monitoring of pollutant linkages, maintenance and arrangements for contingency action and for the reporting of this to the local planning authority.
 3. If no contamination is encountered during the development, a letter confirming this fact shall be submitted to the local planning authority upon completion of the development.
- Condition 48. Piling or any other foundation designs using penetrative methods shall not be permitted other than with the express written consent of the local planning authority, which may be given for those parts of the site where it has been demonstrated that there is no resultant unacceptable risk to groundwater.

1.3 Information Sources

This document draws on information from the following sources:

- i. Ramboll, March 2016. Green Park Village, Ground Investigation Report. Ref 1620000492/RPT/002.
- ii. Ramboll, March 2016. Green Park Village, Ground Contamination Interpretative Report. Ref 1620000492/RPT/003.
- iii. Ramboll, August 2016. Green Park Village, Technical Note – Phase 5 Ground Investigation Findings and Remedial Options. Ref. 1620000492/TN/003.
- iv. Ramboll, August 2016. Green Park Village – Phase 5, Asbestos Management Plan. Ref. 1620000492-GPV-P5-AMP-R2.
- v. Ramboll, May 2017. Green Park Village, Specification for Earthworks. Ref 1620000492/SP/001.
- vi. Terramech, June 2017. Factual Report on Ground Investigation. Ref 3700D.

1.4 Earthworks and Proposed Development

In order to facilitate the wider GPV development a significant earthworks programme is proposed to be undertaken in order to bring the site to a minimum level of +40.2 m Ordnance Datum (OD) for flood alleviation purposes. The filling operation will involve the import of circa 600,000 m³ of material across the site under a re-use of waste in construction bespoke environmental permit ref EPR/DB3206HL. Filling operations would be conducted under the material requirements of the Ramboll Specification for Earthworks¹.

Phase 5 of the GPV development will comprise residential housing with gardens, areas of soft landscaping and associated infrastructure.

The majority of the Phase 5 will need to be raised by approximately 1.5 m from the original ground level of +39 mOD. This platform will effectively act as a cap to the underlying ground and is required for flood alleviation purposes.

¹ Ramboll, May 2017. Green Park Village, Specification for Earthworks. Ref 1620000492/SP/001.

1.5 Objectives

The objectives of this report are:

- i. To further assess the potential for significant risks to both human health and environmental receptors (including controlled waters) for the contaminants identified at the site;
- ii. To carry out a refined contaminated land risk assessment based on a source, pathway and receptor methodology in general accordance with the provisions of the EA / DEFRA Model Procedures for the Management of Land Contamination, 2004 (EA, 2004); and
- iii. To refine the Conceptual Site Model (CSM) based on the findings of the ground investigation.

1.6 Constraints and Limitations

This report has been prepared for the use of St Edward Homes Limited for the purpose of assisting them in developing appropriate risk management measures in order to allow the safe development of the land at Green Park Village for the proposed end use at the time of writing.

The recommendations detailed in this report relate to details of the proposed development at the time of writing the report. Any substantial changes to the proposed design may require a reassessment of the implications of the environmental risks identified. This report may not be used in whole or in part by any third parties without the express permission of Ramboll in writing.

Ramboll has endeavoured to assess all information provided during this process. This report summarises information provided from a number of external sources and cannot offer any guarantees or warranties for the completeness or accuracy of information relied upon.

The conclusions resulting from this study are not necessarily indicative of future conditions or operating practices at or adjacent to the site.

2. SITE SETTING

2.1 Site Location and Description

The GPV site is located approximately 4 km to the south of Reading Town Centre, Berkshire. Phase 5 is present in the centre of the GPV site and occupies approximately 2.1 ha at an approximate National Grid reference of 496906, 170328. The site location is shown in Figure 1.

Phase 5 is separated into two separate sub-phases, Phase 5A (west) and 5B (east), as described below.

2.1.1 Phase 5A

Phase 5A is currently vacant land following the land raise earthworks which occurred in two stages between August and October 2016 and in May 2017. Localised areas on the southern section of Phase 5A are used for the storage of construction materials for Phase 1 to the south. Phase 5A is relatively flat and sits at an approximate level of +40.5 mOD with the exception of the northern extent which is occupied by the access road to Phases 1, 3 and 4. Phase 5A slopes down gradient to the access road which lies at a level of circa +39 mOD.

2.1.2 Phase 5B

Phase 5B is currently made up of the access road which runs from north to south along the western boundary and also west to east along the northern boundary. A series of stockpiles line the eastern section of Phase 5B comprising imported material associated with the environmental permit and other site won material.

Phase 1 is present to the south of Phase 5 which is under construction and was previously occupied by the Pingemead Industrial Estate. The Trout Lake is present immediately adjacent to the west whilst to the north is the GPV northern site boundary beyond which is a restored landfill (Smallmead Landfill) now used for agricultural purposes. To the east of Phase 5 is Phase 4 of the GPV development which like Phase 5B is used for the stockpiling of various aggregate, imported material and other construction materials.

2.2 Site History

Early Ordnance Survey mapping (1883) indicates that Phase 5 was undeveloped open land known as "Smallmead Common". By the 1990s Phase 5A was a vehicle storage area belonging to Pingemead Industrial Estate to the south. Phase 5B has historically been undeveloped open land with evidence of re-profiling of the ground and stockpiling. Phase 5A and 5B were formerly split by a drainage ditch which was infilled during 2016.

2.3 Previous Works

2.3.1 Peter Brett Associates

The GPV development has been subject to numerous historical ground investigations with specific investigations undertaken at Phase 5 by PBA in 2002², 2005³ and 2015⁴.

² Peter Brett Associates, (2002). Geo-environmental Investigation for Phase III, Green Park, Reading

³ Peter Brett Associates, (2005). Earthwork Material Suitability Assessment. Phase III, Green Park, Reading

⁴ Peter Brett Associates, (2015). Report on Ground Investigation for Phase 1A. Green Park Village

These investigations comprised the advancement of four boreholes/window samples to depths between 4 m to 24 m and six trial pits to depths between 1.9 m to 4 m. Visual evidence of contamination was largely limited to anthropogenic materials within the Made Ground whilst a single occurrence of hydrocarbon odours was encountered. Lead, mercury and total petroleum hydrocarbons (TPH) were identified as contaminants of concern within the Phase 5 Made Ground soils however fully speciated organic compound (polycyclic aromatic hydrocarbons (PAH) and TPH) analysis was not undertaken and asbestos screening remained limited. No samples were scheduled for leachate analysis.

Chromium, copper, manganese, ammonia, nitrate, TPH and PAHs were identified as contaminants of concern within groundwater at Phase 5 requiring further investigation.

No elevated hazardous ground gases were detected within the single monitoring well however the ground gas regime remains largely uncharacterised due to the lack of exploratory hole coverage and number of monitoring rounds.

2.3.2 Ramboll

Following the clearance of Phase 5 and the former industrial estate, upon lifting and breaking of the concrete slab in the south-western corner of Phase 5 in 2016, suspected cement bound asbestos sheeting was identified within the soils. Delineation of the impacted soil was subsequently undertaken by Ramboll through the advancement of twenty-three trial pits and the collection of composite samples from the impacted stockpiles. The locations of these are shown in Figure 2.

The initial delineation exercise undertaken in July 2016 identified the asbestos impacts to spread across Phase 5A with bulk asbestos containing materials (ACM) in the form of cement bound sheeting (frequently encountered), insulation board, lagging (infrequently encountered) and also free fibres. In addition to the asbestos impacts, localised benzo(a)pyrene, lead and TPHs were identified within the Made Ground soils. Further details of the initial delineation exercise and risk evaluation are included in the Technical Note – Asbestos Ground Investigation Findings and Remedial Options⁵.

The remediation strategy contained within the Technical Note centred on the land raising works comprising the capping of the impacted residual soils with the importation and placement of inert soils and separation with a demarcation layer. In addition, several mitigation measures were recommended for all future Made Ground disturbing works within Phase 5 including the use of suitable personal and respiratory protective equipment (PPE/RPE), reassurance air monitoring for fibres and 'clean' and 'dirty' work areas separated by fences, warning signs and a decontamination unit. Further delineation of the asbestos impacted area was also recommended prior to site enabling works.

An Asbestos Management Plan⁶ (AMP) was prepared to supplement the Technical Note to address the risks associated with ACMs and to allow site enabling works to progress in an appropriate safe manner. A watching brief from a suitably trained asbestos operative was stated as a requirement for the enabling works.

The enabling works for the majority of Phase 5A were undertaken between August and October 2016. As part of this, the further delineation of asbestos impacts was undertaken which concluded the visibly identified asbestos to be limited to Phase 5A. Follow up works to complete the filling activities along the bank of Trout Lake were undertaken during April and May 2017. These works were largely completed under the watching brief of a Ramboll trained asbestos operative. Further details for the works conducted between August and October 2016 are contained within the Wooldridge Ecotec Ltd Completion Report⁷. Details of work completed in April and May 2017 are to be report shortly.

⁵ Ramboll, (2016). Technical Note – Asbestos Ground Investigation Findings and Remedial Options. Ref. 1620000492/TN/003

⁶ Ramboll, (2016). Asbestos Management Plan – Green Park Village – Phase 5. Ref. 1620000492-GPV-P5-AMP-R2

⁷ Wooldridge Ecotec Ltd, (2016). Green Park Village – Phase 5A Asbestos Remediation Completion Report. Ref. GPV-PH5AARC-DEC16

Through the encapsulation of the impacted soils under circa 1.5 m of clean imported materials, human health risks associated with the residual Made Ground soils in Phase 5A are considered to be negligible due to the lack of plausible pathways.

2.4 Anticipated Ground Conditions, Hydrogeology, Hydrology

The site is underlain by Made Ground, Alluvial clays, River Terrace Deposits, the Reading Formation of the Lambeth Group and the White Chalk Subgroup. As discussed, inert imported engineered fill overlies the residual Made Ground in Phase 5A which is separated by the presence of an orange textile demarcation layer. The Environment Agency classifies the Alluvium as Unproductive Strata, the River Terrace Deposits and Lambeth Group as a Secondary A Aquifer and the White Chalk Subgroup as a Principal Aquifer.

Groundwater bodies have been identified in the superficial deposits and bedrock strata although there may be some hydraulic continuity in places. Groundwater in the superficial strata has been identified with approximate piezometric head elevations of +37 mOD to +38 mOD with a groundwater flow direction towards the north-east. In the Lambeth Group, groundwater piezometric head elevation has been recorded at approximately +36 mOD to +38 mOD with a flow direction towards the east or south-east. Groundwater in the White Chalk Subgroup has been less well characterised, but most likely flows towards the east/south-east with groundwater piezometric head elevations between approximately +35 mOD and +38 mOD.

Trout Lake lines the western extent of Phase 5A which represents flooded former gravel workings. It is considered likely that Trout Lake is in hydraulic continuity with the shallow Secondary A Aquifer of the River Terrace Deposits. Foundry Brook lies circa 350 m southeast of Phase 5 and is understood to flow north-east. A drainage ditch is also present at the northern boundary of the site which flows in an easterly direction where it joins Foundry Brook. The River Kennet is present approximately 650 m to the north of the site, running in a west-east direction and flowing to the east.

Table 2.1: Anticipated Geological Sequence

Strata	Thickness (m)
Made Ground	Up to 4.7
Alluvium	0.1-2.9
River Terrace Deposits	0.1-3.5
Lambeth Group	1.9 to 20.2
White Chalk Subgroup	Unproven

2.5 Conceptual Site Model

A detailed conceptual site model (CSM) was developed within the Ground Contamination Interpretative Report⁸. A number of potential pollutant linkages were present which required further investigation and risk assessment to determine whether any remedial measures are required. From this information, the following significant pollutant linkages were identified:

- Leachable contaminants in the Made Ground that could potentially impact Controlled Waters receptors;
- Potential risks from TPH and PAH in groundwater that could affect the underlying aquifers and nearby surface water bodies;

⁸ Ramboll, (2016). Green Park Village - Ground Contamination Interpretative Report. Ref 1620000492/RPT/003.

- iii. Migration of contaminants to Phase 5 from the landfill to the north and former Pingemead Industrial Estate to the south;
- iv. Hydrocarbons and metals in soil and/or groundwater that could permeate into water supply pipes;
- v. Ground gases which could build up in confined spaces causing a risk to end users and future building structures.

Furthermore a number of areas of potential contamination risk were identified which were not previously investigated, e.g. the southern section of Phase 5 from the former vehicle storage area. Consequently a ground investigation was designed to address the gaps in the information including any potential implications upon the development. The ground investigation is described in the following sections.

3. GROUND INVESTIGATION

3.1 Design

The site investigation was designed by Ramboll to investigate the ground, ground gas and groundwater conditions at the site. The ground investigation was completed by Terramech, and is described in their factual report, enclosed as Appendix 1.

3.2 Site Investigation Activities

The site investigation was undertaken in general accordance with:

- i. BS 5930:2015 Code of Practice for Ground Investigation⁹; and
- ii. BS 10175:2011+A1:2013 Investigation of Potentially Contaminated Sites – Code of Practice¹⁰.

The site investigations for Phase 5 comprised the following items of fieldwork which are pertinent to the assessments contained herein:

- iii. Seven windowless sample boreholes (RWS615-RWS621) to depths between 5 m and 8 m; and
- iv. Thirty machine excavated trial pits (RTP701-RTP730) excavated to depths of between 0.8 m and 2.7 m.

The intrusive ground investigative works on Phase 5 have been split into a number of phases as outlined below:

- i. July 2016 – Initial delineation of asbestos impacts across phase 5A through the advancement of twenty-two trial pits;
- ii. August/September 2016 – Phase 5A enabling works and further delineation of asbestos impacts across the northern section of Phase 5A and Phase 5B through the advancement of eight trial pits; and
- iii. March/April 2017 – Ground investigation involving the advancement of seven windowless sample boreholes across Phase 5.

The exploratory holes were logged and sampled for geo-environmental purposes and groundwater samples were obtained from each of the wells. The aforementioned trial pitting was undertaken by Ramboll whilst the boreholes were undertaken by Terramech under the direction of Ramboll. Six of the seven boreholes were installed as dual purpose monitoring wells to be monitored for groundwater level, vapour and ground gas concentrations following completion of the intrusive works.

The exploratory locations were selected to supplement the historical site investigation works and provide additional general site coverage.

The exploratory hole logs are provided in Appendix 1 with locations shown in Figure 2.

Photo ionisation detector (PID) screening was undertaken on samples of soil which exhibited olfactory evidence of chemical or hydrocarbon odours.

⁹ British Standards Institute (2015) BS 5930:2015 Code of Practice for Ground Investigation

¹⁰ British Standards Institute (2013) v. BS 10175:2011+A1:2013 Investigation of Potentially Contaminated Sites – Code of Practice

3.3 Laboratory Analysis

Soil samples were scheduled by Ramboll for chemical analysis for a suite of potential contaminants based on the conceptual site model and historical site investigations.

Across the course of the works on Phase 5, a total of forty-nine soil samples were tested for a suite broadly comprising pH, free cyanide, sulphate, total phenols, PAHs, metals and speciated TPH. Of this forty-nine, thirty-five were obtained from Phase 5A and fourteen from Phase 5B.

Additional samples were also analysed for volatile organic compounds (VOC), semi-volatile organic compounds (SVOC) and asbestos quantification.

A total of four soil leachate samples were tested for a suite comprising pH, free cyanide, sulphate, ammonium as NH_4 , dissolved organic carbon (DOC), hardness, speciated phenols, PAHs, metals, TPH C6-C10 and TPH C10-C40.

Ten groundwater samples were obtained from a selection of the installed boreholes and were scheduled for laboratory analysis comprising pH, total cyanide, sulphate, ammoniacal nitrogen as N, DOC, hardness, total phenols, PAHs, monoaromatics, metals, speciated TPH, VOCs, SVOCs and microbial analysis.

Due to the presence of historical cess pits on the former Pingemead Industrial Estate to the south, a former sewage treatment works to the west of the GPV development and the landfills to the north, groundwater across the site was targeted with microbiological analysis for total and faecal coliforms, E.Coli and total viable counts (TVC). Microbial samples were collected to examine the potential sources outlined above and determine whether they were migrating across the wider GPV development. Two samples were collected from Phase 5 installed wells including RWS615 and RWS618.

The results of the laboratory testing are provided in Appendix 3.

3.4 Groundwater and Ground Gas Monitoring

A programme of gas and groundwater depth monitoring was undertaken as part of the investigation by Terramech. Six ground gas monitoring visits have been undertaken between the 27th of March and the 24th of May 2017. Gas monitoring was undertaken using a fully calibrated gas monitor from six monitoring wells as indicated in Table 3.1. Monitoring was undertaken in accordance with procedures outlined in BS8576¹¹ and CIRIA C665¹². The following parameters were monitored:

- i. Methane (% vol);
- ii. Carbon Dioxide (% vol);
- iii. Oxygen (% vol);
- iv. Hydrogen Sulphide (ppm)
- v. Carbon Monoxide;
- vi. Volatile Organic Compounds (VOCs) and
- vii. Flow rate (l/hr).

Terramech also completed up to two rounds of groundwater sampling on the wells indicated in Table 3.1 between the 28th of April and 9th of May 2017. Samples were collected in accordance with relevant British Standards i.e. BS ISO 5567-11¹³ and BS ISO 6068-6.1113.

¹¹ British Standards Institute (2013). BS 8576:2013 Guidance on investigations for ground gas. Permanent gases and Volatile Organic Compound (VOCs)

¹² CIRIA (2007). C665 Assessing risks posed by hazardous ground gases to buildings

¹³ British Standards Institute (2009). BS ISO 5567-11:2009 / BS6068-6.11:2009. Water quality sampling: Part 11 Guidance on sampling of groundwaters

Table 3.1: Summary of Monitoring Wells

Monitoring Well	Response Zone (m)	Response Zone Strata	Ground Gas Monitoring Well	Groundwater Sampling Well
RWS615	0.5 to 4.0	ALV and RTD	Y	Y
RWS616	0.5 to 4.5	MG, ALV and RTD	Y	Y
RWS617	1.5 to 5.0	MG, ALV, RTD	Y	Y
RWS618	1.0 to 3.5	ALV, RTD and LMBE	Y	Y
RWS620d	2.0 to 5.0	MG, ALV and RTD	Y	N
RWS621	1.5 to 7.5	MG, ALV, RTD and LMBE	Y	Y

Notes:

MG: Made Ground, ALV: Alluvium, RTD: River Terrace Deposits, LMBE: Lambeth Group

4. GROUND CONDITIONS

4.1 Ground Conditions Encountered

The succession of strata across the site identified during the ground investigation was as anticipated and comprises a surface covering of topsoil (where present) overlying (in sequence) Made Ground over superficial deposits of Alluvium and the River Terrace Deposits. The superficial deposits overlie the Lambeth Group and Chalk Formation. The exploratory hole logs produced by Ramboll and provided by Terramech record these soil types to be variable in terms of both their vertical and lateral extent over the site. A summary of the site geology as recorded in the ground investigation is provided in Table 4.1.

Table 4.1: Summary of Encountered Geological Sequence

Stratum	Typical Description	Depth to Base of Stratum (mbgl)	Thickness (m)
Made Ground	Made Ground in Phase 5A predominantly comprised dark grey gravelly CLAYs. Gravel is fine to coarse subangular to subrounded brick, concrete and flint with wood, metal and plastic inclusions and frequent cement bound asbestos (particularly southern Phase 5A). Cobbles of brick and concrete.	0.25 to 2.50	0.25 to 2.50
	Made Ground in Phase 5B predominantly comprised dark brown gravelly sandy CLAYs. Gravel is fine to coarse subangular to subrounded brick, concrete, flint with inclusions of metal, wood and relic roots.		
Alluvium	Ranged between dark grey gravelly CLAYs. Gravel is fine to coarse subangular to subrounded flint, to Dark grey peaty CLAYs.	1.10 to 2.40	0.30 to 1.30
River Terrace Deposits	Brown to dark grey sandy GRAVELs and gravelly SANDs. Gravel is fine to coarse subangular to subrounded flint.	2.80 to 4.95	0.40 to 3.55
Lambeth Group	Ranged between blueish grey mottled purplish red CLAYs to brownish grey SAND.	Proven to 8.00	Unproven
Chalk Formation	Recovered on Phase 6 as putty chalk with chalk and flint gravel.	Not encountered on Phase 5	

It is of note that during the enabling works for Phase 5A an area of deeper Made Ground was encountered. The Made Ground largely comprised metal and tyre obstructions combined with black reworked Alluvial material, brick and concrete cobbles, plastic, wood and ashes. The Made Ground extended below the groundwater level of approximately 2 mbgl however a final depth at the time could not be established.

4.2 Groundwater

Groundwater strike details and seepages were encountered in all windowless sample boreholes advanced in the ground investigation with strikes in the Alluvium/River Terrace Deposits at depths between 1.2 mbgl and 4 mbgl. It is of note that the large range is in part due to differences in elevations from Phase 5A (raised circa 1.5 m) and Phase 5B. More representative data on groundwater levels has been obtained from current groundwater monitoring at the site. Groundwater levels were monitored within RWS615-RWS618, RWS620d and RWS621 on up to six occasions during 2017 by Terramech.

The results of groundwater monitoring have indicated groundwater within the Made Ground, Alluvium and River Terrace Deposits is at elevations of between +36.72 mOD and +38.09 mOD. Based on

groundwater monitoring on the wider GPV development site it is understood that groundwater within the River Terrace Deposits flows towards the north-east.

Underlying the River Terrace Deposits impermeable Lambeth Group clays have generally been encountered across the site suggesting the strata form separate groundwater bodies. However, due to the presence of groundwater bearing Lambeth Group Sands underlying the River Terrace Deposits within RWS618 and RWS621, it confirms that there may be localised areas of continuity.

Due to the discontinuous presence of impermeable Lambeth clays underlying the River Terrace Deposits, there is the potential that groundwater within the River Terrace Deposits is in continuity with groundwater within the Chalk via the sandy lenses within the Lambeth Group. However, this remains inconclusive and is considered unlikely based on the occurrence of the frequent clay bands which are likely to confine the Chalk in some capacity.

Full groundwater monitoring data is contained in Appendix 5 with a summary in Table 4.2 below.

Table 4.2: Groundwater Levels

Monitoring Well	Average Groundwater Level	
	mbgl	mAOD
RWS615	1.58	38.09
RWS616	2.49	37.68
RWS617	3.35	37.05
RWS618	1.91	36.72
RWS620d	3.3	36.88
RWS621	3.24	37.06

Notes

RWS617, RWS620d and RWS621 lie within the Phase 5A area that has undergone a land raise of circa 1.5 m

4.3 Visual and Olfactory Evidence of Potential Contamination

The Made Ground across Phase 5 generally included a range of anthropogenic materials including brick, concrete, metal, plastic, tyres and ceramics. The most notable visual evidence of contamination was the frequent cement bound asbestos encountered in Phase 5A. A localised area of black staining and a hydrocarbon sheen was identified on material surrounding a redundant drainage pipe in central Phase 5A (RTP711 at 1 m to 1.4 m), however no free product was present.

No olfactory evidence of contamination was identified across Phase 5 nor were any significant signs of visual contamination present within Phase 5B.

In addition, no visual or olfactory evidence of contamination within groundwater was encountered during the monitoring program.

5. GROUND CONTAMINATION – GENERIC QUANTITATIVE RISK ASSESSMENT

5.1 Introduction

This ground contamination assessment has been undertaken in accordance with the current UK framework and comprises a generic quantitative risk assessment (GQRA) as defined in Contaminated Land Report CLR 11¹⁴. The risk assessment has been undertaken following the procedures set out within the guidance document CIRIA C552 Contaminated Land Risk Assessment, a Guide to Good Practice¹⁵ and EA/NHBC guidance²¹. Further details of the UK legislative context and methodologies are provided in Appendix 2.

In order to assess the significance of the chemical concentrations reported, generic assessment criteria (GAC) must be selected based on the critical receptors identified at the site. Receptors are considered in relation to human health (e.g. construction workers, future site users and adjacent site users), property (building materials, water supply pipes and structures) and the water environment (e.g. surface water features and the sensitive aquifers underlying the site). An assessment of aggressive ground conditions however does not form a part of the scope of this report and is presented under a separate cover¹⁶.

5.2 Data Quality and Site Coverage

The sampling strategy for the collection of the soil samples has been discussed in Section 3.3. As outlined in Section 2.3.2, circa 1.5 m of inert imported material has been placed on Phase 5A encapsulating the impacted residual Made Ground soils. Prior to this, human health risks from the Phase 5A soils were assessed and reported as part of the Technical Note⁵. In addition, ground improvement across Phase 5 for the proposed development comprises the installation of vibro-stone columns whereby no arisings are generated. As such, unacceptable risks posed to human health from Made Ground soils in Phase 5A are eliminated bar the disturbance of this ground. The human health assessment below has therefore been made for soils in Phase 5B which is yet to be subject to land raising. It is of note that RWS618 was advanced on a small strip of land north of the access road on Phase 5A which has yet to undergo raising activities. This localised area around RWS618 has consequently been included in the assessment of Phase 5B.

A summary of the number of soil samples analysed for potential contaminants as part of the Ramboll ground investigation in each geological stratum and the depth range from which the samples were collected is presented in Table 5.1 below.

Table 5.1: Total Number of Soil Samples Analysed within Phase 5B

Stratum	No. of Samples Analysed	Sampling Depths (m)
Soil		
Made Ground	10	0.1 to 0.5
Alluvium	3	0.8 to 1.2
River Terrace Deposits	1	1.5

The reported concentrations of contaminants will depend on a combination of the nature of the contaminant in the soil matrix, site geology, sampling strategy, sample handling and the method of laboratory analysis.

¹⁴ EA / DEFRA (2004). Contaminated Land Report 11: Model Procedures for the Management of Land Contamination

¹⁵ CIRIA (2001) C552 Contaminated Land Risk Assessment, a Guide to Good Practice

¹⁶ Ramboll (2017). Green Park Village. Ground Investigation Report ref 1620000492/RPT/003

Based on the material encountered and the sampling density (both laterally across the site and vertically) adopted during the ground investigation it is considered that sufficient information is available to robustly characterise the site and to highlight the requirement for any further detailed assessment and / or remediation works.

5.3 Human Health Assessment

Methodology

Detail of the UK framework for human health risk assessment is provided in Appendix 2.

Contaminant concentrations within soil samples below the adopted GAC are considered not to warrant further risk assessment. Where any concentrations are recorded above the GAC consideration of the contaminant distribution is undertaken.

Current UK guidance is provided in the Defra/EA Contaminated Land Report (CLR) framework which sets out standard land uses for which GAC are derived for individual contaminants: residential with plant uptake, residential without plant uptake, allotments, and commercial/ industrial use. Additional land use categories have been developed for public open spaces by more recent guidance issued by Defra within the Category 4 Screening Level (C4SL) framework and subsequently by the Chartered Institute of Environmental Health / Land Quality Management CIEH/LQM in the derivation of Suitable 4 Use Levels (S4ULs), see Appendix 2 for further detail.

As the proposed development comprises residential houses with private gardens, generic assessment criteria have been adopted for a residential (with homegrown produce) land use.

Based on the average soil organic matter (SOM) content of the site soils GAC for 1 % has been adopted.

5.4 Soil Screening Analysis

The soil analysis results are presented in Appendix 3 and 4. Table 5.2 below summarises the contaminants of concern identified at concentrations above the GAC in one or more samples.

Table 5.2: Human Health Contaminants of Concern

Contaminant	No of Samples	GAC (mg/kg) (No. of Exceedences)	Min (mg/kg)	Max (mg/kg)	Distribution Comment
Lead	18	200 (1)	5.9	210	The single exceedence is present within RWS618 at a depth of 0.5m

* Surrogate marker approach (benzo(a)pyrene) used for the assessment of carcinogenic PAH species

All other determinands analysed, as presented in Appendix 4, were observed to be below adopted GAC (where available).

Hydrocarbon Theoretic Saturation Assessment

Following assessment a number of soil results recorded concentrations of petroleum hydrocarbons in excess of theoretical saturation limits which are indicative of the potential presence of free phase hydrocarbons. With the exception of the material surrounding the drainage pipe on Phase 5A which exhibited a hydrocarbon sheen, due to the lack of visual/olfactory evidence of contamination across Phase 5, the theoretical exceedences are not considered significant.

Where the hydrocarbon sheen was encountered, it was identified to be localised to RTP711 with no other signs of impacts across the phase. As such, this is also not considered significant.

Statistical Assessment

When exceedences of GAC are present statistical analysis of the soil results has been carried out in general accordance with industry guidance¹⁷ to provide an estimate of the true population mean which can be compared against GAC. This approach is intended to assess the average exposure to a contaminant rather than looking at solely worst case values. Outlier testing has been carried out to indicate whether or not a data point is likely to form part of the same statistical distribution. Where a maximum concentration has been determined as an outlier (confirmed by visual/olfactory evidence or the result of an error) this concentration has not been included in the calculation of the true mean.

No significant difference has been identified between the Made Ground soils on Phase 5B (including RWS618) and therefore no outliers have been omitted from the statistical assessment of lead concentrations.

Table 5.3: Summary of Statistical Assessment for Made Ground

Analysis	No of Samples	GAC (mg/kg)	Outlier Details	Maximum Concentration Recorded Excluding Outliers (mg/kg)	True Mean of Sample Population (mg/kg)	Outcome of Statistical Test
Lead	10	200	None	210	119.87	True mean <GAC

On the basis of the above, the true mean of the lead sample population within Phase 5B is below the GAC and thus no risks are envisaged to end users in that part of the site with results not considered further in this assessment.

Asbestos

With the exception of the asbestos impacts on Phase 5A previously discussed and remediation, asbestos containing soils (ACSS) were recorded in two locations, RWS618 at 0.5 m and RTP726 at 0.1 m as chrysotile/amosite loose fibres and sheeting/board debris and chrysotile loose fibres respectively. Quantification results highlight results for RTP726 at 0.1 m returned below detection limits of <0.001 %w/w and is therefore not considered significant. However, the sample obtained from RWS618 at 0.5 m returned a value of 0.002 %w/w and will therefore be considered further.

Soil Screening Summary

Following an assessment of the site soils in relation to residential GAC (with homegrown produce), contaminants of concern have been identified to be limited to chrysotile/amosite loose fibres and sheeting/board debris within RWS618 at 0.5 m.

¹⁷ CL:AIRE and CIEH (2008). Guidance on Comparing Soil Contamination Data with a Critical Concentration

6. CONTROLLED WATERS ASSESSMENT

6.1 Methodology

Generic assessment criteria (GAC) for waters have been selected to assess potential risks to identified environmental receptors, which, for the site include the Secondary River Terrace Deposits Aquifer, the Secondary Lambeth Group Aquifer, the Principal Chalk Aquifer, Trout Lakes and the Foundry Brook. On this basis comparison of concentrations of determinands in leachate and groundwater has been made to Water Framework Directive Standards for General Quality of Groundwater and WFD thresholds for Inland surface water bodies. In the absence of these, environmental quality standards for freshwater have been used due to the presence of Trout Lake on the western boundary.

6.2 Soil Leachate Assessment

The results of the Made Ground soil leachate results highlights marginally elevated concentrations of arsenic at 10 µg/l (RTP710 at 2.4 m) and lead at 7.8 µg/l (RTP704 at 0.3 m), exceeding assessment criteria of 7.5 µg/l for each determinand. No organic leachable contaminants of concern are present from the soil leachate screening assessment.

Table 6.1: Summary of Soil Leachate Exceedences

Contaminant	No of Samples	Assessment Criteria (µg/l) (No of Exceedences)	Minimum (µg/l)	Maximum (µg/l)	Comment
Arsenic	4	7.5 (1)	3.6	10	Both exceedences are marginal and isolated occurrences therefore not considered to be significant
Lead	4	7.5 (1)	<LoD	7.8	

6.3 Groundwater Assessment

Made Ground/Alluvium/River Terrace Deposits/Lambeth Group

The results of the groundwater analysis from Phase 5 indicate marginal exceedences for inorganic contaminants including sulphate and the metals arsenic, mercury and nickel. For the case of mercury only a single exceedence was recorded. Exceedences for organic contaminants were limited to heavy end aliphatic petroleum hydrocarbons (C16-C21 and C21-C35) in excess of the conservative assessment criteria of 10 µg/l.

Microbial analysis of the groundwater samples from RWS615 and RWS618 has highlighted concentrations of coliforms and E.Coli that render the groundwater unsuitable for potable supply. Concentrations of total coliforms of comprised 980 mpn/100ml and 188 mpn/100ml within samples RWS615 and RWS618 whilst faecal coliform concentrations were recorded at 162 mpn/100ml and 411 mpn/100ml respectively. E.Coli concentrations for RWS615 were below detection limits of < 1.0 mpn per 100ml /500 and 12. mpn per 100ml /500 for RWS 618. TVC concentrations were recorded > 300 cfu/ml. The source of bacteria remains inconclusive however the exceedences are not considered significant given the groundwater is not used for a potable supply and human interaction with groundwater at the site in its proposed state is unlikely. However the risks will require consideration during the groundworks phase should deep sewers be installed beneath the water table.

Further details on exceedences of GAC are contained in Table 6.2 below. Full results are presented in Appendix 4.

Table 6.2: Summary of Exceedences of Groundwater GAC

Contaminant	No of Samples	Assessment Criteria (µg/l) (No of Exceedences)	Minimum (µg/l)	Maximum (µg/l)	Comment
Sulphate	10	188,000 (4)	66,000	290,000	Marginal exceedences therefore not considered to be significant
Arsenic	10	7.5 (5)	0.87	18	
Nickel	10	15 (3)	0.6	22	
Mercury	10	0.07 (1)	<LoD	0.13	Marginal exceedence and isolated occurrence therefore not considered to be significant
TPH Aliphatic C16-C21	9	10 (4)	<LoD	150	Aliphatic petroleum hydrocarbon concentrations in RWS616 exceed the conservative assessment criteria by up to two orders of magnitude. No visual or olfactory evidence of hydrocarbon contamination was noted in groundwater throughout Phase 5, however the elevated concentrations could be linked to historical onsite activities as a car storage area or historical hydrocarbon impacted groundwater from the former Pingemead Industrial Estate hydraulically up-gradient to the south. The primary potential sources of the hydrocarbons have since been removed or remediated. Aliphatic bands noted to be exceeding are generally low mobility and risk fractions ¹⁸
TPH Aliphatic C21-C35	9		<LoD	910	
Total Coliforms*	2	0 per 100ml	188	980	The exceedences are not considered significant given the groundwater is not used for a potable supply and human interaction with groundwater at the site in its proposed state is unlikely. Risks to be considered in relation to human health during groundworks stage
Faecal Coliforms*	2	0 per 100ml	162	411	
E.Coli*	2	0 per 100ml /500	<1.0	12	

Notes:

* It is of note that holding times for microbial analysis were marginally exceeded and therefore the results are treated as indicative only.

¹⁸ Environment Agency (2009). Petroleum Hydrocarbons in Groundwater: Supplementary Guidance for Hydrogeological Risk Assessment

Groundwater Summary

Arsenic and lead have been identified to be leachable from the Made Ground soils, albeit it with marginal exceedences of assessment criteria. No lead impacts have been identified in groundwater and whilst both arsenic soil leachate and groundwater exceedences have been recorded, due to their marginal nature it remains inconclusive that a correlation can be established between the two.

Groundwater exceedences for sulphate, arsenic, mercury and nickel are all marginal and are therefore not considered significant. In the case of mercury, the exceedence was also an isolated occurrence. The concentrations recorded are likely to be attributed to the background chemistry of the groundwater rather than being reflective of an on-site source of contamination.

Elevated concentrations of heavy end aliphatic petroleum hydrocarbons have been identified in groundwater in RWS616, RWS617 and RWS618 but these are considered to be of low mobility and risk¹⁸. The hydrocarbons may source from historical on-site activities as a car storage area or the former Pingemead Industrial Estate which is hydraulically up-gradient from the identified impacts, however it is noted that the primary potential sources of the hydrocarbons in the Pingemead area have been removed and/or remediated.

E.Coli, faecal and total coliforms in excess of drinking water standard derived GAC have been identified in groundwater in Phase 5. Given the current depth to groundwater in the River Terrace Deposits (1.2 m to 3.47 m) limiting human interaction and the absence of potable groundwater abstractions in the proposed development human health risks are considered limited. However, the presence of pathogens will require consideration by the groundworks contractor during the construction stage.

7. GROUND GAS ASSESSMENT

7.1 Methodology

The gas regime at the site has been characterised using the guidelines provided in CIRIA Report C665¹⁹, BS8485²⁰ and RSK/NHBC²¹. Further details of the assessment methodology are provided in Appendix 2.

Changes in the ground gas regime may be driven by a number of factors or combination of these, including for example:

- i. Barometric pressure;
- ii. Rate of change of barometric pressure;
- iii. Groundwater elevation;
- iv. Rate of change of groundwater pressure; and
- v. Degree of 'sealing' at the surface by wet/frozen ground conditions.

Recent guidance contained within BS8576²² states that monitoring should be sufficient to allow prediction of worst-case conditions, and the monitoring period and frequency should be based upon site's conceptual site model, but that this monitoring does not necessarily need to coincide with low or falling pressure conditions. BS8576 states that gas monitoring should be continued until it is unlikely that additional data will change the interpretation of the data, risk assessment or proposed remedial options.

7.2 Results and Discussion

In order to characterise the ground gas regime at the site ground gas monitoring has been undertaken on six occasions between the 27th of March 2017 and 24th of May 2017. During the monitoring period atmospheric pressure varied between 1007 mb and 1032 mb. Full ground gas monitoring data is contained within Appendix 5 with a summary of the data provided in Table 7.1.

Table 7.1: Summary of Gas Monitoring Data

ID	No. of Visits	Response Zone (mbgl)	Response Zone Strata	Average Water Level (mbgl)	Max Gas Flow Rate (l/hr)	Peak CO ₂ (%) v/v	Peak CH ₄ (%) v/v	Peak VOC (ppm)
RWS615	6	0.5 to 4.0	ALV and RTD	1.58	0.1	11.3	0.2	0.7
RWS616	6	0.5 to 4.5	MG, ALV and RTD	2.49	<LoD	8.3	1.8	2.2
RWS617	6	1.5 to 5.0	MG, ALV, RTD	3.35	<LoD	4.3	0.2	2.7
RWS618	6	1.0 to 3.5	ALV, RTD and LMBE	1.91	<LoD	5.7	0.2	2.1
RWS620d	6	2.0 to 5.0	MG, ALV and RTD	3.3	<LoD	0.6	0.2	0.8
RWS621	6	1.5 to 7.5	MG, ALV, RTD and LMBE	3.24	<LoD	1.5	0.1	0.8

¹⁹ CIRIA (2007) Assessing Risks Posed by Hazardous Ground Gases to Buildings. C665

²⁰ British Standards Institution (2015) Code of Practice for The Design of Protective Measures for Methane and Carbon Dioxide Ground Gases for New Buildings. BS8485-2015

²¹ National House Building Council (NHBC) (2006) Guidance on Evaluation on Development Proposals on Sites Where Methane and Carbon Dioxide Are Present, Incorporating 'Traffic Lights'

²² British Standards Institution (2013) Guidance for Investigations for Ground Gas: Permanent Gases and Volatile Organic Compound. BS8576:2013

Notes:

- MG: Made Ground, ALV: Alluvium, RTD: River Terrace Deposits, LMBEL Lambeth Group, VOC: Volatile Organic Compounds
- LoD: Instrument limit of detection (0.1 l/hr for flow rate, 0.1 %v/v for carbon dioxide and methane and 1 ppm for VOCs)

The recorded VOC concentrations (all <3 ppm) are considered to be generally low and do not warrant further assessment.

Table 7.2: Worst Case Ground Gas Assessment

	Flow Rate	Peak Gas Concentration (% v/v)				Characteristic Situation (CIRIA C665)
		CO ₂	GSV	CH ₄	GSV	
Worst Case	0.1	11.3	0.0113	1.8	0.0018	1

The worst case GSV of 0.0113 corresponds to a Characteristic Situation of 1 / NHBC Green (very low risk), however due to concentrations of both carbon dioxide (RWS615, RWS616 and RWS618) and methane (RWS616) being recorded in excess of the thresholds 5 %v/v and 1 %v/v respectively it is considered that Phase 5 should be upgraded to a Characteristic Situation of 2 / NHBC Amber 1 (low risk).

Due to this it is recommended that ground gas protection measures in line with a Characteristic Situation of 2 are installed within new buildings at the site. However, it may be possible to reduce the need for ground gas protection measures within buildings through additional detailed assessment.

8. GROUND CONTAMINATION RISK EVALUATION

8.1 Proposed Development Considerations

The majority of the Phase 5 will need to be raised by approximately 1.50 m from the original ground level of +39 mOD. This platform will effectively act as a cap to the underlying ground and is required for flood alleviation purposes. This will effectively sever any direct contact, inhalation and ingestion of soil pathways between end users and the residual Made Ground. In addition, ground improvement comprises the installation of vibro-stone columns whereby no arisings are generated.

8.2 Conceptual Site Model

The information presented in the previous sections of this report has been collated and evaluated to refine the preliminary conceptual site model for the site. The conceptual site model has been updated in accordance with the guidance contained within CIRIA document C552¹⁵ and EA/NHBC publications²³.

Sources

A summary of the potential sources identified includes those as given in Table 8.1.

Table 8.1: Summary of Potential Sources Identified

Source	Comment
Soil impacts	Contaminants of concern within soils are limited to the ACM identified in RWS618. Leachable contaminants of concern are limited to arsenic and lead.
Ground gas	Elevated concentrations of carbon dioxide and methane have been recorded during the monitoring period and ground gas protection measures will be required at the site.
Groundwater Impacts in Made Ground/Alluvium/ River Terrace Deposits/Lambeth Group Aquifer	Contaminants of concern include marginal exceedences of sulphate, arsenic, mercury and nickel, however these are not considered significant. Petroleum hydrocarbons have also been recorded above assessment criteria. Exceedences of drinking water standards have been detected for total coliforms, faecal coliforms and E.Coli.

Receptors

The site-specific receptors that could potentially be affected by the contamination hazards are summarised in Table 8.2.

Table 8.2: Potential Receptors

Feature	Detail
Onsite	
End users	Site residents within the proposed housing which includes private gardens.
Groundworkers	Any workers coming in contact with the ground/groundwater or working within a confined space in which gases may build up, including construction workers and maintenance workers.
Groundwater	Secondary A Aquifers of the River Terrace Deposits and Lambeth Group, Principal Aquifer of the Chalk.

²³ National House Building Council (NHBC) and Environment Agency (2008) Guidance for the Safe Development of Housing on Land Affected by Contamination. R&D Publication 66

Buried infrastructure and building foundations	Buildings materials used below ground (e.g. foundations and services, including water supply pipes)
Offsite	
End users	Exposure to the nearest adjacent site users circa 150 m south-west comprising commercial office space is limited however the adjacent phases of the GPV development are considered as sensitive receptors.
Controlled Waters – Surface Water	Trout Lake to the immediate west and the drainage ditch to the north which feeds the Foundry Brook to the east.

Pathways

In order for the contaminants identified in this site investigation to reach potential receptors, there have to be viable pathways for the contaminants to travel from the sources to those receptors. Potential pathways were identified within the preliminary conceptual site model and are discussed further in Table 8.3 in relation to the identified sources and receptors.

Table 8.3: Potential Pathways

Receptor	Pathway	Comment
Human health	Dermal contact	Due to the raising of levels by circa 1.5 m of inert imported material, exposure pathways from the residual Made Ground to human health are eliminated bar the disturbance of these soils.
	Dust/soil ingestion/inhalation	Should there be the requirement for penetrative works beyond the clean cap during construction the risks will be managed by the implementation and adherence to an AMP.
	Inhalation of asbestos fibres	Potential risks to construction workers from interaction with pathogens in groundwater would be mitigated through appropriate health and safety procedures.
Human health	Inhalation of gases	Carbon dioxide and methane have the potential to migrate and build up in buildings and confined spaces
Water environment	Leaching and / or migration of contaminants to the water environment; including creation of pathways via ground improvement or other construction activities to the River Terrace Deposits, Lambeth Group and Chalk.	The Made Ground, Alluvium and River Terrace Deposits are observed to be in hydraulic continuity whilst localised areas have also been identified where groundwater in the aforementioned strata is also in continuity with sandy lenses of the Lambeth Group. This highlights the potential for the superficial aquifers to be in continuity with the Chalk however this is considered unlikely due to the frequent clay bands within the Lambeth Group.
	Leaching direct to surface waterbodies and migration of impacted groundwater to surface water.	The leachable contaminants and inorganic contaminants of concern within groundwater are not considered significant due to their marginal exceedence of adopted GAC. Remediation of groundwater is likely to have little effect and the inorganic exceedences are considered to comprise background concentrations rather than being reflective of an on-site source of contamination.
	Leaching and migration direct to surface waterbodies and migration of impacted groundwater to surface water	Whilst the TPH concentrations have been identified

Receptor	Pathway	Comment
		above conservative GAC, the hydrocarbons are heavy end aliphatics that are considered to be of low mobility and risk¹⁸. The source of contamination may be linked to historical on-site activities as a car storage area or the former Pingemead Industrial Estate hydraulically up-gradient. In both cases the primary potential sources of the hydrocarbons have since been removed and/or remediated. The highest TPH concentrations were detected in RWS616 and with groundwater flow in the superficial aquifer towards the north-east, further dilution and dispersion are likely to occur prior to the impacts reaching Foundry Brook via the drainage ditch. The source of bacteria remains inconclusive however the exceedences are not considered significant given the groundwater is not used for a potable supply and human interaction with groundwater at the site in its proposed state is unlikely aside from during construction of deep drainage.
Buildings and structures	Damage to building materials or services through direct contact with contaminants or through contaminant migration	Hydrocarbons have been identified in the ground at concentrations which may affect subsurface construction materials and in particular water supply pipes. Water supply pipes are likely to be installed within the clean cap and therefore risks from permeation or organic contaminants are considered negligible.

Qualitative Risk Assessment

Potential pollutant linkages are identified using the source-pathway-receptor framework detailed in Appendix 2. An assessment of the potential significance of each linkage is then made by consideration of the likely magnitude and mobility of the source, the sensitivity of the receptor and nature of the migration/exposure pathways between them.

This qualitative hazard assessment has been undertaken in accordance with NHBC and Environment Agency²³ guidance. Further details of which are provided in Appendix 2 including definition of risk categories.

The table below summarises the pollutant linkages and risk ratings associated with the proposed development as assessed following interpretation of the results of the ground investigation.

Table 8.4 Risk Assessment

Source	Contaminants of Concern	Pathway	Receptor	Probability of Risk being Realised	Consequence of Risk being Realised	Risk Classification
Made Ground	Asbestos containing materials	Dermal contact, inhalation of soil dust and ingestion of soil	End users (indoor)	Unlikely	Medium	Low
			End users (outdoor)	Unlikely	Medium	Low
			Adjacent users	Unlikely	Medium	Low
			Groundworkers	Unlikely	Medium	Low
	Leachable arsenic and lead	Leaching and migration to shallow groundwater within the River Terrace Deposits and Lambeth Group including creation of pathways via ground improvement or other construction activities	River Terrace Deposits Aquifer and Surface Water	Low likelihood	Mild	Low
		Leaching and migration to groundwater within the Chalk	Chalk Aquifer	Unlikely	Medium	Low
	Organic contaminants	Permeation of buried water supply pipes and damage to buried structures	Buried infrastructure and building foundations	Unlikely	Low	Very Low
Groundwater	Sulphate, arsenic, mercury and nickel	Dermal contact, ingestion of water	Groundworkers	Unlikely	Medium	Low
		Migration to surface water	Surface Water	Low likelihood	Mild	Low
		Migration to groundwater within the Chalk	Chalk Aquifer	Unlikely	Medium	Low
	Heavy end aliphatic (C16-C35) petroleum hydrocarbons	Dermal contact, ingestion of water	Groundworkers	Unlikely	Medium	Low
		Migration to surface water	Surface Water	Low likelihood	Mild	Low
		Migration to groundwater within the Chalk	Chalk Aquifer	Unlikely	Medium	Low
	Bacteria (total and faecal coliforms and E.Coli)	Dermal contact, ingestion of water	End users	Unlikely	Medium	Low
			Groundworkers	Unlikely	Medium	Low
Ground Gases	Carbon dioxide and methane	Migration of gases and build up in confined spaces	End users (indoor)	Likely	Medium	Moderate
			End users (outdoor)	Unlikely	Medium	Low
			Groundworkers	Likely	Medium	Moderate
			Building structures	Likely	Medium	Moderate

Notes:

- Assessment completed assuming site in current condition, with Phase 5A raised with clean imported material with Phase 5B currently at grade. Clean imported fill material will be placed across the remainder of Phase 5 to raise site levels. Should site levels be altered from this assumption, a reassessment may be required
- Assessment completed assuming no other remediation/mitigation in place
- Should the development proposals alter significantly a review of this risk assessment may be required

9. CONCLUSIONS AND RECOMMENDATIONS

9.1 Conclusions

This ground contamination interpretative report has been prepared to fulfil the requirements of Planning Condition 42 parts (1) and (2) of planning permission ref 10/01461/OUT and should be submitted to both the Environment Agency and Reading Borough Council for approval.

Early Ordnance Survey mapping (1883) indicates that Phase 5 was undeveloped open land known as "Smallmead Common". By the 1990s Phase 5A was a vehicle storage area belonging to Pingemead Industrial Estate to the south. Phase 5B has historically been undeveloped open land with evidence of re-profiling of the ground and stockpiling. Phase 5A and 5B were formerly split by a drainage ditch which was infilled during 2016.

Phase 5A is currently vacant land following the land raise earthworks which occurred in two stages between August and October 2016 and April to May 2017. Phase 5A slopes down gradient to the access road which lies at a level of circa +39 mOD. Phase 5B is currently made up of the access road which runs from north to south along the western boundary and also west to east along the northern boundary. A series of stockpiles line the eastern section of Phase 5B comprising imported material associated with the environmental permit and other site won material.

Phase 5 will comprise residential housing with gardens, areas of soft landscaping and associated infrastructure. The majority of the Phase 5 will need to be raised by approximately 1.5 m from the original ground level of +39 mOD. This platform will effectively act as a cap to the underlying ground and is required for flood alleviation purposes.

In the context of the proposed development the ground investigation has identified limited pollutant linkages that will require consideration and mitigation. These are summarised below and should be integrated into the design and construction process by the Principal Designer and Principal Contractor.

Soils

Soils on Phase 5A have been effectively capped, therefore an assessment of soils on Phase 5B has been made. A screening assessment identified contaminants of concern within the soil matrix to be limited to asbestos containing materials. This was encountered in an area located away from proposed gardens and buildings and therefore disturbance of these soils are likely to be limited. Phase 5B is to be raised by circa 1.5 m with inert imported materials as with Phase 5A. This will eliminate the direct contact, ingestion of soil and inhalation of dust pathways to human health. This assessment has been made on the presumption that the residual Made Ground soils across Phase 5 are not disturbed.

Controlled Waters

Arsenic and lead have been identified to be leachable from the Made Ground soils, albeit it with marginal exceedences of assessment criteria. No lead impacts have been identified in groundwater and whilst both arsenic soil leachate and groundwater exceedences have been recorded, due to their marginal nature it remains inconclusive that a correlation can be established between the two.

Inorganic contaminants of concern within groundwater including sulphate, arsenic, mercury and nickel are not considered significant due to their marginal exceedence of adopted GAC. Remediation of groundwater is likely to have little effect and the inorganic exceedences are considered to comprise background concentrations rather than being reflective of an on-site source of contamination.

Whilst heavy end aliphatic (C16-C35) petroleum hydrocarbons concentrations have been identified above conservative GAC, they are considered to be of low mobility and risk. The highest TPH concentrations were detected in RWS616 and with groundwater flow in the superficial aquifer towards the north-east, further dilution and dispersion are likely to occur prior to the impacts reaching Foundry Brook via the drainage ditch.

The source of bacteria in groundwater remains inconclusive however the exceedences are not considered significant given that groundwater is not used for a potable supply and human interaction with groundwater at the site in its proposed state is unlikely. Potential risks during the construction stage should be managed through adherence to good construction practice e.g. use of appropriate PPE.

Ground Gas

Elevated concentrations of carbon dioxide and methane have been recorded during the monitoring period and as such ground gas protection measures will be required at the site. The performance requirements of these should be detailed in a remediation strategy for the site. However, it may be possible to reduce the need for ground gas protection measures within buildings through additional detailed assessment.

Water Supply Pipes

Providing water supply pipes are installed within the land raise, the risks from the permeation of organics is considered negligible. Nonetheless, the choice of water supply pipe material is subject to assessment agreement from regulators and the local water company.

9.2 Recommendations for Further Works

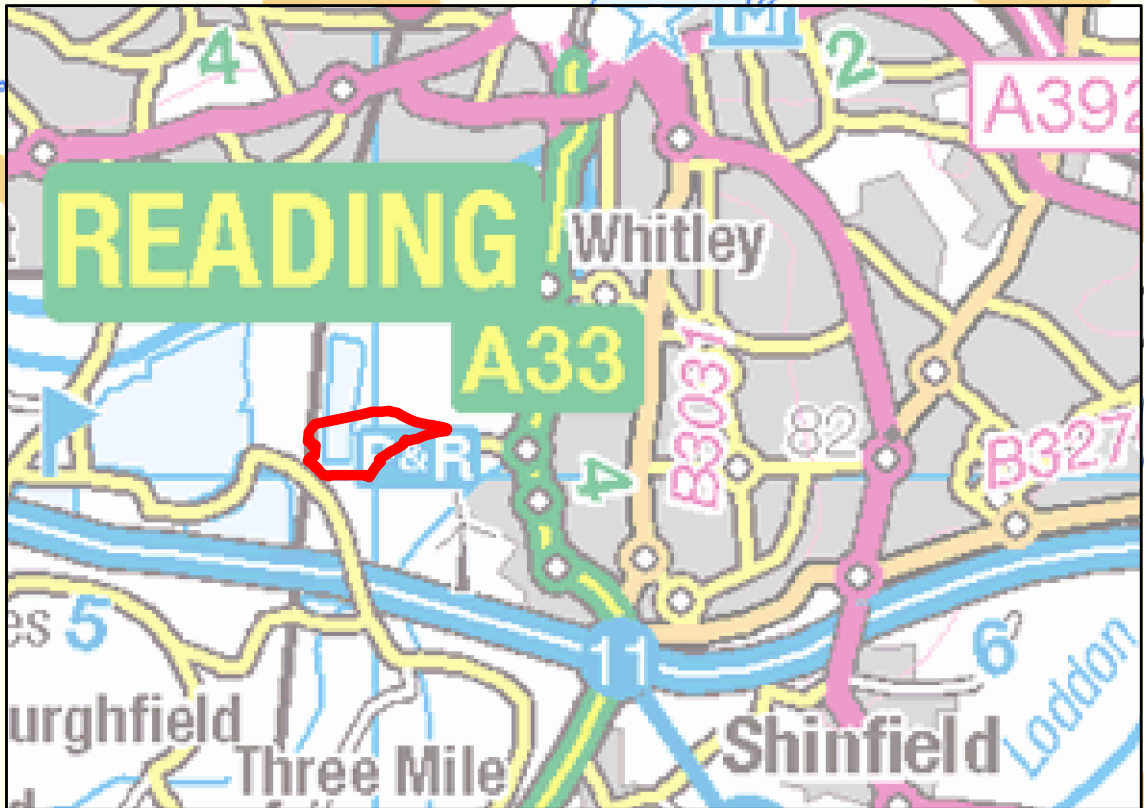
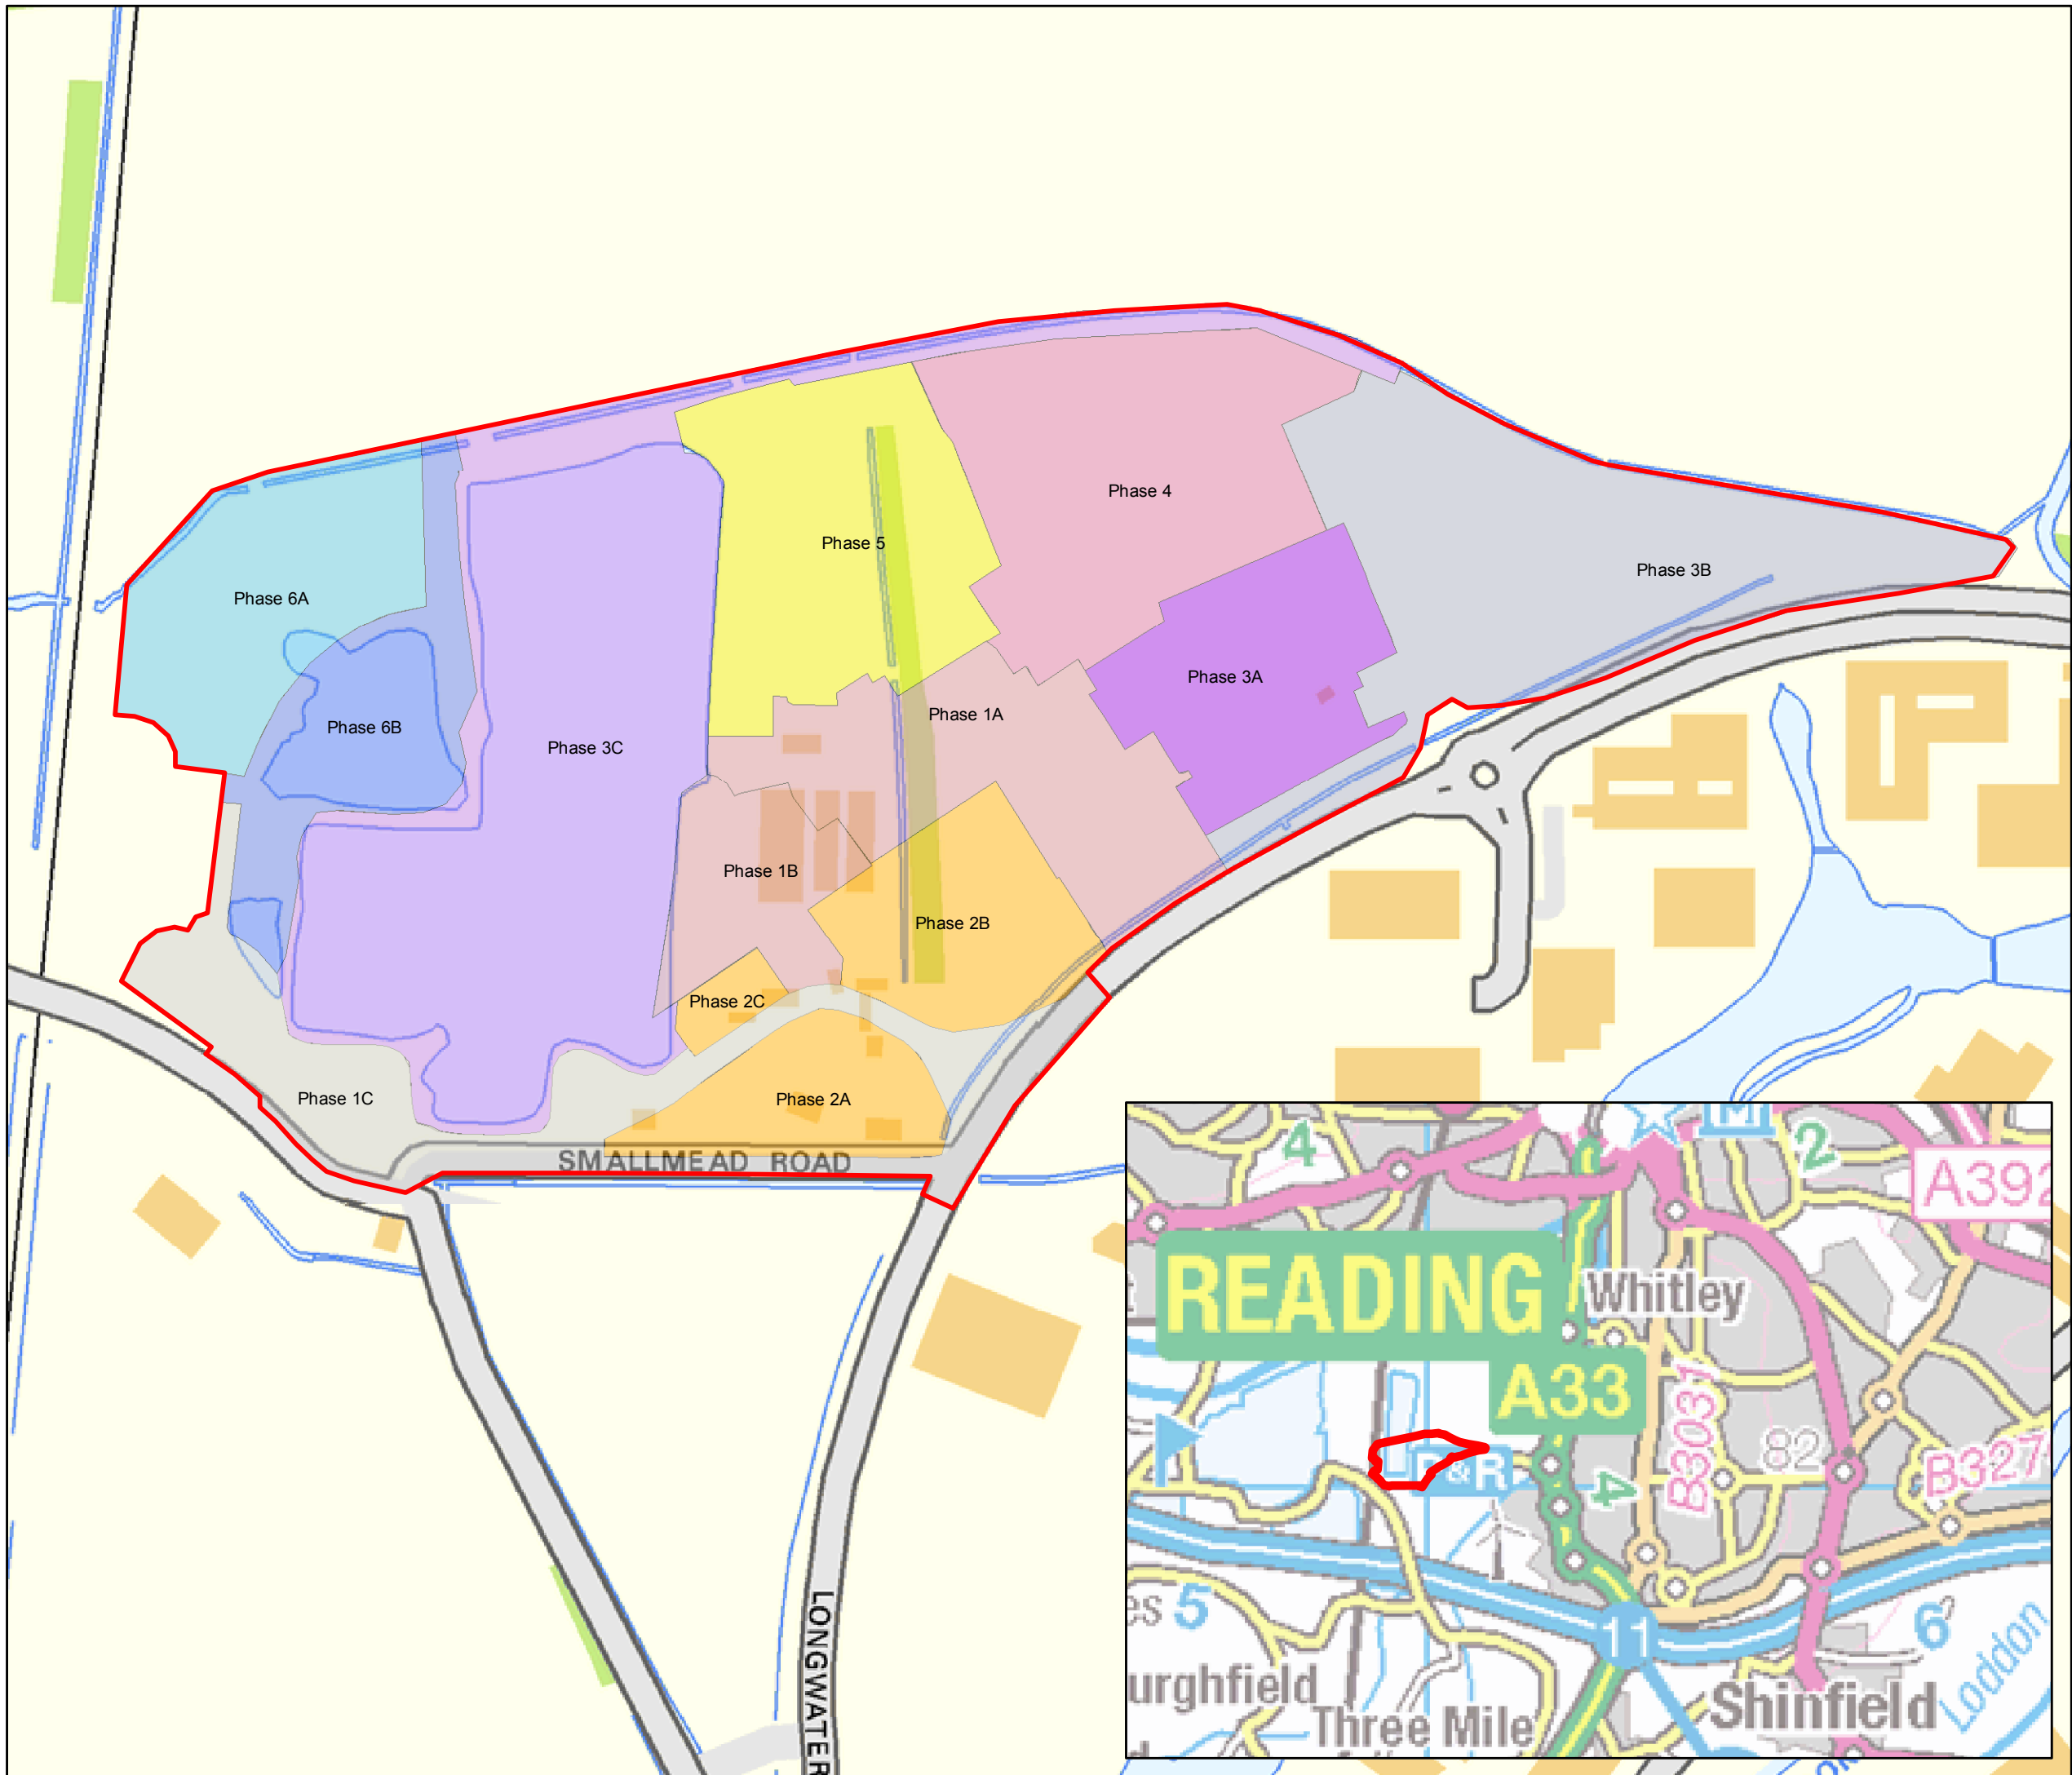
The assessments undertaken herein have resulted in the identification of a limited number of plausible pollutant linkages that require further investigation and remedial intervention in order to deliver a site that is suitable for use for the proposed development. The recommended next steps are summarised below with the immediate next steps to comprise the preparation of a foundation works risk assessment and detailed ground gas risk assessment for the phase.

Table 9.1: Recommended Next Steps

Action	Timescale	Likely Interactions and Stakeholders	Status
Further assessment of gas risks recommended with agreement on requirement for gas protection measures with local authority	Prior to development	St Edwards Ltd, Ramboll, EA, local authority, development contractor	Further detailed gas risk assessment required. In lieu of this gas protection will be required in new buildings and will be detailed in Remediation Strategy.
Completion of foundation and piling risk assessment	Prior to development	St Edwards Ltd, Ramboll, EA, development contractor	To be reported in a Foundation Works Risk Assessment
Contractor method statements for environmental management plans, waste disposal etc	During development	St Edwards Ltd, Ramboll, EA, local authority, development contractor	To be completed
Validation report	After groundwork phases of development	St Edwards Ltd, Ramboll, EA, local authority, development contractor	To be completed after groundworks phase

FIGURES/DRAWINGS

FIGURE 1	SITE LOCATION PLAN
FIGURE 2	TRIAL PIT LOCATION PLAN
FIGURE 3	EXPLORATORY HOLE PLAN



Site Boundary



1:3,000

1:50,000

Drawn at A3

Reproduced from Ordnance Survey
digital map data © Crown copyright
2015 All rights reserved.
Licence number 100040631

Client

St Edward Homes Ltd

Project Title

Green Park Village

Project Number

1620000492

Figure Title

Site Location Plan

RAMBOLL

Tel: 023 8081 7500
Fax: 023 8081 7600

southampton@ramboll.co.uk
www.ramboll.co.uk

Date

May 2017

Prepared By

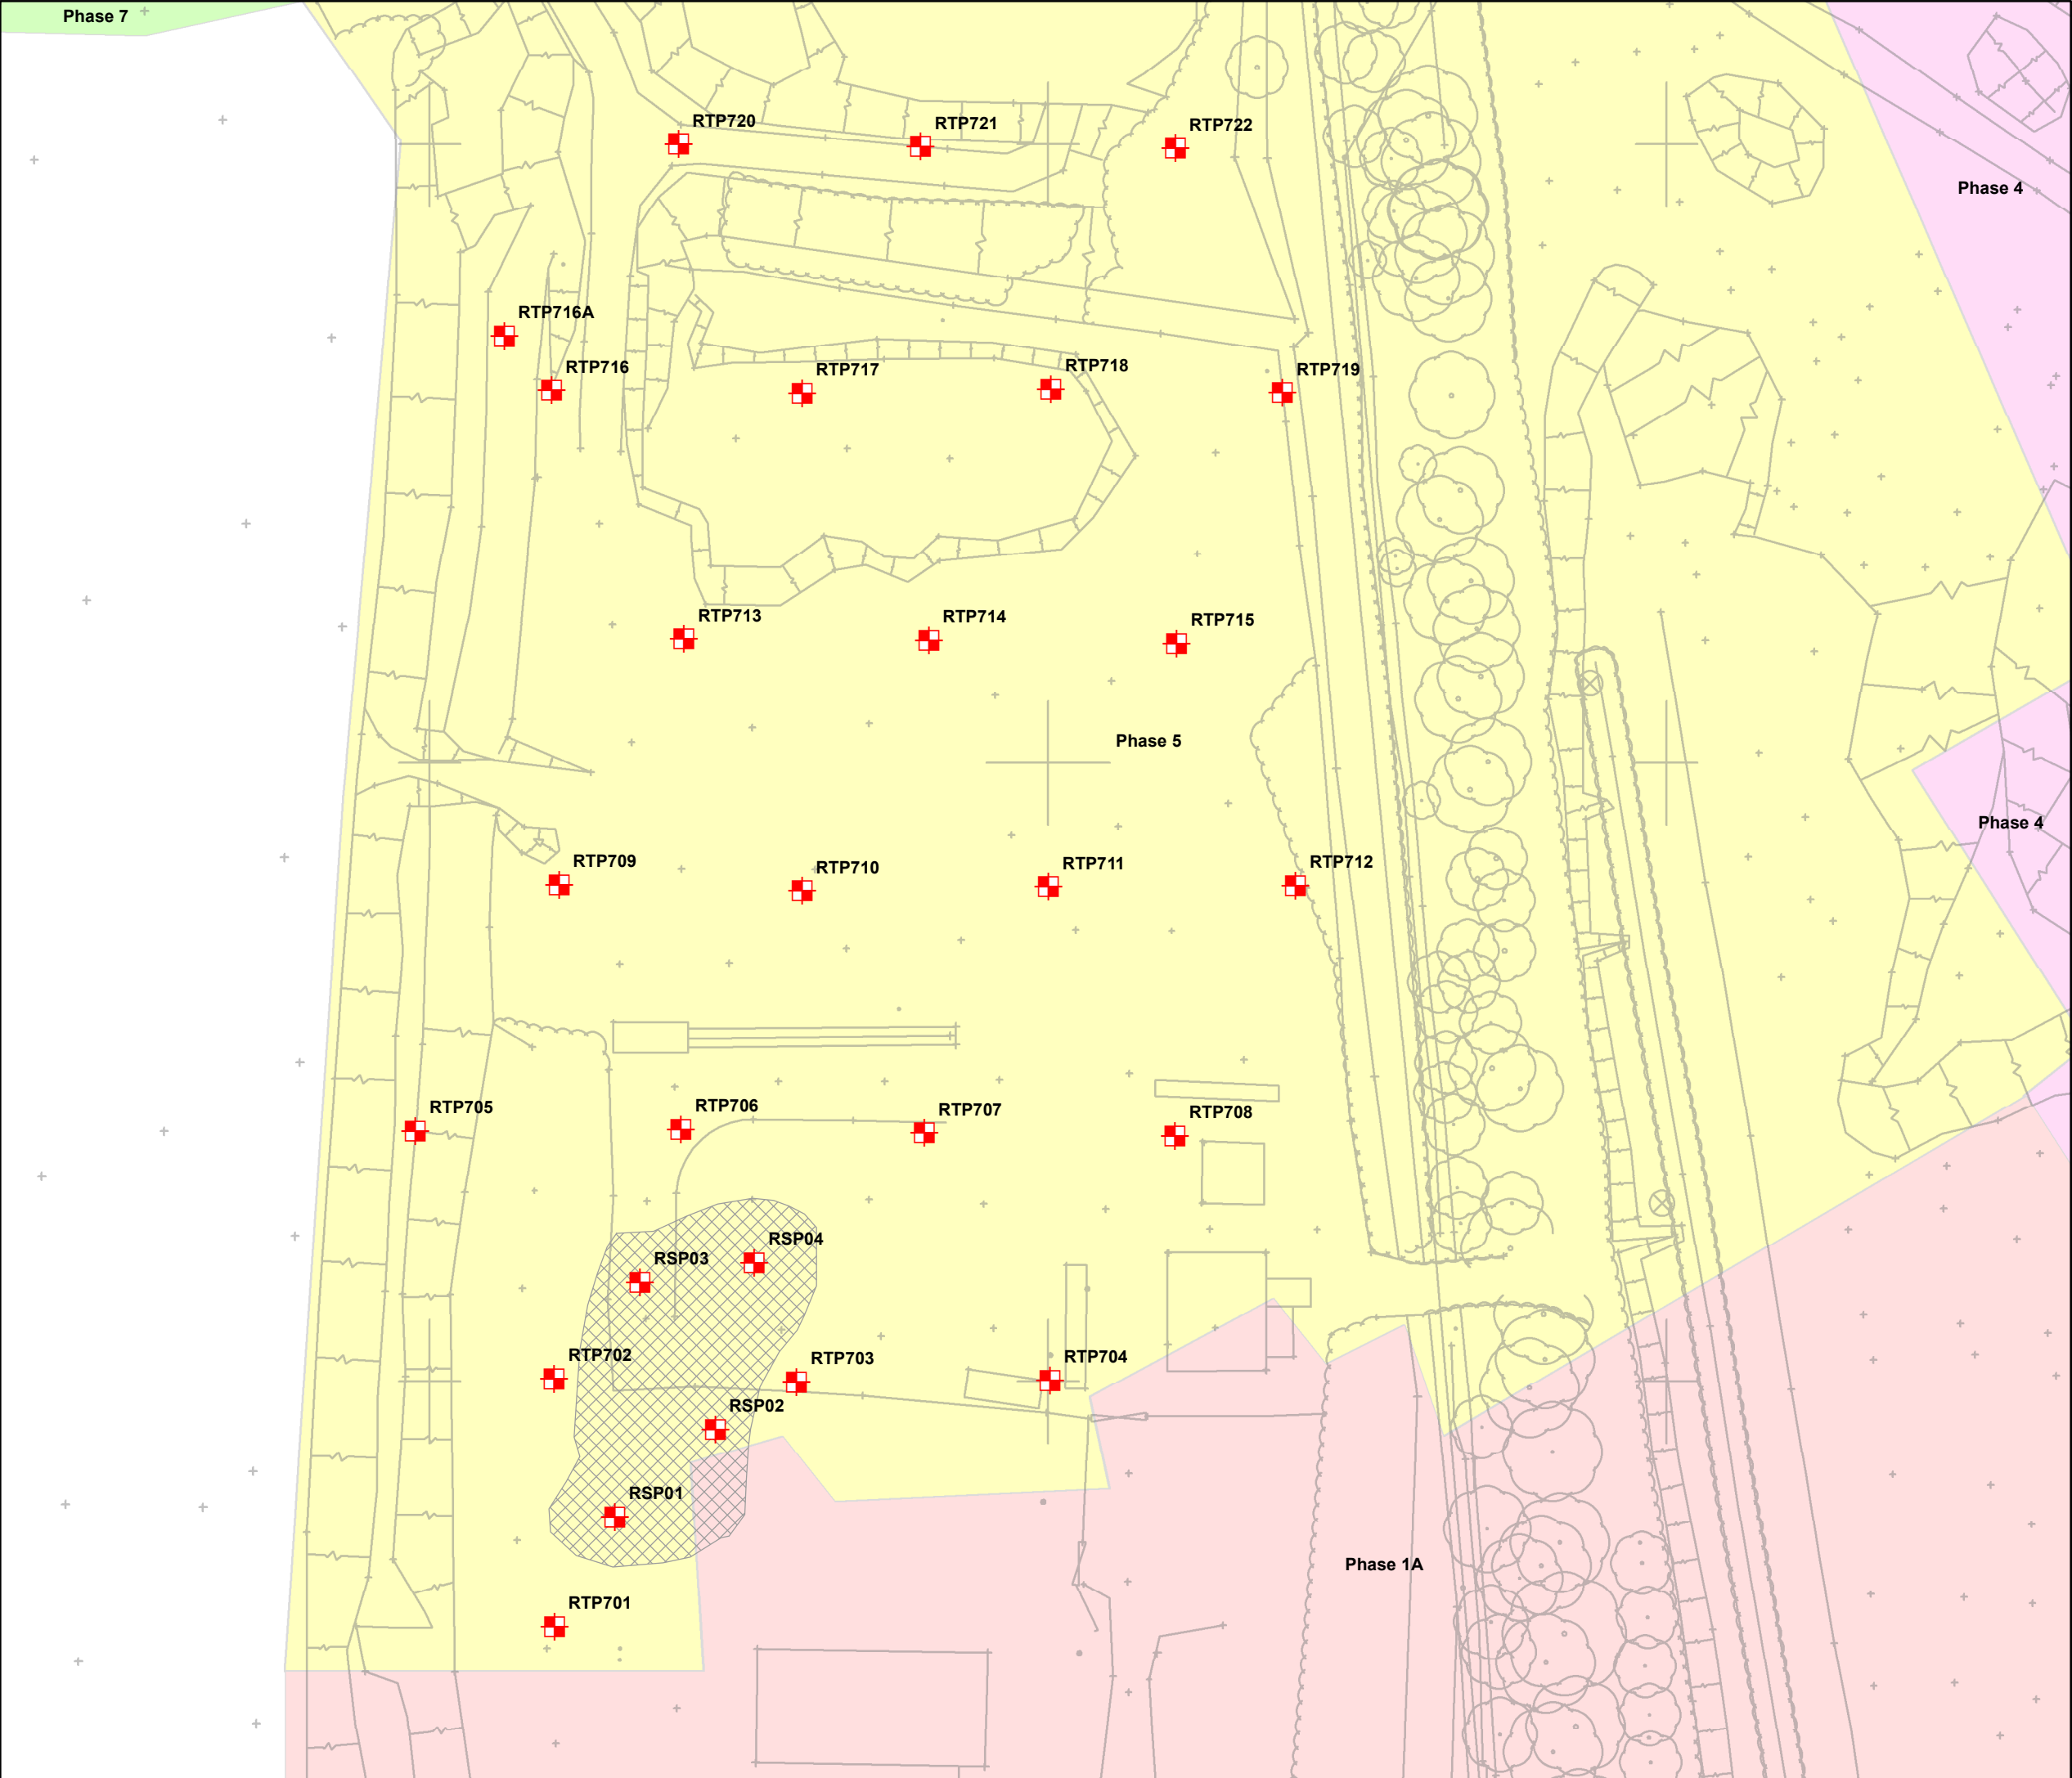
TS

Figure No.

Figure 1


Revision

-



- Trial Pit
- Former Asbestos Impacted Area
- Phase 1A
- Phase 1B
- Phase 1C
- Phase 2A
- Phase 2B
- Phase 2C
- Phase 3
- Phase 4
- Phase 5
- Phase 6
- Phase 7

Scale: 1:500
Drawn at A3
Baseplan adopted from
BroadwayMalyanSite Layout
Drawing PL-P1-002 rev P



Client
St. Edwards Homes Ltd

Project Title
Green Park Village

Project Number
1620000492

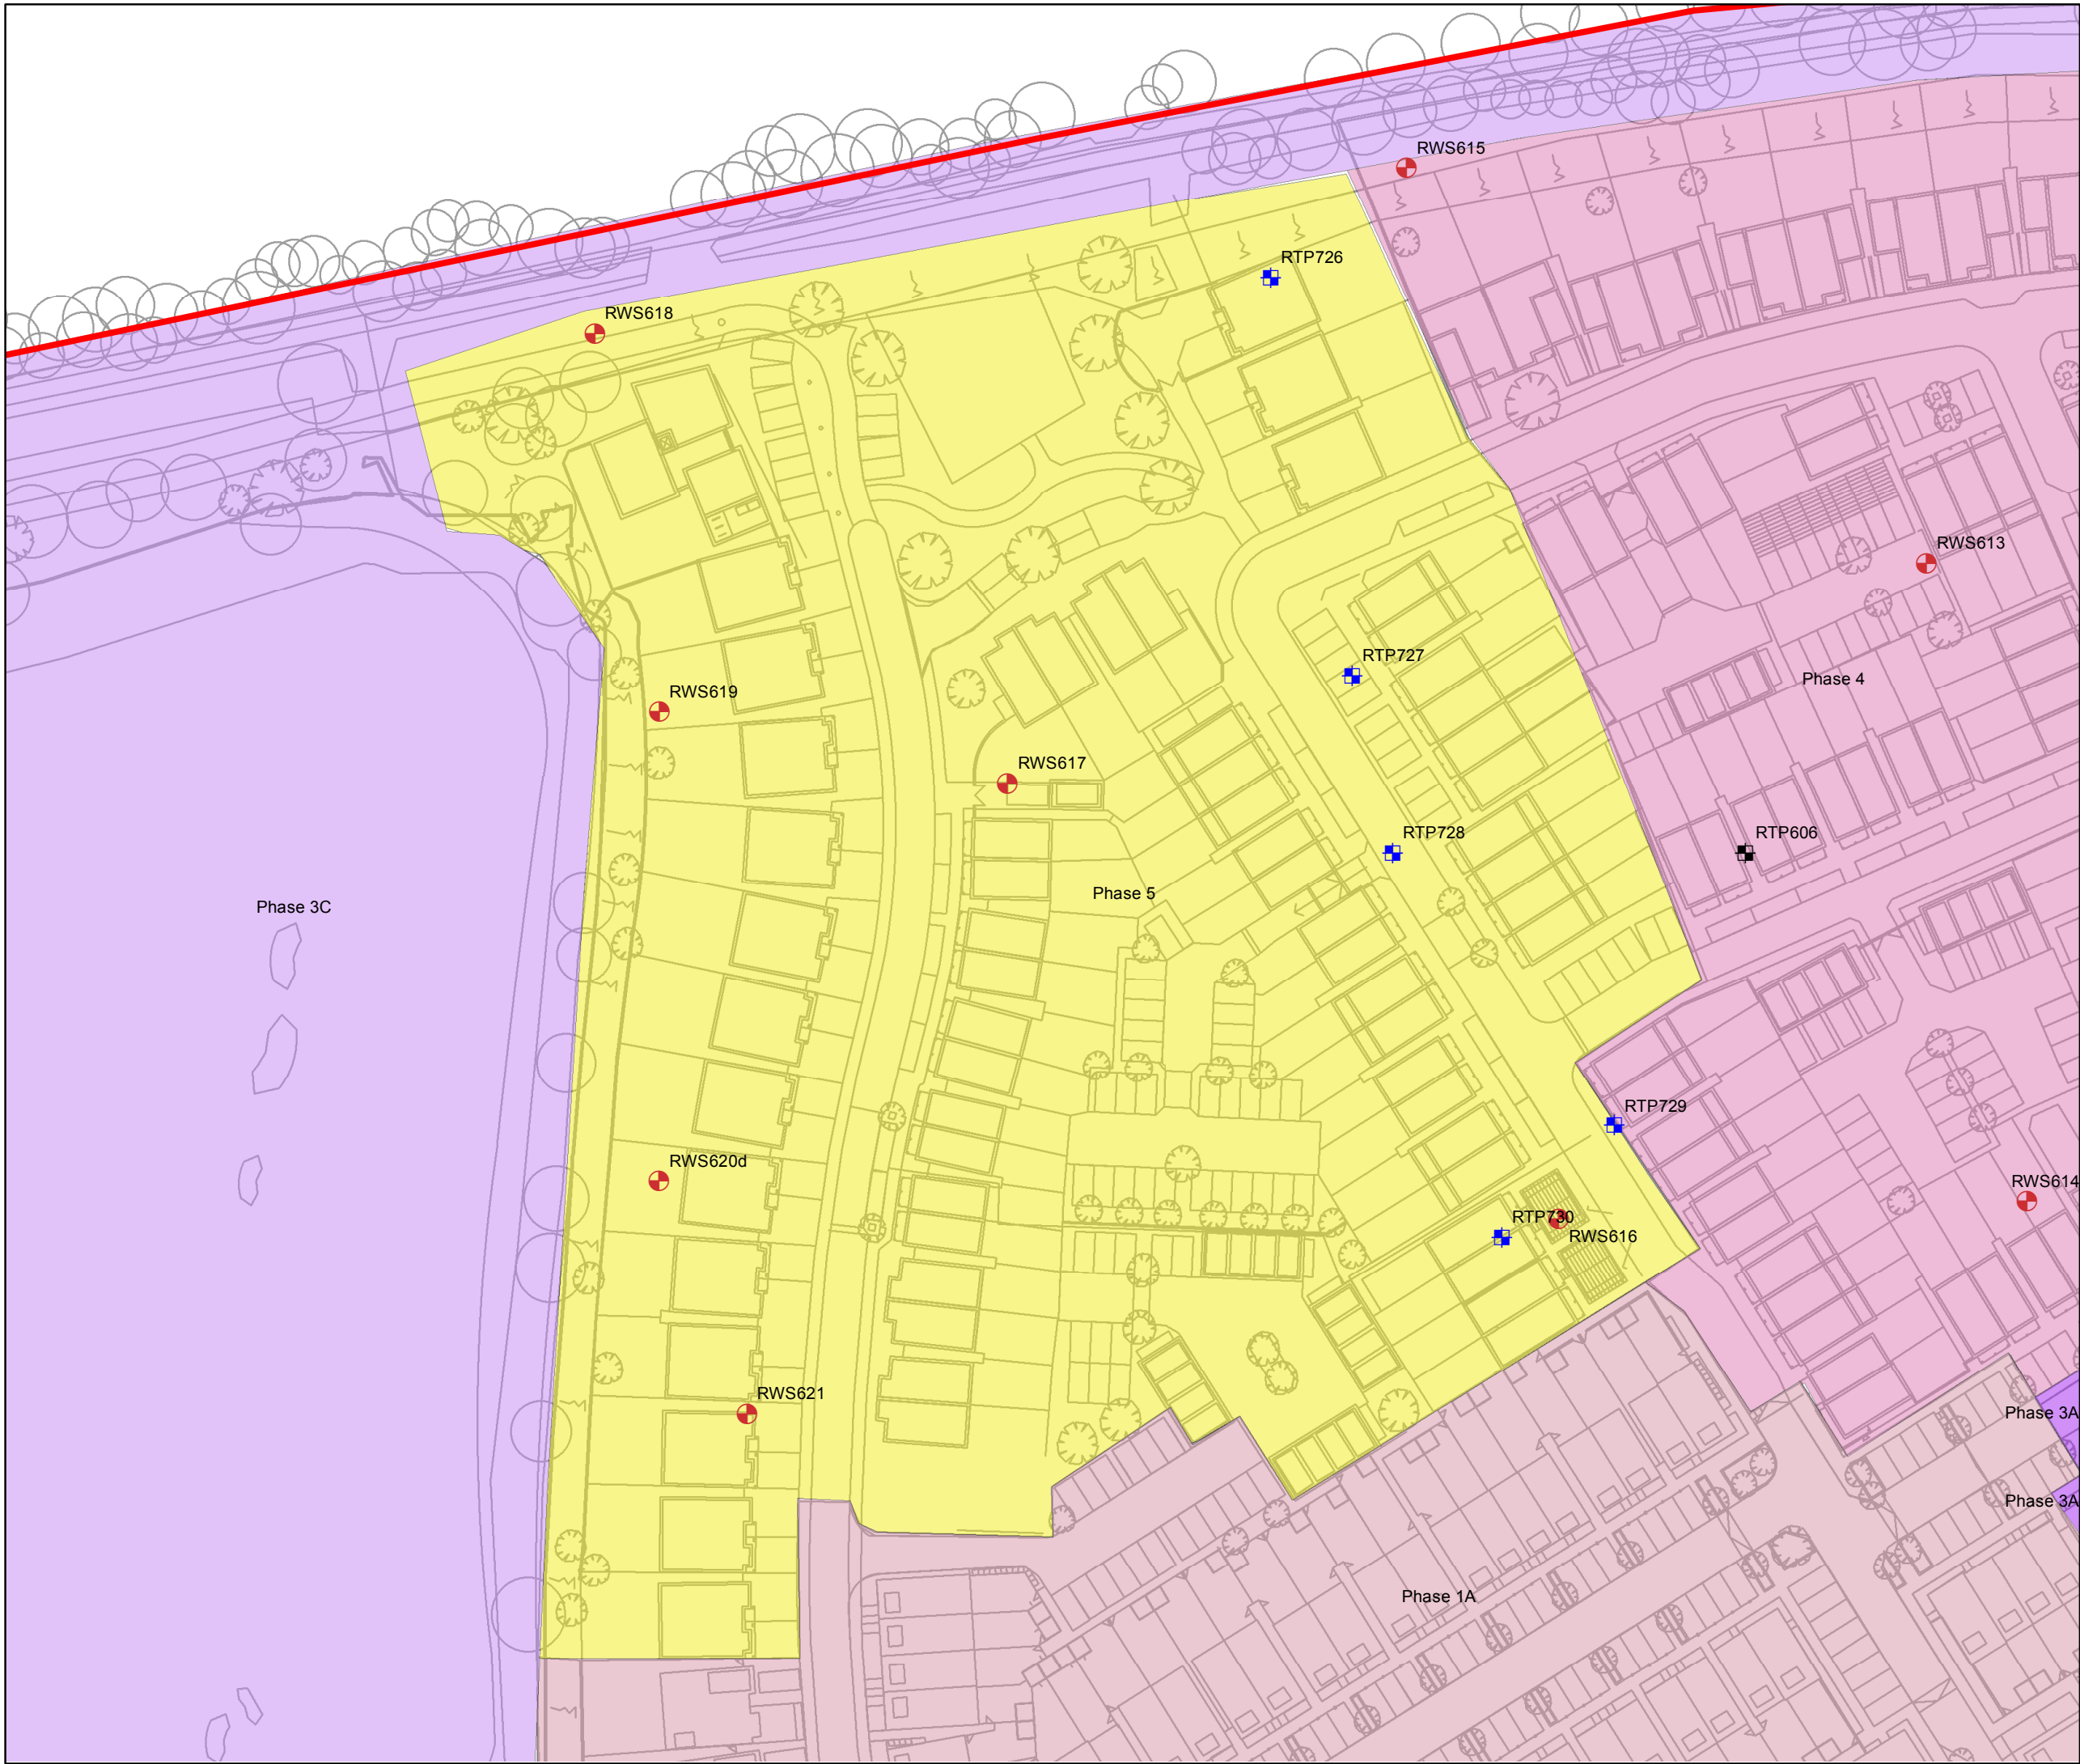
Figure Title
Phase 5 - Trial Pit Location Plan



Tel: 023 8081 7500
Fax: 023 8081 7600
www.ramboll.co.uk
southampton@ramboll.co.uk
www.ramboll.co.uk

Date
26/07/2016
Prepared By
BH

Figure No.
Figure 2
Revision
01



Site Boundary

Phase 1A

Phase 1B

Phase 1C

Phase 2A

Phase 2B

Phase 2C

Phase 3A

Phase 3B

Phase 3C

Phase 4

Phase 5

Phase 6A

Phase 6B

Borehole

Trial Pit

Window Sample Borehole

2016 Trial Pits

N

Drawn at A3

1:750

Client

St Edward Homes Ltd

Project Title

Green Park Village

Project Number

1620000492

Figure Title

Phase 5 Exploratory Hole Plan

RAMBOLL

Tel: 023 8081 7500 southampton@ramboll.co.uk
Fax: 023 8081 7600 www.ramboll.co.uk

Date

June 2017

Prepared By

TS

Figure No.

Figure 3




Revision

-

APPENDIX 1

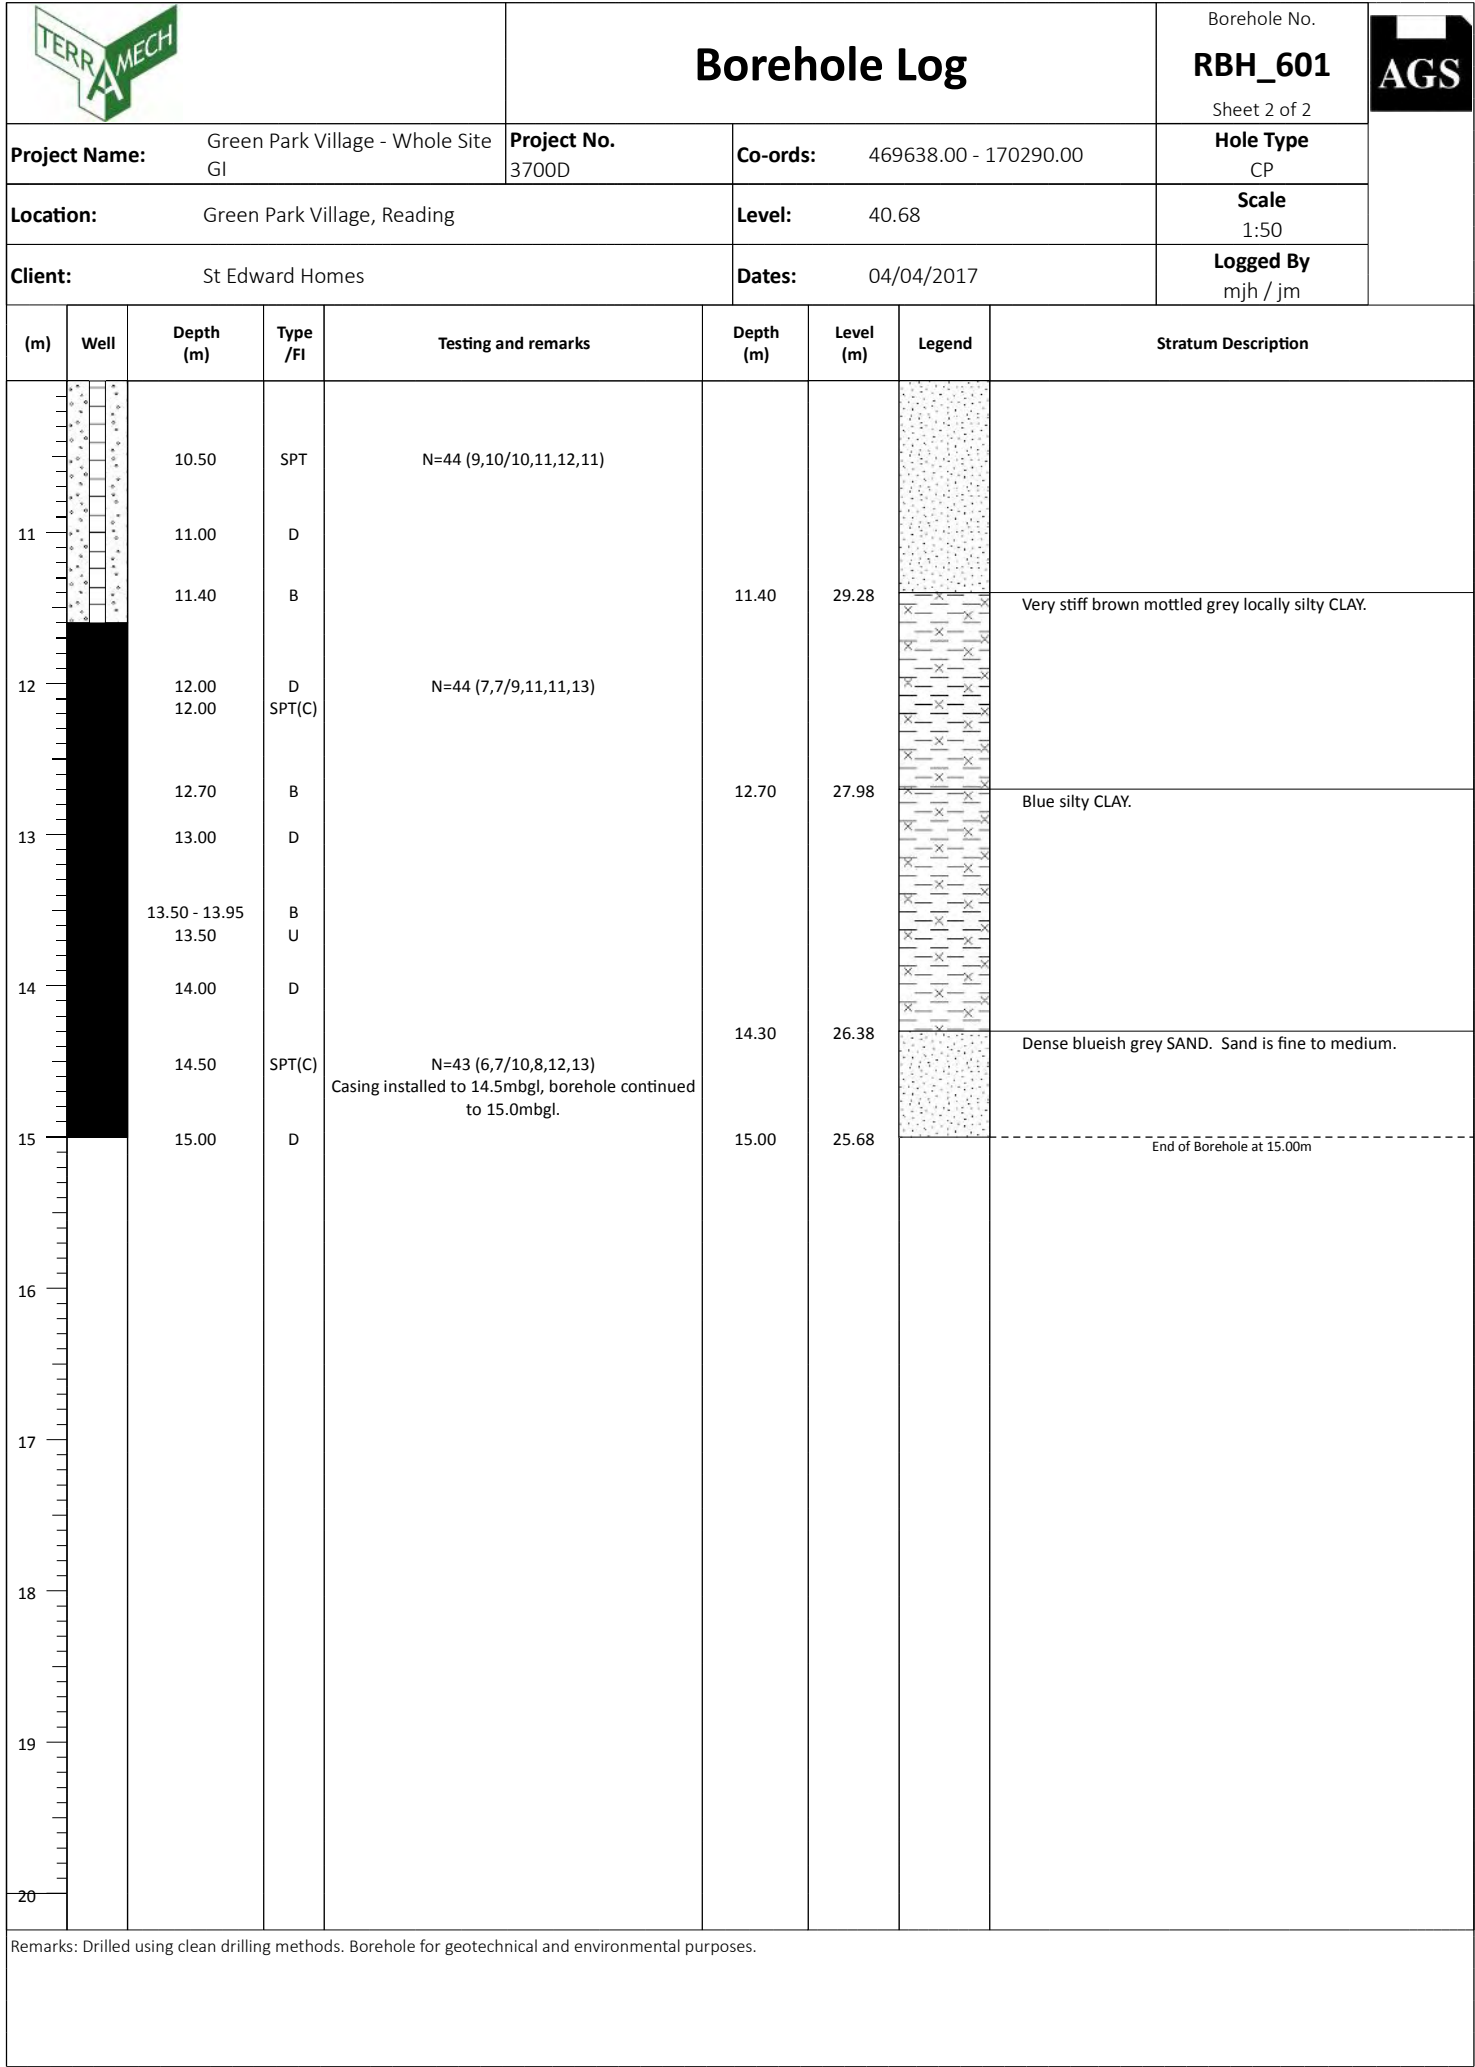
TERRAMECH DRAFT FACTUAL INFORMATION

		Borehole Log				Borehole No. RBH_601		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469638.00 - 170290.00		Hole Type CP		
Location: Green Park Village, Reading		Level: 40.68		Scale 1:50		Logged By mjh / jm		
Client: St Edward Homes		Dates: 04/04/2017						

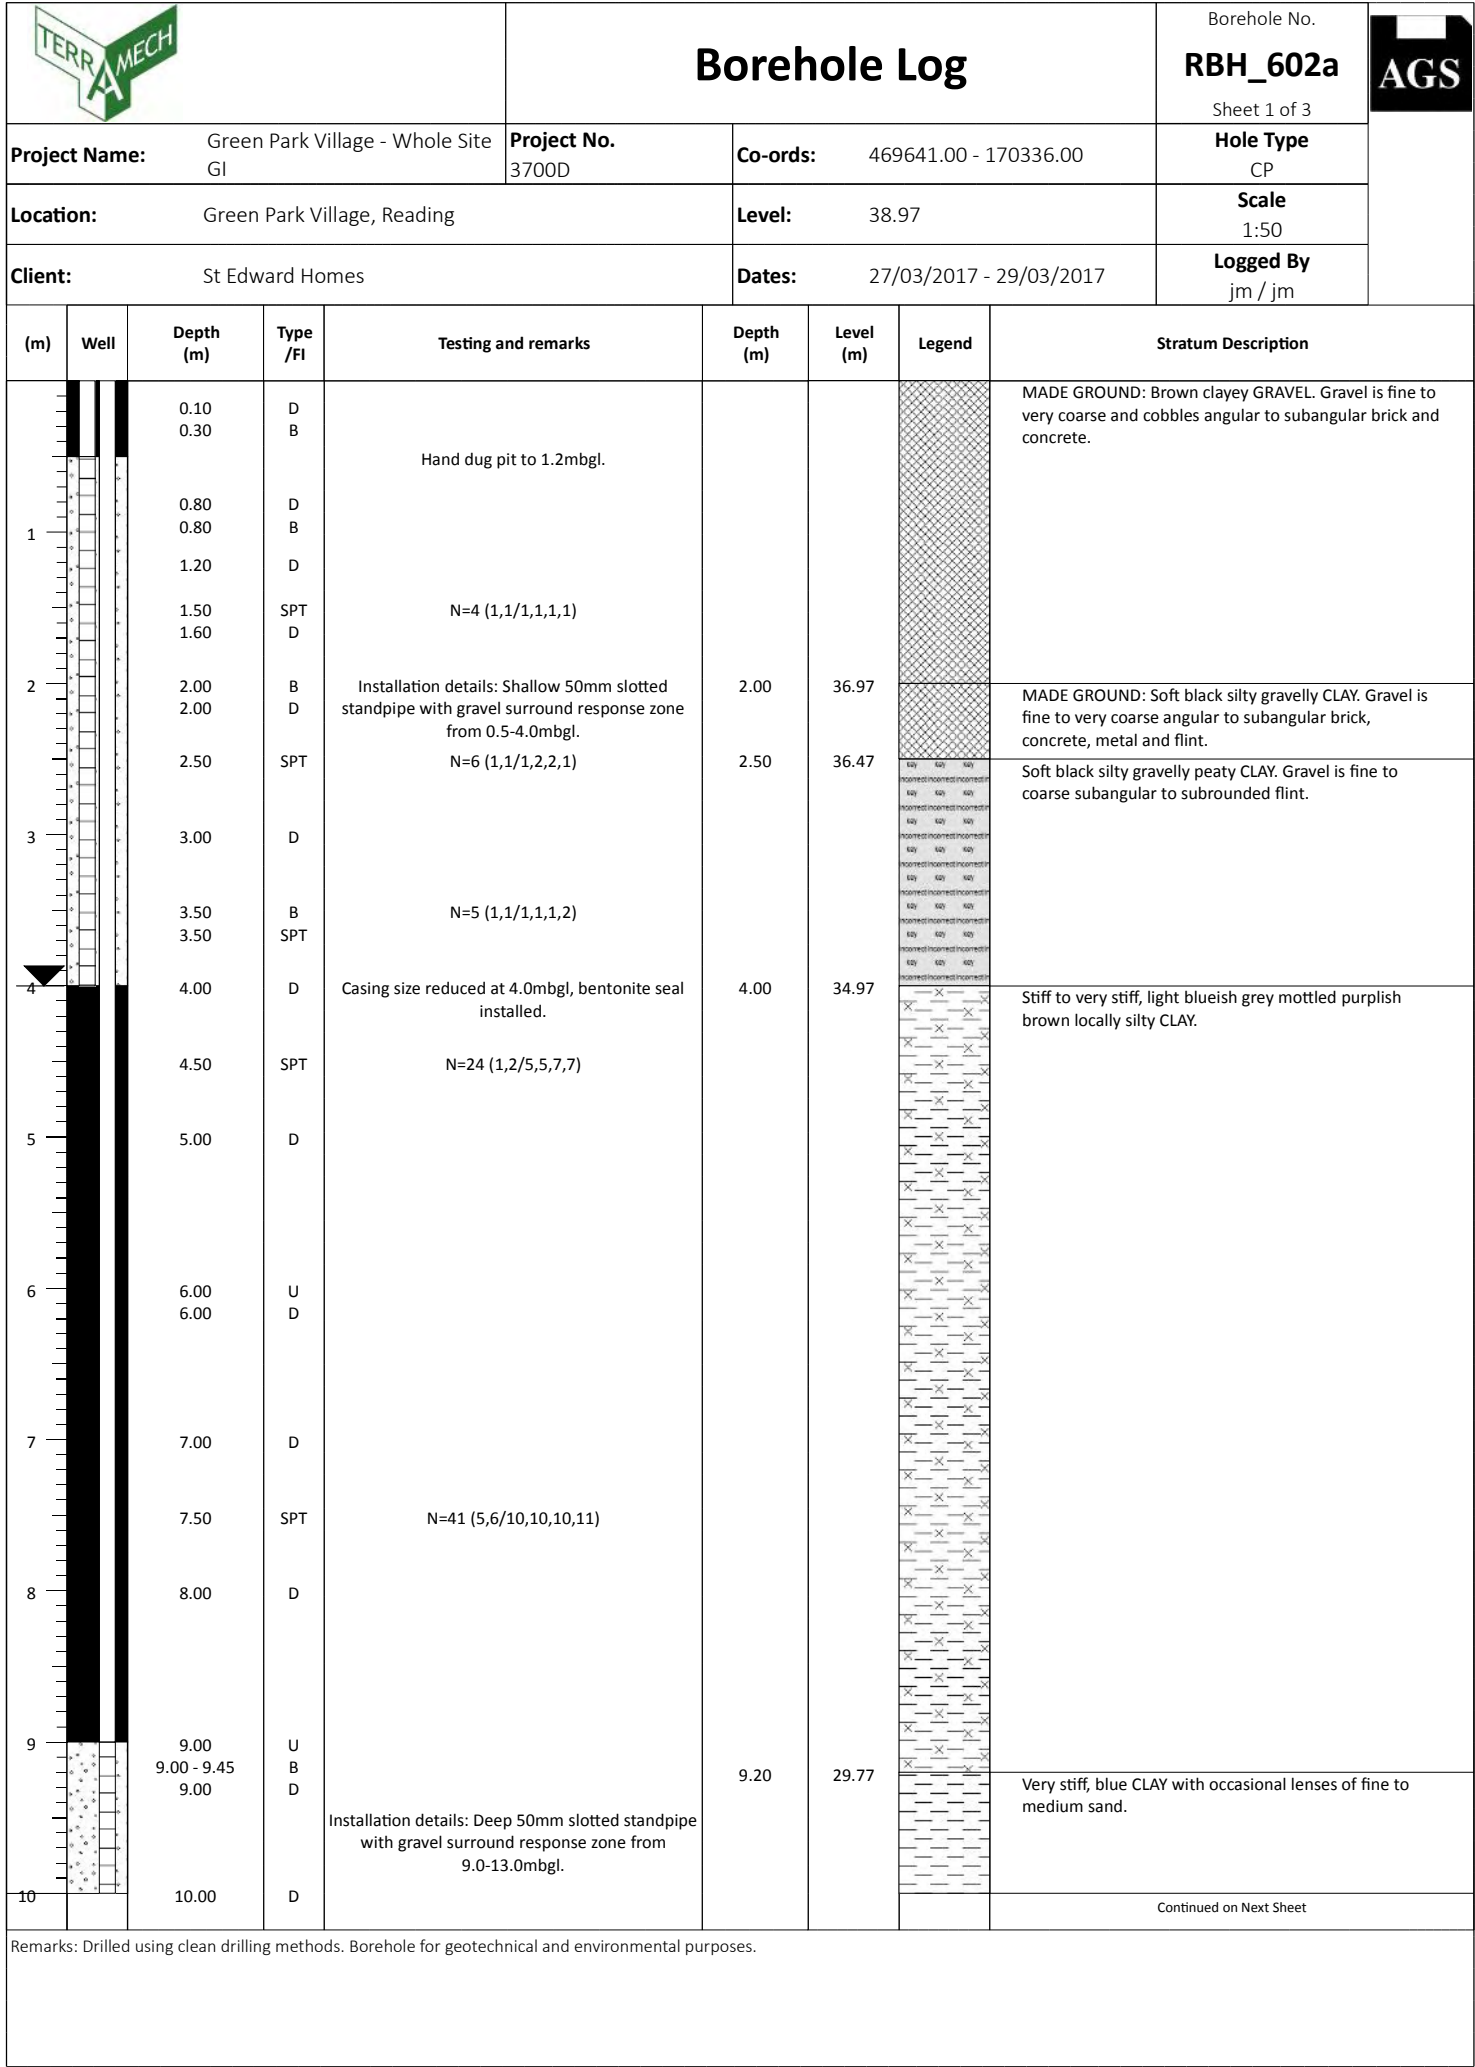
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
1		0.20	ES	Hand dug starter pit to 1.2mbgl.	1.20	39.48		MADE GROUND: Brown gravelly silty CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and flint.
		0.20	B					
		0.25	D					
		0.50	B					
		0.70	D					
		0.80	ES					
		0.80	B					
		1.00	D					
		1.20 - 1.95	B					
		1.20	D					
2		1.50	SPT(C)	N=18 (2,2/5,4,3,6)	3.20	37.48		MADE GROUND: Brown gravelly CLAY. Gravel is fine to coarse angular to subangular tarmac, brick, flint, wood, plastic and occasional clinker.
		1.50	B					
		1.50	ES					
		2.00	D					
		2.50	ES					
3		2.50	SPT(C)	N=7 (1,1/1,2,2,2)	4.40	36.28		MADE GROUND: Dark brownish grey slightly gravelly silty CLAY. Gravel is fine to coarse,
		2.50	B					
		2.50 - 2.95	D					
		3.00	D					
		3.50	SPT(C)					
4		3.50	ES	N=8 (1,2/3,2,2,1)	5.00	35.68		MADE GROUND: Dark grey/black slightly gravelly peaty CLAY. Gravel is fine to coarse angular to subrounded brick and flint.
		3.50	B					
		3.50 - 3.95	D					
		4.00	D					
		4.50	SPT(C)					
5		4.50	ES	N=8 (1,2/2,2,2,2)	6.50	34.18		Medium dense, brown clayey SAND. Sand is fine to medium.
		4.50	B					
		4.50 - 4.95	D					
		5.00	ES					
		5.00	B					
6		5.00	D	Installation details: 50mm slotted standpipe with gravel surround response zone from 6.6-11.6mbgl.	8.00	32.68		Stiff brown mottled blueish grey silty CLAY.
		6.00 - 6.45	B					
		6.00	D					
		6.00	U					
		6.50	B					
7		7.00	D	Casing size reduced at 7.7mbgl, bentonite seal installed.	8.50	32.18		Dense brown mottled grey SAND. Sand is fine to medium.
		7.50	B					
		7.50	SPT					
		8.00	D					
		8.50	B					
8		8.00	D	N=26 (2,3/6,6,7,7)	9.00	SPT		
		8.50	B					
9		9.00	SPT	N=42 (8,8/8,10,11,13)	10.00	D		
		9.00	D					
10		10.00	D					

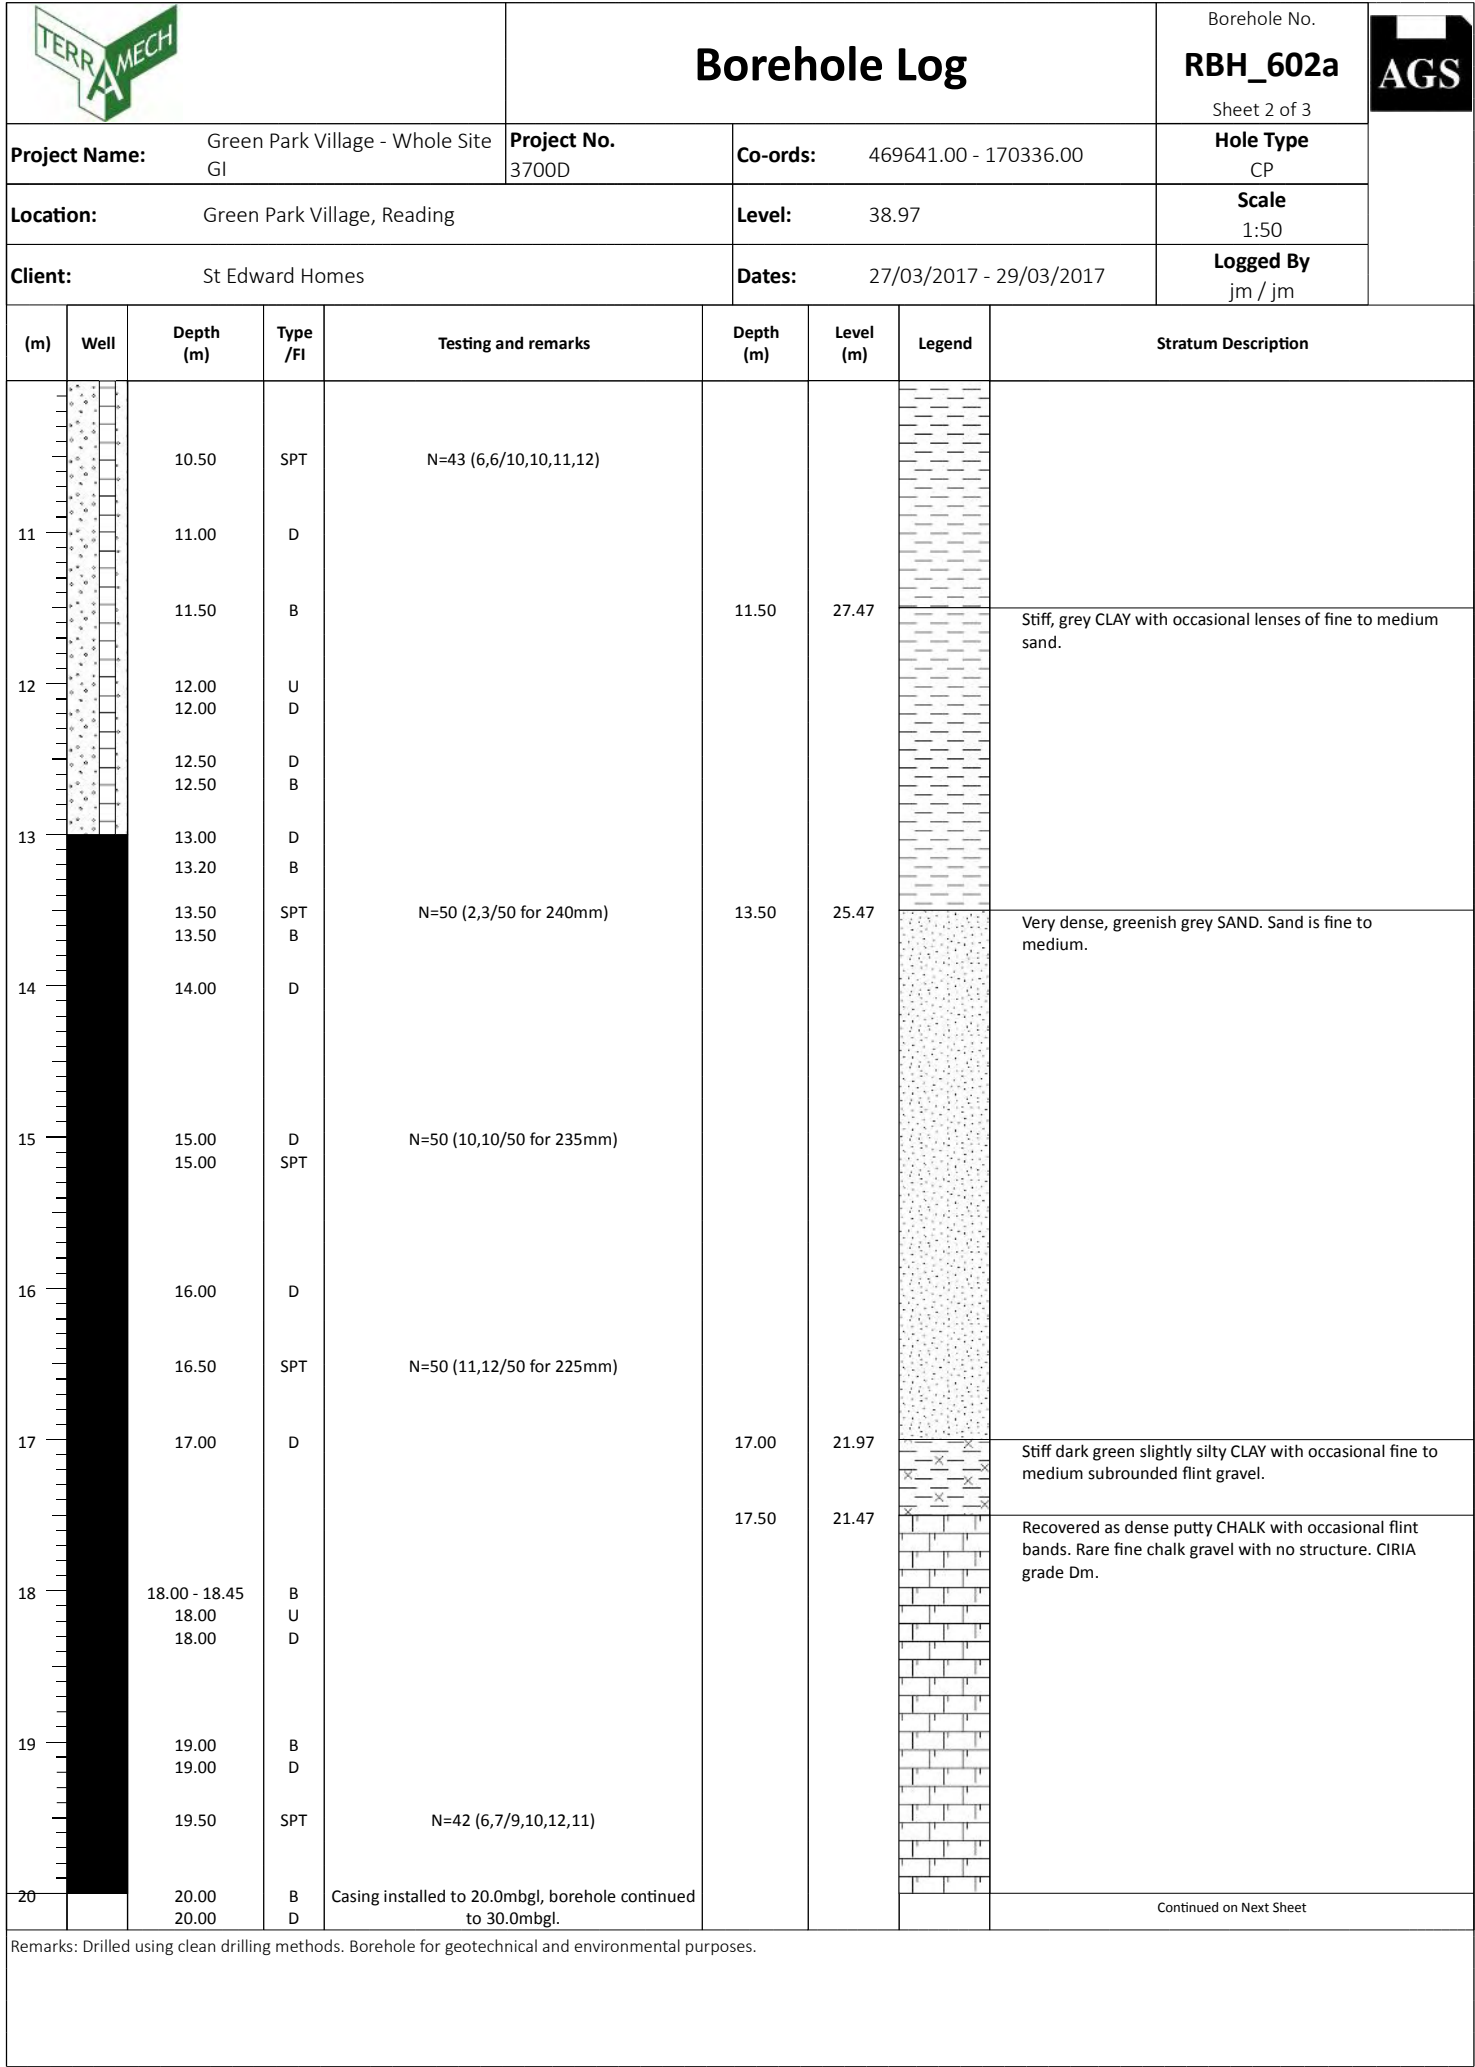
Continued on Next Sheet

Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.

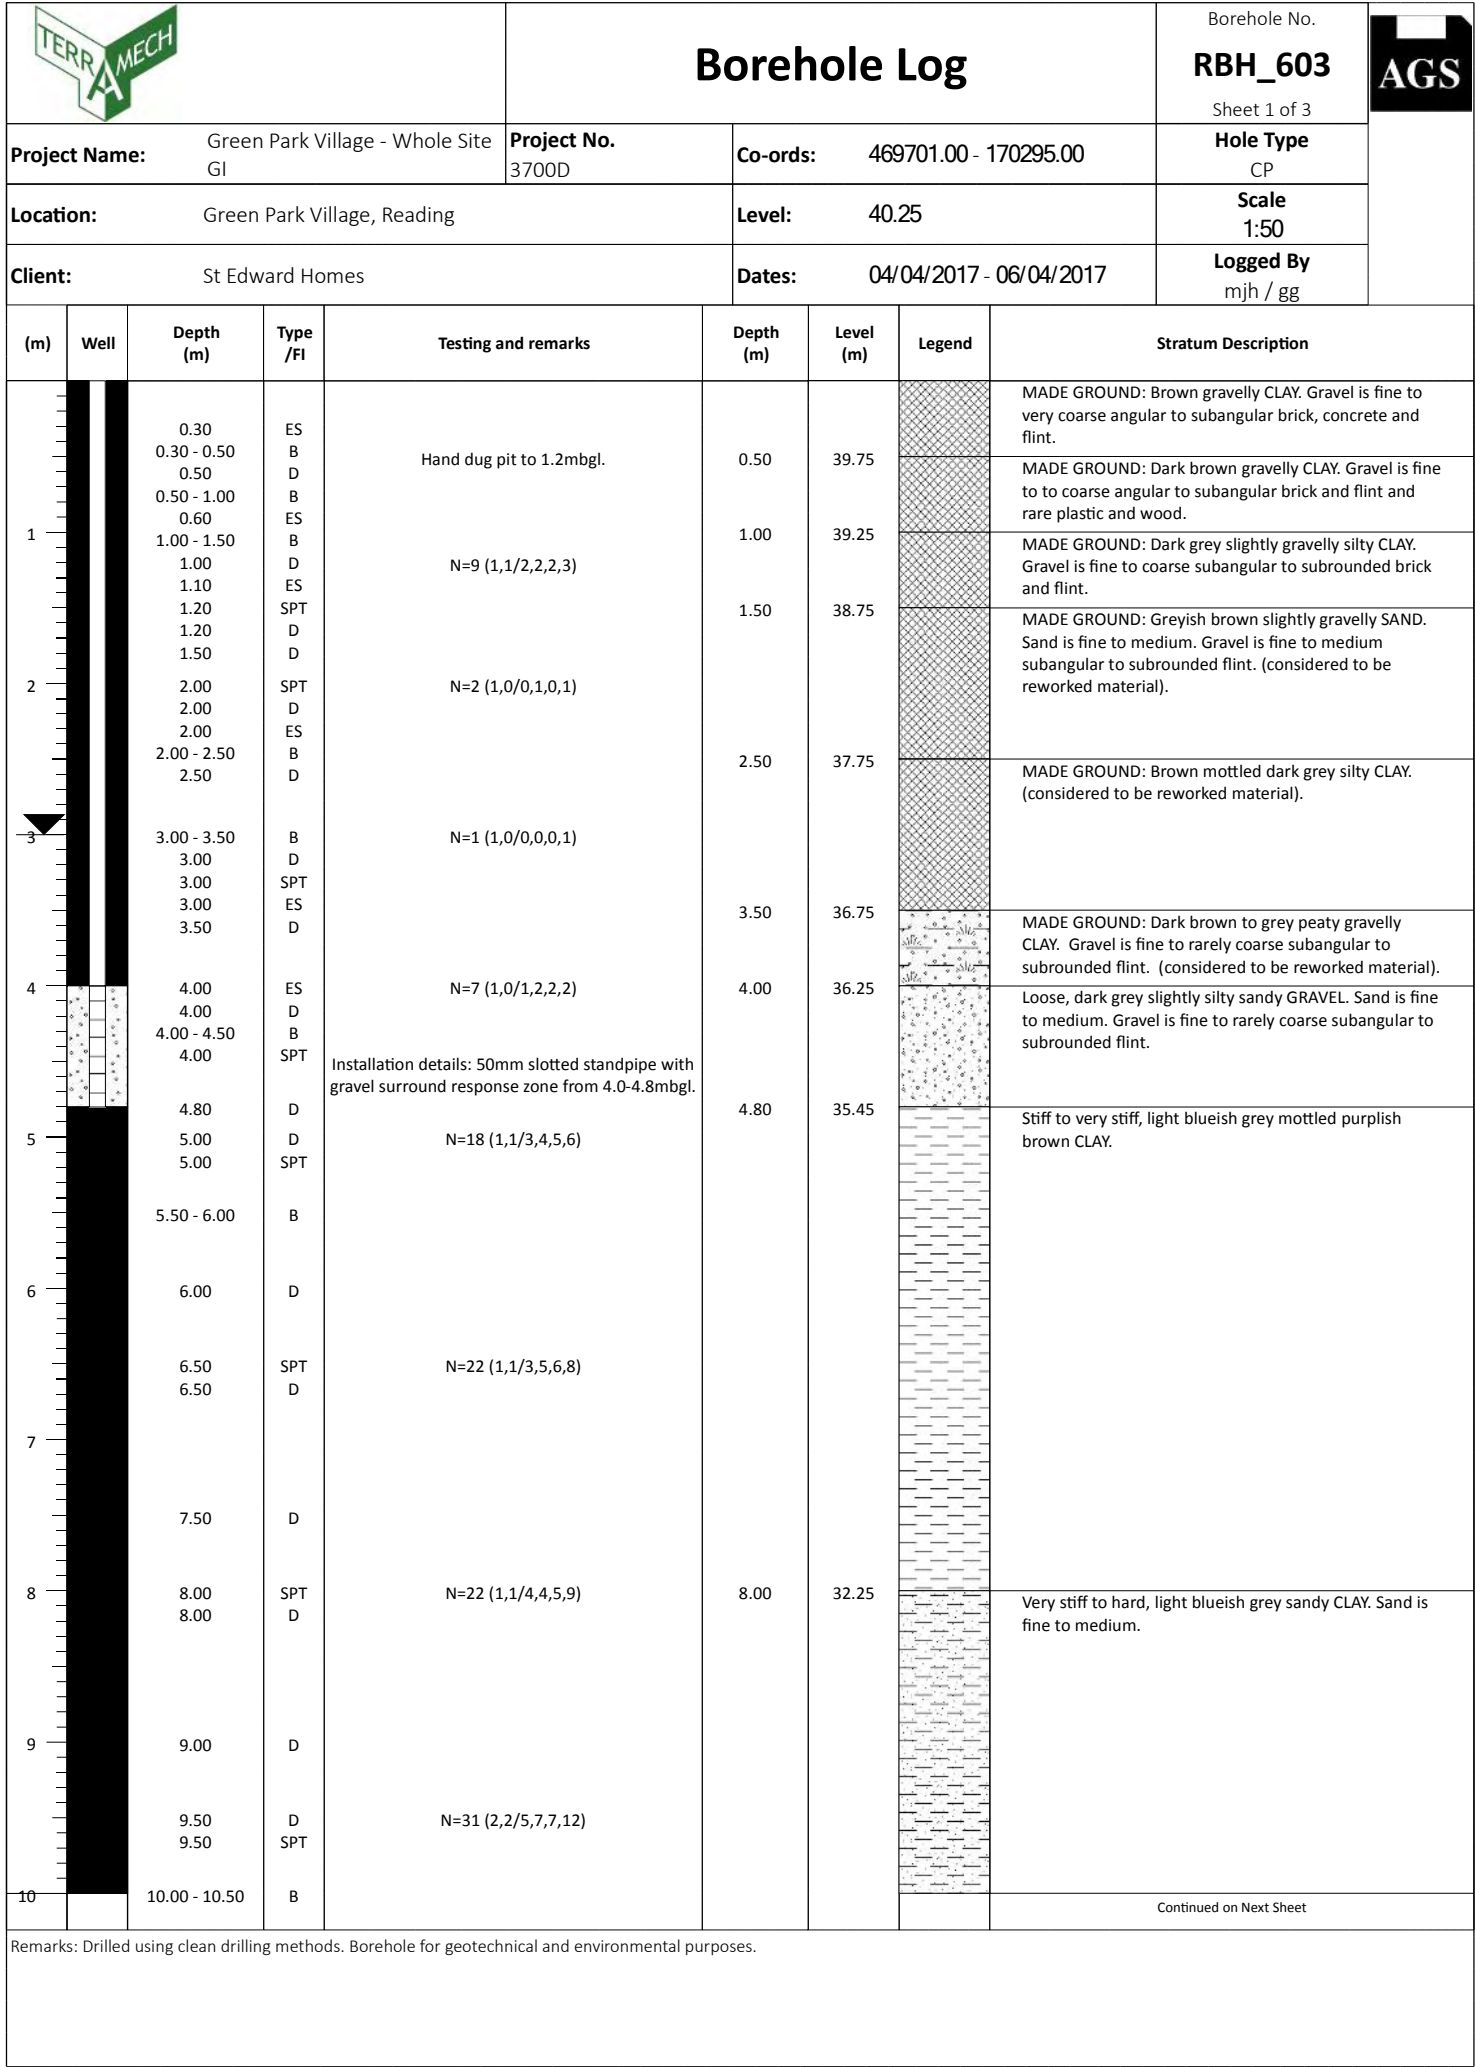


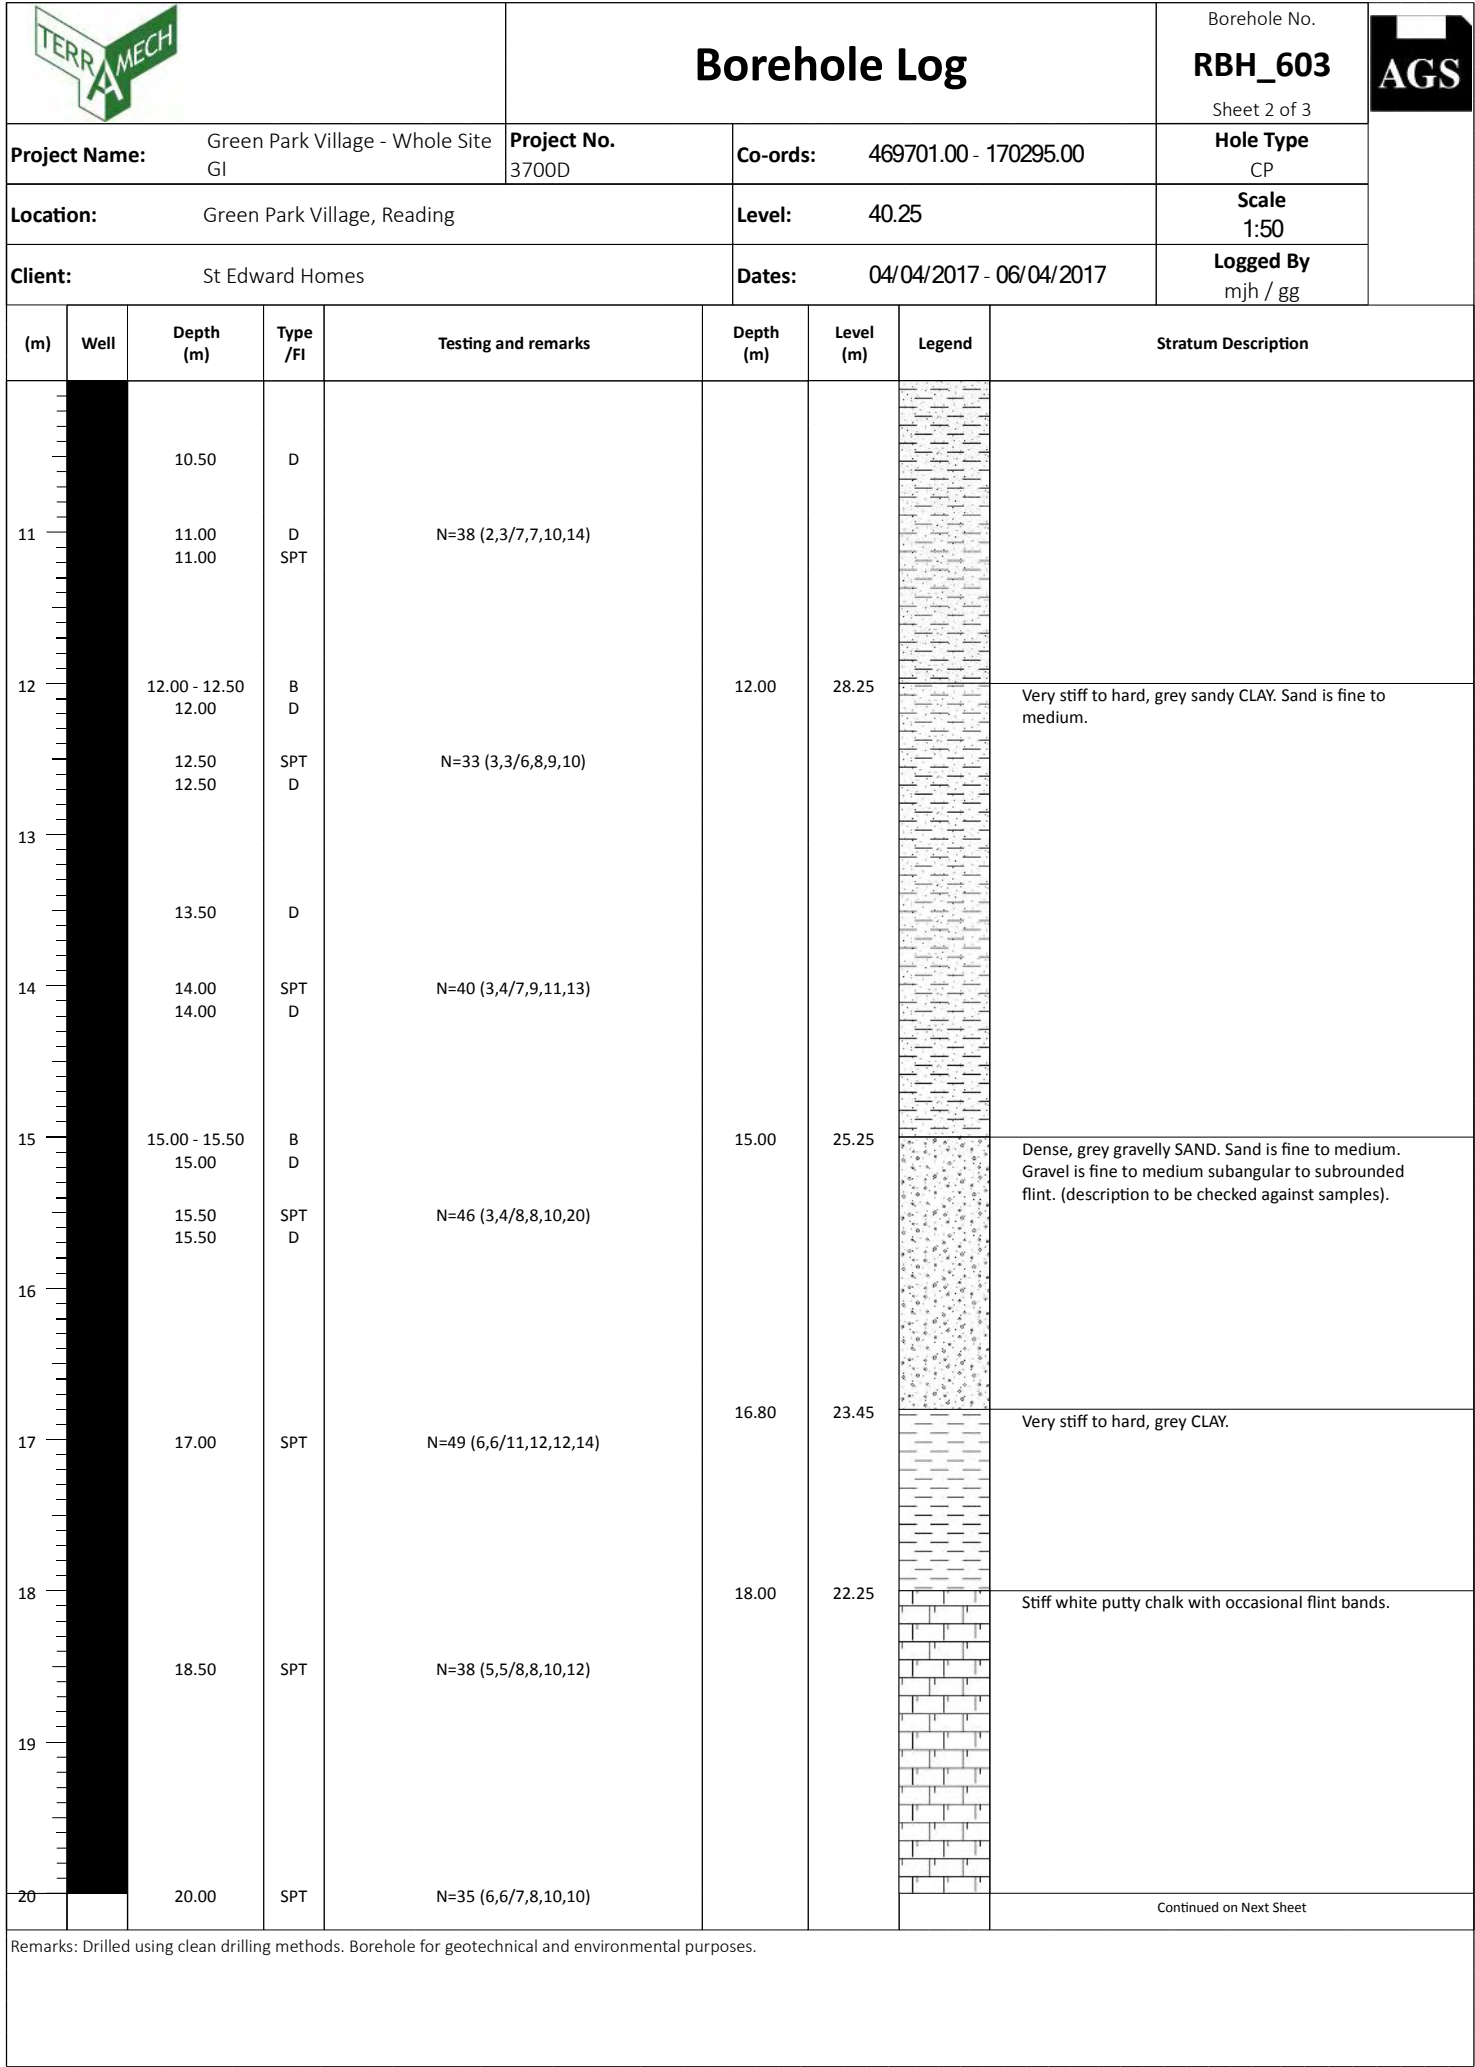
				Borehole Log				Borehole No. RBH_602 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords:			Hole Type CP	
Location: Green Park Village, Reading				Level:			Scale 1:50			
Client: St Edward Homes				Dates: 27/03/2017			Logged By jm / jm			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
					0.40			MADE GROUND: Brown clayey GRAVEL. Gravel is fine to very coarse and cobbles angular to subangular brick.		
								----- End of Borehole at 0.40m		
1										
2										
3										
4		4.00	B							
5		5.00	B							
6										
7										
8										
9										
10										
Remarks: Borehole terminated in hand dug starter pit due to presence of concrete slab.										
















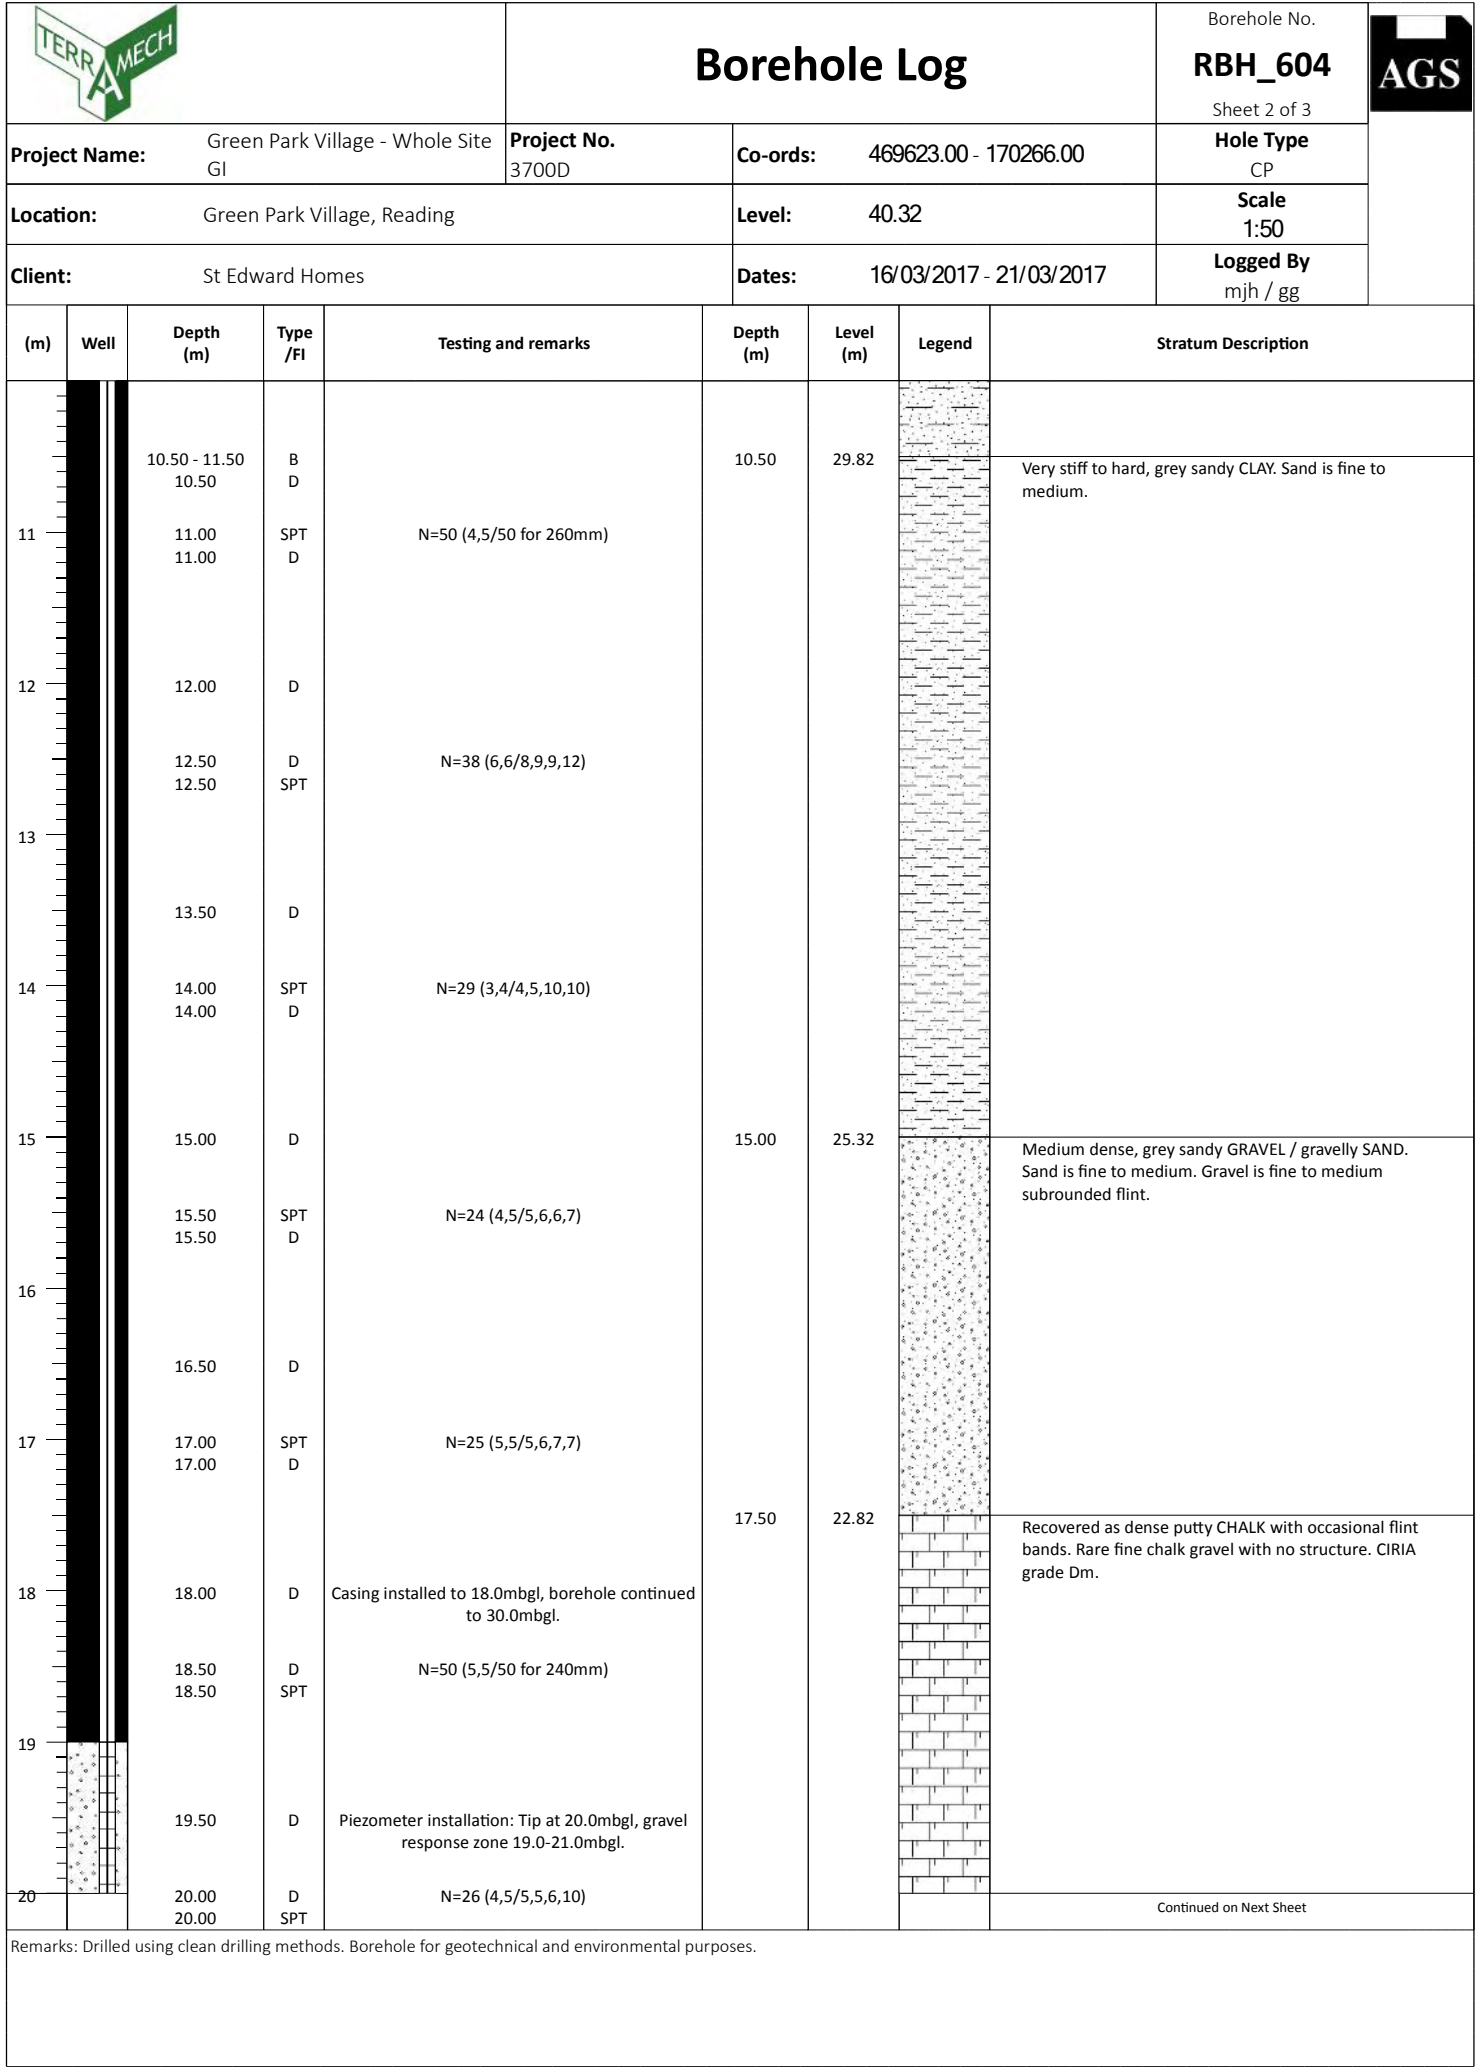
		Borehole Log				Borehole No. RBH_602a Sheet 3 of 3				
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469641.00 - 170336.00		Hole Type CP				
Location: Green Park Village, Reading				Level: 38.97		Scale 1:50				
Client: St Edward Homes				Dates: 27/03/2017 - 29/03/2017		Logged By jm / jm				
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
21		20.50	B	N=42 (5,6/10,10,11,11)						
		21.00	SPT							
		21.00	D							
		21.50	B							
		22	22.00						D	
			22.50						U	
			22.50 - 22.95						B	
		23	23.00						D	
			24						24.00	SPT
									24.00	D
		24.00							B	
		25	25.00						D	
25.50	SPT									
26	26.00		D							
	27	27.00	SPT							
		27.00	D							
28		28.00	D							
	28.50	SPT								
	29	29.00	D							
29.50		SPT								
30		30.00	D	Borehole terminated upon reaching target depth.	30.00	8.97		----- End of Borehole at 30.00m		
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.										



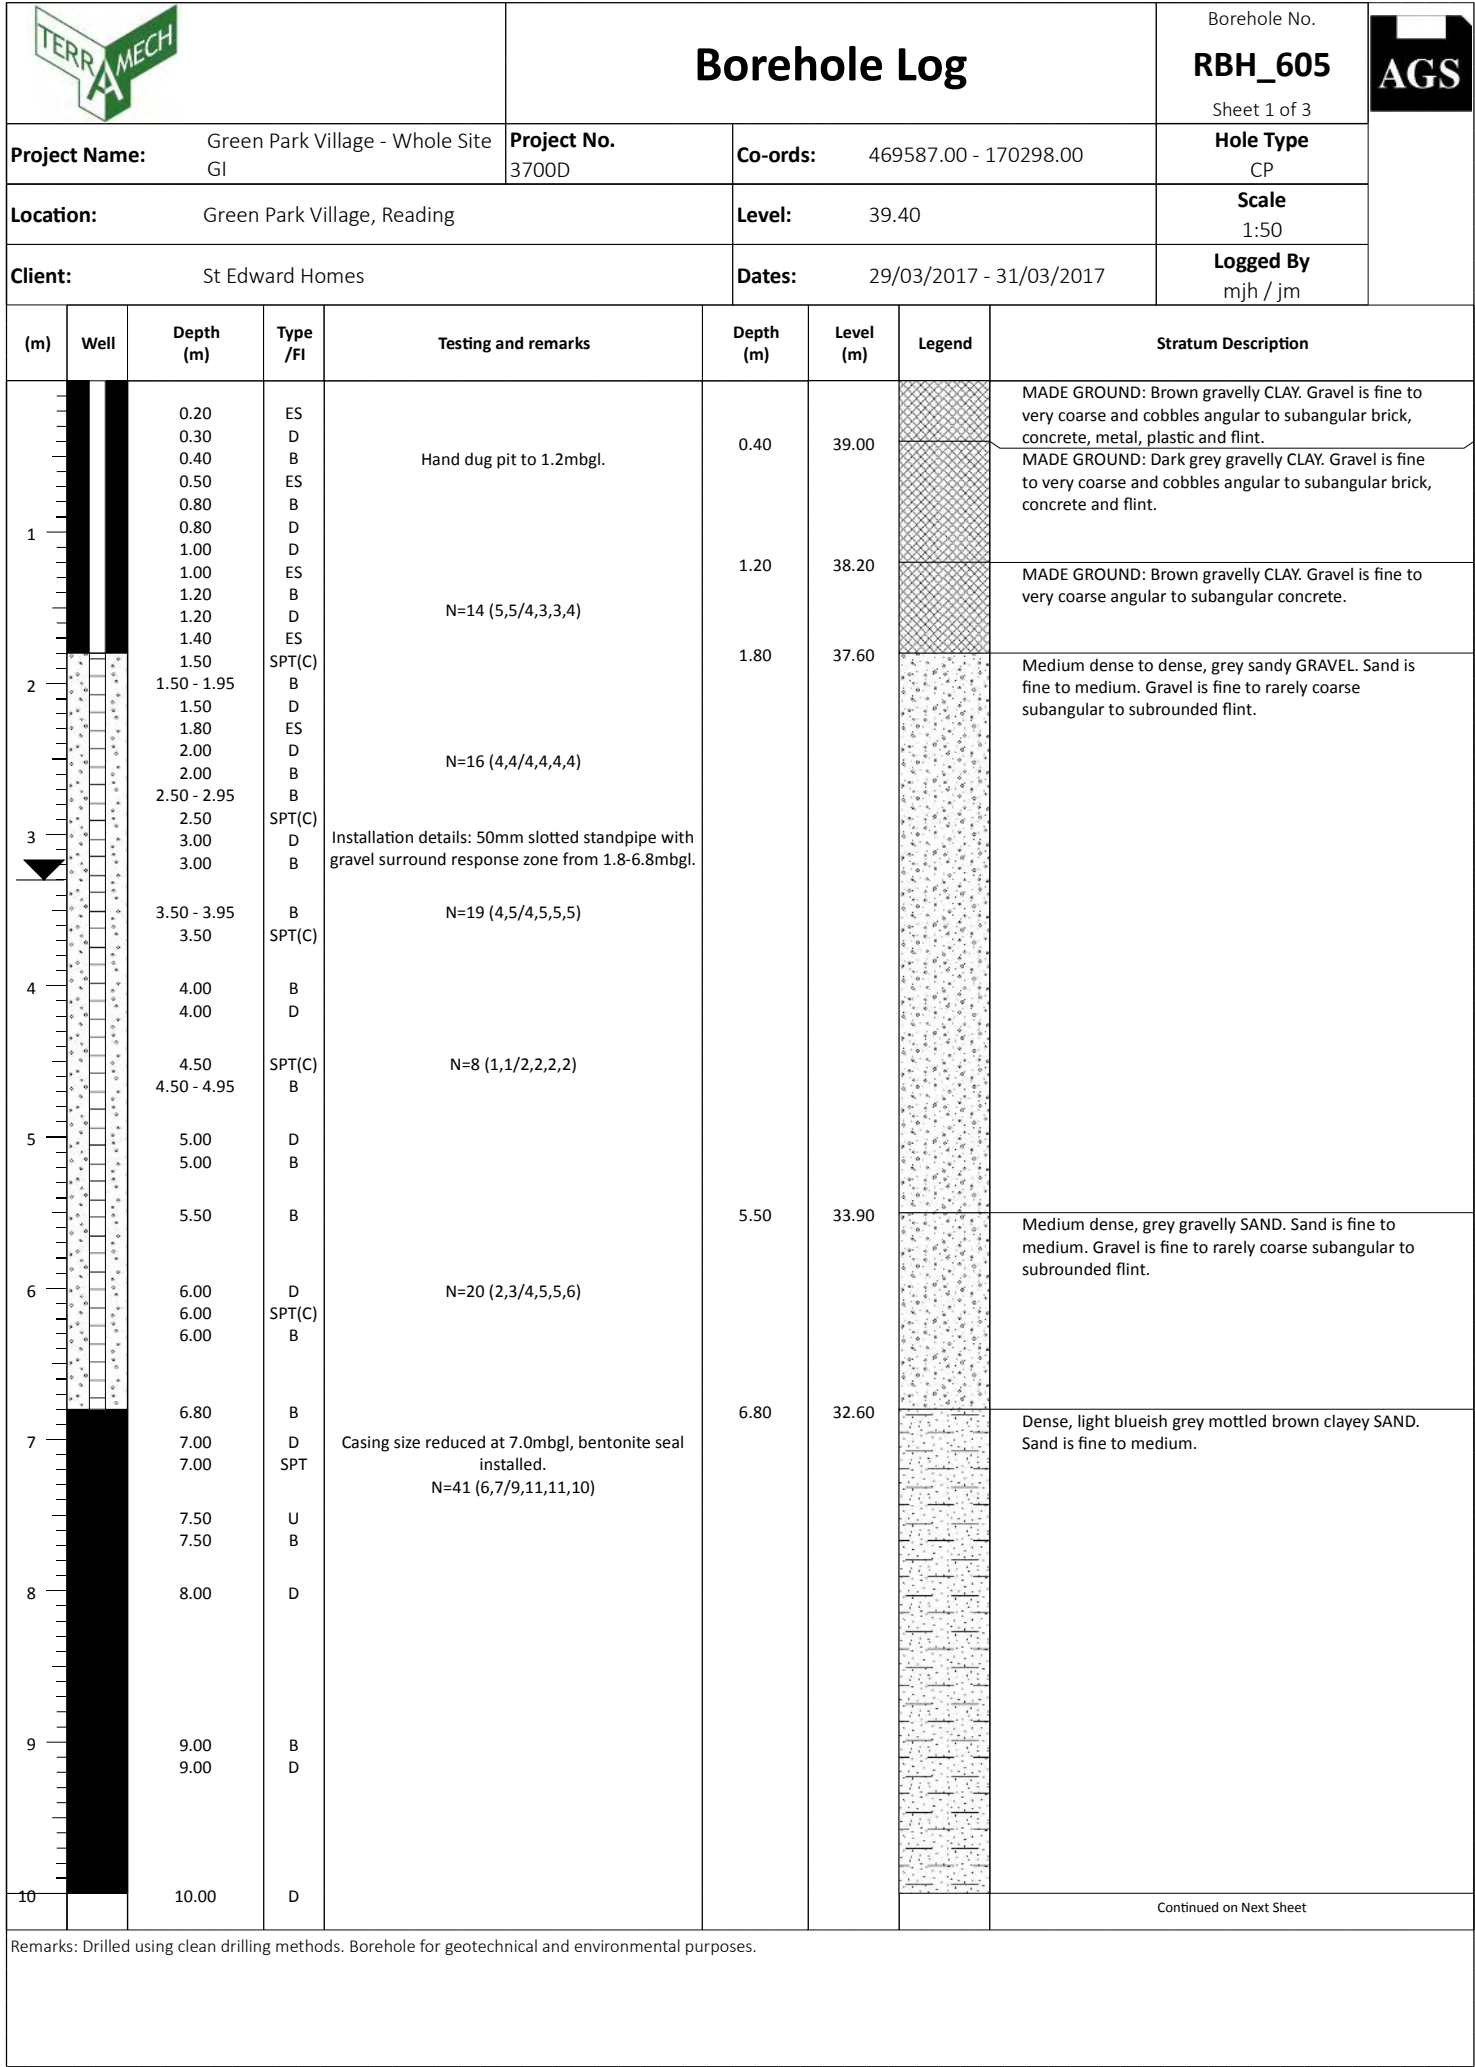


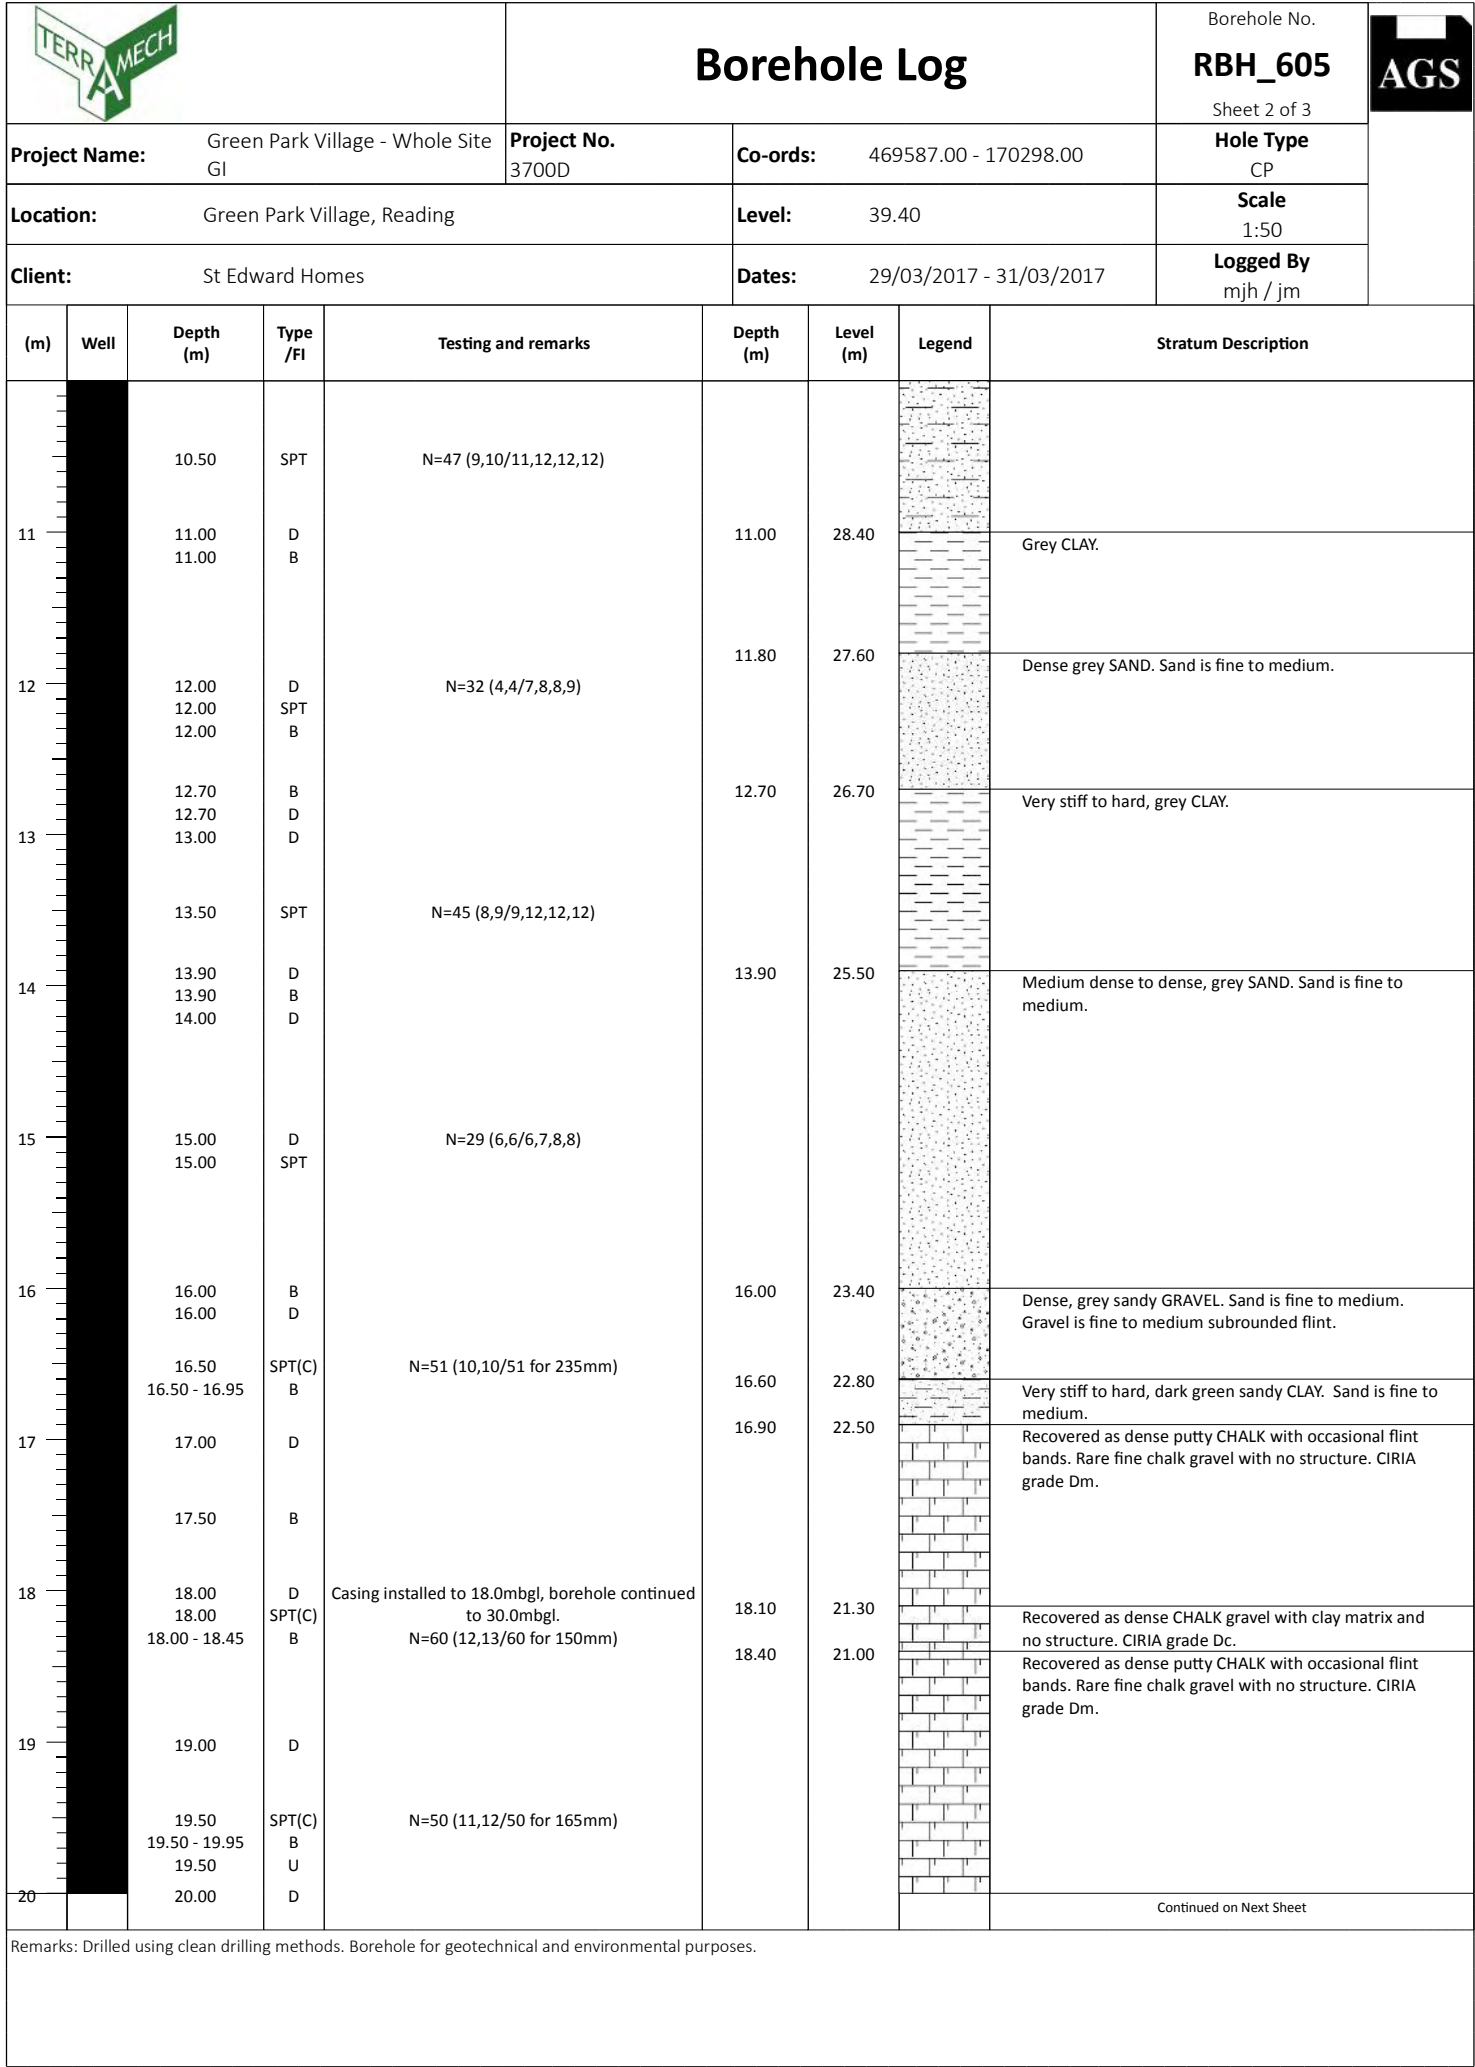
		Borehole Log				Borehole No. RBH_603 Sheet 3 of 3		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469701.00 - 170295.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 40.25		Scale 1:50		
Client: St Edward Homes				Dates: 04/04/2017 - 06/04/2017		Logged By mjh / gg		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
21		21.50	SPT	N=50 (4,6/6,10,14,20)				
22								
23		23.00	SPT	N=52 (4,5/9,9,12,22)				
24								
25		24.50	SPT	N=43 (4,7/7,11,10,15)				
26		26.00	SPT	N=50 (7,7/50 for 255mm)				
27								
28		27.50	SPT	N=50 (7,8/50 for 255mm)				
29								
30		29.00	SPT	N=47 (7,8/9,10,10,18)				
				Borehole terminated upon reaching target depth.	30.00	10.25		----- End of Borehole at 30.00m
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.								

		Borehole Log			Borehole No. RBH_604							
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469623.00 - 170266.00		Sheet 1 of 3						
Location: Green Park Village, Reading		Level: 40.32		Hole Type CP								
Client: St Edward Homes		Dates: 16/03/2017 - 21/03/2017		Scale 1:50		Logged By mjh / gg						
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description				
1		0.00 - 0.20	B	Hand dug pit to 1.2mbgl.	0.20	40.12		MADE GROUND: Brown gravelly CLAY. Gravel is fine to very coarse angular to subangular brick, concrete, flint.				
		0.10	ES					0.30	40.02	MADE GROUND: Dark grey occasionally mottled white and brown gravelly CLAY. Gravel is fine to very coarse and cobbles brick, concrete, tile, plastic and metal.		
		0.20	ES									
		0.20 - 0.30	B									
		0.30 - 0.50	B									
		2		0.40	ES	N=5 (1,1/1,1,2)	0.90	39.42		MADE GROUND: Brown gravelly CLAY. Fine to coarse angular to subangular brick, concrete, flint and wood.		
				0.50 - 0.80	B							
				0.50	D							
				0.80 - 1.00	B							
				1.00	ES							
3				1.00 - 1.20	B	Installation details: 50mm slotted standpipe with gravel surround response zone from 0.5-5.0mbgl.	2.80	37.52		MADE GROUND: Brown gravelly sandy CLAY with occasional peat pockets. Sand is fine to medium. Gravel is fine to coarse angular to subangular brick, concrete, wood, tile and flint.		
				1.00	D							
				1.20 - 1.50	B							
				1.20	D							
				1.20	SPT							
		4		1.50	D	N=8 (1,1/2,2,2,2)	4.00	36.32		MADE GROUND: Dark grey peaty gravelly CLAY with rare pockets of brown gravelly clay. Gravel is fine to rarely coarse subangular to subrounded flint and rare fine brick. (Considered to be reworked material).		
				1.50 - 2.00	B							
				2.00	SPT							
				2.00	ES							
				2.00	D							
5				2.00 - 2.50	B	N=15 (1,1/2,3,4,6)	5.00	35.32		Soft, dark grey peaty gravelly CLAY. Gravel is fine to medium subangular to subrounded flint.		
				2.50	D							
				2.50 - 3.00	B							
				3.00	SPT							
				3.00	D							
		6		3.00	ES	N=4 (1,1/1,1,1,1)	5.20	35.12		Loose, grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.		
				3.00 - 3.50	B							
				3.50	D							
				3.50 - 4.00	B							
				4.00	SPT							
7				4.00 - 4.50	B	N=7 (1,1/1,1,1,4)	5.20	35.12		Medium dense, greenish grey slightly clayey SAND. Sand is fine to medium.		
				4.00	ES							
				4.00	D							
				4.50	D							
				4.50	ES							
		8		4.50 - 5.00	B	Casing size reduced at 5.0mbgl, bentonite seal installed.	5.20	35.12		MADE GROUND: Dark grey peaty gravelly CLAY with rare pockets of brown gravelly clay. Gravel is fine to rarely coarse subangular to subrounded flint and rare fine brick. (Considered to be reworked material).		
				5.00	D							
				5.00	SPT							
				5.00	D							
				5.00	SPT							
9				5.50 - 6.50	B	N=16 (1,2/3,4,4,5)	8.00	35.12		MADE GROUND: Dark grey peaty gravelly CLAY with rare pockets of brown gravelly clay. Gravel is fine to rarely coarse subangular to subrounded flint and rare fine brick. (Considered to be reworked material).		
				6.00	D							
				6.20	ES							
				6.50	D							
				6.50	SPT							
		10		6.50 - 7.50	B	N=12 (2,3/2,3,3,4)	9.00	35.12		MADE GROUND: Dark grey peaty gravelly CLAY with rare pockets of brown gravelly clay. Gravel is fine to rarely coarse subangular to subrounded flint and rare fine brick. (Considered to be reworked material).		
				7.50	D							
				8.00	D							
				8.00	SPT							
				9.00	D							
11				9.50	SPT	N=13 (2,2/3,2,3,5)	9.50	35.12		MADE GROUND: Dark grey peaty gravelly CLAY with rare pockets of brown gravelly clay. Gravel is fine to rarely coarse subangular to subrounded flint and rare fine brick. (Considered to be reworked material).		
				9.50	D							
				9.50	SPT							
				9.50	D							
				9.50	SPT							
		Continued on Next Sheet										
		Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.										






		Borehole Log				Borehole No. RBH_604 Sheet 3 of 3		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469623.00 - 170266.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 40.32		Scale 1:50		
Client: St Edward Homes				Dates: 16/03/2017 - 21/03/2017		Logged By mjh / gg		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
21		21.00	D	N=37 (4,5/6,6,8,17)				
		21.50 21.50	SPT D					
22		22.50	D					
23		23.00 23.00	SPT D	N=48 (4,6/7,7,17,17)				
24		24.00	D					
		24.50 24.50	D SPT	N=49 (5,6/7,7,16,19)				
25		25.50	D					
26		26.00 26.00	SPT D	N=50 (7,7/50 for 225mm)				
27		27.00	D					
		27.50 27.50	D SPT	N=50 (7,8/50 for 210mm)				
28		28.50	D					
29		29.00 29.00	SPT D	N=50 (8,8/50 for 225mm)				
30	30.00 30.00	D SPT	N=50 (9,12/50 for 175mm) Borehole terminated upon reaching target depth.	30.00	10.32	----- End of Borehole at 30.00m		
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.								

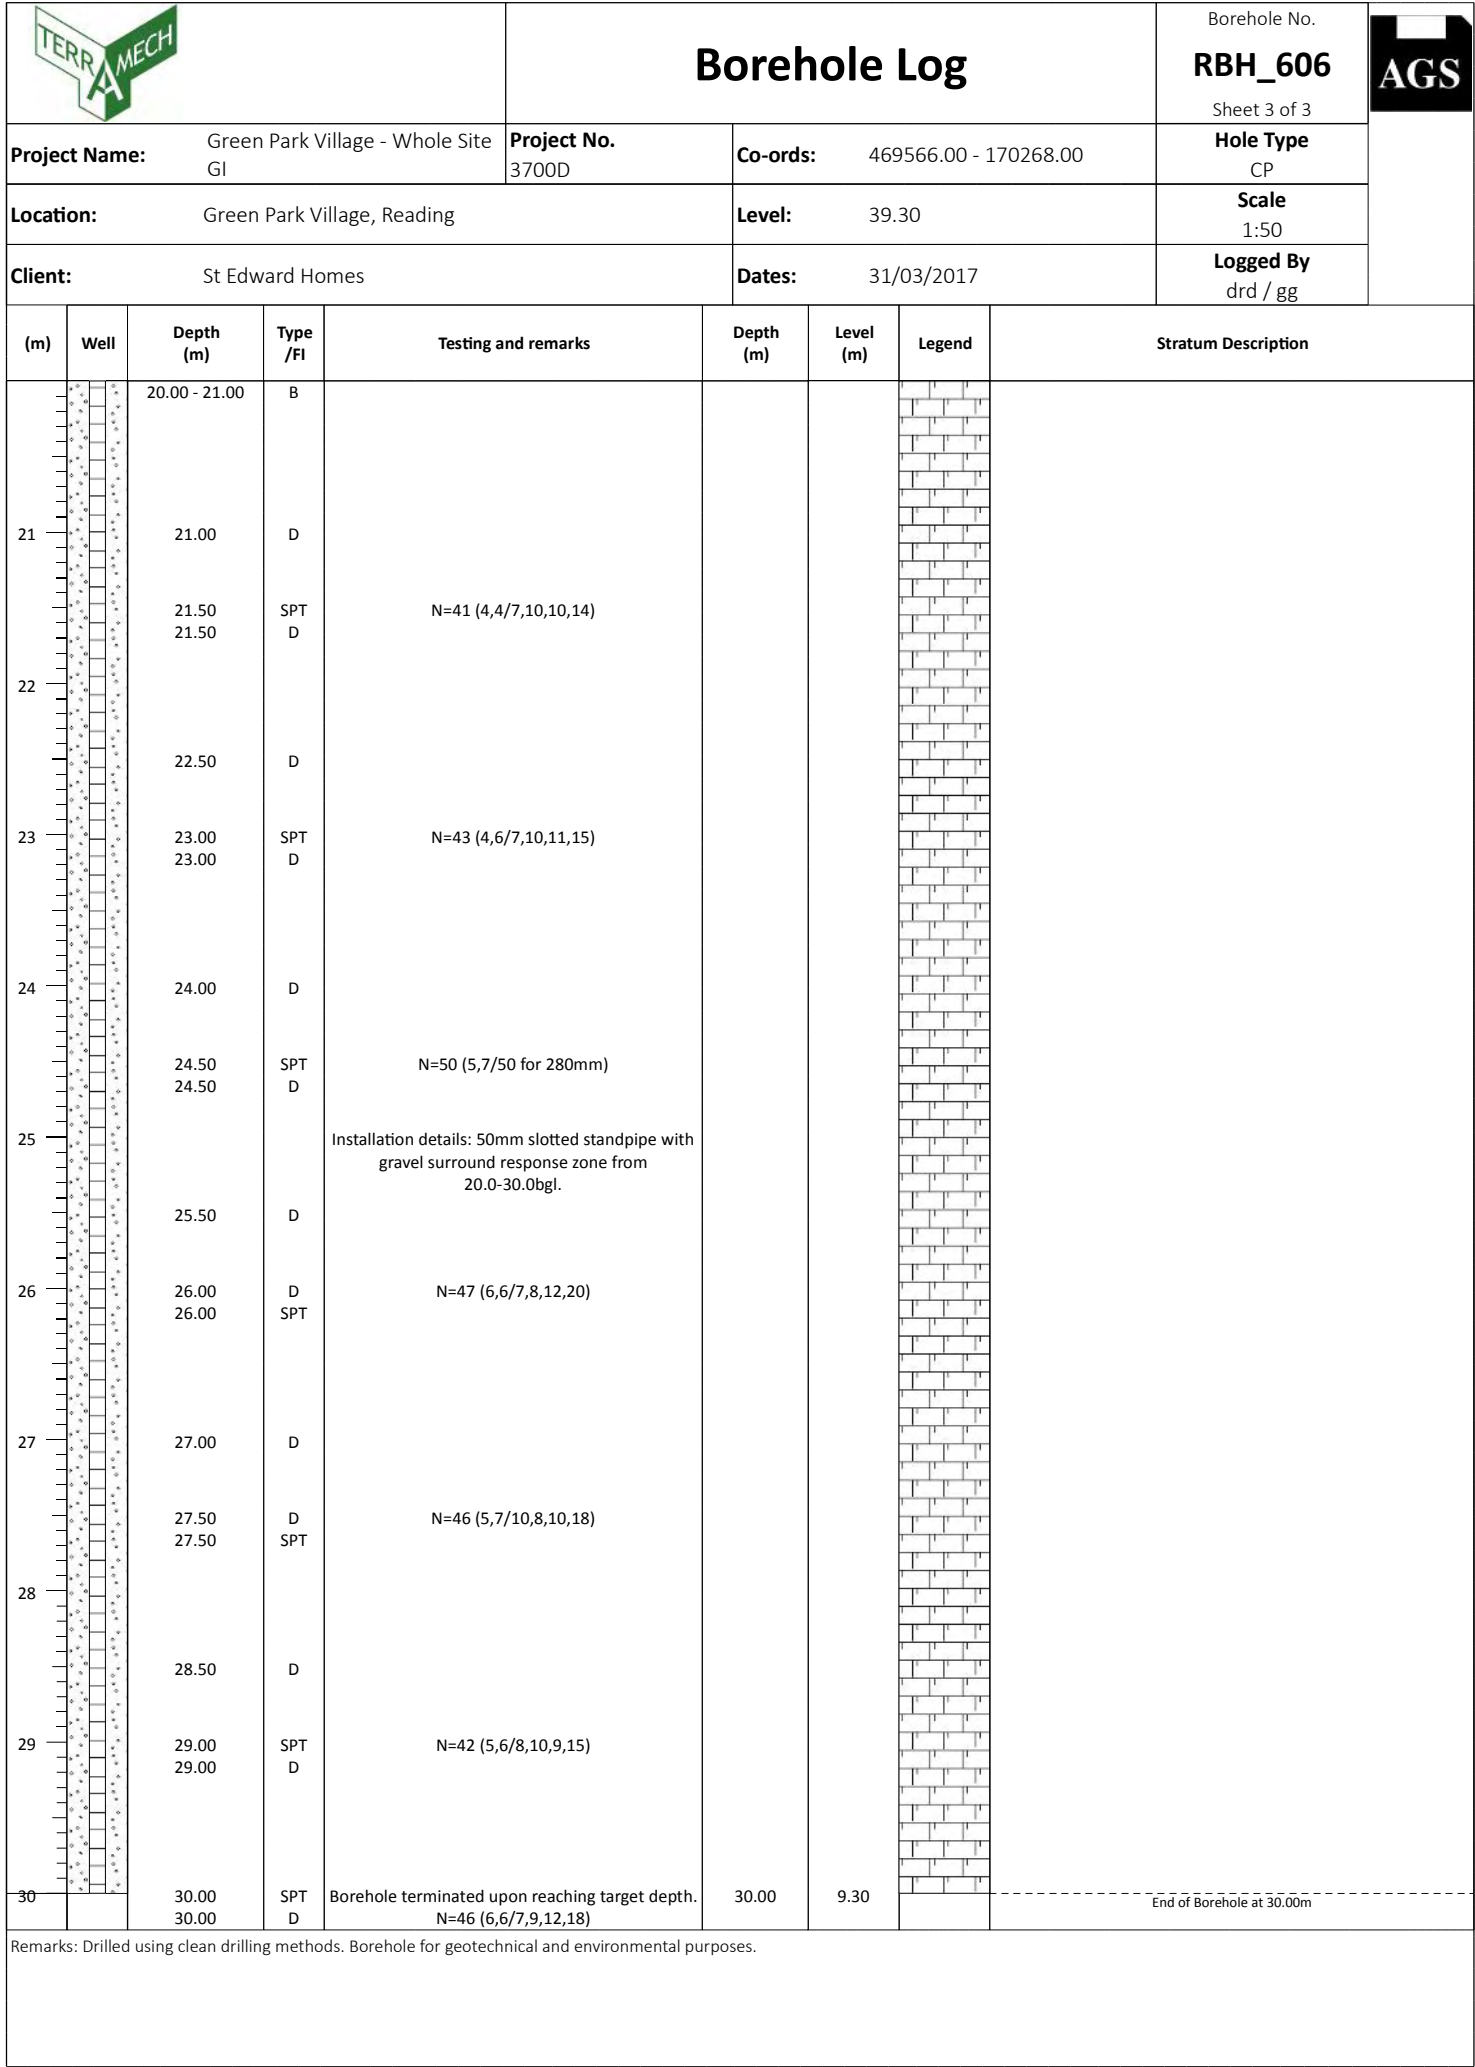








		Borehole Log				Borehole No. RBH_605 Sheet 3 of 3		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469587.00 - 170298.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 39.40		Scale 1:50		
Client: St Edward Homes				Dates: 29/03/2017 - 31/03/2017		Logged By mjh / jm		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
21		21.00 21.00	SPT(C) D	N=50 (11,12/50 for 225mm)				
22		22.00	D					
		22.50	SPT(C)	N=45 (12,13/45 for 225mm)				
23		23.00 23.00	B D					
24		24.00 24.00	D SPT(C)	N=50 (10,10/50 for 250mm)				
25		25.00 25.00	B D					
		25.50	SPT	N=50 (5,5/11,12,15,12)				
26		26.00	D					
27		27.00 27.00 27.00 - 27.45	U D B					
28		28.00	D					
		28.50	SPT	N=50 (6,7/10,12,13,15)				
29		29.00 29.00	D B					
	29.50	SPT	N=50 (8,9/50 for 235mm)					
30	30.00	D	Borehole terminated upon reaching target depth.	30.00	9.40		----- End of Borehole at 30.00m	
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.								

				Borehole Log			Borehole No. RBH_606 Sheet 1 of 3			
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469566.00 - 170268.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 39.30		Scale 1:50				
Client: St Edward Homes				Dates: 31/03/2017		Logged By drd / gg				
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
1		0.00 - 0.40	B	Hand dug pit to 1.2mbgl.	0.60	38.70		MADE GROUND: Greyish brown gravelly CLAY fill. Gravel is fine to very coarse and cobbles angular to subrounded brick, wood, plastic, flint.		
		0.20	ES							
		0.40 - 0.80	B							
		0.50	D							
		0.60	ES							
		2	0.80 - 1.20	B	N=14 (0,1/2,4,4,4)	1.80	37.50		MADE GROUND: Brown gravelly CLAY fill. Gravel is fine to very coarse and cobbles brick, flint, wood and plastic.	
			1.00	D						
			1.00	ES						
			1.20	D						
			1.20	SPT						
3	1.50	D	N=11 (1,1/2,2,3,4)	4.50	34.80		Medium dense, grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint.			
	2.00	SPT(C)								
	2.00	D								
	2.00 - 2.50	B								
	2.10	ES								
4	2.50	D	N=13 (1,1/3,3,3,4)	5.50	33.80		Firm to stiff light grey mottled brown slightly sandy clayey SILT. Sand is fine to medium.			
	3.00	SPT(C)								
	3.00	D								
	3.50	D								
	5	4.00					SPT(C)	Casing size reduced at 4.5mbgl, bentonite seal installed.	5.50	33.80
4.00		D								
4.50		D								
4.60 - 5.00		B								
4.70		ES								
6	5.00	SPT	N=17 (1,2/3,4,4,6)	5.50	33.80		Medium dense to dense, grey slightly clayey silty SAND with bands of clay. Sand is fine to medium.			
	5.00	D								
	5.70	ES								
	6.00	D								
	6.00 - 6.50	B								
7	6.50	D	N=12 (1,0/1,2,3,6)	5.50	33.80		Medium dense to dense, grey slightly clayey silty SAND with bands of clay. Sand is fine to medium.			
	6.50	SPT								
	7.50	D								
	8.00	SPT								
	8.00	D								
8	9.00	D	N=17 (1,1/2,3,5,7)	5.50	33.80		Medium dense to dense, grey slightly clayey silty SAND with bands of clay. Sand is fine to medium.			
	9.50	D								
	9.50	SPT								
	9.50	D								
	9.50	SPT								
9	9.50	D	N=43 (1,2/7,10,12,14)	5.50	33.80		Medium dense to dense, grey slightly clayey silty SAND with bands of clay. Sand is fine to medium.			
	9.50	SPT								
10								Continued on Next Sheet		
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.										

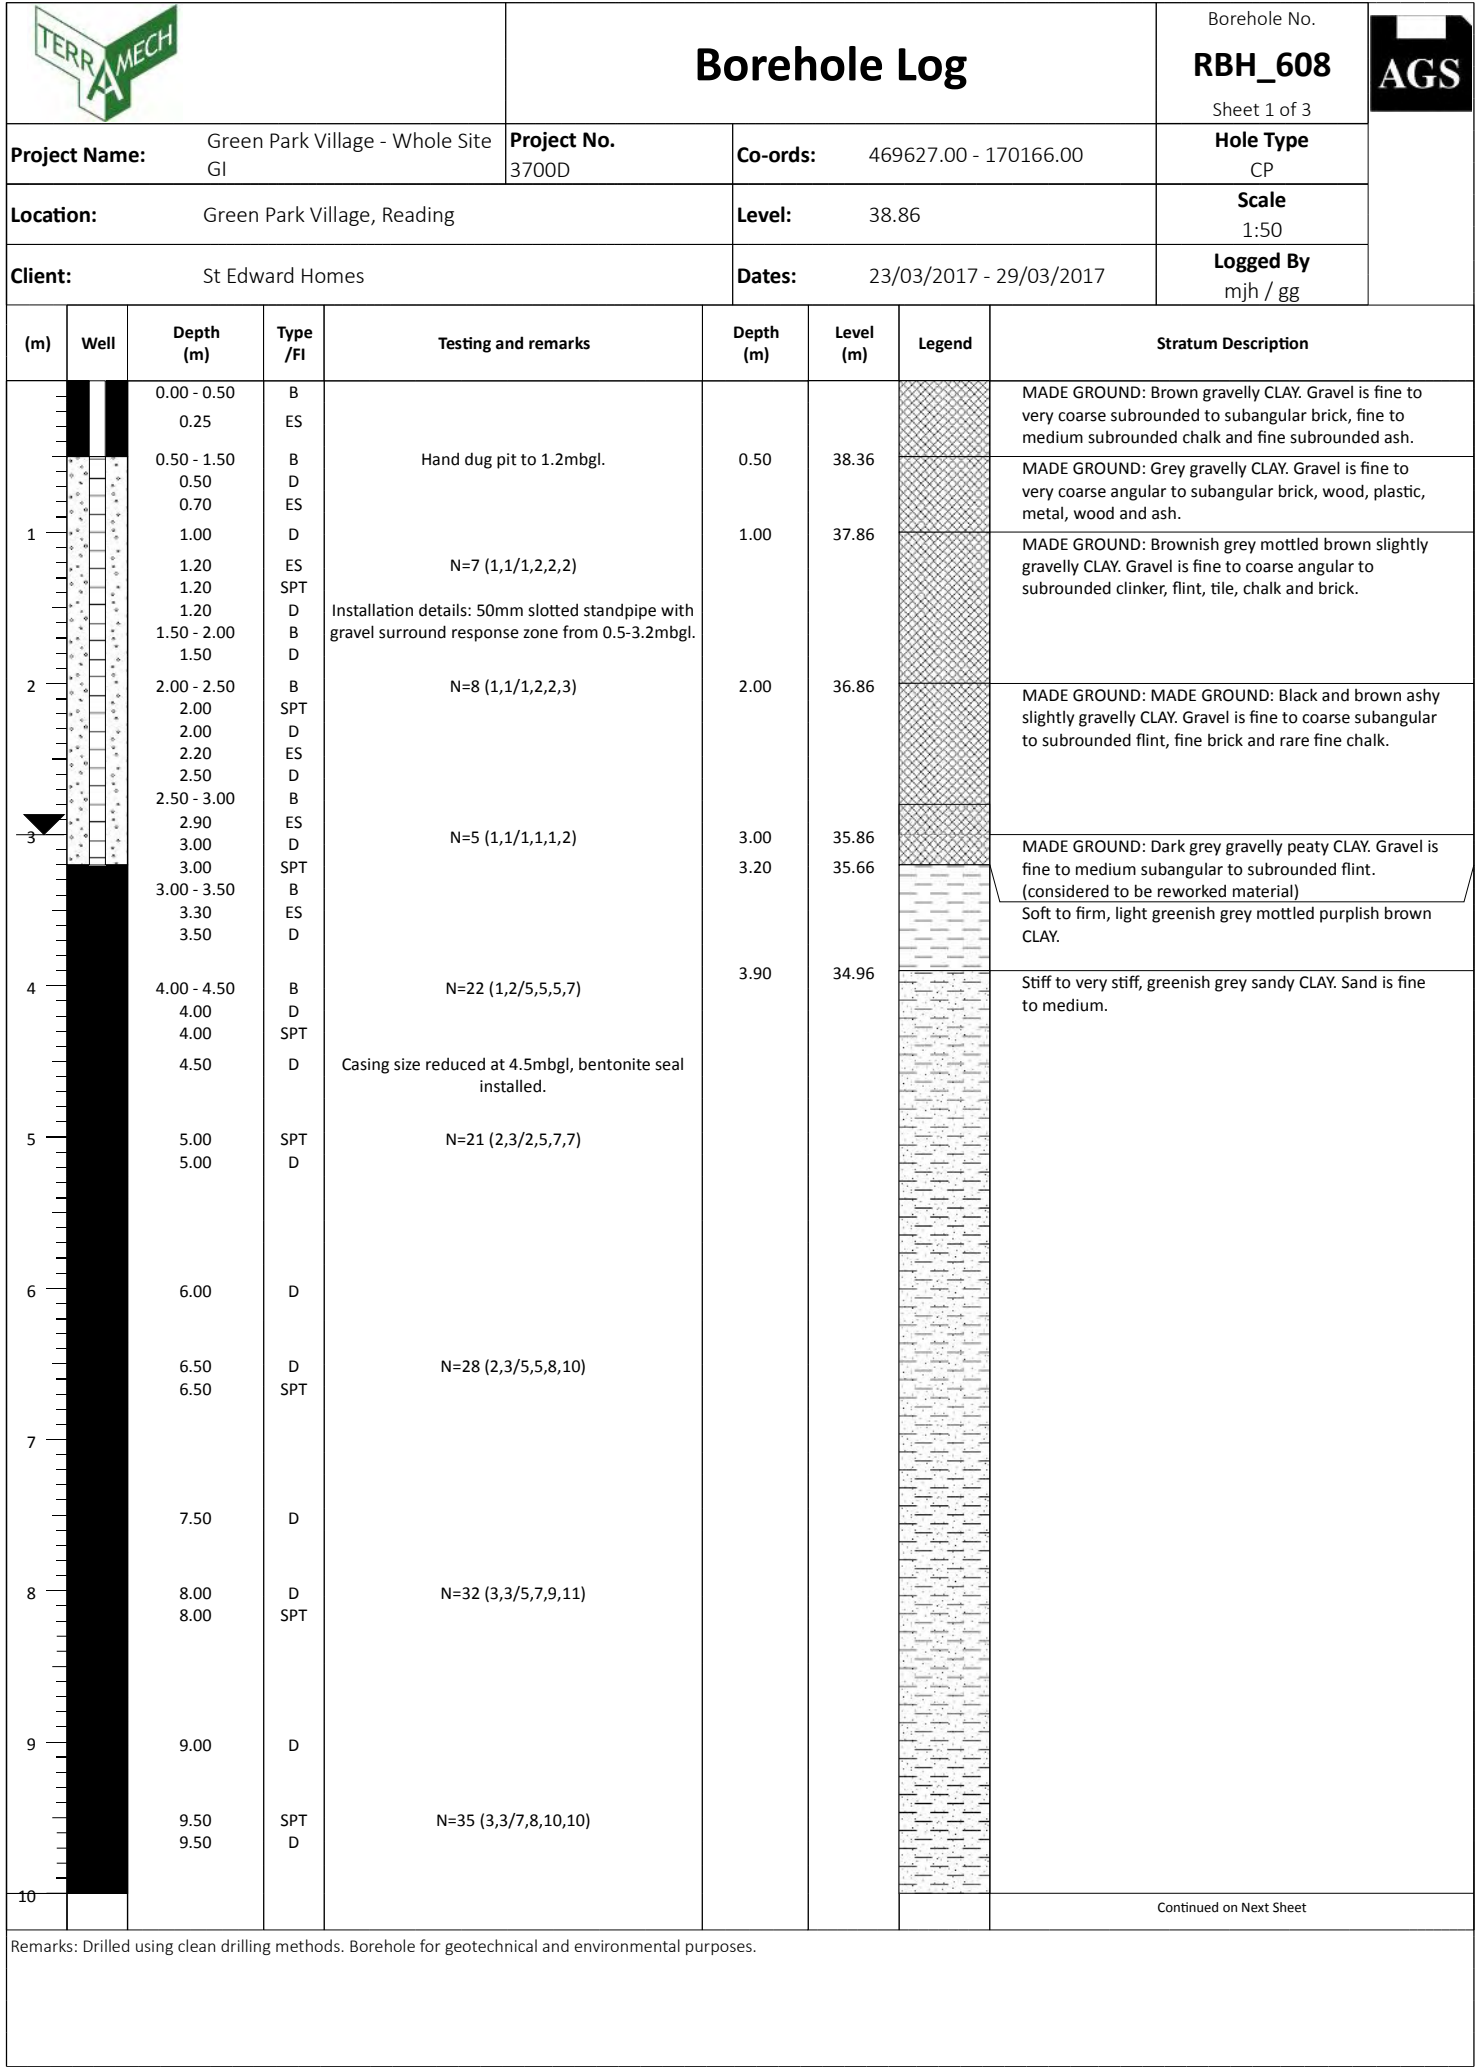
		Borehole Log				Borehole No. RBH_606 Sheet 2 of 3		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469566.00 - 170268.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 39.30		Scale 1:50		
Client: St Edward Homes				Dates: 31/03/2017		Logged By drd / gg		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
11		10.50	D	N=20 (1,0/1,5,7,7)	13.00	26.30		Very stiff, grey silty CLAY with bands of sand. Sand is fine to medium.
		11.00 - 12.00	B					
		11.00	SPT					
		12.00	D	N=50 (1,2/4,10,18,18)				
		12.50	D					
		12.50	SPT					
		13.00 - 15.00	B	N=35 (4,4/6,7,7,15)				
		13.50	D					
		14.00	SPT					
		14.00	D	N=39 (4,5/7,8,10,14)				
15.00	D							
15.50	SPT							
15.50	D	Casing installed to 16.5mbgl, borehole continued to 30.0mbgl.	16.20	23.10		Recovered as dense putty CHALK with occasional flint bands. Rare fine chalk gravel with no structure. CIRIA grade Dm.		
16.50	D							
17.00	SPT							
17.00	D	N=51 (3,3/7,9,10,25)						
18.00	D							
18.50	SPT							
18.50	D	N=34 (3,3/6,7,7,14)						
19.00	D							
19.50	D							
19.50	D	N=47 (3,4/7,10,10,20)						
20.00	SPT							
20.00	SPT							
Continued on Next Sheet								
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.								

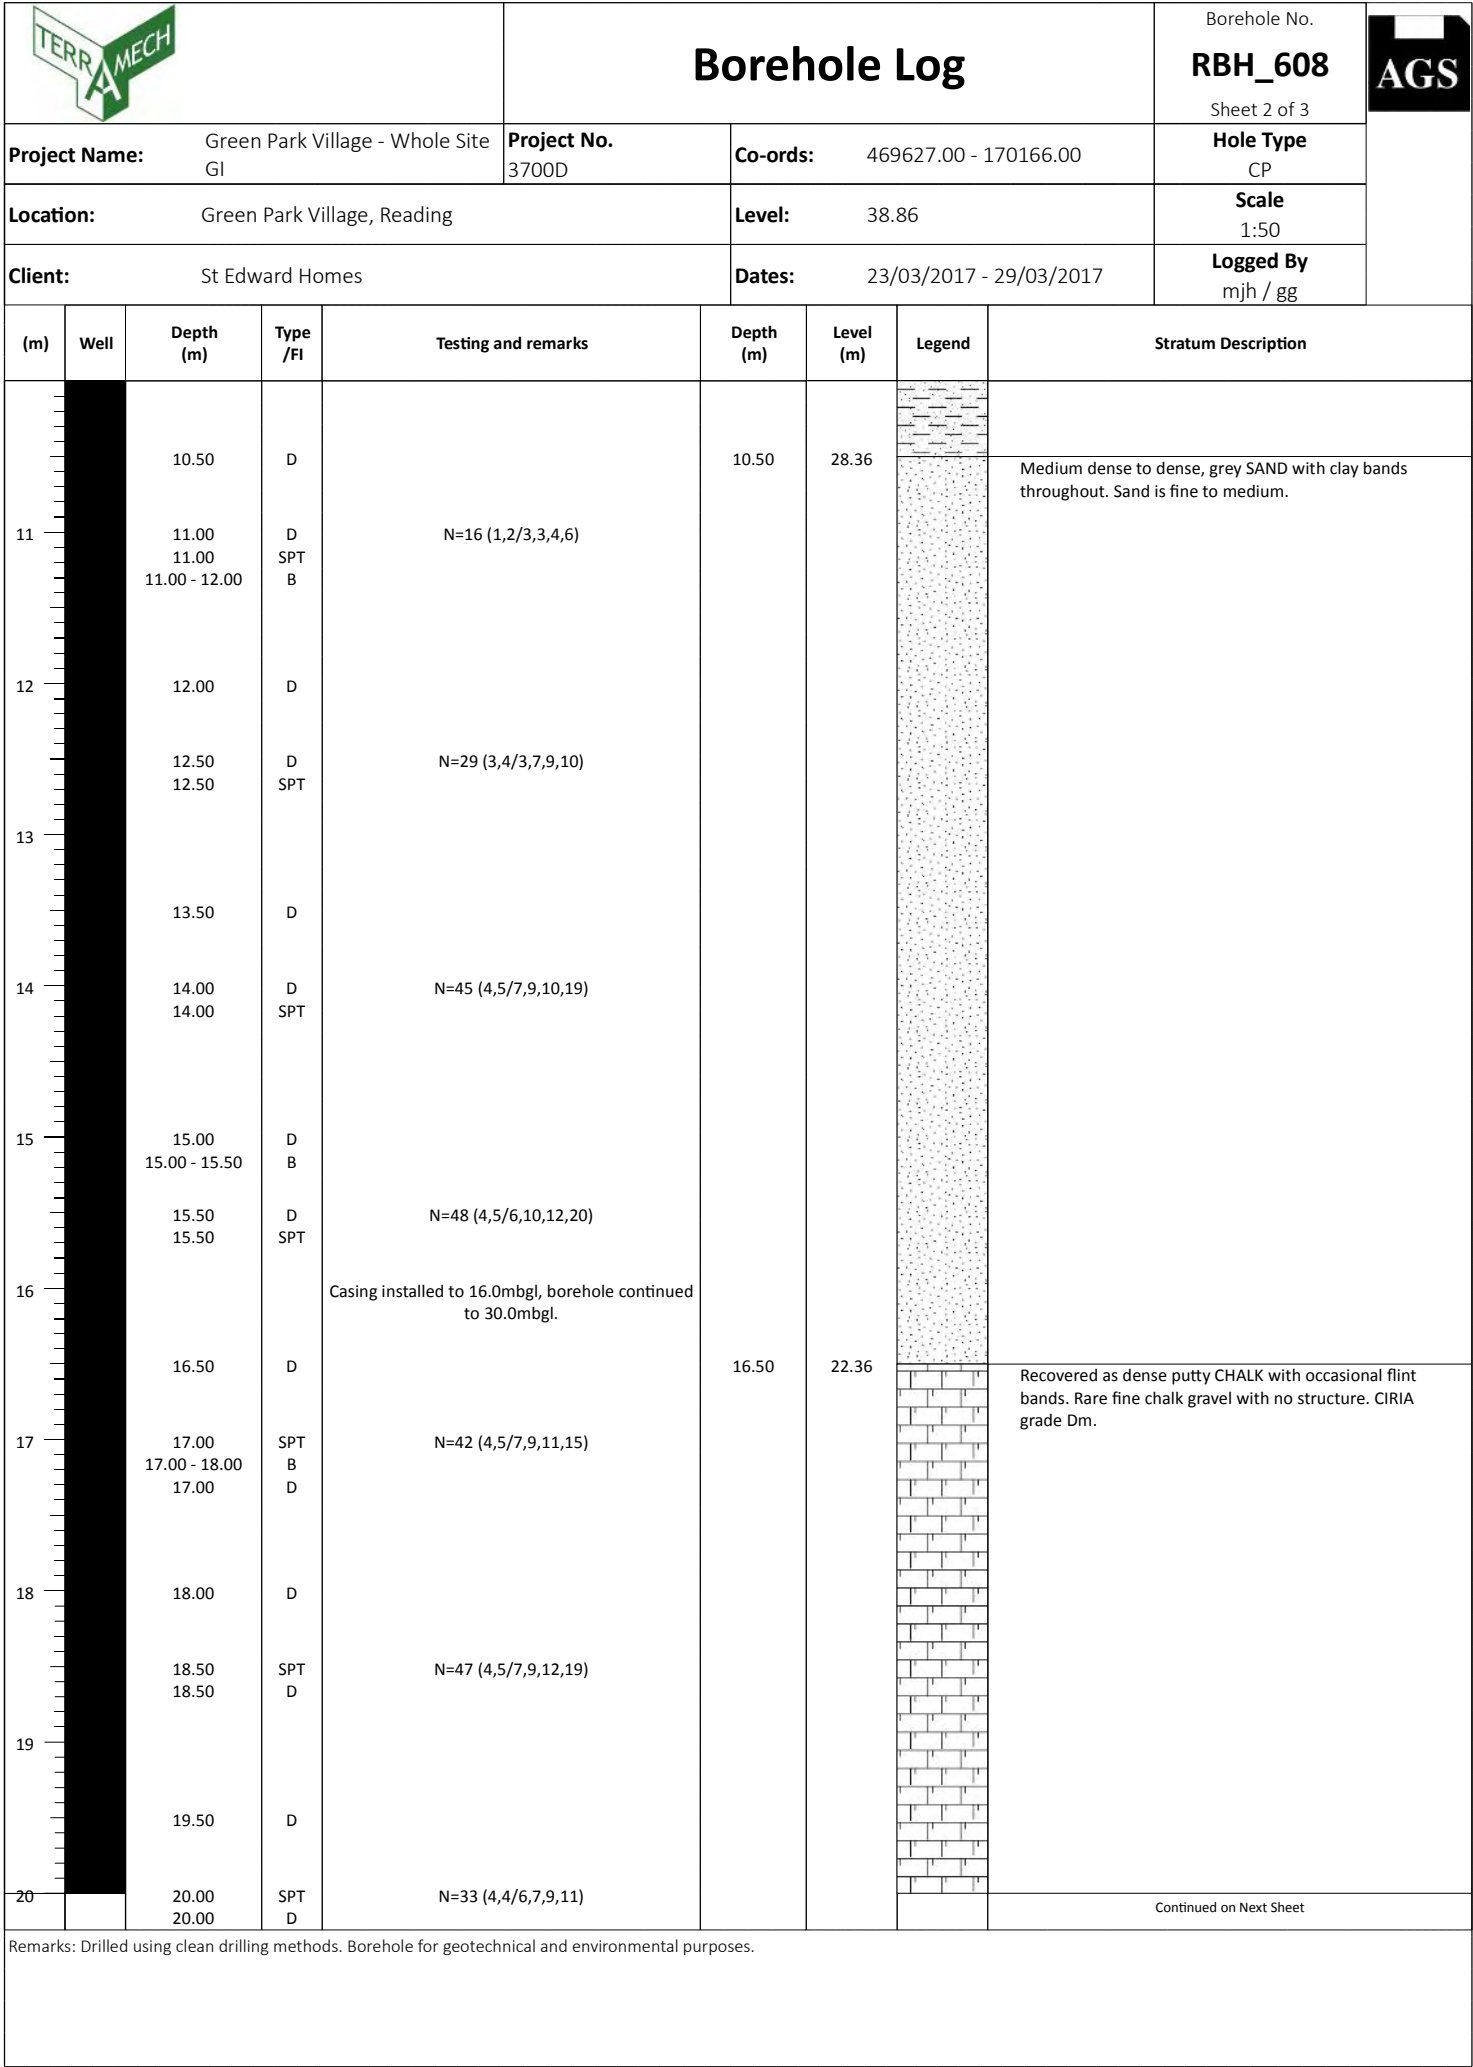


		Borehole Log				Borehole No. RBH_607 Sheet 1 of 3		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469616.00 - 170229.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 40.02		Scale 1:50		
Client: St Edward Homes				Dates: 21/03/2017 - 23/03/2017		Logged By		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
		0.00 - 0.50 0.20	B ES	Hand dug pit to 1.2mbgl.	0.90	39.12		MADE GROUND: Brown clayey GRAVEL. Gravel is fine to very coarse angular to subangular brick, concrete, chalk and wood fragments.
		0.50 - 1.00 0.50 0.50	B ES D					
	1	1.00 - 1.50 1.00 1.00 1.20 1.20	B ES D D SPT					N=9 (1,2/2,2,2,3) Installation details: 50mm slotted standpipe with gravel surround response zone from 1.5-4.0mbgl.
	2	2.00	SPT	N=26 (10,10/15,4,4,3)	2.50	37.52		MADE GROUND: Brownish grey gravelly CLAY. Gravel is subangular to subrounded flint. (considered to be reworked material)
		2.50 2.50 - 3.00 2.60	D B ES					
	3	3.00 3.00	D SPT	N=16 (4,4/4,4,4,4)				
	4	3.50	D		4.00	36.02		MADE GROUND: Stiff, light greenish grey mottled purplish brown CLAY.
		4.00 4.00 - 4.50 4.00 4.10 4.50	SPT B D ES D	N=17 (2,3/4,4,4,5) Casing size reduced at 4.5mbgl, bentonite seal installed.				
	5	5.00 5.00 5.20 - 6.20	D SPT B	N=18 (2,3/4,4,5,5)				
	6	6.00	D		4.80	35.22		Medium dense to dense, grey clayey SAND with frequent clay bands throughout. Sand is fine to medium.
	6.50 6.50	SPT D	N=23 (2,3/4,6,6,7)					
7	7.50	D						
8	8.00 8.00	SPT D	N=23 (2,3/4,5,7,7)					
9	9.00	D						
	9.50 9.50	D SPT	N=26 (3,3/4,5,8,9)					
10								Continued on Next Sheet
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.								

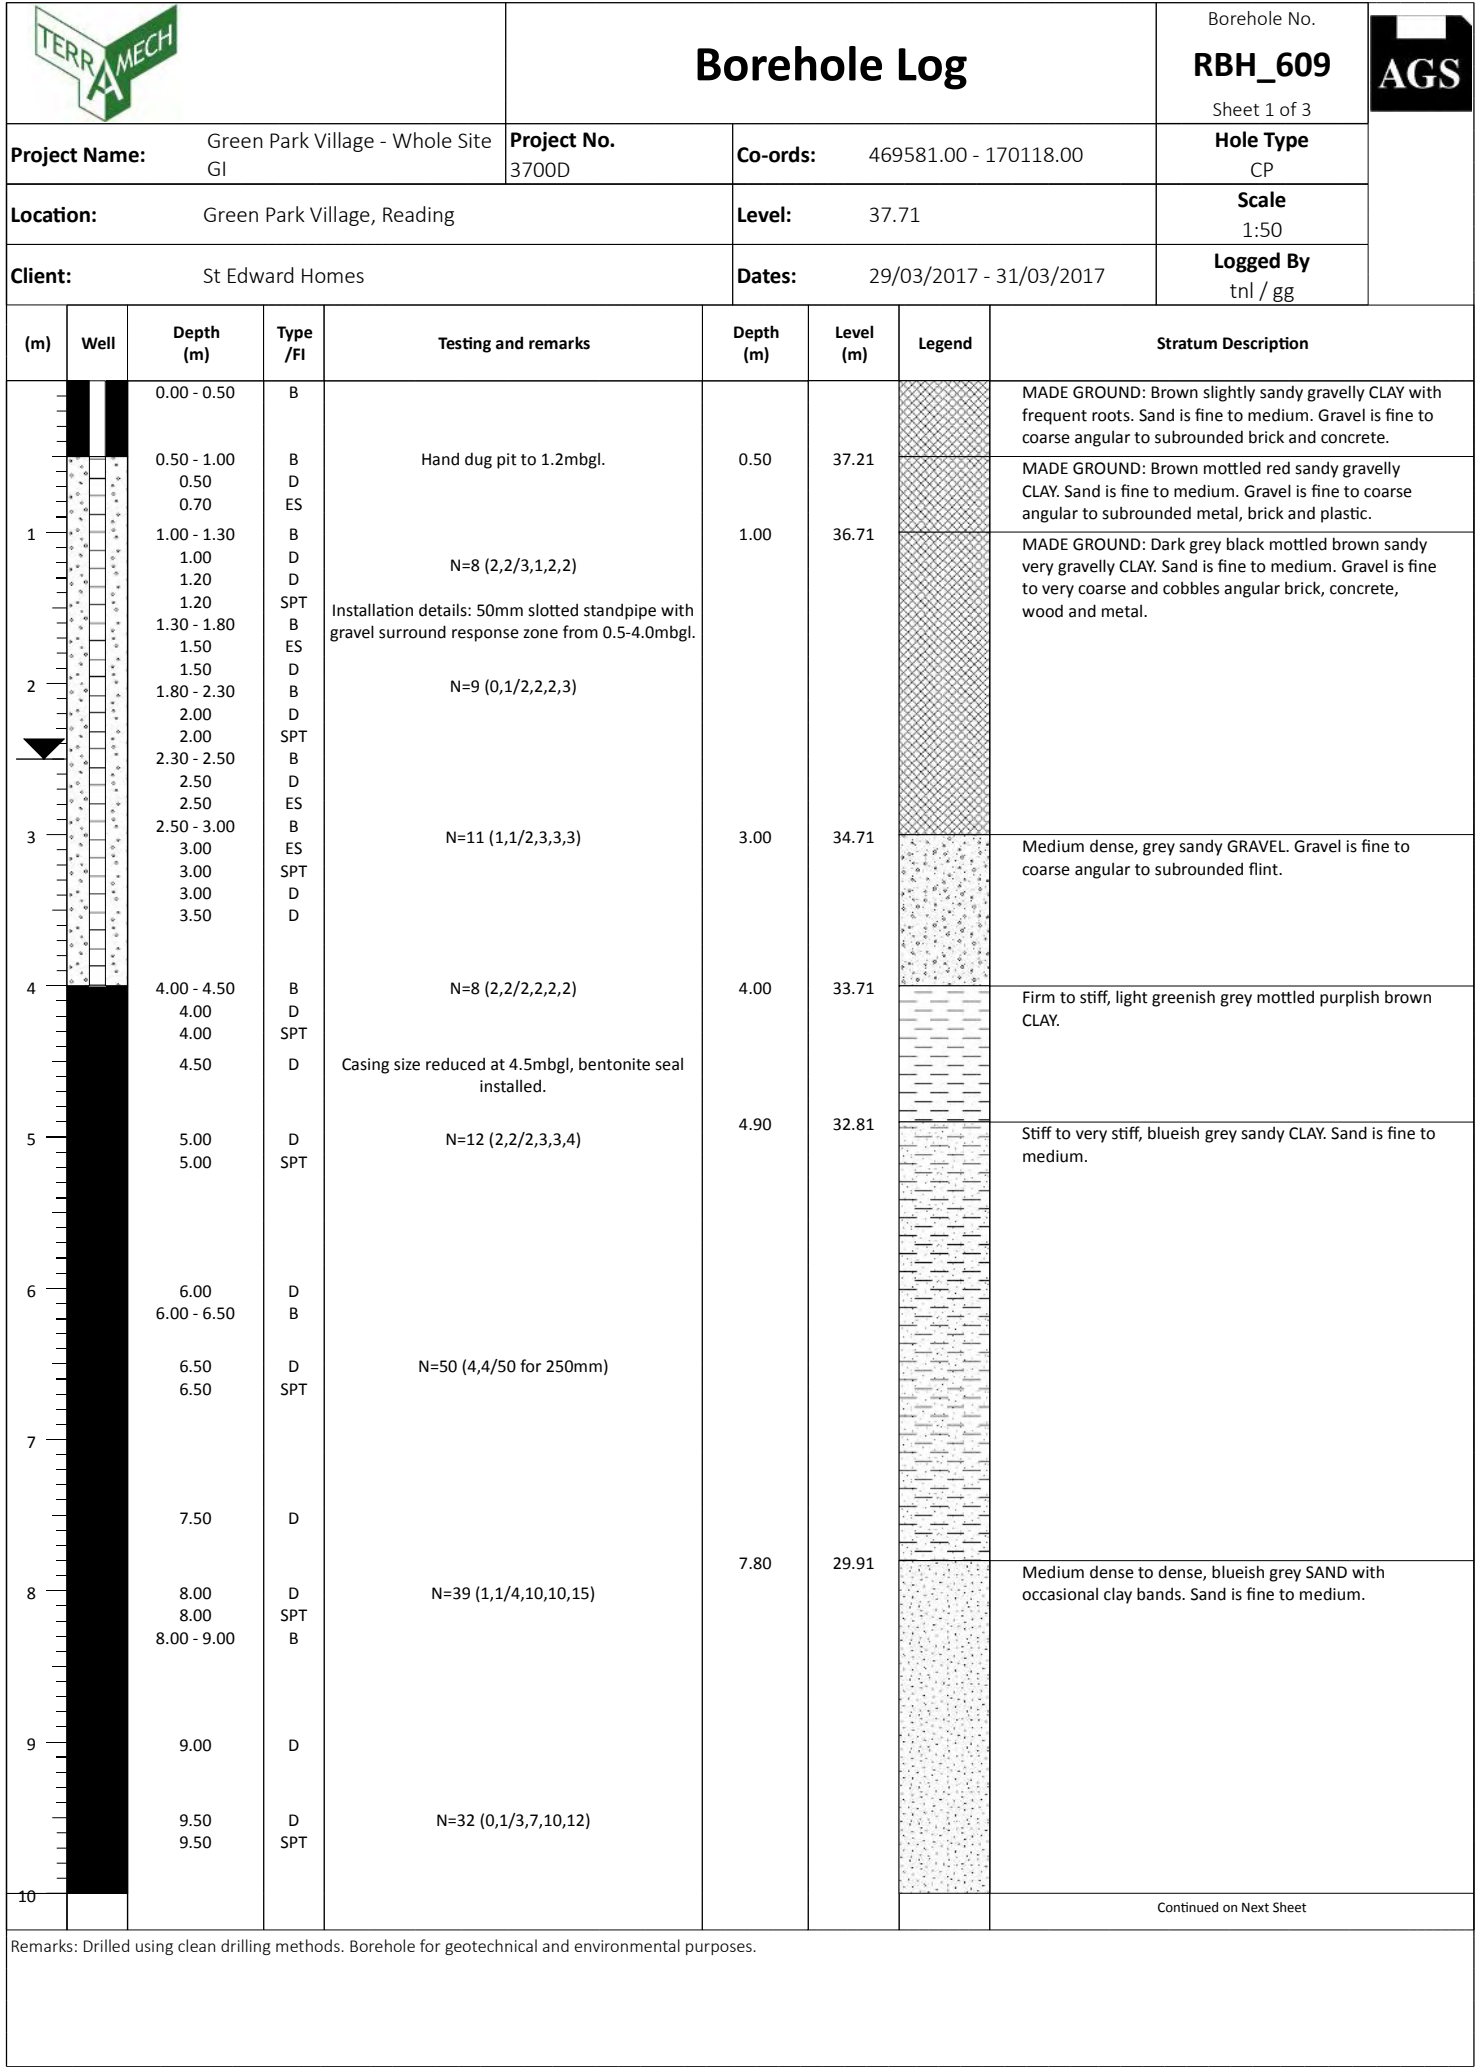
				Borehole Log				Borehole No. RBH_607 Sheet 2 of 3		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469616.00 - 170229.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 40.02		Scale 1:50		Logged By		
Client: St Edward Homes				Dates: 21/03/2017 - 23/03/2017						
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
11		10.50	D	N=41 (4,4/5,7,8,21)	17.00	23.02				
		11.00 11.00	SPT D							
		12.00	D	N=35 (4,5/7,7,10,11)						
		12.50 12.50	D SPT							
		13.50	D	N=37 (4,5/7,8,11,11)						
		14.00 14.00	SPT D							
		15.00 15.00 - 16.00	D B	N=33 (4,4/6,8,8,11)						
		15.50 15.50	SPT D							
		16.50	D	Casing installed to 17.0mbgl, borehole continued to 30.0mbgl. N=38 (4,4/6,8,12,12)						
		17.00 17.00	D SPT							
18		18.00	D	N=50 (4,5/50 for 280mm)	17.00	23.02		Recovered as dense putty CHALK with occasional flint bands. Rare fine chalk gravel with no structure. CIRIA grade Dm.		
		18.50 18.50	D SPT							
		19.50	D							
		20.00 20.00	SPT D							
								Continued on Next Sheet		
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.										

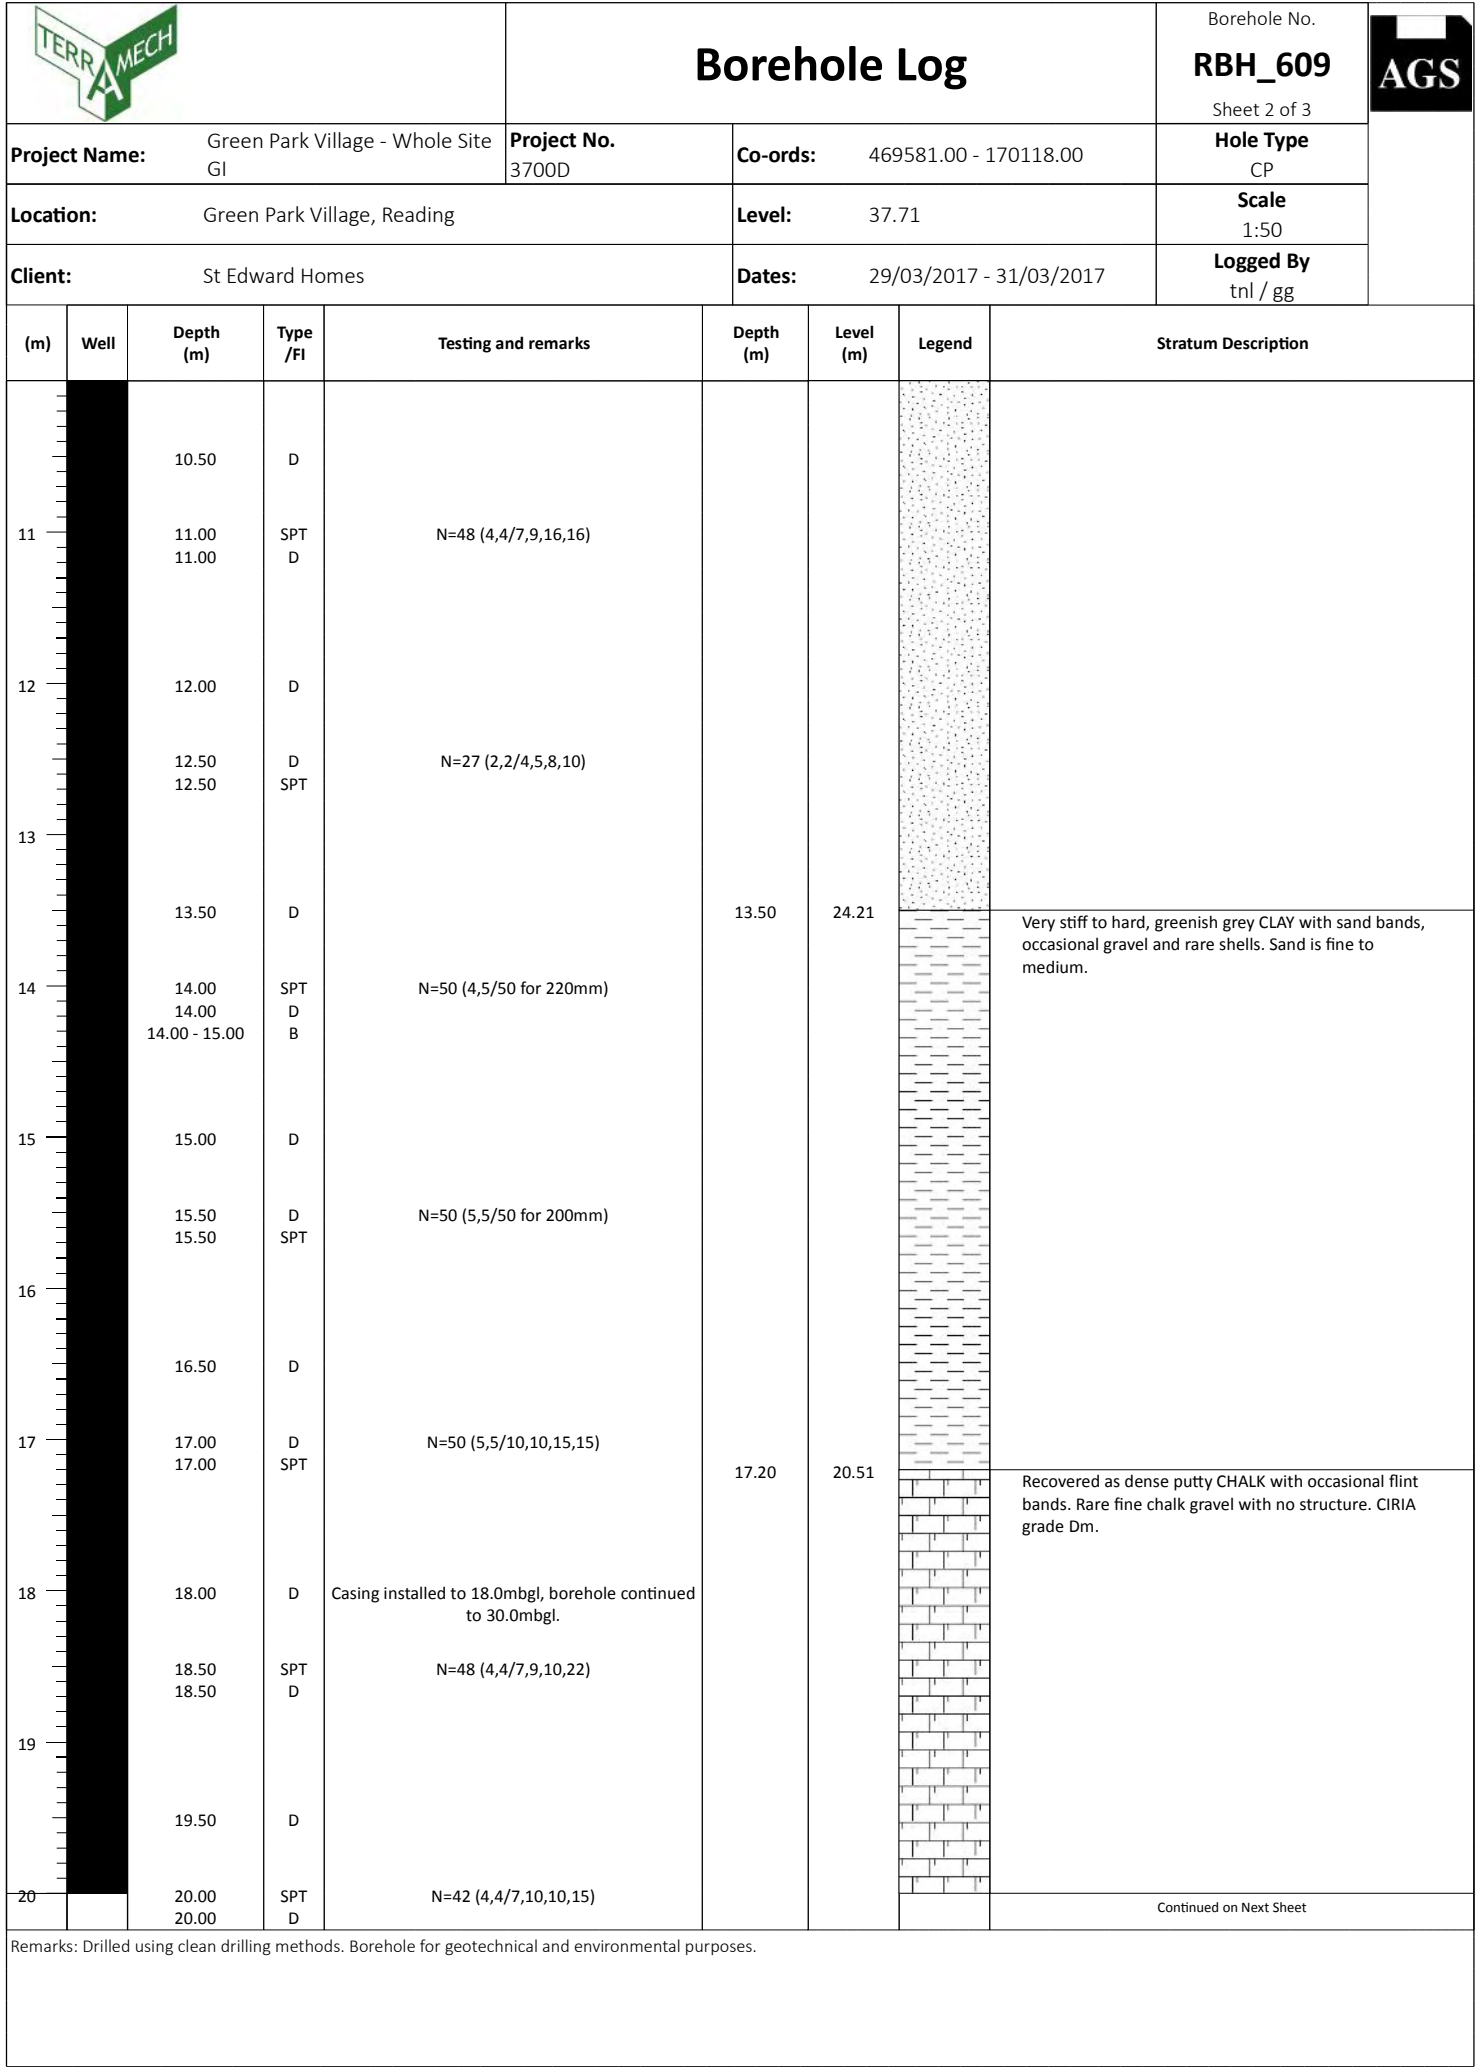
				Borehole Log				Borehole No. RBH_607 Sheet 3 of 3								
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469616.00 - 170229.00		Hole Type CP								
Location: Green Park Village, Reading				Level: 40.02		Scale 1:50		Logged By								
Client: St Edward Homes				Dates: 21/03/2017 - 23/03/2017												
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description								
21		21.00	D	N=50 (4,7/50 for 220mm)												
		21.50 21.50	D SPT													
22			22.50	D												
23			23.00	SPT						N=40 (5,5/5,8,10,17)						
			23.50	D												
24			24.00	D												
			24.50 24.50	D SPT						N=45 (4,5/7,8,15,15)						
25			25.50	D												
26			26.00 26.00	SPT D						N=50 (8,10/50 for 190mm)						
27			27.00	D												
			27.50 27.50	D SPT						N=50 (7,8/50 for 180mm)						
28			28.50	D												
29			29.00 29.00	D SPT						N=50 (7,10/50 for 160mm)						
30			30.00	D						Borehole terminated upon reaching target depth.	30.00	10.02	----- End of Borehole at 30.00m			
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.																



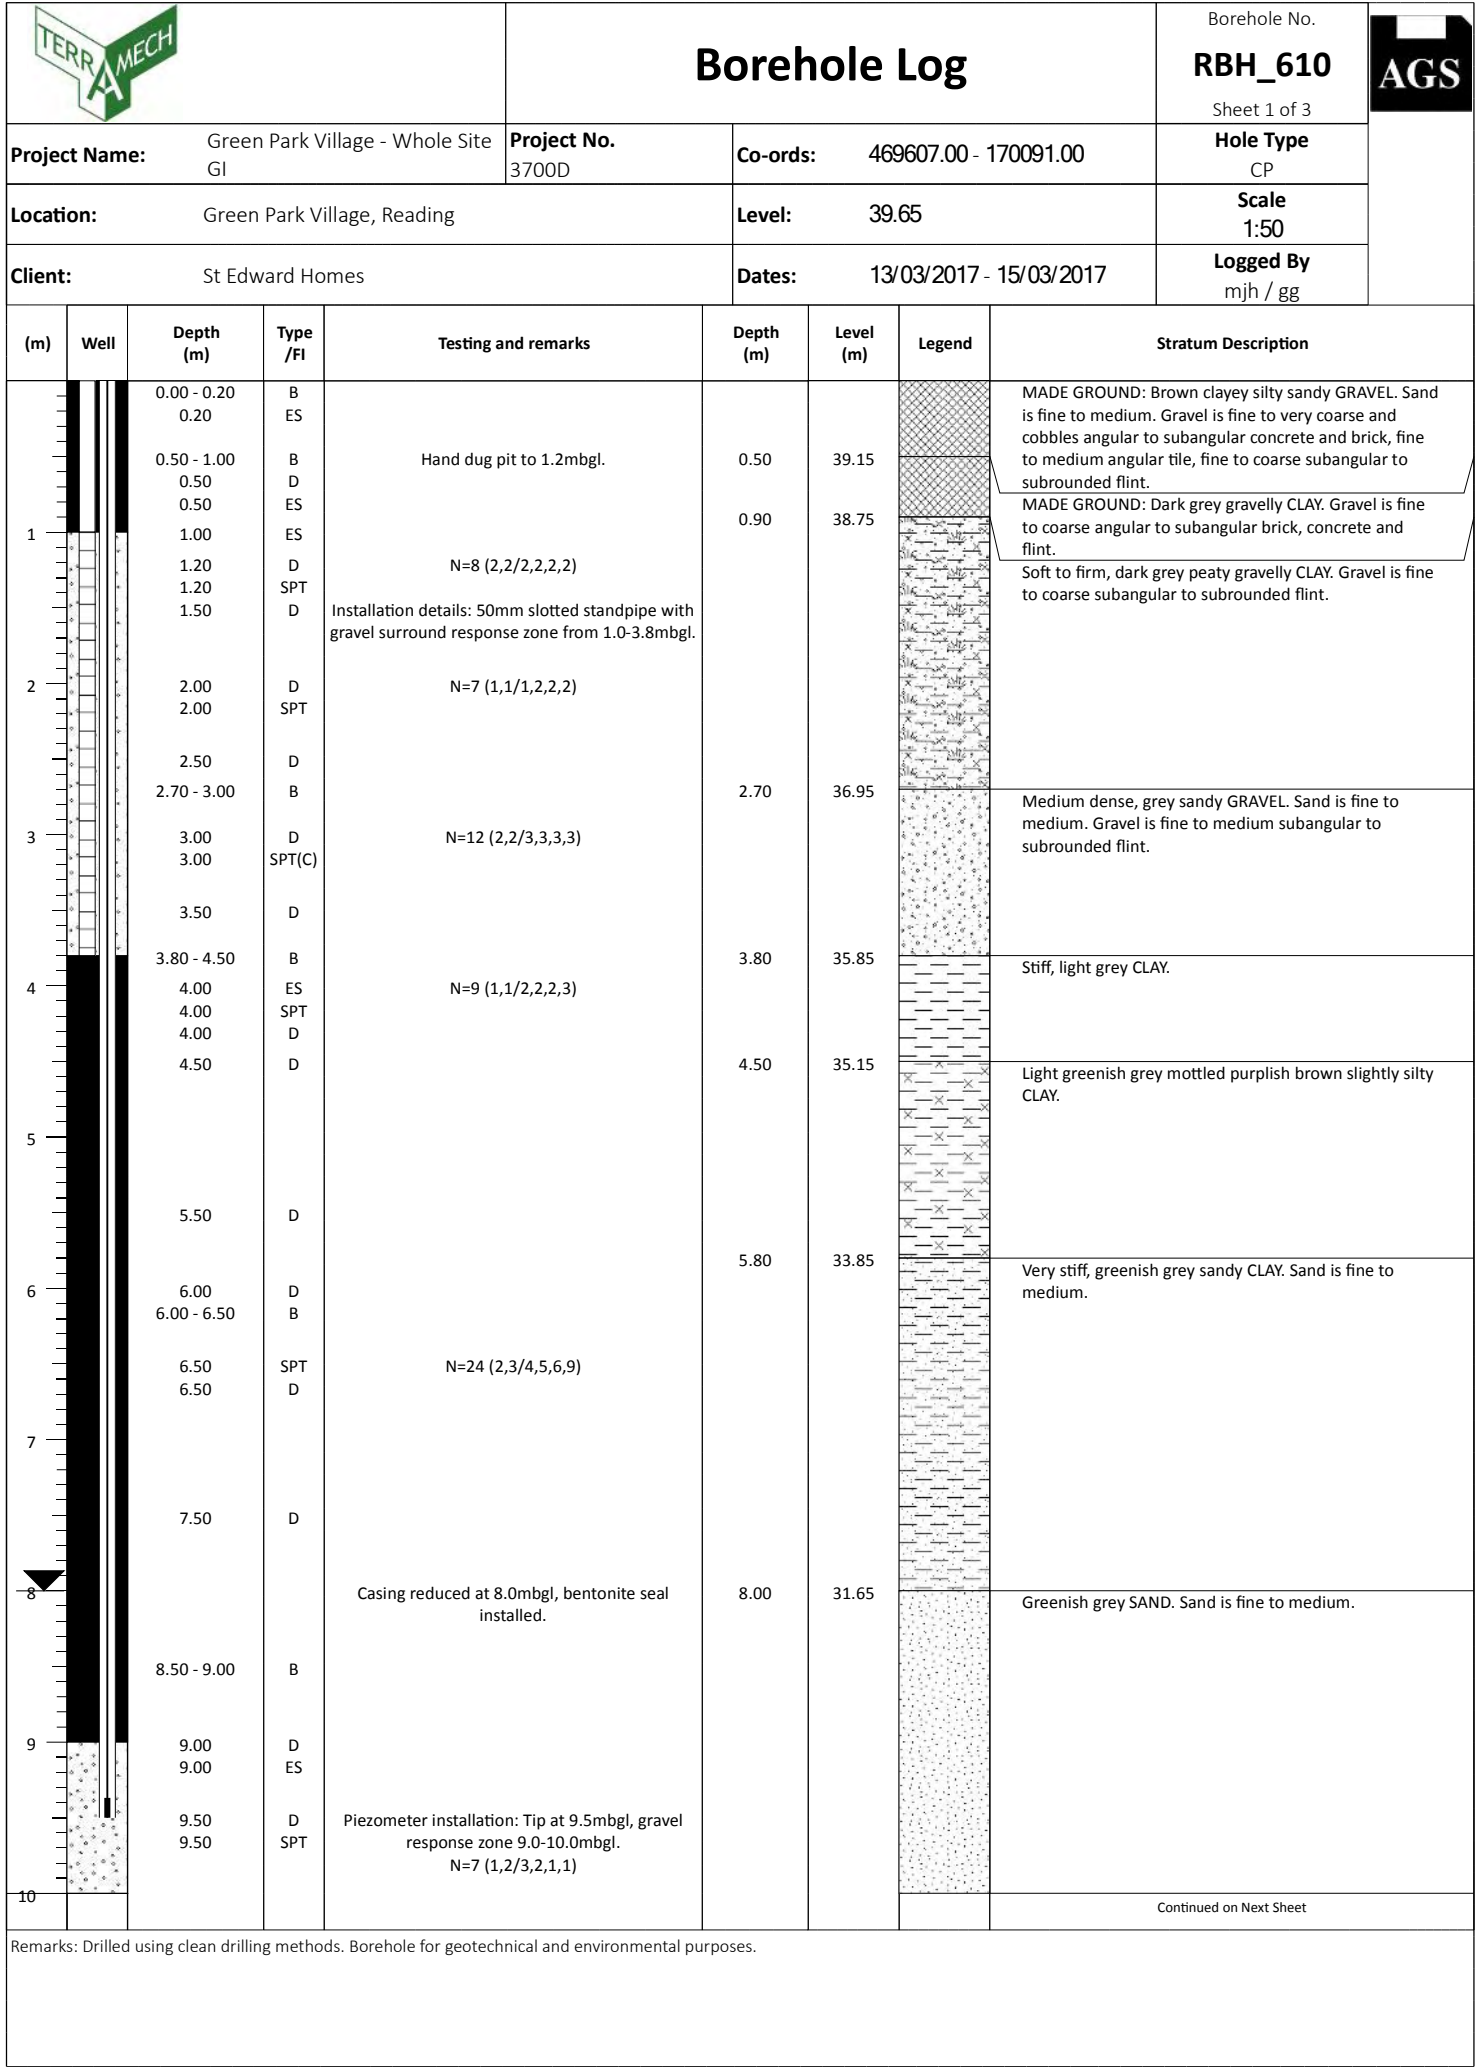


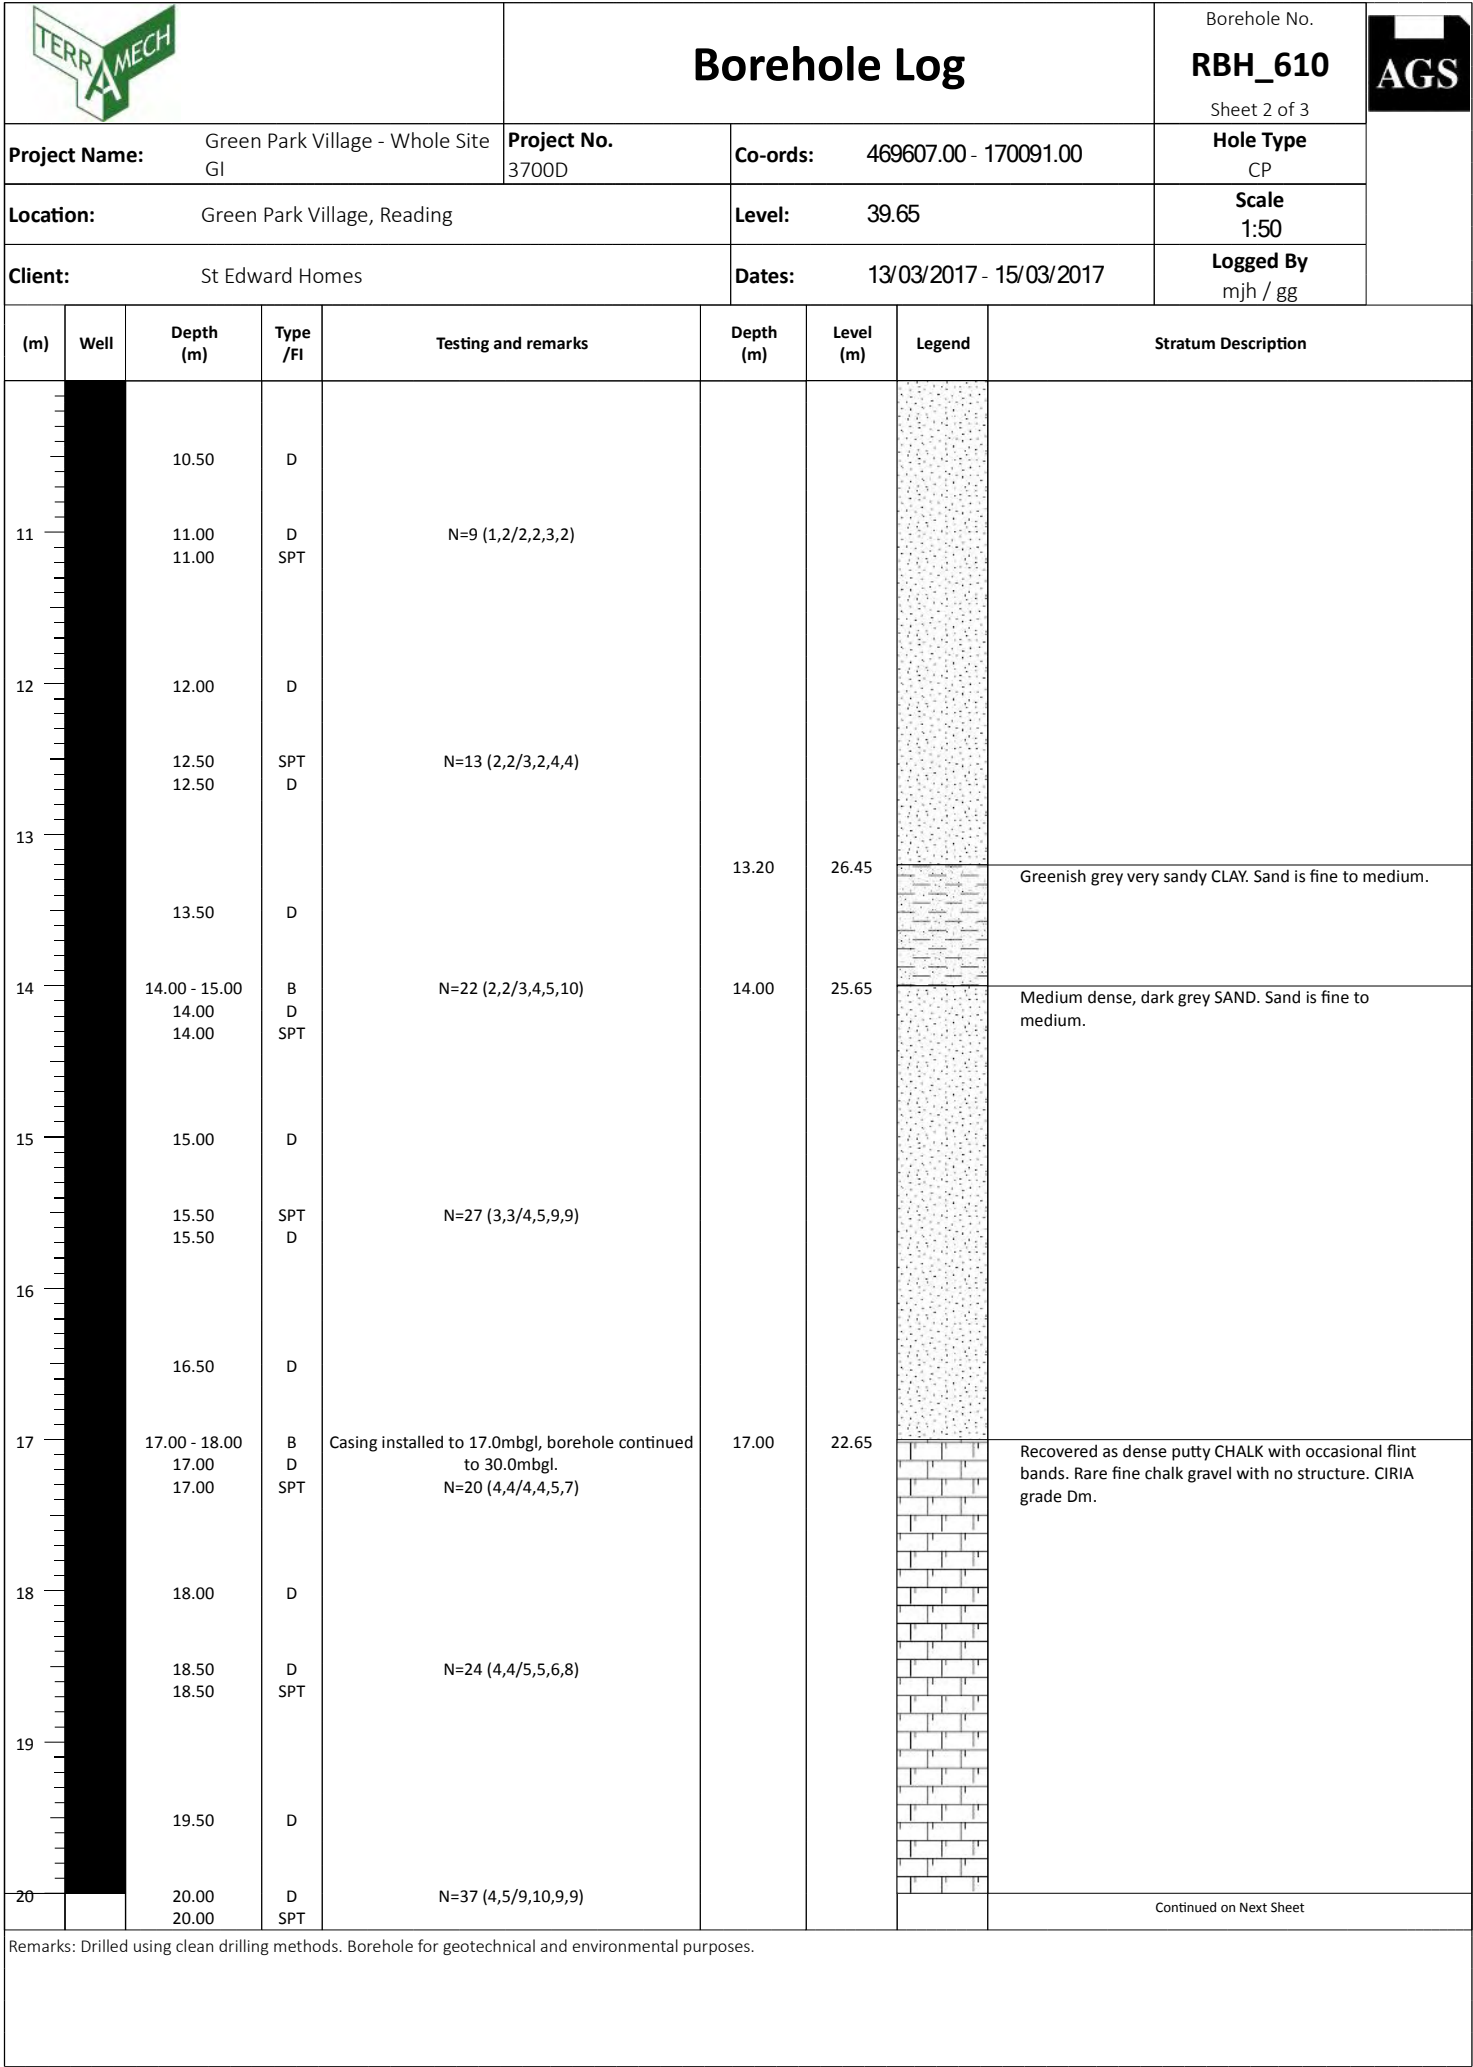
				Borehole Log				Borehole No. RBH_608 Sheet 3 of 3		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469627.00 - 170166.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 38.86		Scale 1:50		Logged By mjh / gg		
Client: St Edward Homes				Dates: 23/03/2017 - 29/03/2017						
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
21		21.00	D	N=36 (4,6/7,9,10,10)						
		21.50 21.50	D SPT							
22			22.50	D						
23			23.00 23.00	D SPT						N=50 (4,8/50 for 250mm)
24			24.00	D						
		24.50 24.50	D SPT	N=39 (5,5/8,11,12,8)						
25			25.50	D						
26			26.00 26.00	SPT D						N=40 (5,5/7,7,9,17)
27			27.00	D						
		27.50 27.50	D SPT	N=46 (5,7/10,10,12,14)						
28			28.50	D						
29			29.00 29.00	SPT D						N=50 (6,8/50 for 280mm)
30		30.00	D	Borehole terminated upon reaching target depth.	30.00	8.86	----- End of Borehole at 30.00m			
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.										








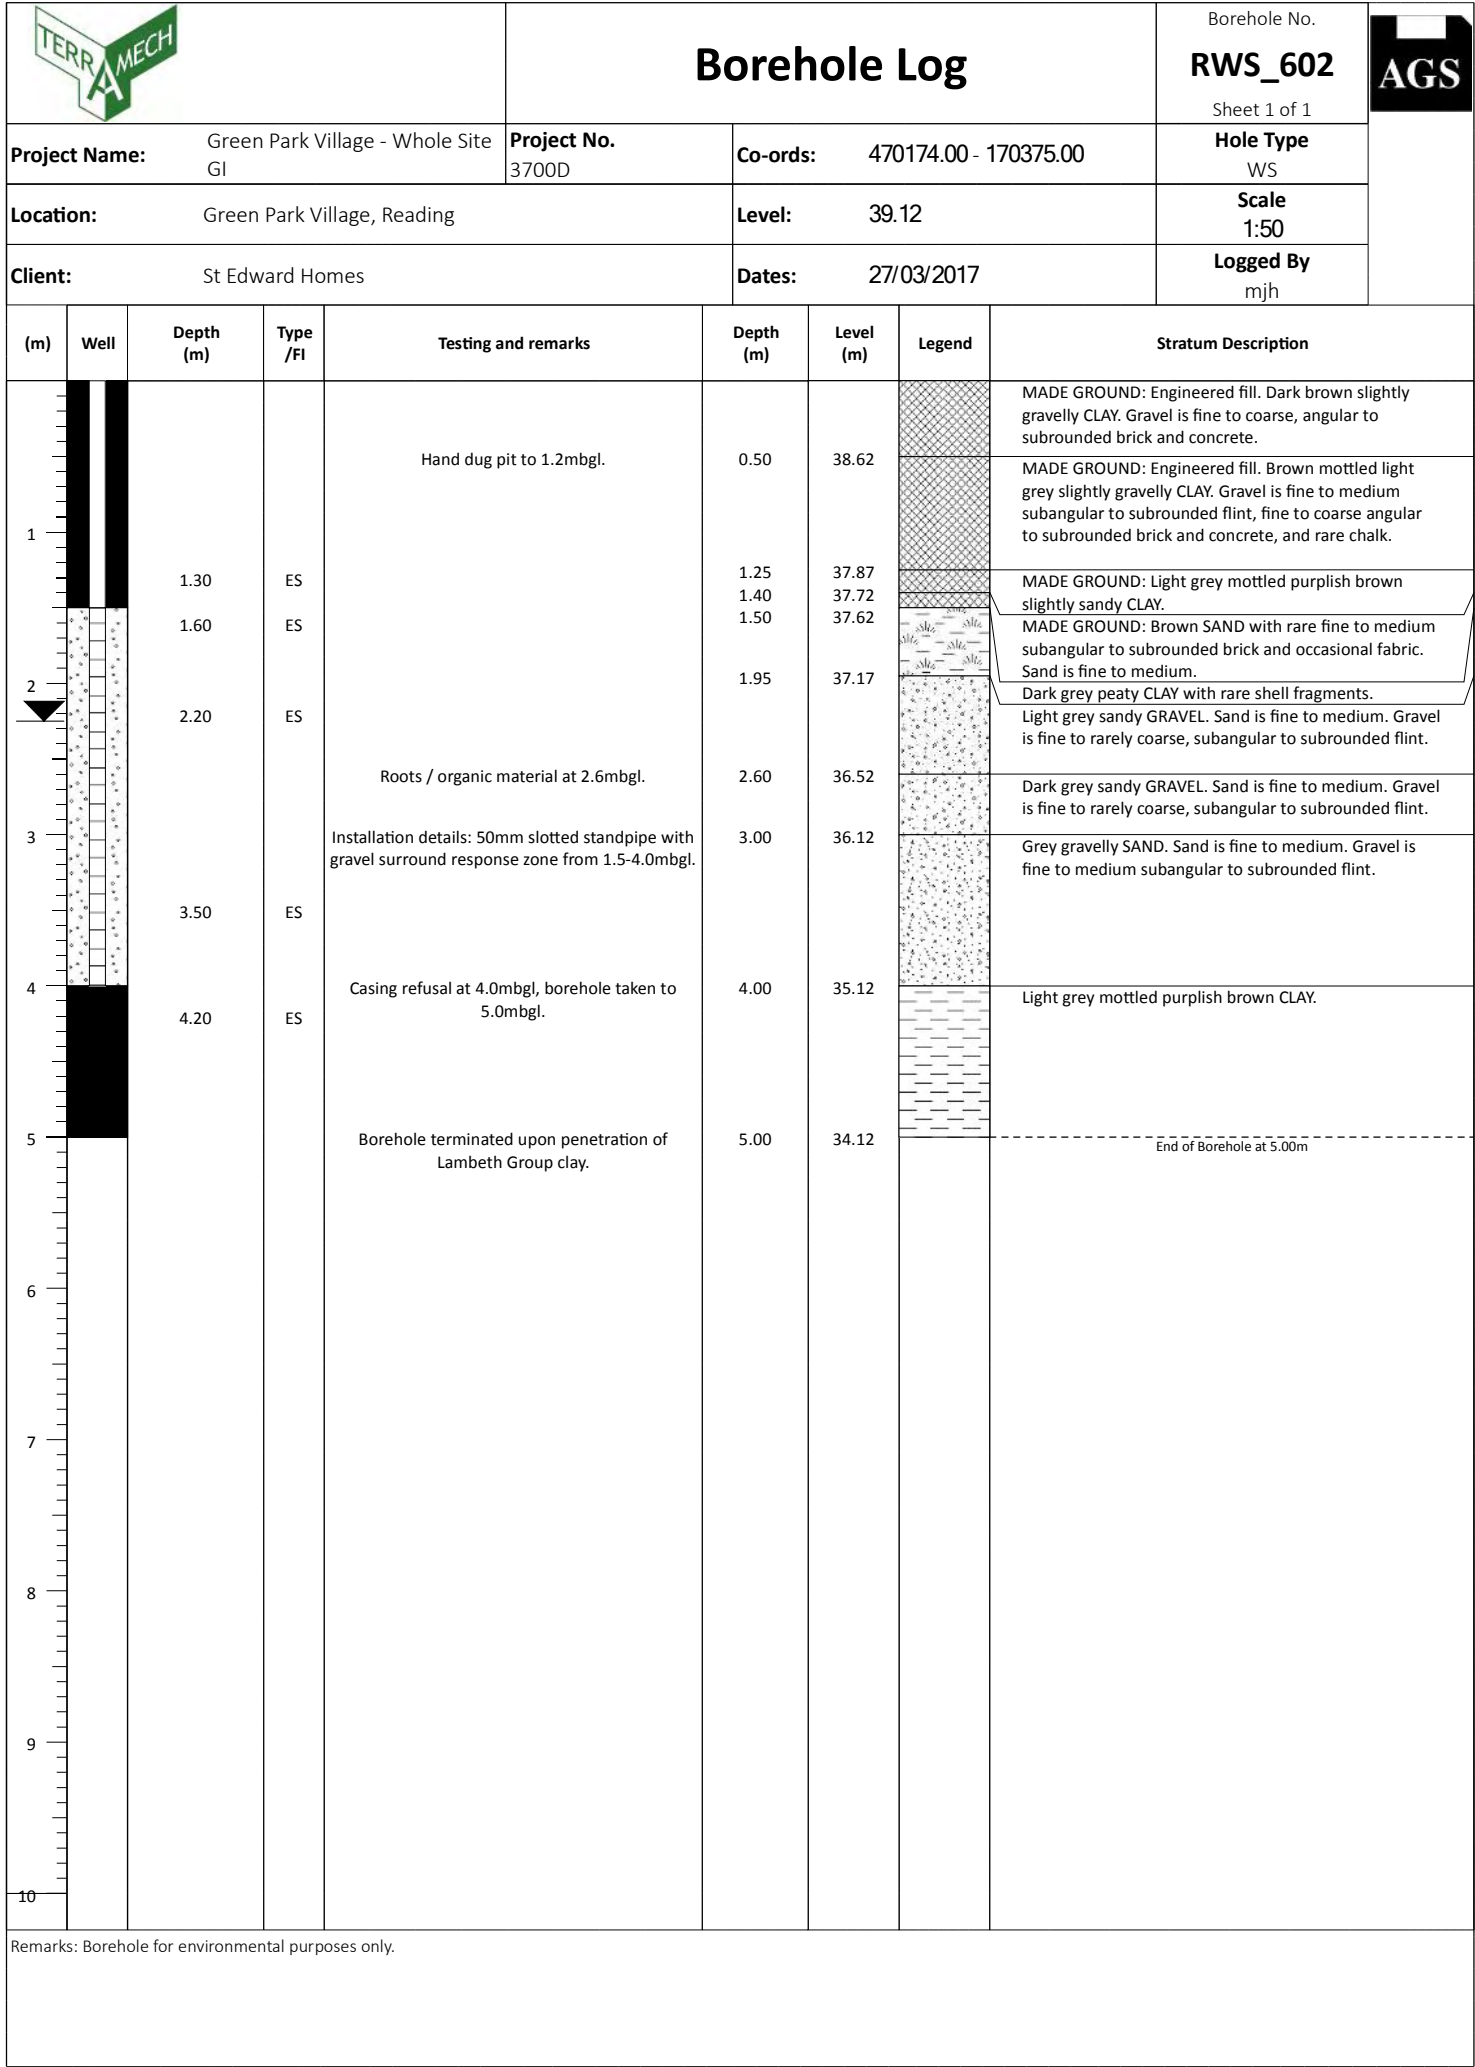
		Borehole Log				Borehole No. RBH_609 Sheet 3 of 3			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469581.00 - 170118.00		Hole Type CP			
Location: Green Park Village, Reading				Level: 37.71		Scale 1:50			
Client: St Edward Homes				Dates: 29/03/2017 - 31/03/2017		Logged By tnl / gg			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
21		21.00	D	N=38 (5,5/7,7,9,15)					
		21.50 21.50	D SPT						
22			22.50	D					
23			23.00 23.00	SPT D					N=47 (5,7/7,10,15,15)
24			24.00	D					
		24.50 24.50	D SPT	N=50 (5,8/50 for 285mm)					
25			25.50 25.50 - 26.00	D B					N=50 (25 for 68mm/50 for 120mm)
26			26.00 26.00	SPT D					
27			27.00	D					
		27.50 27.50	SPT D	N=38 (5,7/9,9,10,10)					
28			28.50	D					
29			29.00 29.00	D SPT					N=33 (5,5/7,8,9,9)
30		30.00	D	Borehole terminated upon reaching target depth.	30.00	7.71		----- End of Borehole at 30.00m	
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.									












				Borehole Log				Borehole No. RBH_610 Sheet 3 of 3		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469607.00 - 170091.00		Hole Type CP		
Location: Green Park Village, Reading				Level: 39.65		Scale 1:50		Logged By mjh / gg		
Client: St Edward Homes				Dates: 13/03/2017 - 15/03/2017						
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
21		21.00	D	N=34 (4,5/7,8,10,9)						
		21.50 21.50	SPT D							
22		22.50	D							
23		23.00 23.00	D SPT	N=28 (5,6/6,6,7,9)						
24		24.00	D							
		24.50 24.50	D SPT	N=41 (6,7/8,9,9,15)						
25		25.50	D							
26		26.00 26.00	SPT D	N=50 (5,8/50 for 170mm)						
27		27.00	D							
		27.50 27.50	D SPT	N=51 (5,8/51 for 155mm)						
28		28.50	D							
29		29.00 29.00	SPT D	50 (25 for 86mm/50 for 200mm)						
30	30.00 30.00	D SPT	Borehole terminated upon reaching target depth. N=50 (25 for 140mm/50 for 135mm)		30.00	9.65	----- End of Borehole at 30.00m			
Remarks: Drilled using clean drilling methods. Borehole for geotechnical and environmental purposes.										




		Borehole Log				Borehole No. RWS_601 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470338.00 - 170325.00		Hole Type WS		
Location: Green Park Village, Reading				Level: 38.97		Scale 1:50		
Client: St Edward Homes				Dates: 24/03/2017		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
		0.20	ES	Hand dug pit to 1.2mbgl.				MADE GROUND: Brown gravelly CLAY. Gravel is fine to coarse, subangular to subrounded flint and rare brick.
		0.60	ES		0.60	38.37		MADE GROUND: Topsoil with occasional fine to medium, subangular to subrounded brick, glass and tile.
	1	1.00	ES		0.90	38.07		MADE GROUND: Dark brownish grey gravelly CLAY. Gravel is predominantly fine to medium, subangular to subrounded flint, with rare tile and brick.
			1.40		37.57		MADE GROUND: Dark grey gravelly peaty CLAY. Gravel is fine to medium subangular to subrounded flint.	
		1.80	ES	1.75	37.22		Terracotta pipe at base.	
	2			Installation details: 50mm slotted standpipe with gravel surround response zone from 0.6-3.0mbgl.				Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium, subangular to subrounded flint.
	3				3.00	35.97		Grey gravelly SAND. Sand is fine to medium. Gravel is fine to medium, subangular to subrounded flint.
		3.90	ES		3.80	35.17		Light grey mottled orange brown slightly clayey silty SAND. Sand is fine to medium.
	4			Borehole terminated upon experiencing blowing sands.	4.00	34.97		End of Borehole at 4.00m
	5							
6								
7								
8								
9								
10								
Remarks: Borehole for environmental purposes only.								









		Borehole Log				Borehole No. RWS_603 Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470203.00 - 170303.00		Hole Type WS			
Location: Green Park Village, Reading				Level: 39.28		Scale 1:50			
Client: St Edward Homes				Dates: 24/03/2017		Logged By mjh			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
				Hand dug pit to 1.2mbgl.	0.70	38.58		MADE GROUND: Engineered Fill. Dark grey and brown gravelly CLAY. Gravel is fine to coarse, angular to subrounded brick, concrete and rare wood.	
		1.50 - 2.00	ES						
		1.60	ES			1.30	37.98		MADE GROUND: Brown slightly gravelly CLAY. Gravel is fine subrounded to rounded ash, fine to coarse angular to subrounded brick and rare ceramic. Concrete block at base of pit.
		2.10 - 2.30	ES	Installation details: 50mm slotted standpipe with gravel surround response zone from 1.5-3.1mbgl.	2.00	37.28		MADE GROUND: Black, occasionally dark brown, slightly clayey sandy GRAVEL with high ash content. Sand is fine to medium. Gravel is fine to coarse angular to subrounded brick, concrete, coal, glass and wood - all blackened surfaces.	
					2.35	36.92		Organic layer, with the appearance and texture of hay (relic TOPSOIL?).	
				Borehole collapsed back to 2.6mbgl upon completion.	2.50	36.78		Light grey slightly gravelly SAND. Sand is fine to medium. Gravel is fine to medium subrounded flint.	
				Borehole terminated upon experiencing blowing sands.	3.00	36.28		Brownish grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.	
								End of Borehole at 3.00m	
Remarks: Borehole for environmental purposes only.									

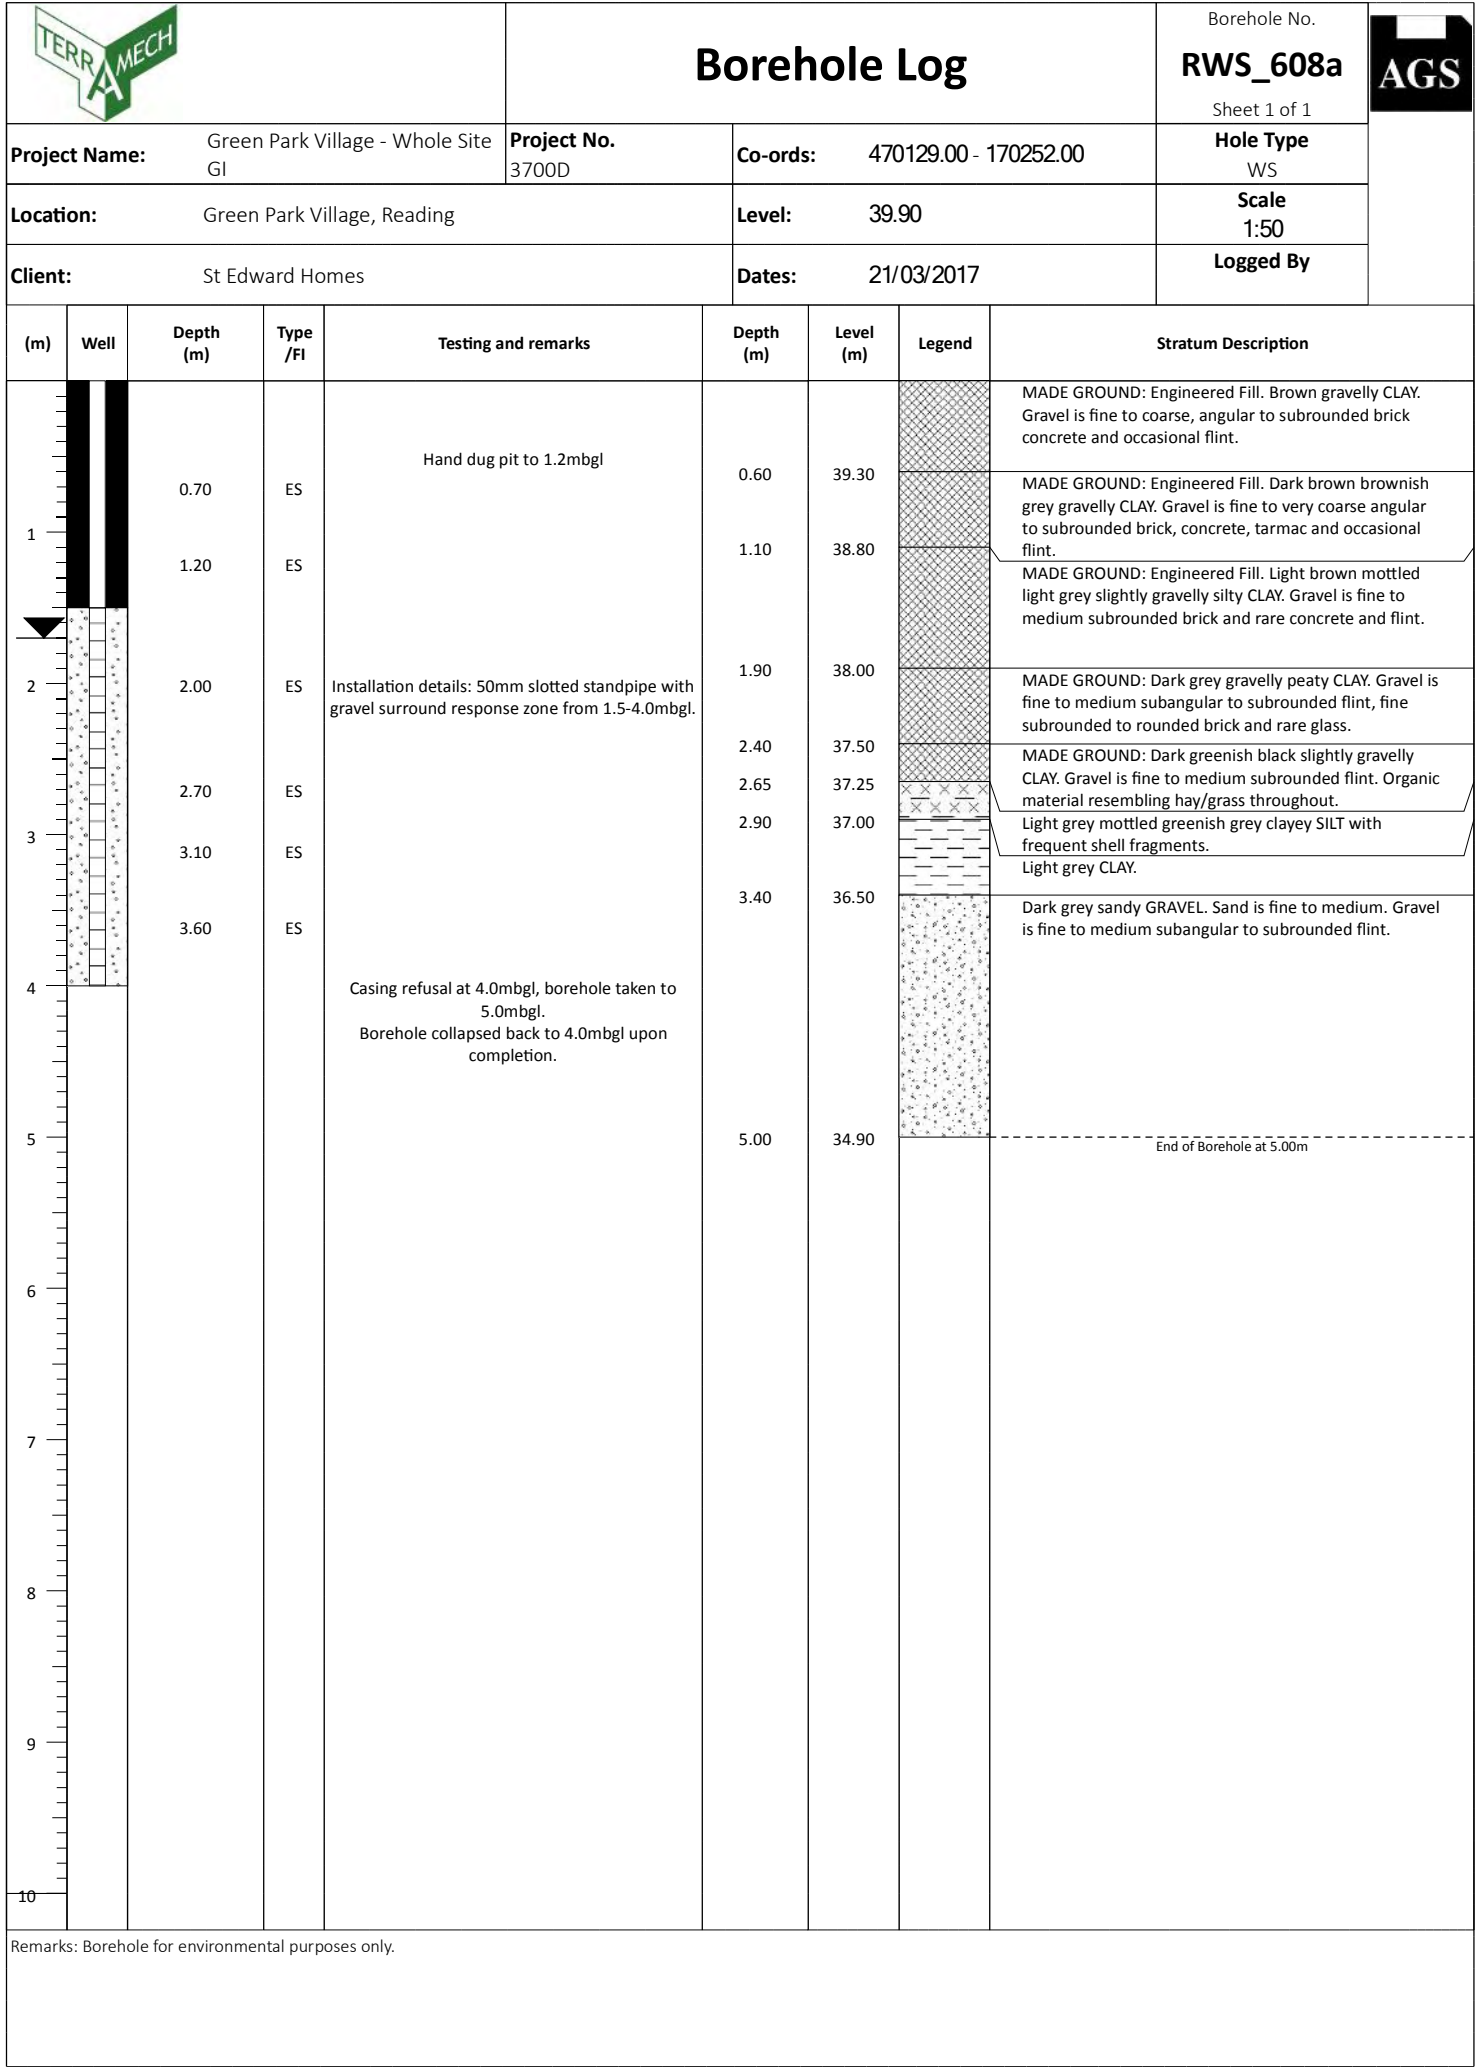
		Borehole Log				Borehole No. RWS_604 Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470157.00 - 170338.00		Hole Type WS			
Location: Green Park Village, Reading				Level: 39.98		Scale 1:50			
Client: St Edward Homes				Dates: 17/03/2017		Logged By mjh			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1		2.20	ES	Hand dug pit to 1.2mbgl.	1.30	38.68		MADE GROUND: Engineered Fill. Brown slightly gravelly CLAY. Gravel is medium to coarse angular to subrounded flint, brick and concrete.	
2					2.00	37.98		MADE GROUND: Engineered Fill. Brown mottled greenish grey slightly gravelly CLAY. Gravel is fine to coarse subangular to subrounded flint and rare fine to medium subrounded brick.	
3		2.70	ES	Installation details: 50mm slotted standpipe with gravel surround response zone from 2.5-4.0mbgl. Root bundle at 3.3mbgl.	2.40	37.58		MADE GROUND. Brown mottled light grey slightly gravelly silty CLAY. Gravel is fine to coarse subangular to subrounded flint and rare fine to medium subangular to subrounded brick.	
					2.45	37.53		Light grey silty peaty CLAY with rare shell fragments.	
					2.60	37.38		Dark grey gravelly peaty CLAY. Gravel is fine to medium subangular to subrounded flint.	
					2.85	37.13		Light grey gravelly SAND. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.	
4		5.00	34.98	Casing refusal at 4.0mbgl, borehole taken to 5.0mbgl.	3.50	36.48		Light brownish grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.	
5					5.00	34.98		Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.	
6					Borehole terminated upon experiencing blowing sands. Borehole collapsed back to 4.0mbgl upon completion.				End of Borehole at 5.00m
7									
8									
9									
10									
Remarks: Borehole for environmental purposes only.									





			Borehole Log				Borehole No. RWS_605 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI			Project No. 3700D		Co-ords: 470124.00 - 170292.00		Hole Type WS		
Location: Green Park Village, Reading				Level: 39.97		Scale 1:50			
Client: St Edward Homes				Dates: 23/03/2017		Logged By mjh			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1				Hand dug pit to 1.2mbgl.				MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to coarse, subangular to subrounded brick, concrete and occasional flint.	
					1.30	38.67		MADE GROUND: Engineered Fill. Orange brown mottled light grey slightly gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and flint, with occasional sand pockets.	
2					1.80	38.17		MADE GROUND: Engineered Fill. Brown mottled orange brown slightly gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, plastic and occasional flint.	
		2.60	ES		2.50	37.47		MADE GROUND: Dark greenish grey gravelly CLAY. Gravel is fine to coarse subangular to subrounded concrete, brick, flint and rare ash.	
		2.80	ES		2.75	37.22		Dark grey slightly gravelly CLAY. Gravel is fine to medium subrounded flint and fine shell fragments.	
3					Installation details: 50mm slotted standpipe with gravel surround response zone from 2.5-3.65mbgl.				
		3.70	ES		Casing refusal at 3.65mbgl, borehole taken to 4.0mbgl.	3.60	36.37		Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.
4					Borehole terminated upon experiencing blowing sands. Borehole collapsed back to 3.65mbgl upon completion.	4.00	35.97		End of Borehole at 4.00m
5									
6									
7									
8									
9									
10									
Remarks: Borehole for environmental purposes only.									

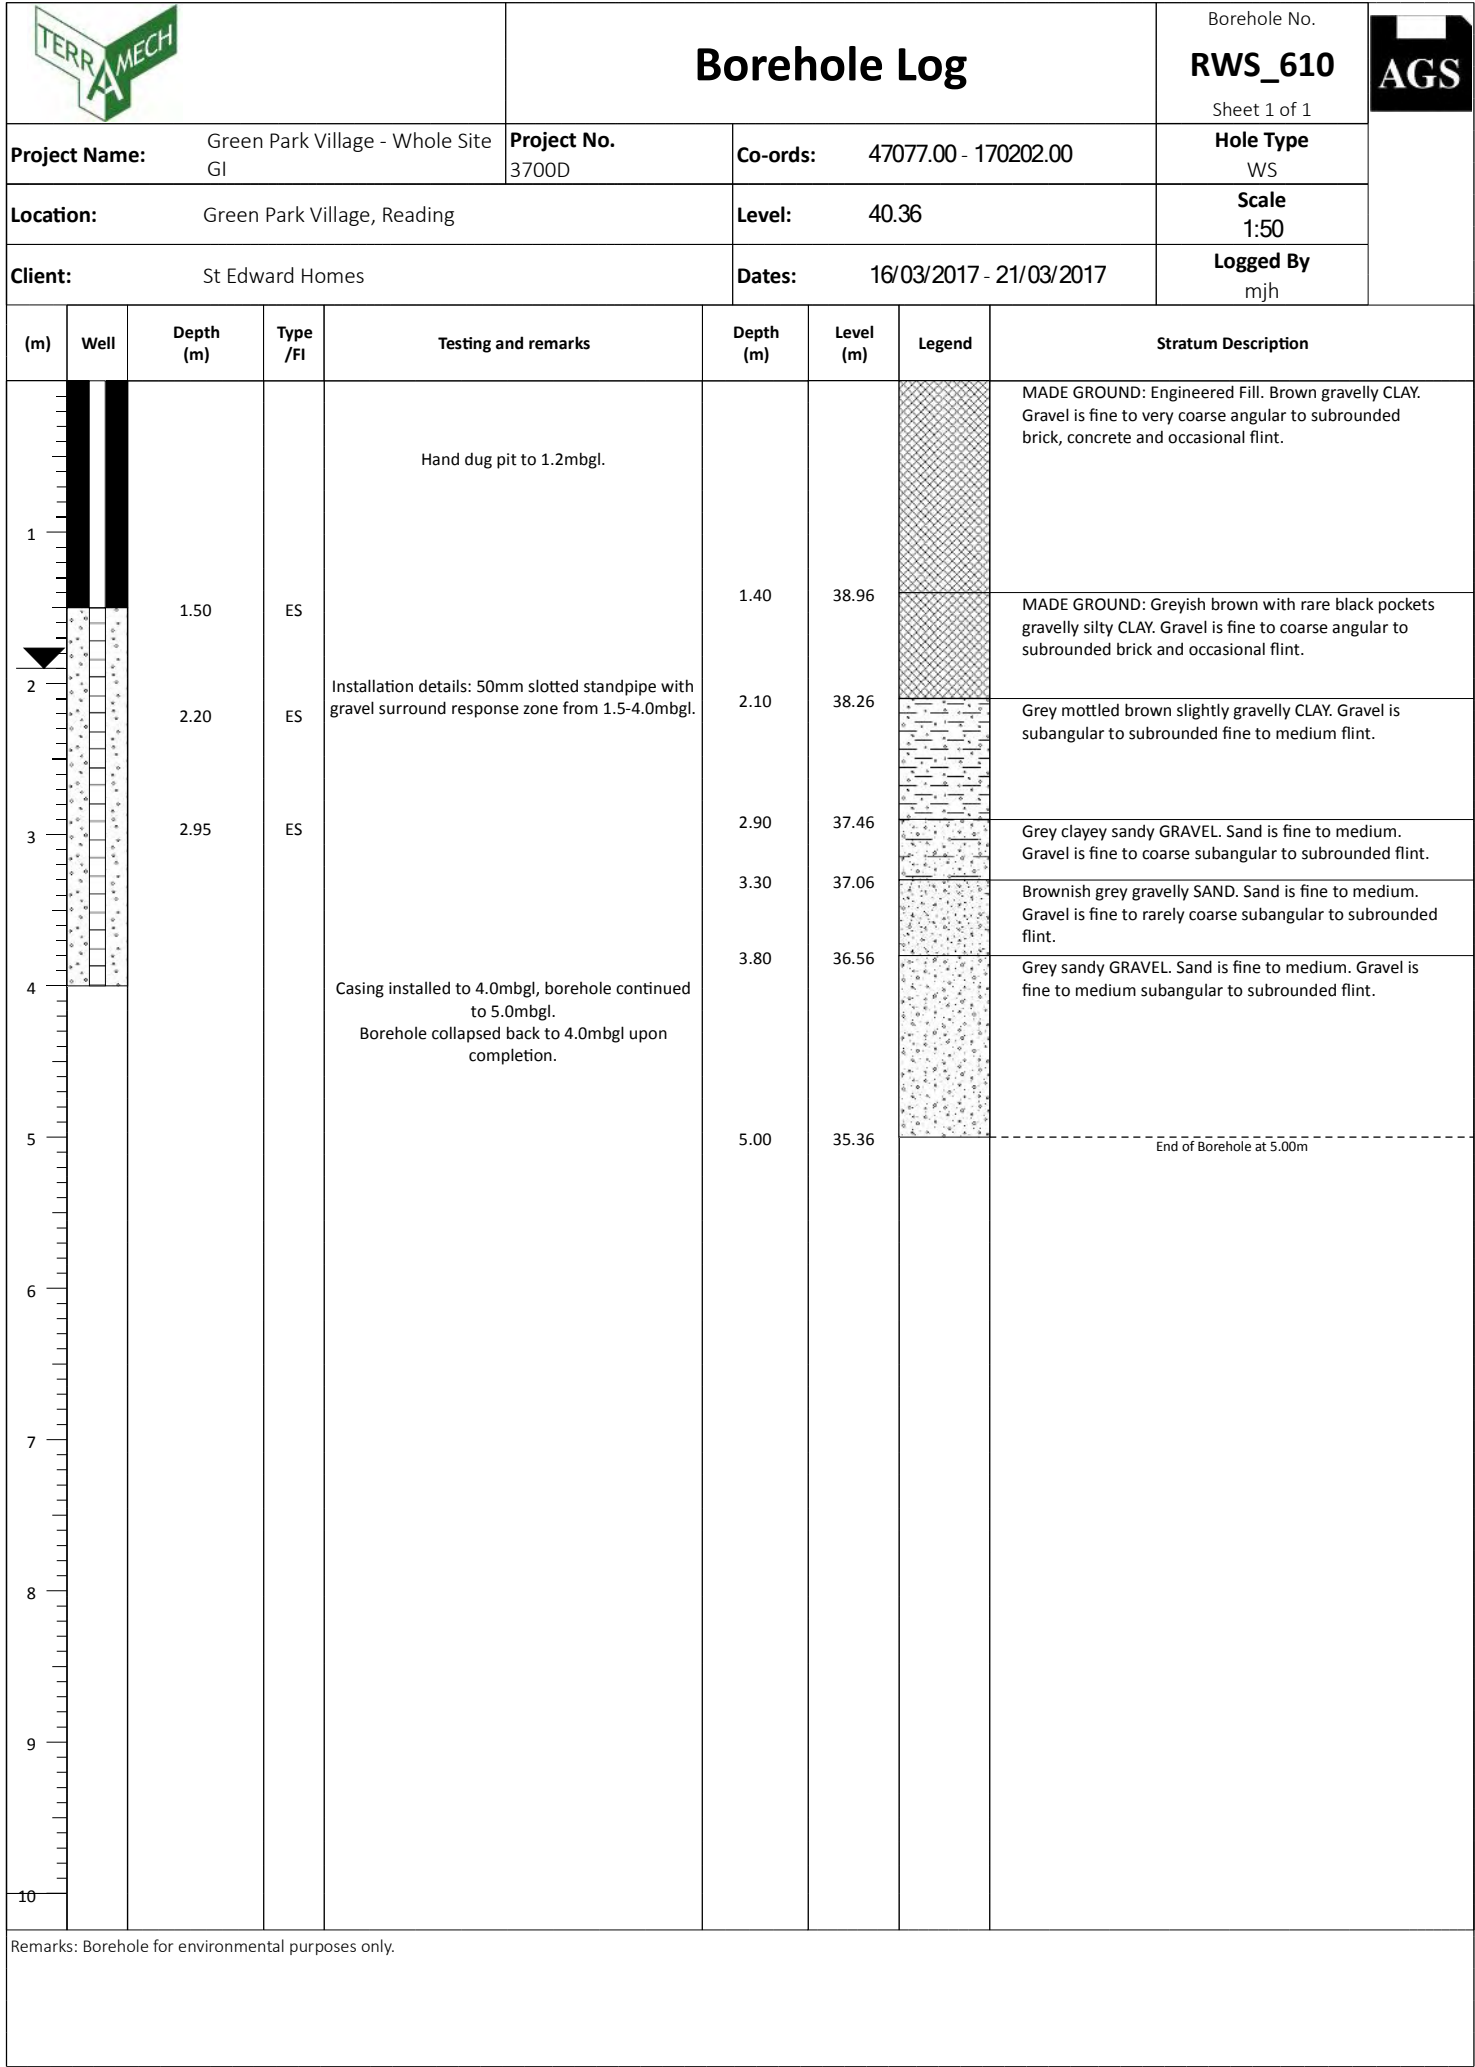
		Borehole Log				Borehole No. RWS_606 Sheet 1 of 1				
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470173.00 - 170265.00		Hole Type WS				
Location: Green Park Village, Reading				Level: 40.04		Scale 1:50				
Client: St Edward Homes				Dates: 22/03/2017		Logged By mjh				
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
1		1.80	ES	Hand dug pit to 1.2mbgl.	1.30	38.74		MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and flint.		
2				1.70	38.34	MADE GROUND: Engineered Fill. Light grey mottled purplish brown CLAY with frequent gravel. Gravel is fine to coarse subangular to subrounded flint and rare concrete.				
2				2.30	37.74	MADE GROUND: Dark grey gravelly peaty CLAY. Gravel is fine to medium subangular to subrounded flint and rare brick at upper boundary. Organic material resembling grass at base.				
3		2.90	ES	Casing refusal at 3.0m, borehole taken to 4.0mbgl. Borehole terminated upon experiencing blowing sands. Borehole collapsed back to 3.0mbgl upon completion.	4.00	36.04		Light grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.		
4	End of Borehole at 4.00m									
5										
6										
7										
8										
9										
10										
Remarks: Borehole for environmental purposes only.										


		Borehole Log				Borehole No. RWS_607 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470097.00 - 170268.00		Hole Type WS		
Location: Green Park Village, Reading				Level: 40.35		Scale 1:50		
Client: St Edward Homes				Dates: 22/03/2017		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
1				Hand dug pit to 1.2mbgl.				MADE GROUND: Engineered Fill. Dark brown gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and occasional flint.
		1.45	ES		1.30	39.05		
		1.70	ES		1.40	38.95		MADE GROUND: Light yellowish brown slightly gravelly CLAY. Gravel is fine to medium subangular to subrounded flint and rare brick.
2				Installation details: 50mm slotted standpipe with gravel surround response zone from 1.5-4.1mbgl.	1.65	38.70		MADE GROUND: Dark greenish grey silty CLAY with rare tarmac gravel.
		2.40	ES					MADE GROUND: Light brown mottled green sandy CLAY with occasional fine to medium subangular to subrounded brick and flint gravel. Sand is fine to medium.
3		2.95	ES		2.85	37.50		Light grey mottled black SILT.
		3.50	ES		2.90	37.45		Black / dark grey peaty CLAY.
4				Borehole terminated upon experiencing blowing sands. Borehole collapsed back to 4.1mbgl upon completion.	3.35	37.00		Grey sandy GRAVEL. Gravel is fine to medium subangular to subrounded flint.
5					5.00	35.35		End of Borehole at 5.00m
6								
7								
8								
9								
10								
Remarks: Borehole for environmental purposes only.								




				Borehole Log				Borehole No. RWS_608 Sheet 1 of 1		
Project Name:		Green Park Village - Whole Site GI		Project No.		3700D		Co-ords:		Hole Type WS
Location:		Green Park Village, Reading		Level:				Scale 1:50		
Client:		St Edward Homes		Dates:		16/03/2017		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
1				Borehole terminated at 0.6mbgl due to encountering pea shingle.	0.50			MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to coarse angular to subrounded brick and concrete.		
					0.60			MADE GROUND: Pea shingle. ----- End of Borehole at 0.60m		
2										
3										
4										
5										
6										
7										
8										
9										
10										
Remarks: Borehole for environmental purposes only.										







		Borehole Log				Borehole No. RWS_609 Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470147.00 - 170242.00		Hole Type WS			
Location: Green Park Village, Reading				Level: 40.22		Scale 1:50			
Client: St Edward Homes				Dates: 22/03/2017		Logged By mjh			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
				Hand dug pit to 1.2mbgl.	1.00	39.22		MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to coarse subangular to subrounded brick, concrete and flint.	
		1.10	ES					MADE GROUND: Greyish brown mottled light grey gravelly sandy CLAY with pockets of CLAY. Sand is fine to medium. Gravel is fine to coarse angular to subangular brick, concrete, flint and rare plastic.	
		1.80	ES			1.70	38.52		MADE GROUND: Grey slightly gravelly clayey SAND. Sand is fine to medium. Gravel is fine to medium subangular to subrounded brick.
		2.20	ES		Installation details: 50mm slotted standpipe with gravel surround response zone from 1.0-3.0mbgl.	2.10	38.12		Dark grey gravelly peaty CLAY. Gravel is fine to medium subangular to subrounded flint.
		2.60	ES			2.50	37.72		Light grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.
				Casing installed to 4.0mbgl, blowback to 3.0mbgl. Borehole terminated upon experiencing blowing sands.	4.00	36.22		End of Borehole at 4.00m	
Remarks: Borehole for environmental purposes only.									

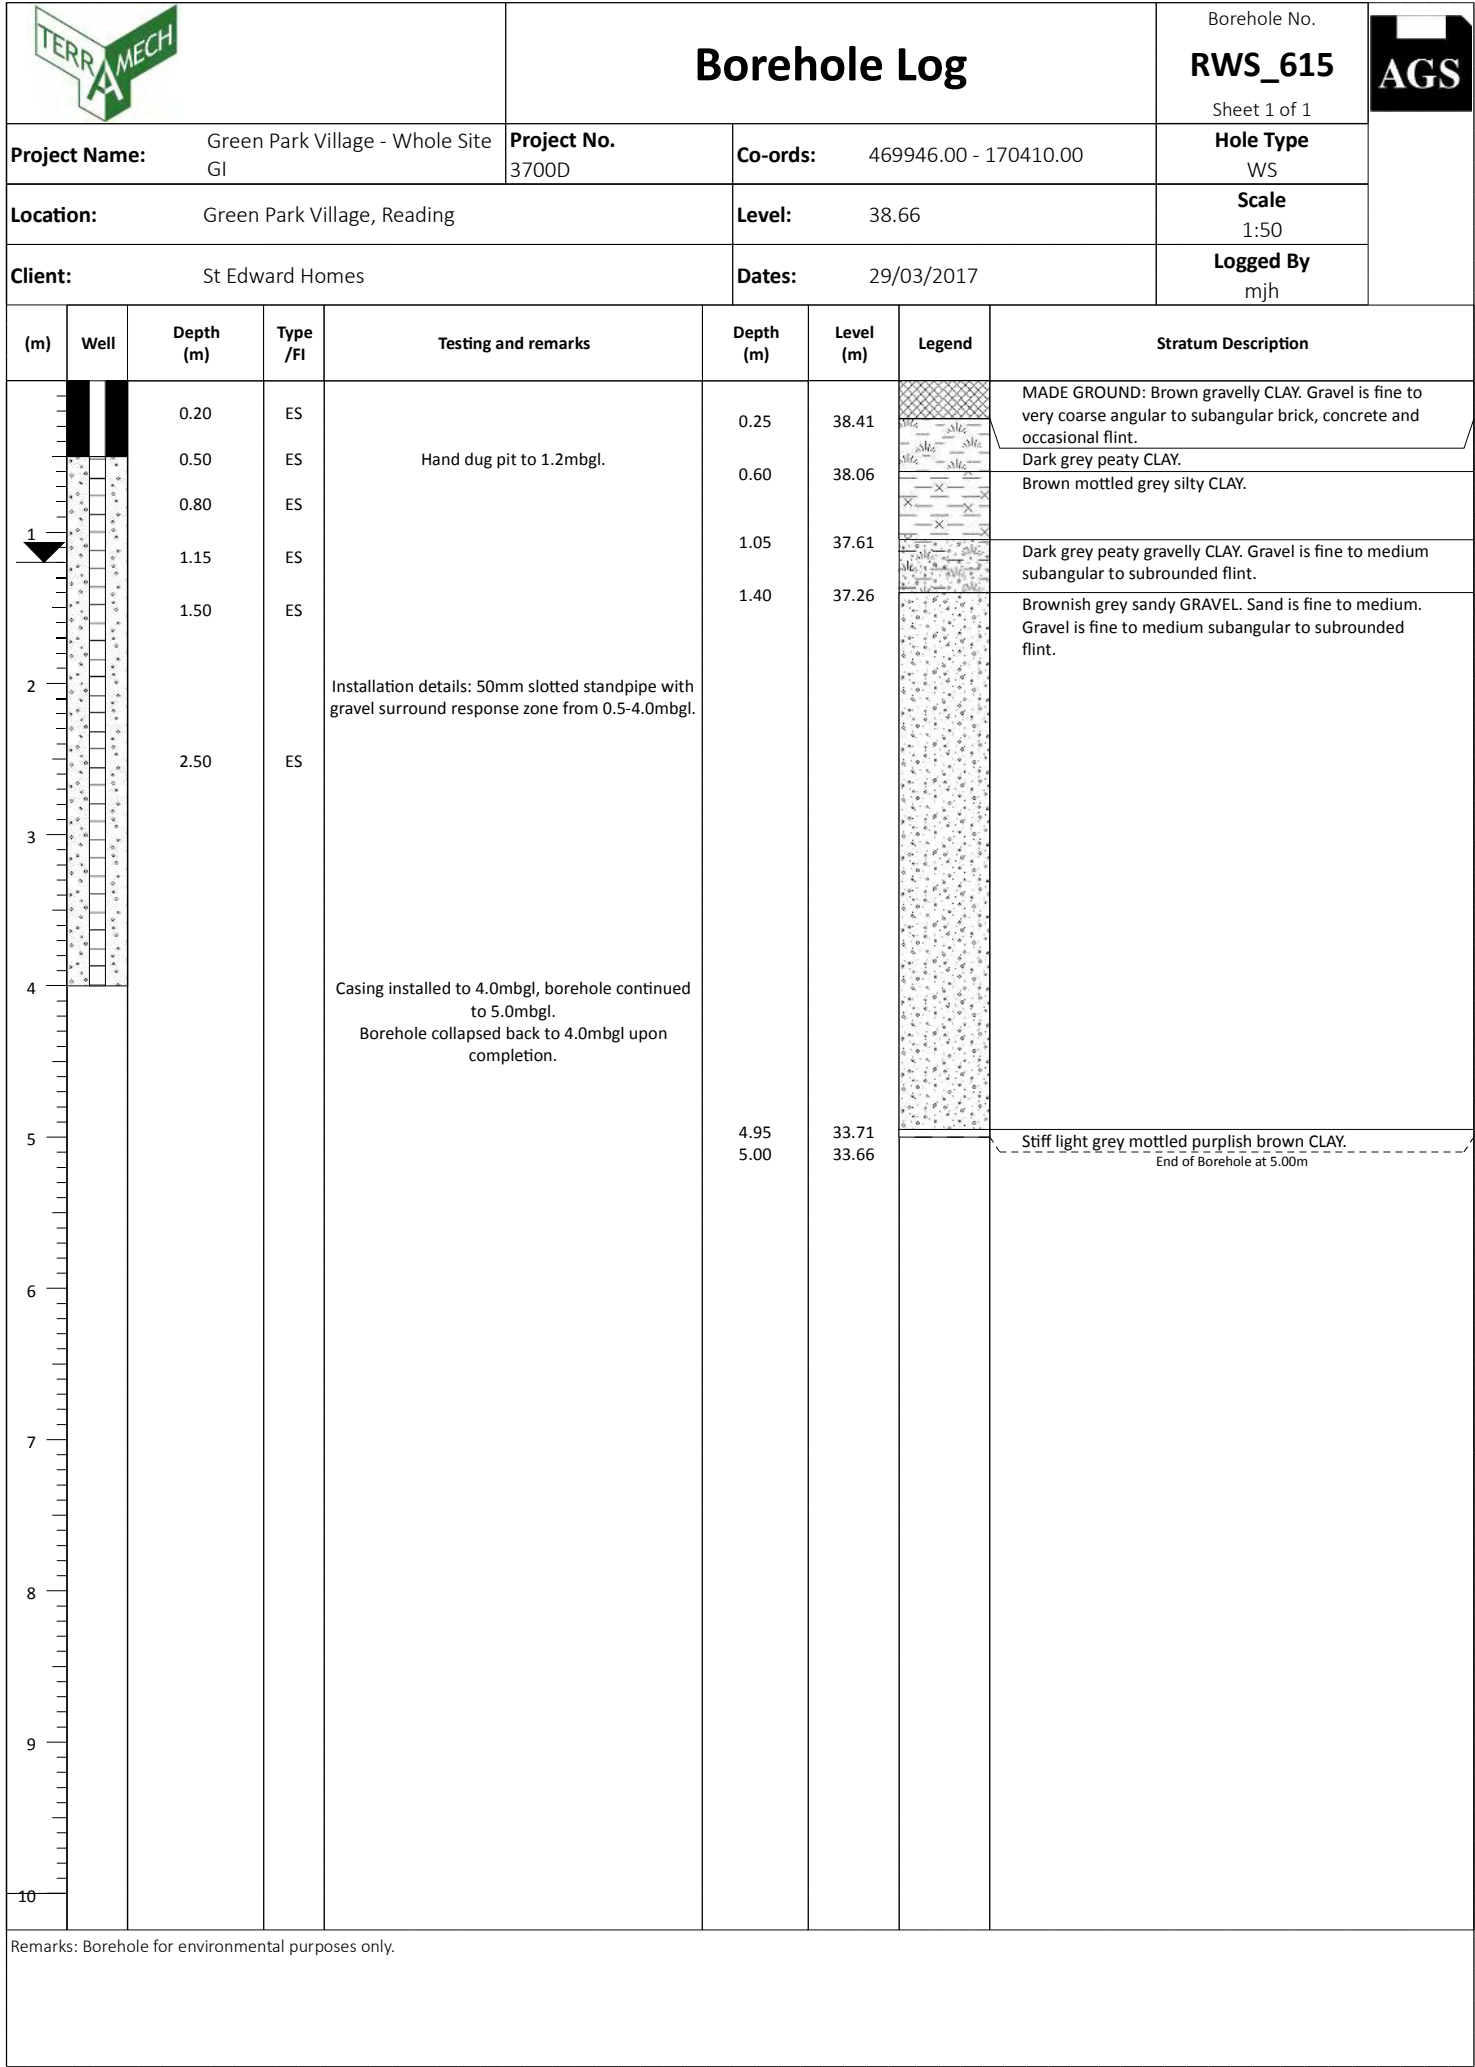


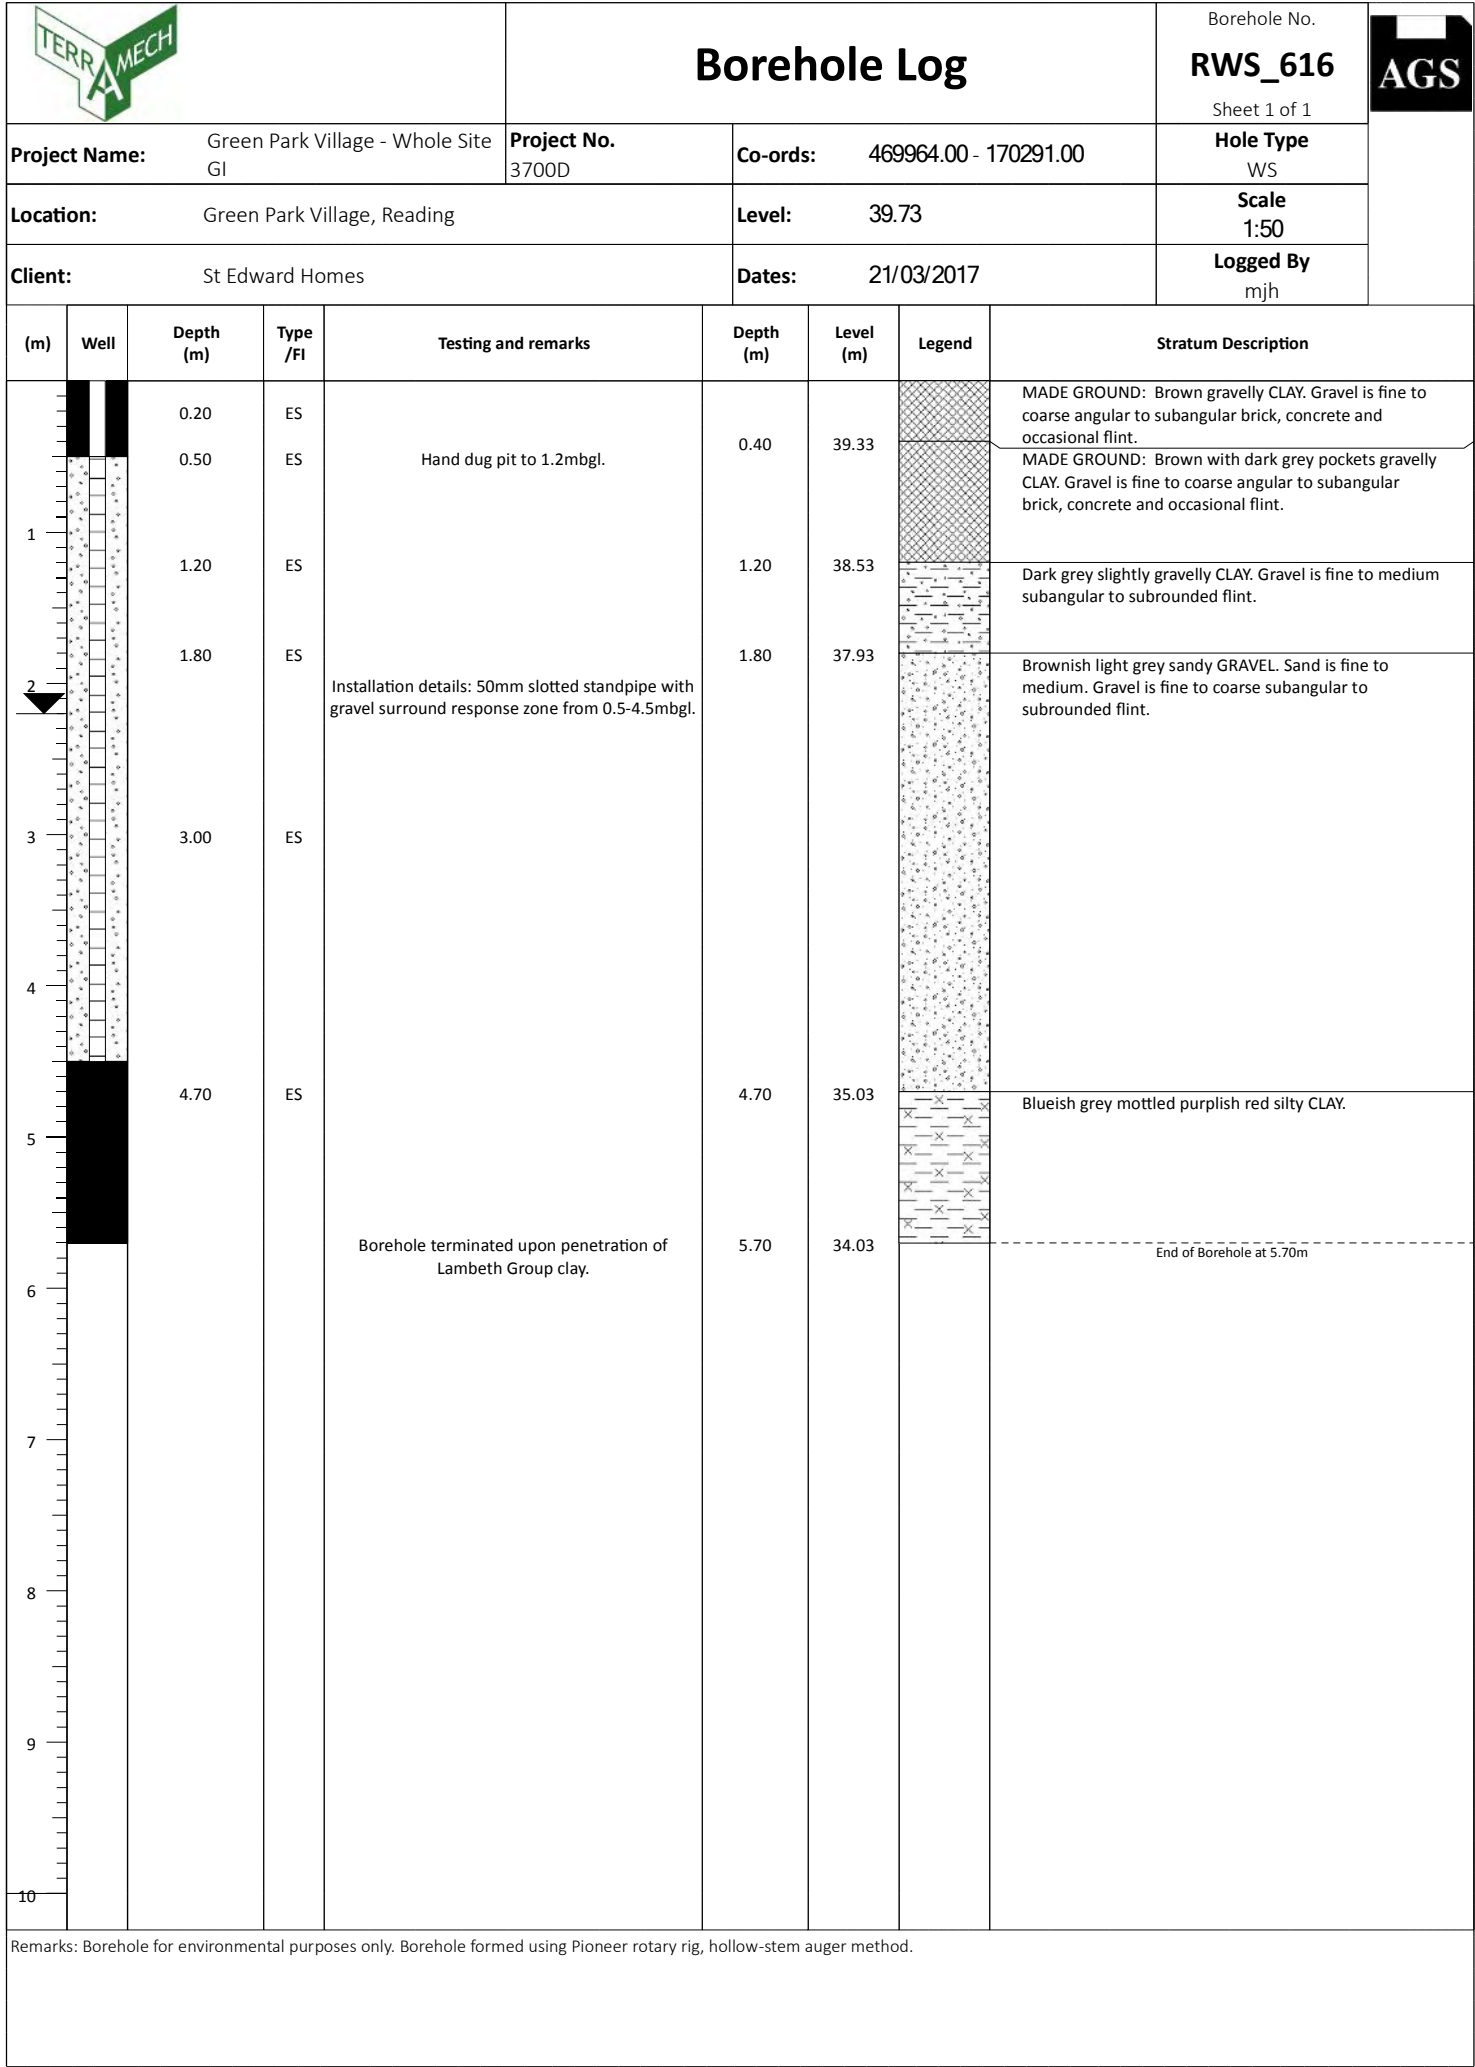
		Borehole Log				Borehole No. RWS_611		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470130.00 - 170389.00		Sheet 1 of 1		
Location: Green Park Village, Reading		Level: 40.00		Hole Type WS				
Client: St Edward Homes		Dates: 27/03/2017		Scale 1:50		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
1		1.40	ES	Hand dug pit to 1.2mbgl.	1.30	38.70		MADE GROUND: Engineered Fill. Brown slightly gravelly CLAY. Gravel is fine to coarse subangular to subrounded brick, concrete and rare flint.
2		2.10	ES	Installation details: 50mm slotted standpipe with gravel surround response zone from 1.5-4.0mbgl.	2.00	38.00		MADE GROUND: Brown mottled orange brown silty CLAY with rare gravel of fine to coarse angular to subrounded brick, concrete and plastic.
		2.40	ES		2.35	37.65		MADE GROUND: Dark grey slightly mottled brown slightly gravelly CLAY. Gravel is fine to medium subrounded flint and rare brick.
		2.65	ES		2.65	37.35		Dark grey gravelly CLAY. Gravel is fine to coarse subangular to subrounded flint.
3								
4				Casing installed to 4.0mbgl, borehole continued to 5.0mbgl. Borehole collapsed back to 4.0mbgl upon completion.				
5					5.00	35.00		End of Borehole at 5.00m
6								
7								
8								
9								
10								
Remarks: Borehole for environmental purposes only.								





		Borehole Log				Borehole No. RWS_612		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470073.00 - 170309.00		Sheet 1 of 1 Hole Type WS		
Location: Green Park Village, Reading				Level: 40.27		Scale 1:50		
Client: St Edward Homes				Dates: 28/03/2017		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
1				Hand dug pit to 1.2mbgl.				MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to coarse angular to subangular brick, concrete and flint.
2		2.20	ES		2.10	38.17		MADE GROUND: Grey gravelly CLAY. Gravel is fine to very coarse angular to subrounded brick and concrete.
		2.70	ES	Installation details: 50mm slotted standpipe with gravel surround response zone from 2.0-4.0mbgl.	2.65	37.62		Dark grey peaty CLAY with occasional fine to medium subrounded flint gravel.
3		3.00	ES		2.95	37.32		Grey sandy silty CLAY / clayey silty SAND. Sand is fine to medium.
		3.60	ES	Root bundle / organic material at 3.5mbgl.	3.40	36.87		Brown sandy GRAVEL, becoming very sandy GRAVEL. Sand is fine to medium. Gravel is fine rarely coarse subangular to subrounded flint.
4				Casing installed to 4.0mbgl, borehole taken to 5.0mbgl. Borehole collapsed back to 4.0mbgl upon completion.				
5					5.00	35.27		End of Borehole at 5.00m
6								
7								
8								
9								
10								
Remarks: Borehole for environmental purposes only.								





		Borehole Log				Borehole No. RWS_613 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470010.00 - 170362.00		Hole Type WS		
Location: Green Park Village, Reading				Level: 38.17		Scale 1:50		
Client: St Edward Homes				Dates: 28/03/2017		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
		1.30	ES	Hand dug pit to 1.2mbgl.	0.20	37.97		MADE GROUND: Brownish black gravelly CLAY. Gravel is fine to medium subangular to subrounded brick, flint and lithics.
								MADE GROUND: Dark brown clayey GRAVEL. Gravel is fine to rarely coarse angular to subrounded brick and occasional concrete.
				1.00	37.17			Brown gravelly SAND. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.
				2.00	36.17			Grey gravelly SAND. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.
				2.50	35.67			Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.
3				Borehole terminated upon experiencing blowing sands.	3.00	35.17		End of Borehole at 3.00m
4								
5								
6								
7								
8								
9								
10								
Remarks: Borehole for environmental purposes only.								

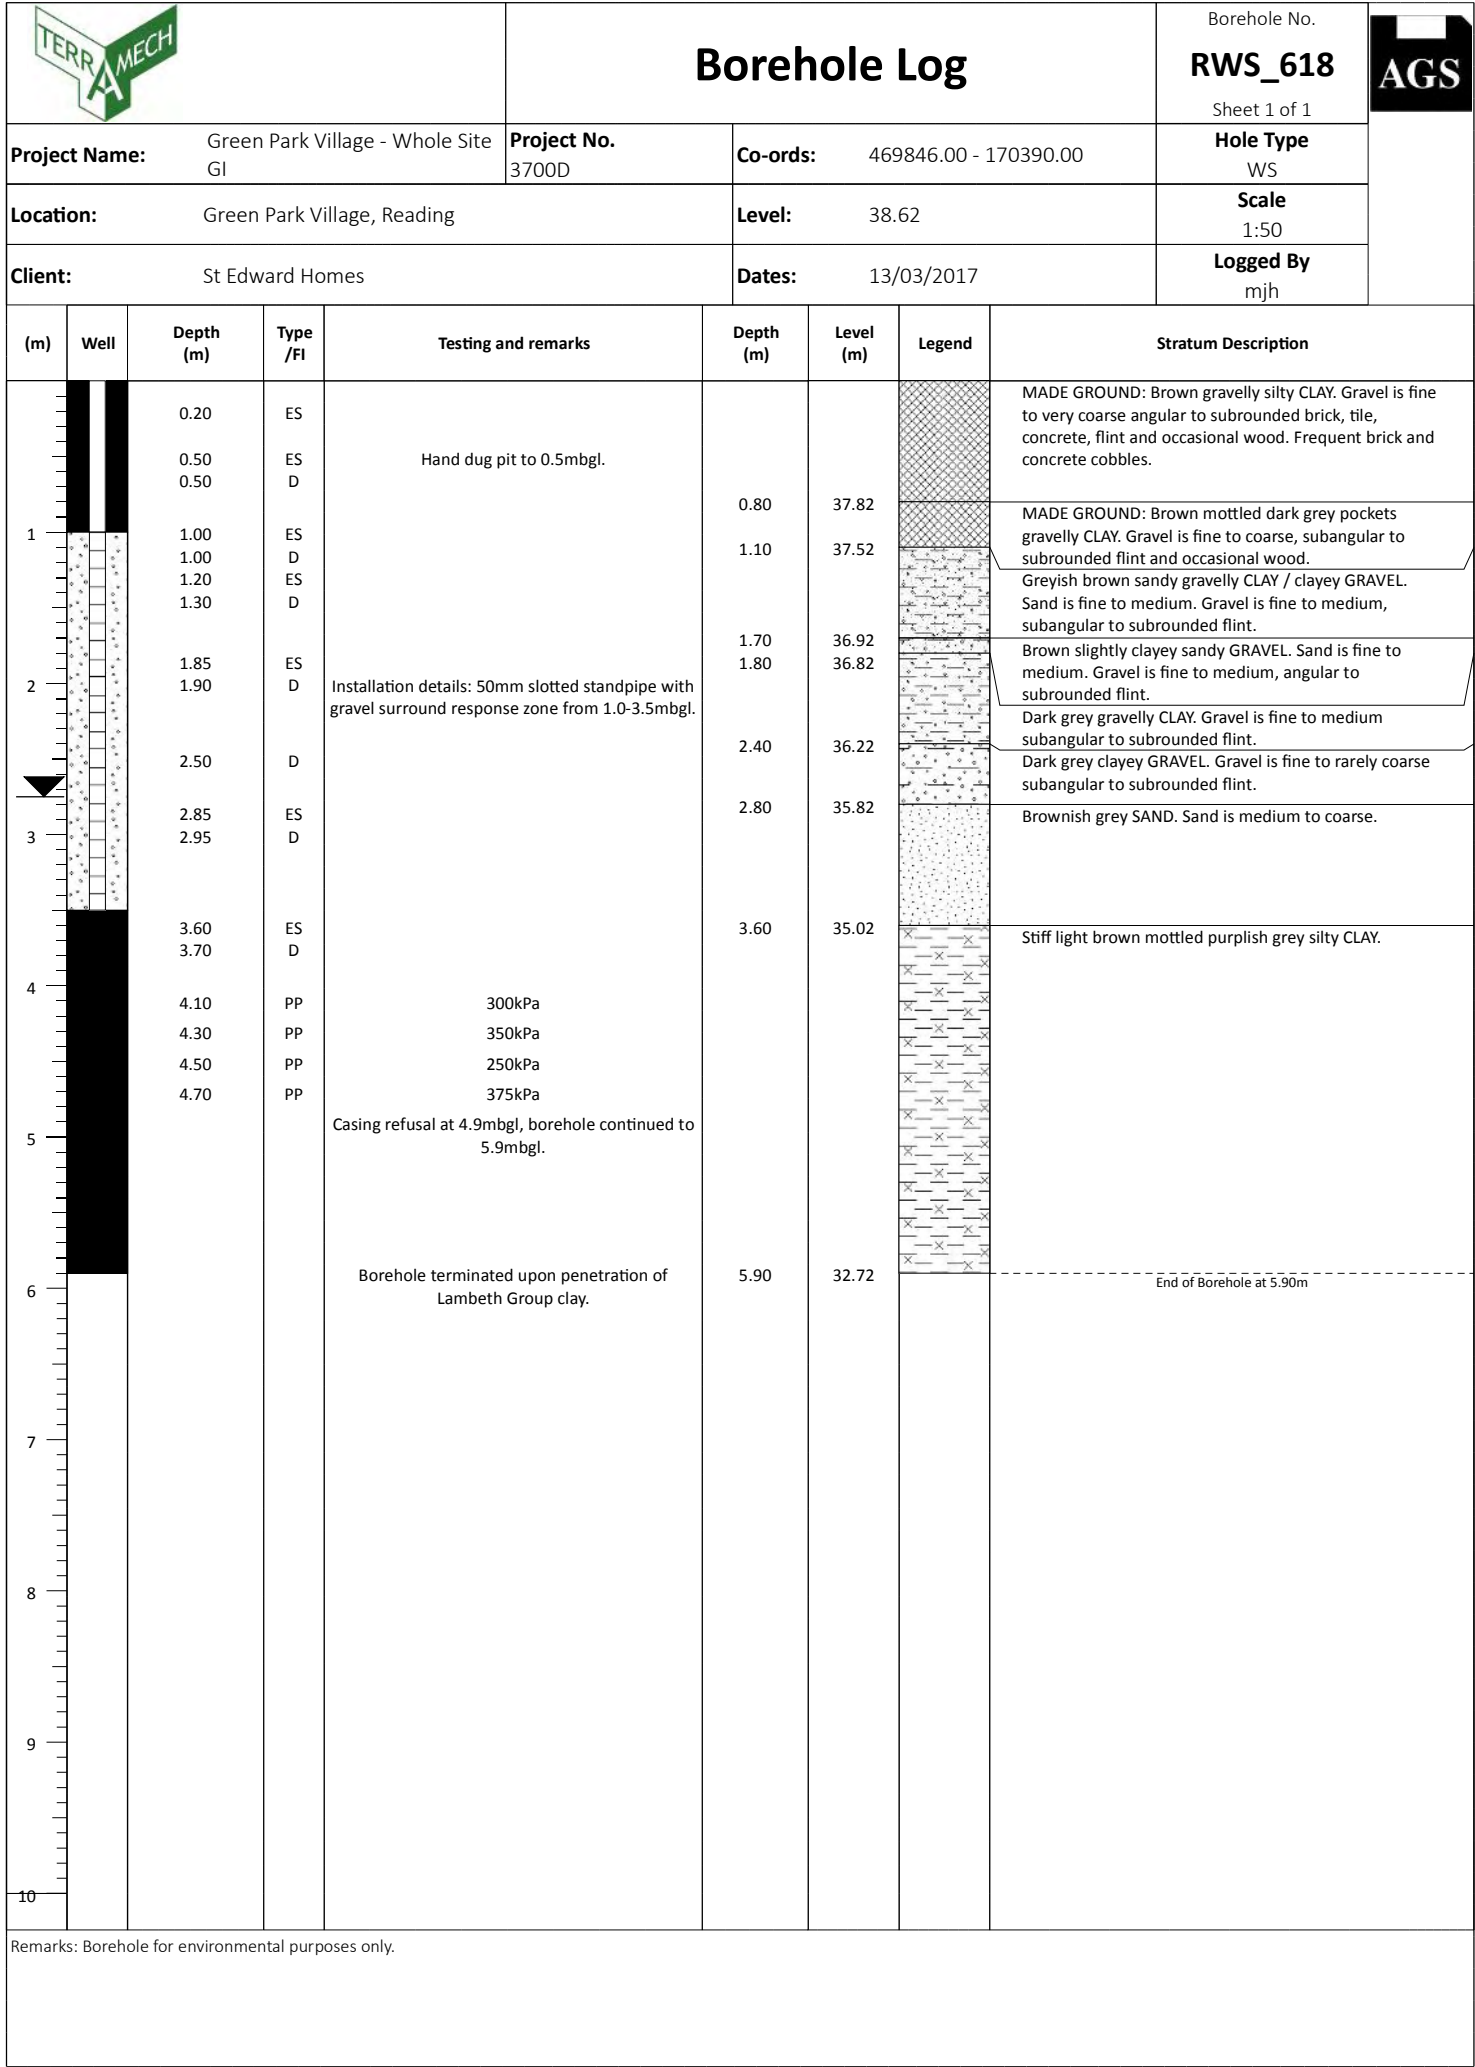
		Borehole Log				Borehole No. RWS_614 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470022.00 - 170284.00		Hole Type WS		
Location: Green Park Village, Reading				Level: 38.61		Scale 1:50		
Client: St Edward Homes				Dates: 28/04/2017		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
		0.20	ES	Hand dug pit to 1.2mbgl.				MADE GROUND: Dark brown gravelly CLAY with orange brown clay pockets. Gravel is fine to very coarse angular to subangular concrete and brick.
	1	1.00	ES		0.90	37.70		Dark grey gravelly peaty CLAY. Gravel is fine to medium subangular to subrounded flint.
		1.30	ES		1.20	37.40		Grey very sandy GRAVEL / very gravelly SAND. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.
	2	1.85	ES	1.80	36.80		Dark brown sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.	
				2.00	36.60		Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.	
4	4.10	ES	Casing installed to 4.0mbgl, borehole continued to 5.0mbgl. Borehole collapsed back to 4.0mbgl upon completion.	3.95	34.66		Stiff light greenish grey mottled brown clayey sandy SILT. Sand is fine to medium.	
5				5.00	33.60	End of Borehole at 5.00m		
Remarks: Borehole for environmental purposes only.								

















		Borehole Log				Borehole No. RWS_617 Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469897.00 - 170335.00		Hole Type WS			
Location: Green Park Village, Reading				Level: 40.40		Scale 1:50			
Client: St Edward Homes				Dates: 20/03/2017		Logged By mjh			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1				Hand dug pit to 1.2mbgl.				MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to very coarse subangular to subrounded brick and concrete.	
2						1.70	38.70		MADE GROUND: Dark grey mottled light grey gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, wood, concrete and flint.
		2.70 - 2.90	ES	Installation details: 50mm slotted standpipe with gravel surround response zone from 1.5-5.0mbgl.	2.60	37.80		Dark grey gravelly peaty CLAY. Gravel is fine to medium subangular to subrounded flint.	
3		3.30 - 3.50	ES		3.00	37.40		Grey gravelly sand / sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded.	
4									
5				Casing installed to 5.0mbgl.	5.00	35.40		End of Borehole at 5.00m	
6									
7									
8									
9									
10									
Remarks: Borehole for environmental purposes only.									

		Borehole Log				Borehole No. RWS_617 Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469897.00 - 170335.00		Hole Type WS			
Location: Green Park Village, Reading				Level: 40.40		Scale 1:50			
Client: St Edward Homes				Dates: 20/03/2017		Logged By mjh			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1				Hand dug pit to 1.2mbgl.				MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to very coarse subangular to subrounded brick and concrete.	
2						1.70	38.70		MADE GROUND: Dark grey mottled light grey gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, wood, concrete and flint.
		2.70 - 2.90	ES	Installation details: 50mm slotted standpipe with gravel surround response zone from 1.5-5.0mbgl.	2.60	37.80		Dark grey gravelly peaty CLAY. Gravel is fine to medium subangular to subrounded flint.	
3		3.30 - 3.50	ES		3.00	37.40		Grey gravelly sand / sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded.	
4									
5				Casing installed to 5.0mbgl.	5.00	35.40		End of Borehole at 5.00m	
6									
7									
8									
9									
10									
Remarks: Borehole for environmental purposes only.									





		Borehole Log				Borehole No. RWS_619		
		Sheet 1 of 1						
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469854.00 - 170343.00		Hole Type WS		
Location: Green Park Village, Reading				Level: 39.67		Scale 1:50		
Client: St Edward Homes				Dates: 14/03/2017		Logged By mjh		
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description
1		0.20	ES	Hand dug pit to 0.5mbgl.	0.10	39.57		MADE GROUND: Roadstone. Pinkish brown clayey sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse, angular to subangular granite.
		0.50	ES		MADE GROUND: Brown gravelly CLAY. Gravel is fine to coarse angular to subangular brick, plastic and flint.			
		0.60	B					
		1.20	SPT	N=10 (2,3/2,2,3,3)	1.10	38.57		Loose to medium dense, dark grey clayey GRAVEL. Gravel is fine to coarse angular to subrounded flint.
		1.20	D					
		1.90	D	N=2 (1,0/0,1,1,0)	1.85	37.82		Soft dark grey gravelly CLAY. Gravel is fine to medium subangular to subrounded flint.
		2.00	SPT					
		2.50	D	N=5 (1,0/1,1,1,2)	3.20	36.47		Soft light grey greenish grey slightly clayey slightly sandy SILT. Becoming mottled brown from 3.45mbgl. Sand is fine to medium.
		3.00	SPT					
		3.30	D					
4		3.65	D	325kPa	3.60	36.07		Light grey clayey SAND with black flecks of mica throughout. Sand is fine to medium.
		3.70	PP	300kPa	3.75	35.92		
		3.80	D	N=19 (1,3/4,5,5,5)	4.00	35.67		Firm light grey mottled brown slightly sandy clayey SILT / silty CLAY. Sand is fine to medium.
		3.90	PP		Medium dense to dense, light grey becoming light greyish brown SAND with black flecks of mica throughout. Sand is fine to medium.			
		4.00	SPT					
4.20	D							
5		4.80	D	N=19 (1,1/2,6,5,6)	6.00	33.67		End of Borehole at 6.00m
		5.00	SPT					
6		6.00	SPT	Terminated upon reaching target depth N=34 (5,6/7,9,9,9)				
7								
8								
9								
10								
Remarks: Borehole for geotechnical purposes only.								




				Borehole Log				Borehole No. RWS_620 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469854.00 - 170286.00		Hole Type WS		
Location: Green Park Village, Reading				Level: 40.30		Scale 1:50		Logged By mjh		
Client: St Edward Homes				Dates: 14/03/2017						
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
1		0.20	ES	Hand dug pit to 0.9mbgl. Terminated upon obstruction in ground.	0.15	40.15		MADE GROUND: Compacted roadstone. Pinkish clayey sandy GRAVEL. Sand is medium to coarse. Gravel is fine to coarse angular to subangular granite.		
		0.50	ES		MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and flint.					
		End of Borehole at 0.90m								
2										
3										
4										
5										
6										
7										
8										
9										
10										
Remarks: Borehole for geotechnical purposes only.										

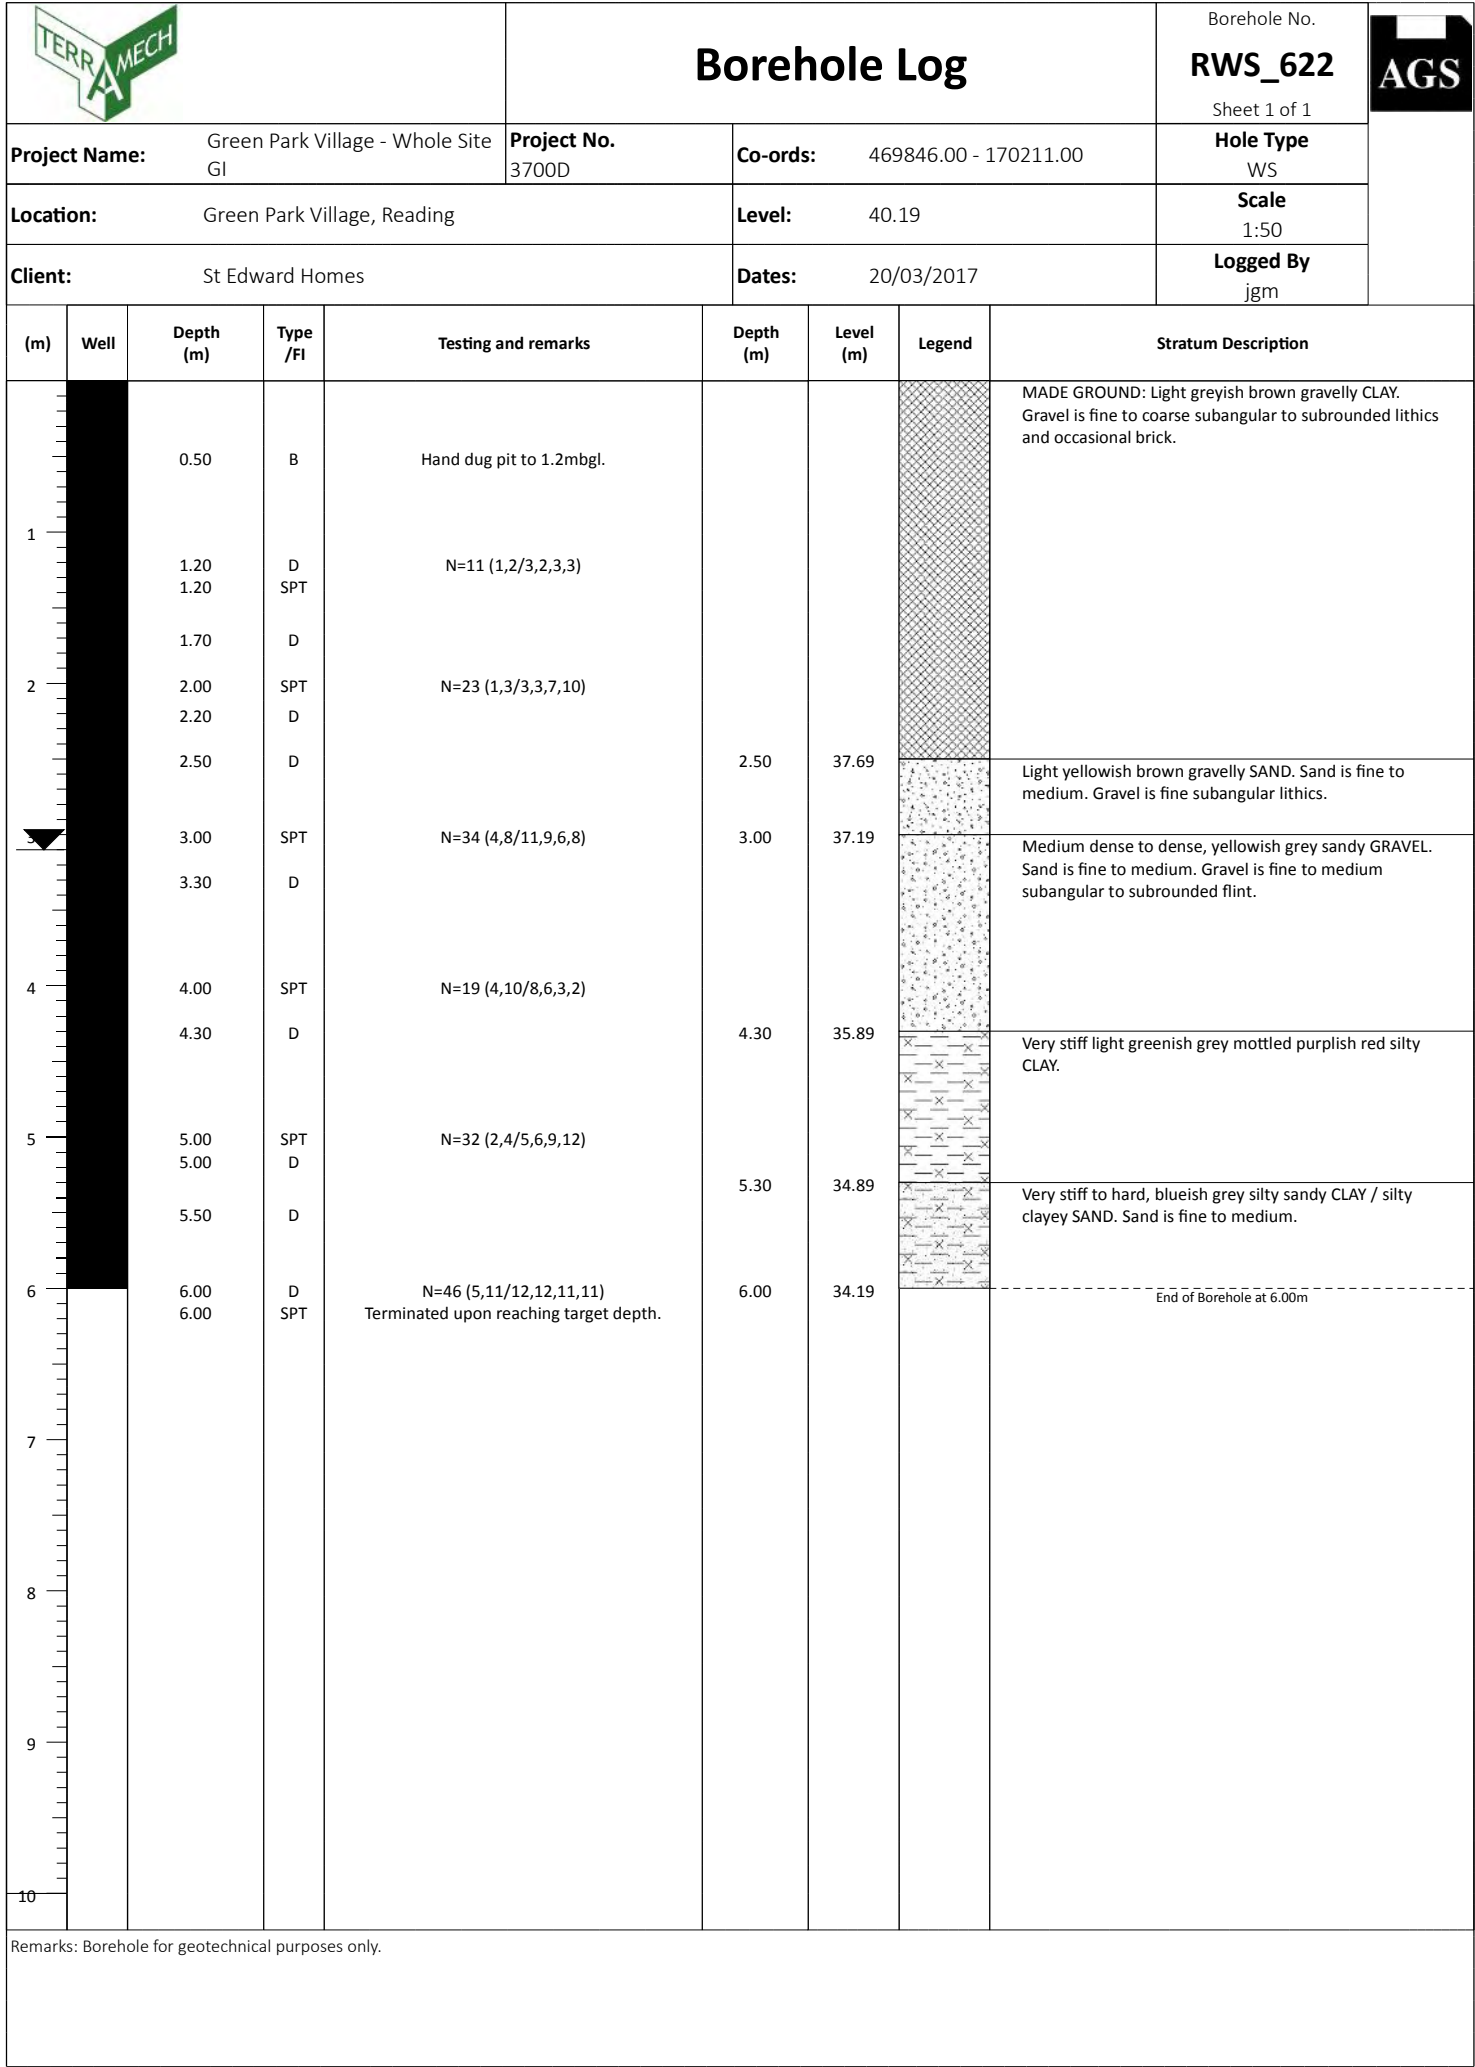
				Borehole Log				Borehole No. RWS_620a Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords:			Hole Type WS	
Location: Green Park Village, Reading				Level:			Scale 1:50			
Client: St Edward Homes				Dates: 14/03/2017			Logged By			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
1				Hand dug pit to 0.9mbgl. Terminated upon obstruction in ground.	0.15			MADE GROUND: Compacted roadstone. Pinkish clayey sandy GRAVEL. Gravel is fine to coarse angular to subangular granite.		
					0.90			MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and flint.		
								----- End of Borehole at 0.90m		
2										
3										
4										
5										
6										
7										
8										
9										
10										
Remarks: Borehole for geotechnical purposes only.										

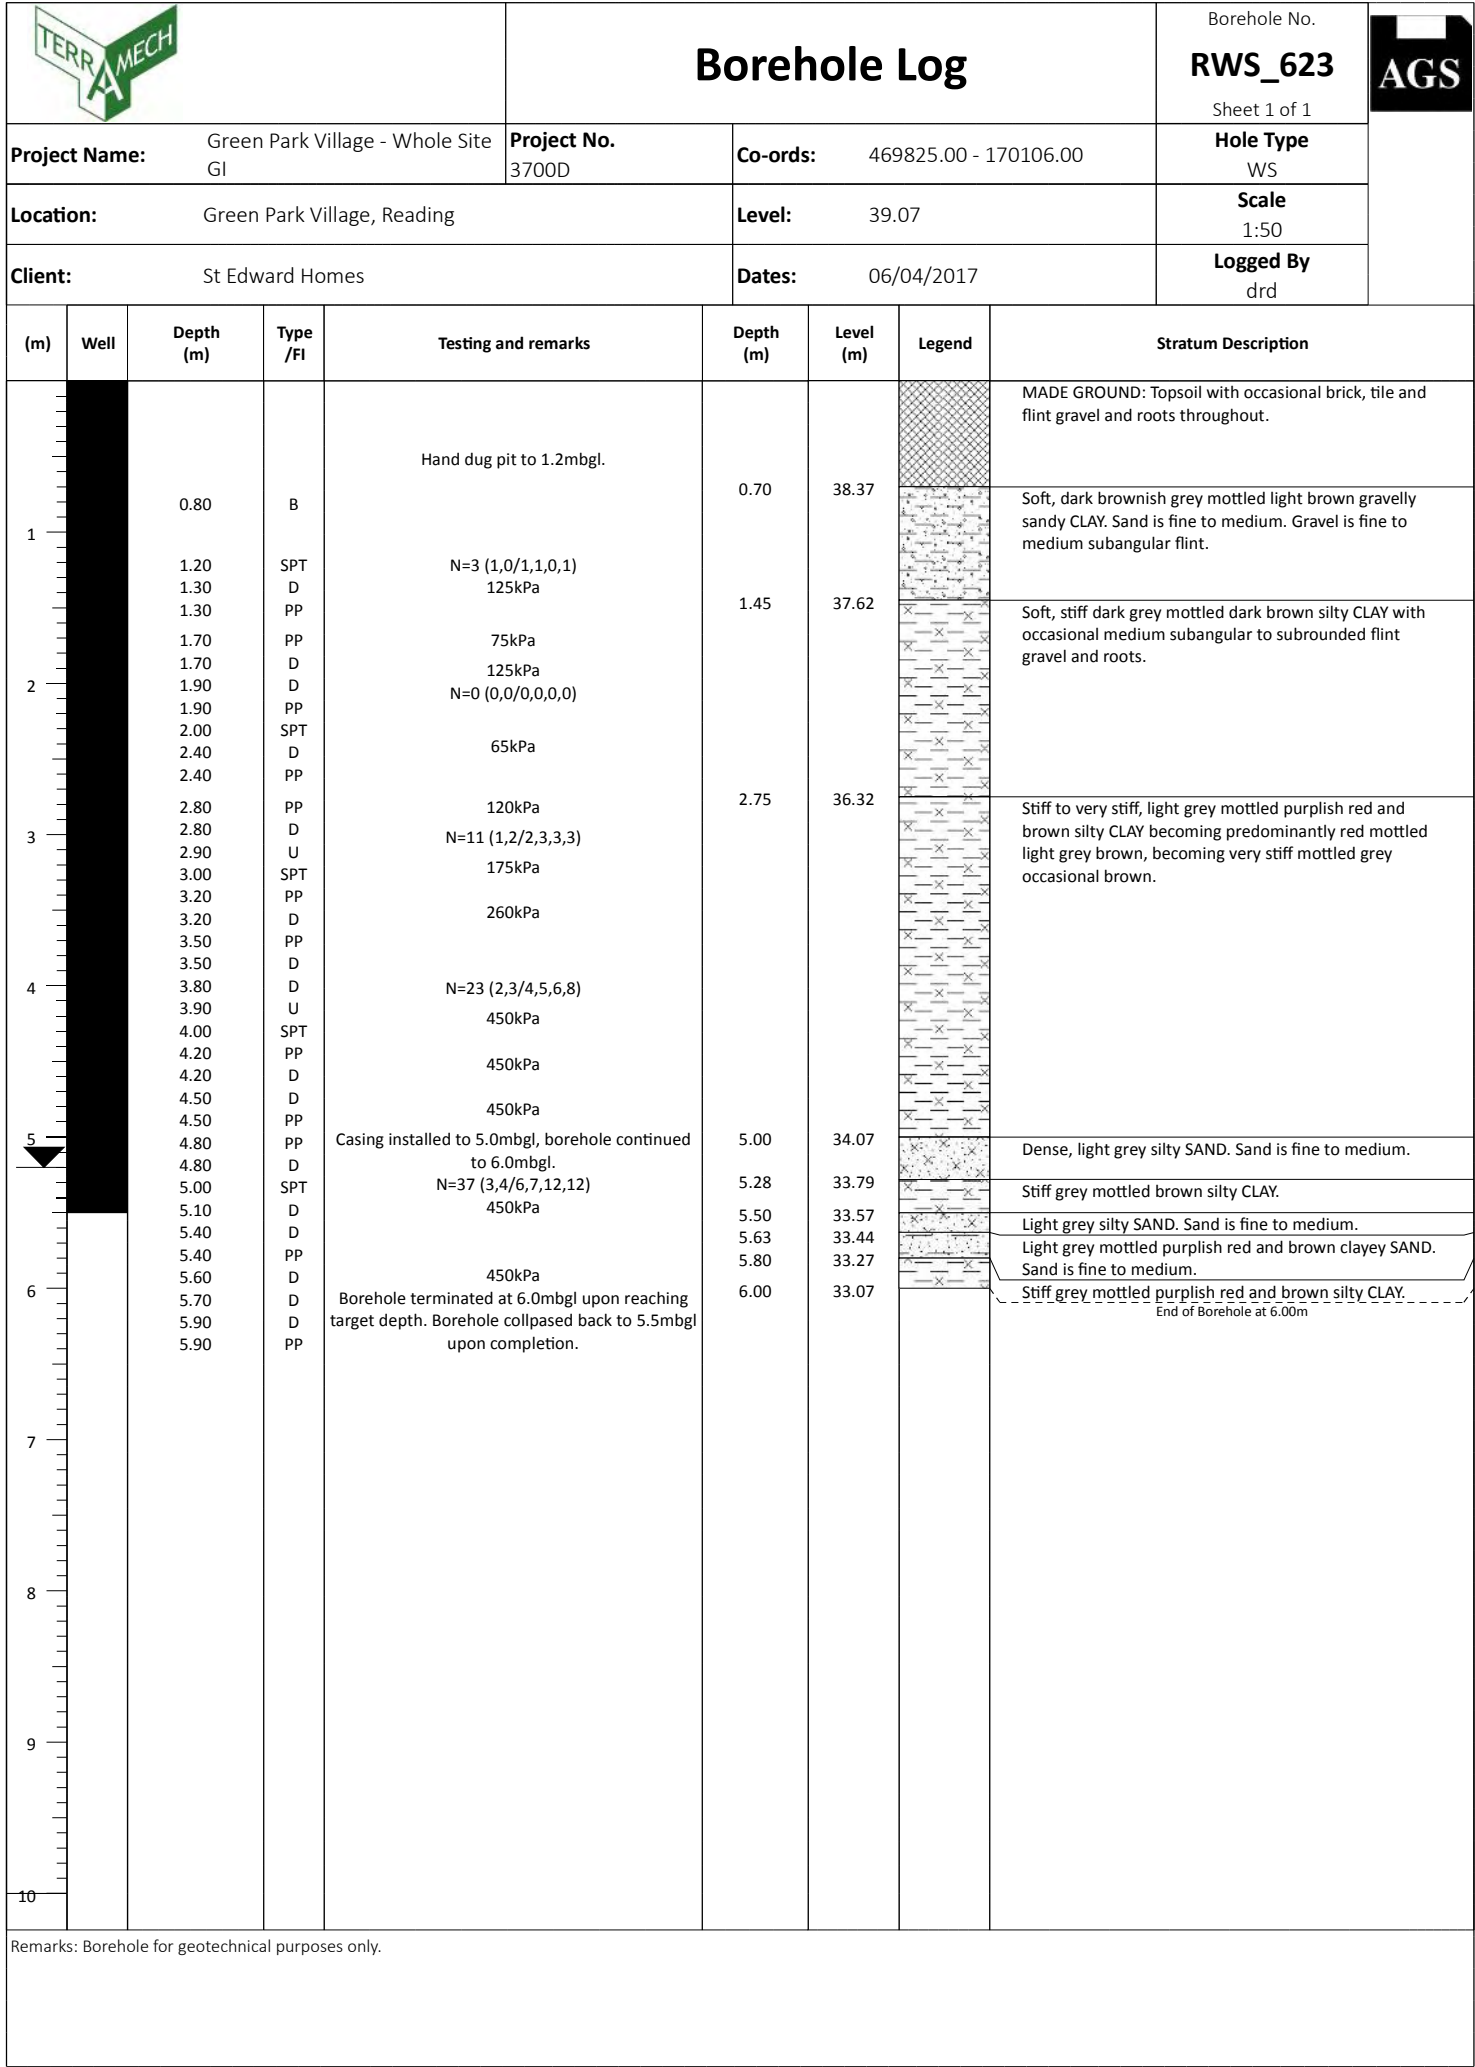
				Borehole Log			Borehole No. RWS_620b Sheet 1 of 1		
Project Name:		Green Park Village - Whole Site GI		Project No.		3700D		Co-ords:	
Location:		Green Park Village, Reading		Level:				Hole Type WS	
Client:		St Edward Homes		Dates:		14/03/2017		Scale 1:50	
								Logged By	
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1				Hand dug pit to 0.9mbgl. Terminated upon obstruction in ground.	0.15			MADE GROUND: Compacted roadstone. Pinkish clayey sandy GRAVEL. Sand is medium to coarse. Gravel is fine to coarse angular to subangular granite.	
					0.90			MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and flint.	
					----- End of Borehole at 0.90m				
2									
3									
4									
5									
6									
7									
8									
9									
10									
Remarks: Borehole for geotechnical purposes only.									

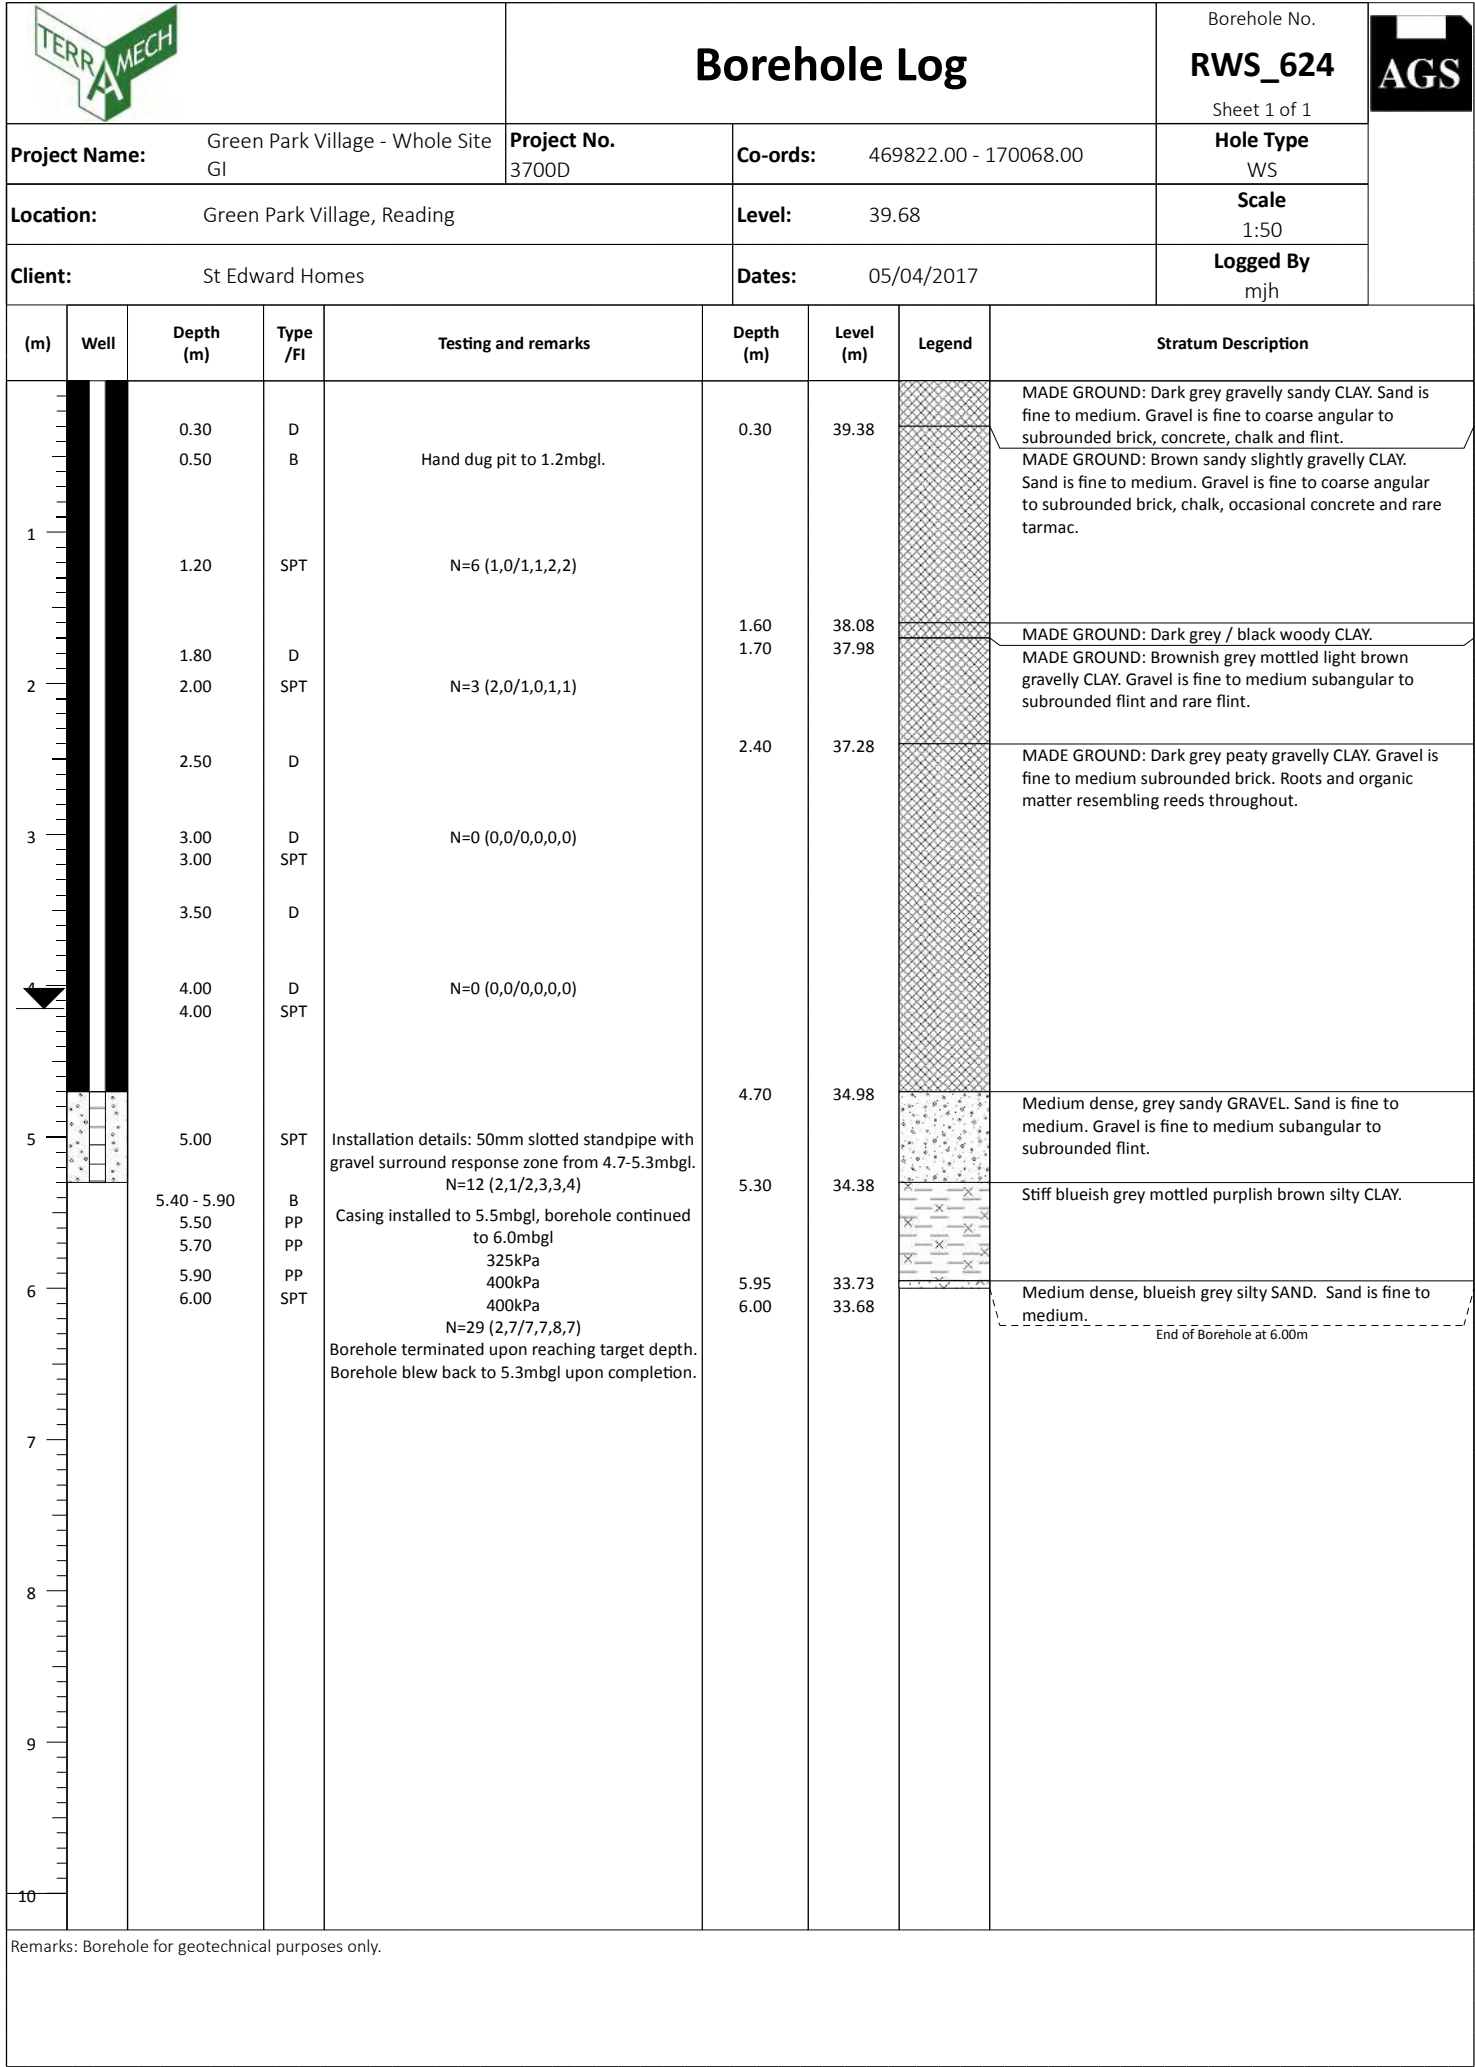
				Borehole Log			Borehole No. RWS_620c Sheet 1 of 1		
Project Name:		Green Park Village - Whole Site GI		Project No.		3700D		Co-ords:	
Location:		Green Park Village, Reading		Level:				Hole Type WS	
Client:		St Edward Homes		Dates:		15/03/2017		Scale 1:50	
								Logged By	
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1				Hand dug pit to 1.05mbgl. Terminated upon obstruction in ground.	0.10			MADE GROUND: Compacted roadstone. Pinkish clayey sandy GRAVEL. Sand is medium to coarse. Gravel is fine to coarse angular to subangular granite.	
					0.40			MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse angular to subrounded brick, concrete and flint.	
					0.60			MADE GROUND: Brown mottled light greenish grey silty CLAY.	
					0.70			MADE GROUND: Brick cobble on west side.	
					1.05			MADE GROUND: Concrete on north side.	
2									
3									
4									
5									
6									
7									
8									
9									
10									
Remarks: Borehole for geotechnical purposes only.									


		Borehole Log				Borehole No. RWS_620d Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469854.00 - 170286.00		Hole Type WS			
Location: Green Park Village, Reading				Level: 40.18		Scale 1:50			
Client: St Edward Homes				Dates: 20/03/2017		Logged By			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1		1.70 - 2.20	B	Hand dug pit to 1.2mbgl.	1.60	38.58		MADE GROUND: Engineered Fill. Dark brown gravelly CLAY. Gravel is fine to very coarse angular to subangular brick and concrete. Orange mesh liner at base.	
2								MADE GROUND: Greyish brown gravelly CLAY. Gravel is fine to very coarse angular to subangular concrete, brick and occasional flint.	
		2.50	D	Installation details: 50mm slotted standpipe with gravel surround response zone from 2.0-5.0mbgl.	2.30	37.88		MADE GROUND: Dark grey slightly gravelly CLAY. Gravel is fine to coarse angular to subangular brick and fine to medium subangular to subrounded flint.	
		2.40	37.78		Dark grey gravelly peaty CLAY. Gravel is fine to rarely coarse subrounded flint.				
3		3.00	D		2.90	37.28		Light greenish grey gravelly CLAY. Gravel is fine to medium subangular to subrounded flint.	
		3.30	D		3.30	36.88		Light brownish grey slightly sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint.	
4		3.80	D		Borehole terminated upon refusal of casing.	5.20	34.98		Light blueish grey silty sandy CLAY / silty clayey SAND. Sand is fine to medium.
5			5.70	34.48					End of Borehole at 5.70m
6									
7									
8									
9									
10									
Remarks: Borehole for geotechnical purposes only.									

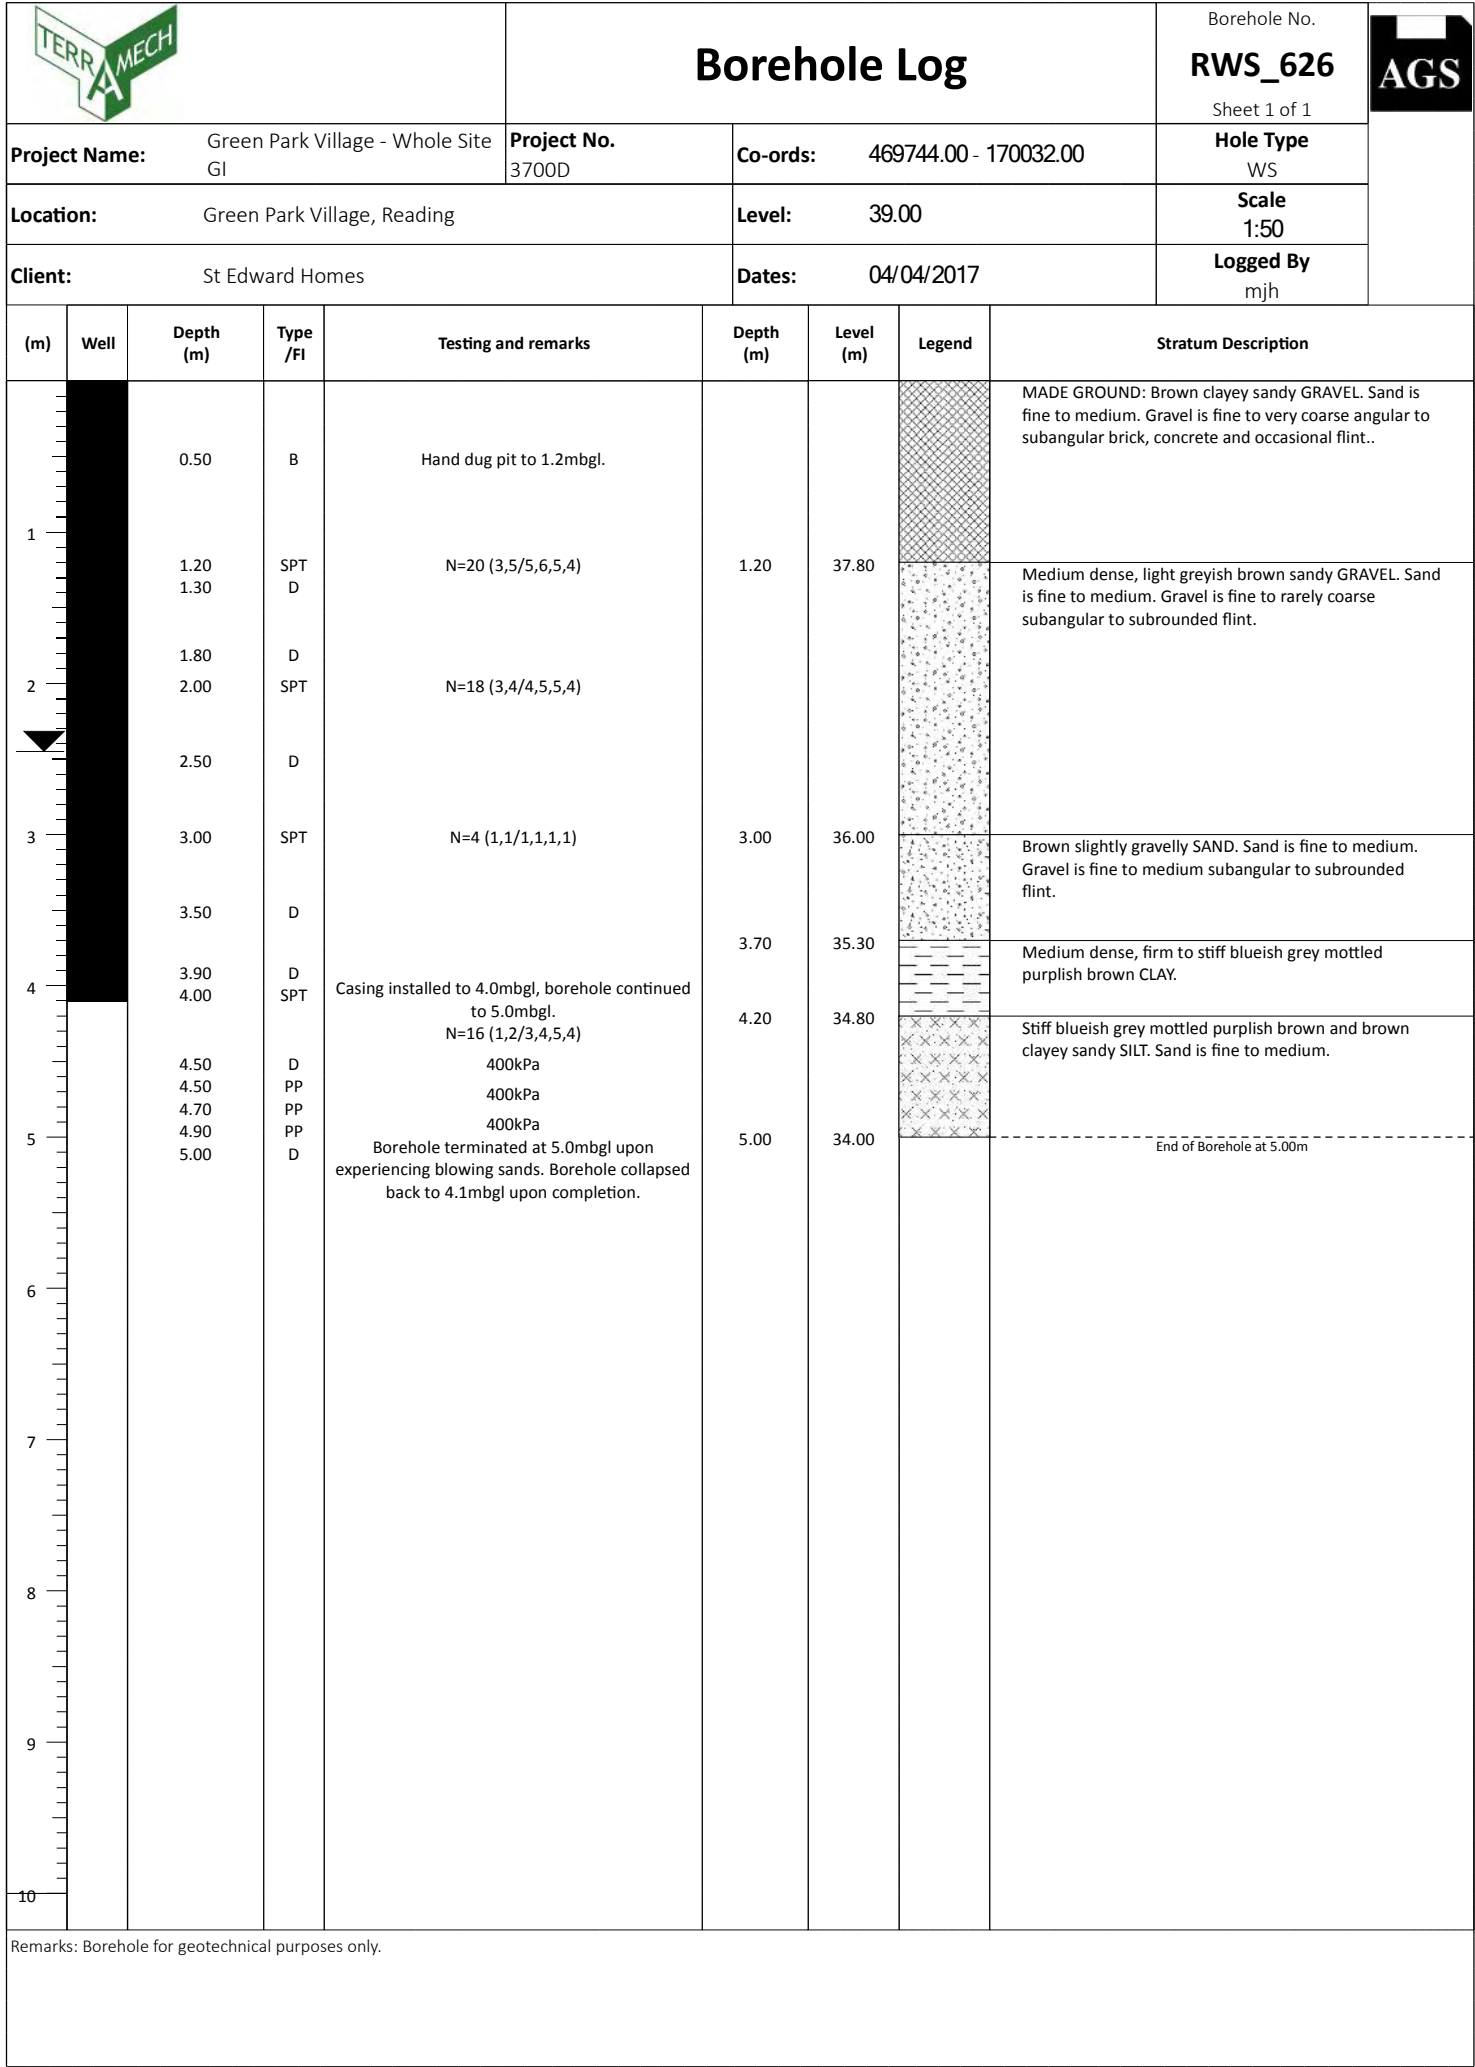
		Borehole Log				Borehole No. RWS_621 Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469865.00 - 170257.00		Hole Type WS			
Location: Green Park Village, Reading				Level: 40.30		Scale 1:50			
Client: St Edward Homes				Dates: 17/03/2017		Logged By mjh			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
1				Hand dug pit to 1.2mbgl.				MADE GROUND: Engineered Fill. Brown gravelly CLAY. Gravel is fine to very coarse angular to subrounded brick, concrete and occasional flint. Orange mesh liner at base.	
2					1.50	38.80		MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse subangular to subrounded brick and subrounded flint, with brick cobbles at base.	
3		3.10	ES	Installation details: 50mm slotted standpipe with gravel surround response zone from 1.5-7.5mbgl.	3.00	37.30		Light grey mottled brown gravelly CLAY. Gravel is fine to medium subrounded flint.	
		3.40	ES		3.30	37.00		Light grey slightly sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint.	
4									
5					5.30	35.00		Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.	
6					5.85	34.45		Brownish grey SAND. Sand is fine to medium.	
7									
8					Blowing sand to 7.2mbgl causing casing to become stuck. Removed with Pioneer rotary rig.	8.00	32.30		End of Borehole at 8.00m
9									
10									
Remarks: Borehole for geotechnical purposes only.									

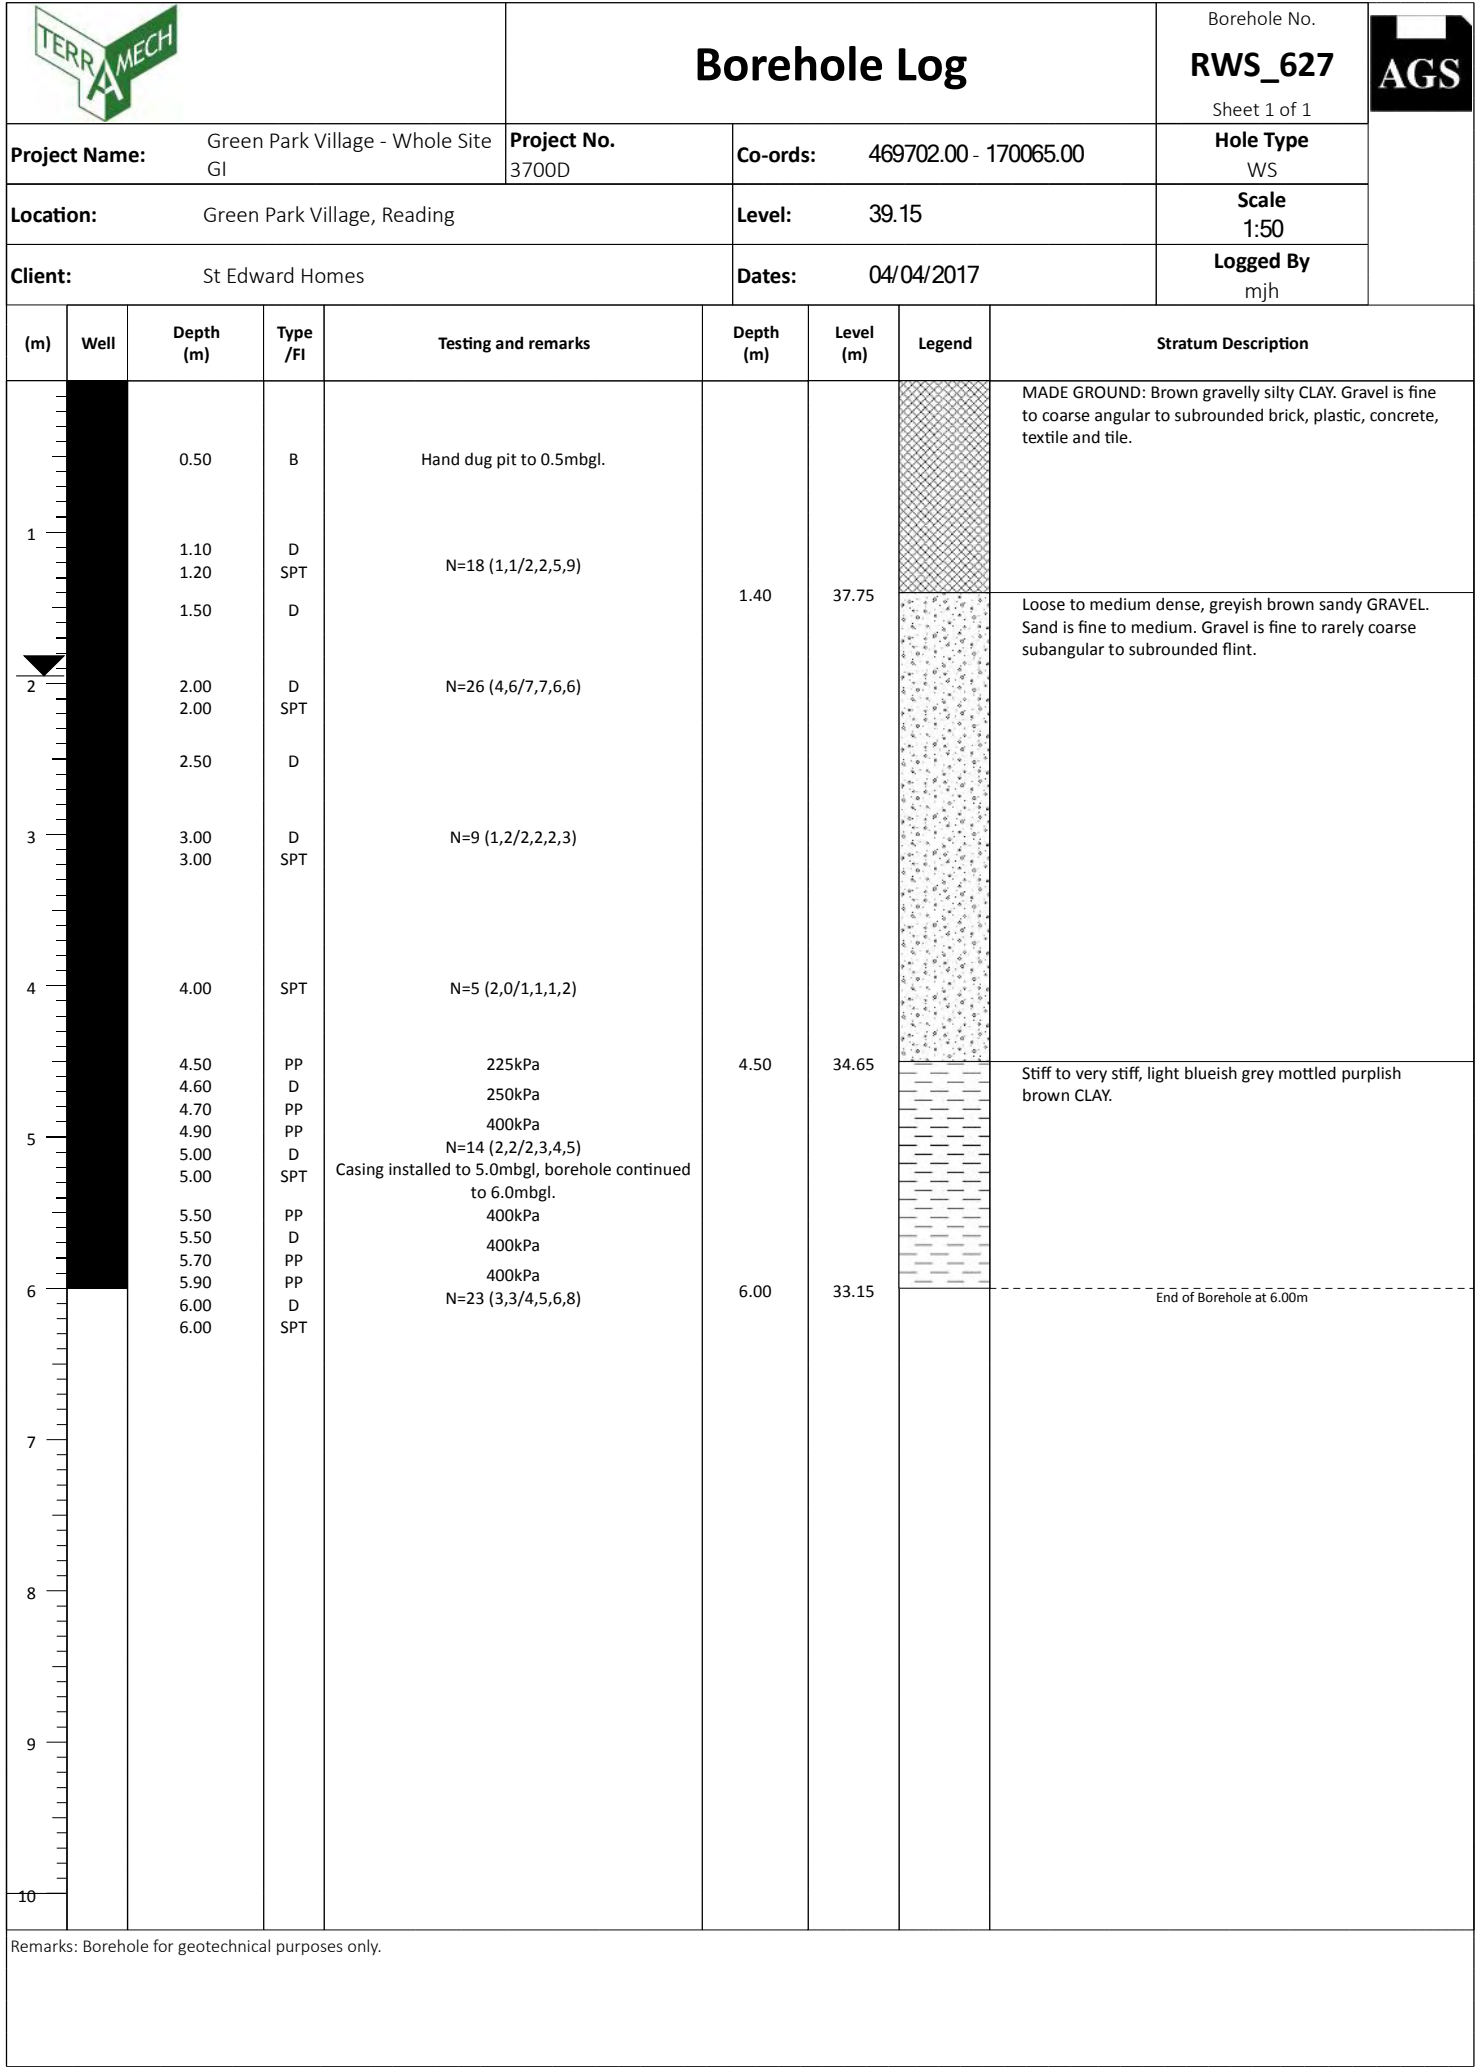






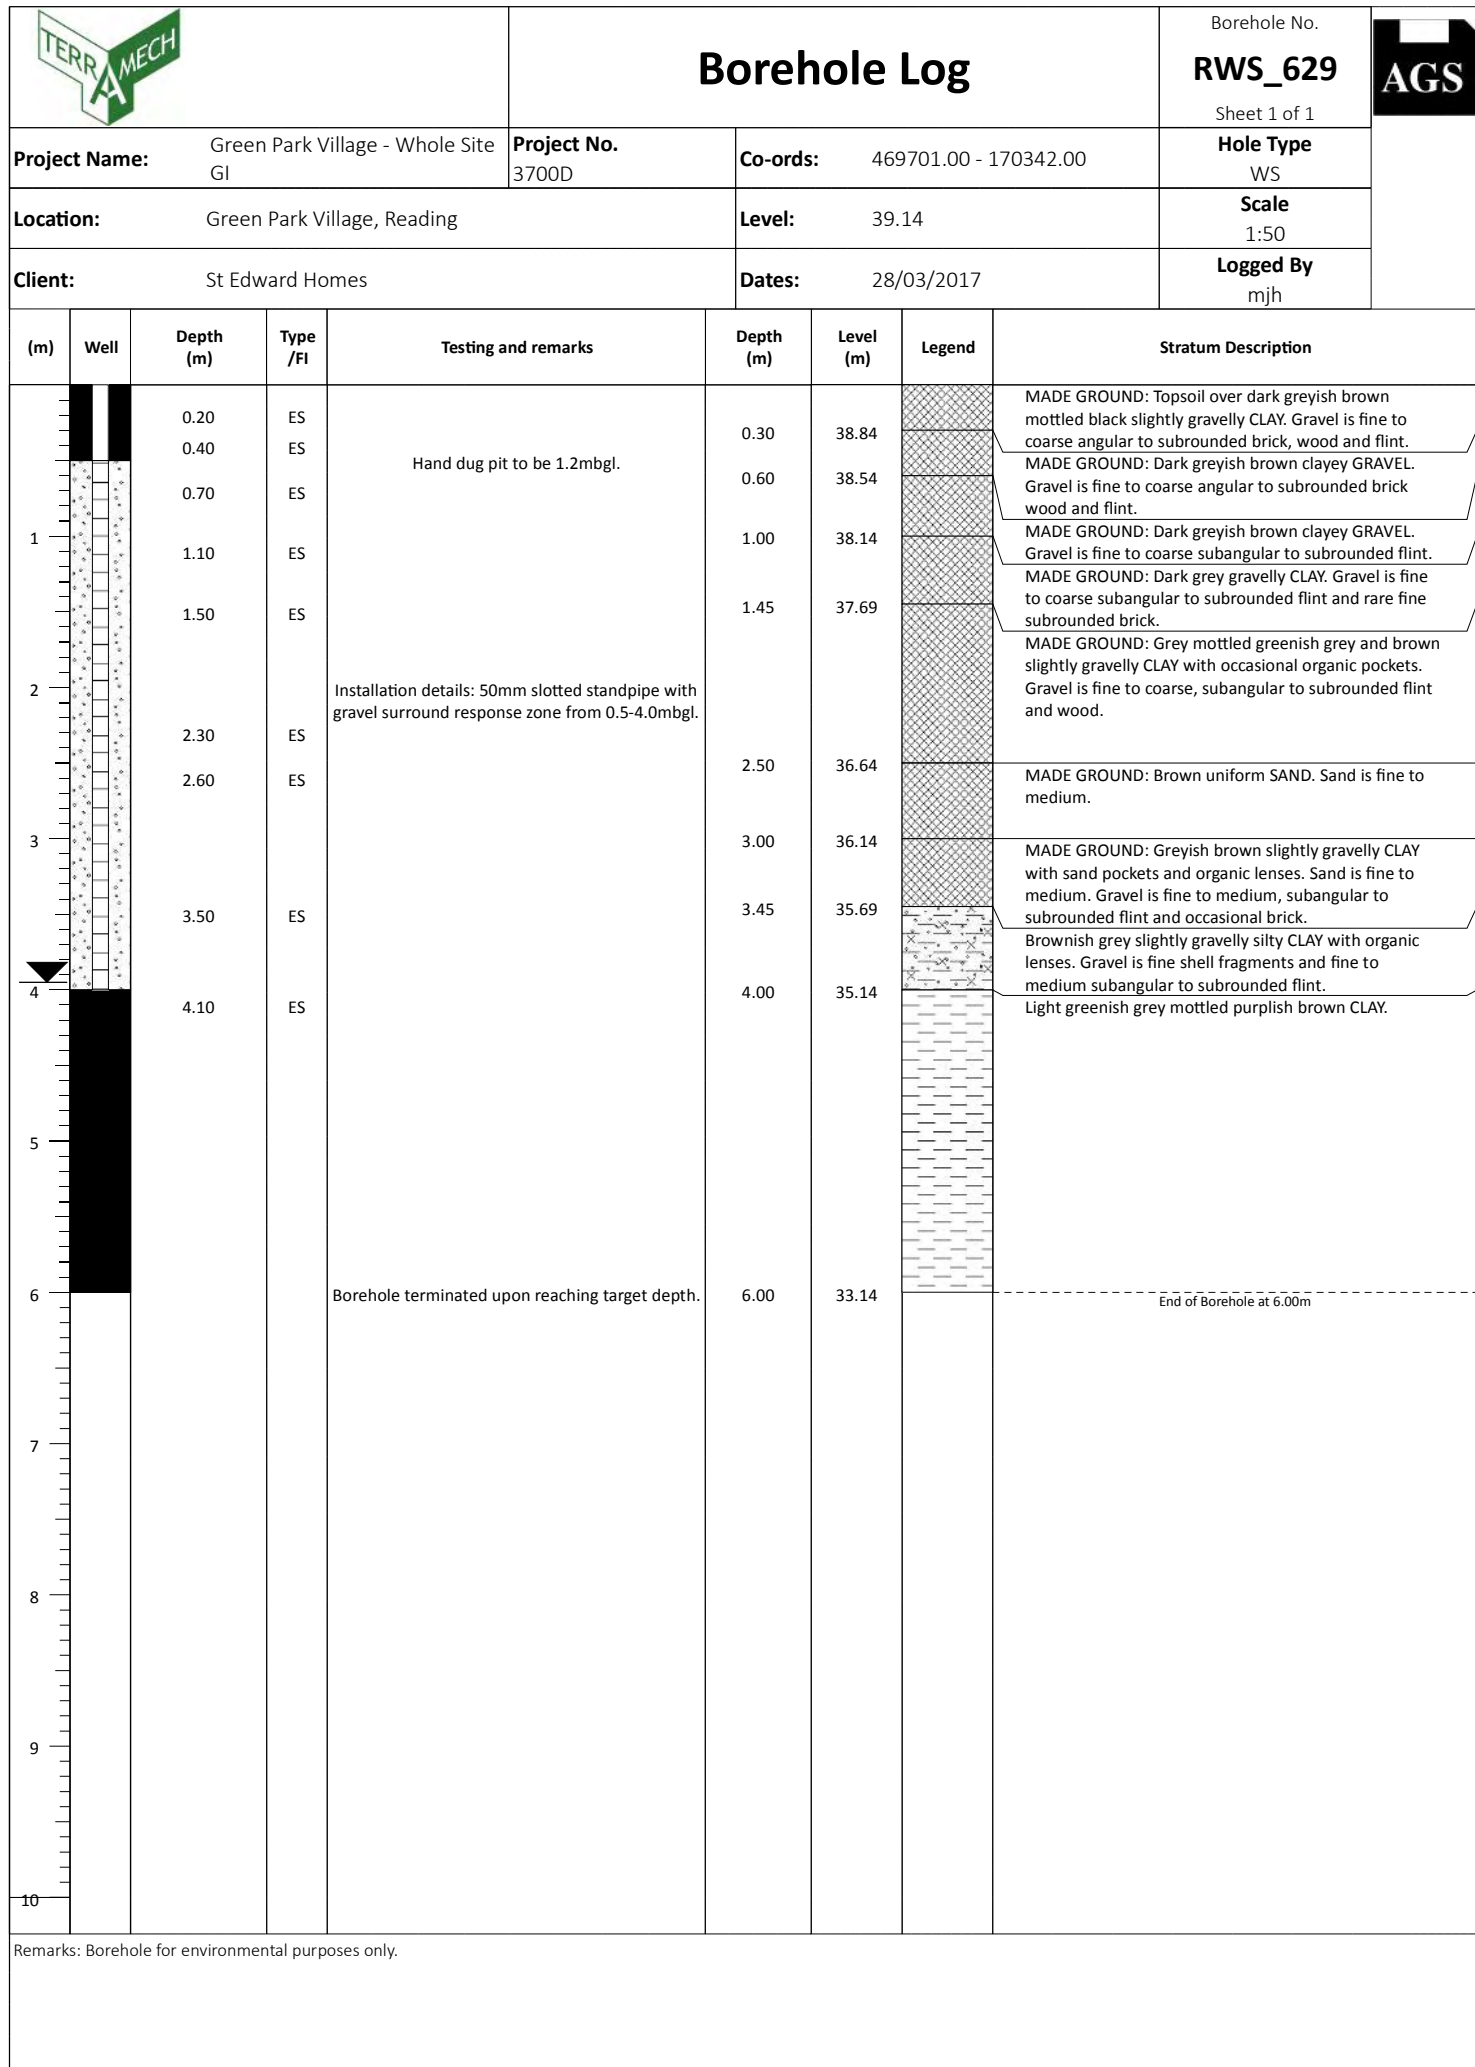


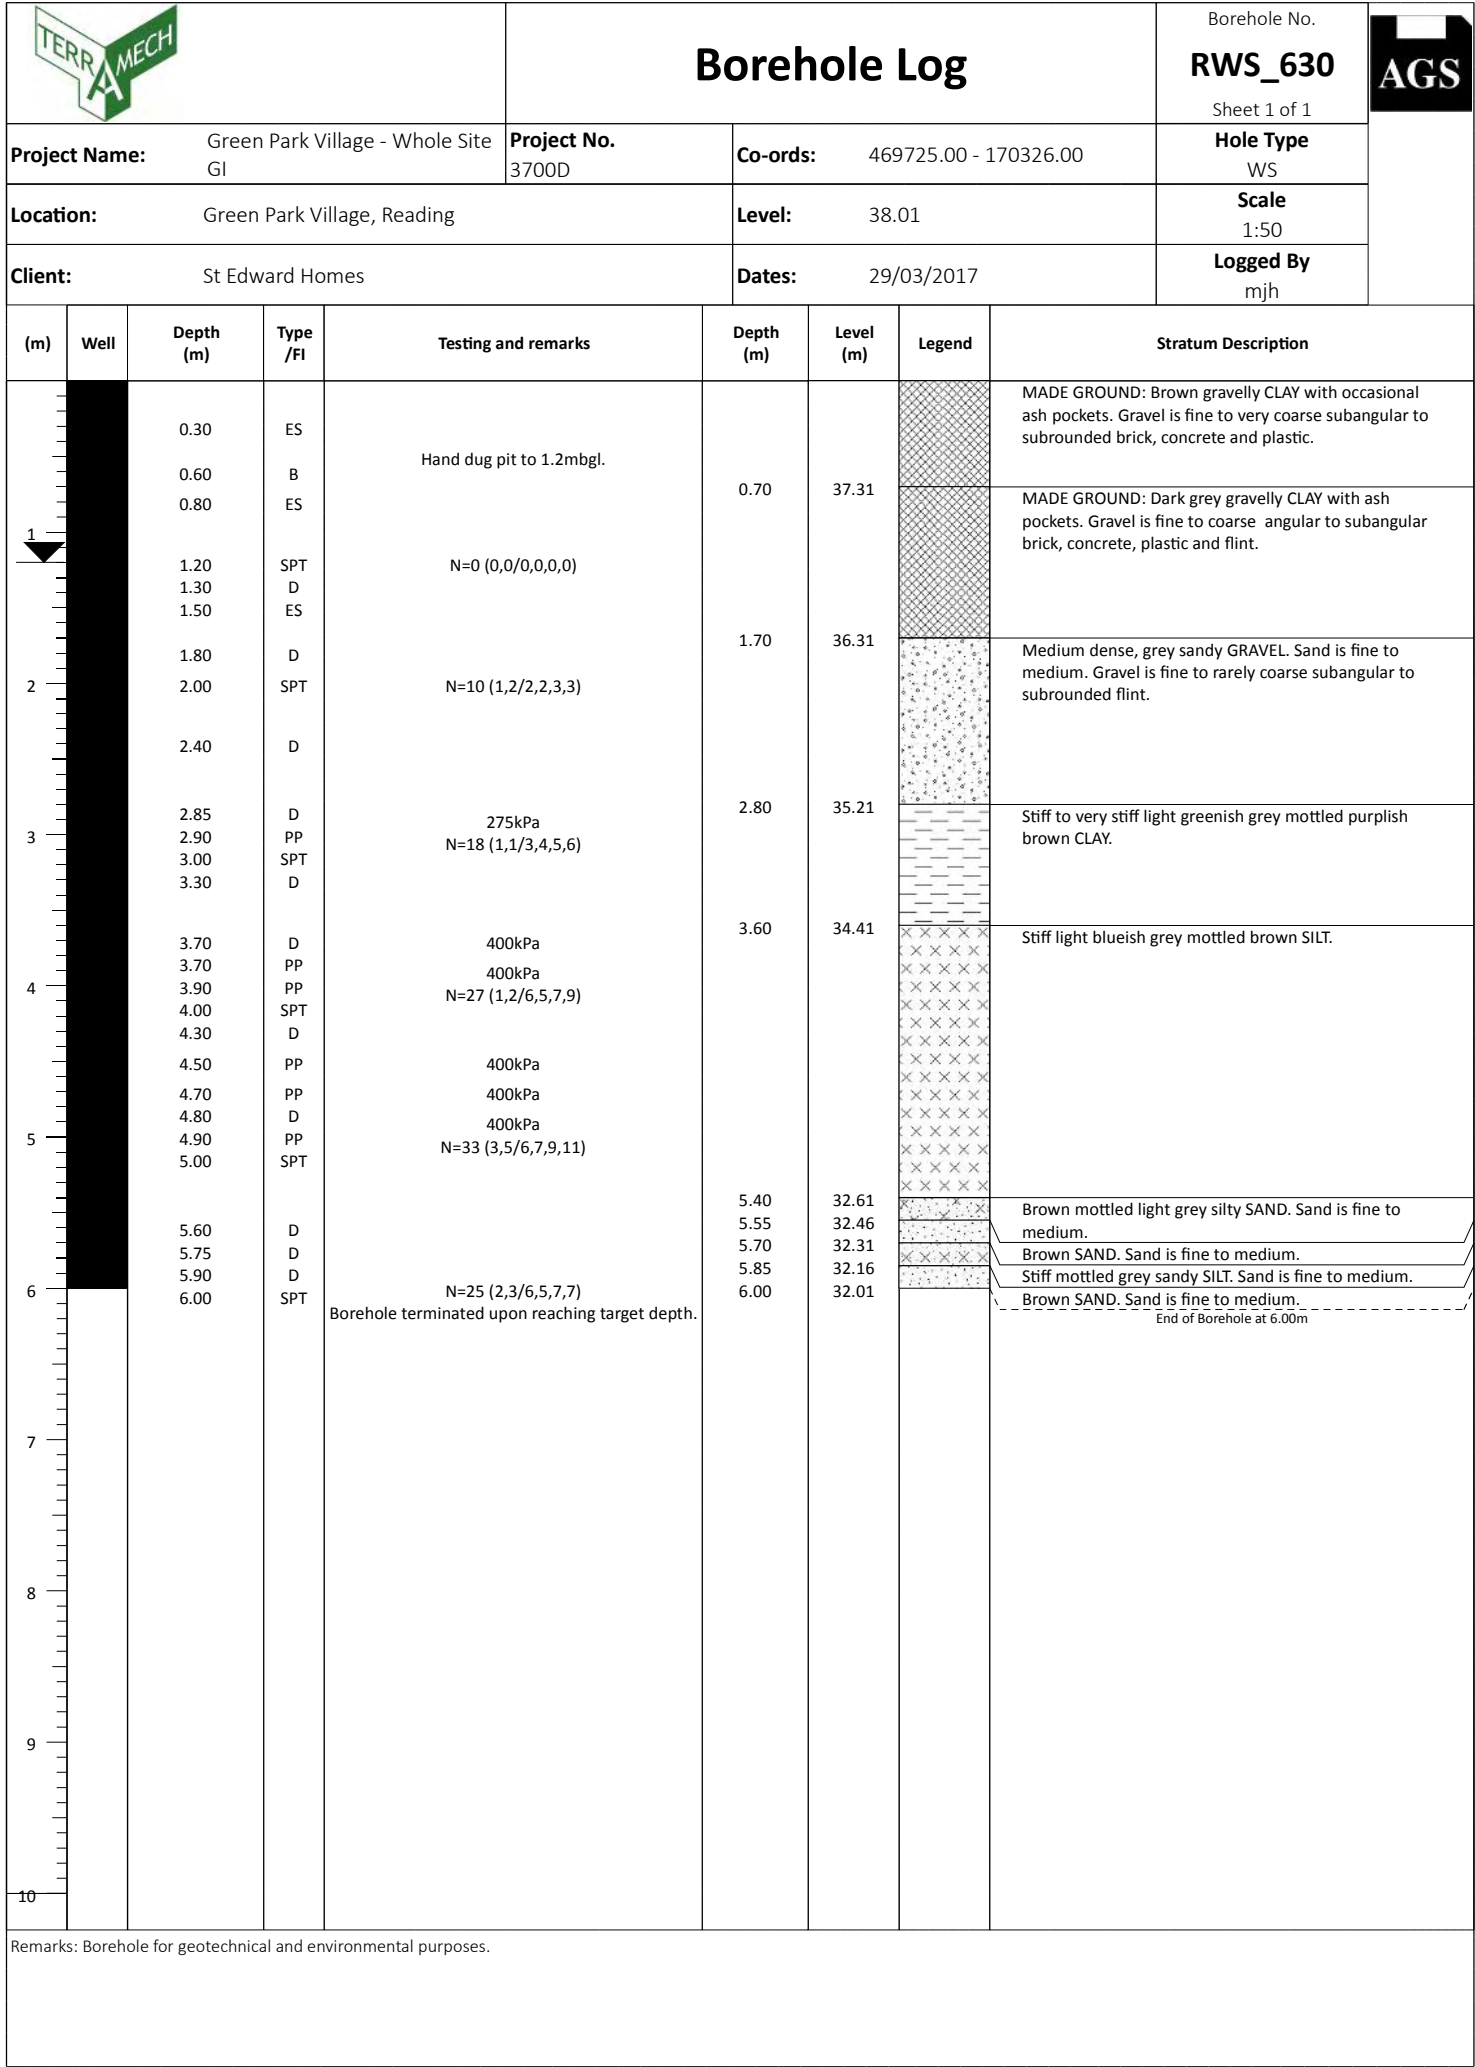
		Borehole Log				Borehole No. RWS_625 Sheet 1 of 1							
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469772.00 - 170066.00		Hole Type WS							
Location: Green Park Village, Reading				Level: 38.51		Scale 1:50							
Client: St Edward Homes				Dates: 05/04/2017		Logged By mjh							
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description					
		0.20	D	Hand dug pit to 1.2mbgl.	0.30	38.21		MADE GROUND: Grey gravelly SAND. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint and occasional brick.					
		0.40	D		0.60	37.91		MADE GROUND: Brown clayey sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint and occasional brick.					
		0.70	D		0.90	37.61		Orange brown SAND & GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.					
		1.00	D	N=23 (1,4/23 for 225mm)	1.30	37.21		Medium dense, grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.					
		1.20	SPT		N=10 (1,2/10 for 225mm)	4.00	34.51		Very stiff to hard, blueish grey sandy silty CLAY. Sand is fine to medium.				
		1.40	D							N=6 (1,1/6 for 225mm)	4.30	34.21	
		2.00	SPT	N=37 (2,2/37 for 225mm)									
		3.00	SPT		50 (2,8/50 for 95mm) Casing installed to 5.0mbgl. Borehole terminated upon refusal at 5.0mbgl.								
		4.00	SPT										
		4.10	D										
4.50	D												
5.00	D												
5.00	SPT												
6													
7													
8													
9													
10													
Remarks: Borehole for geotechnical purposes only.													

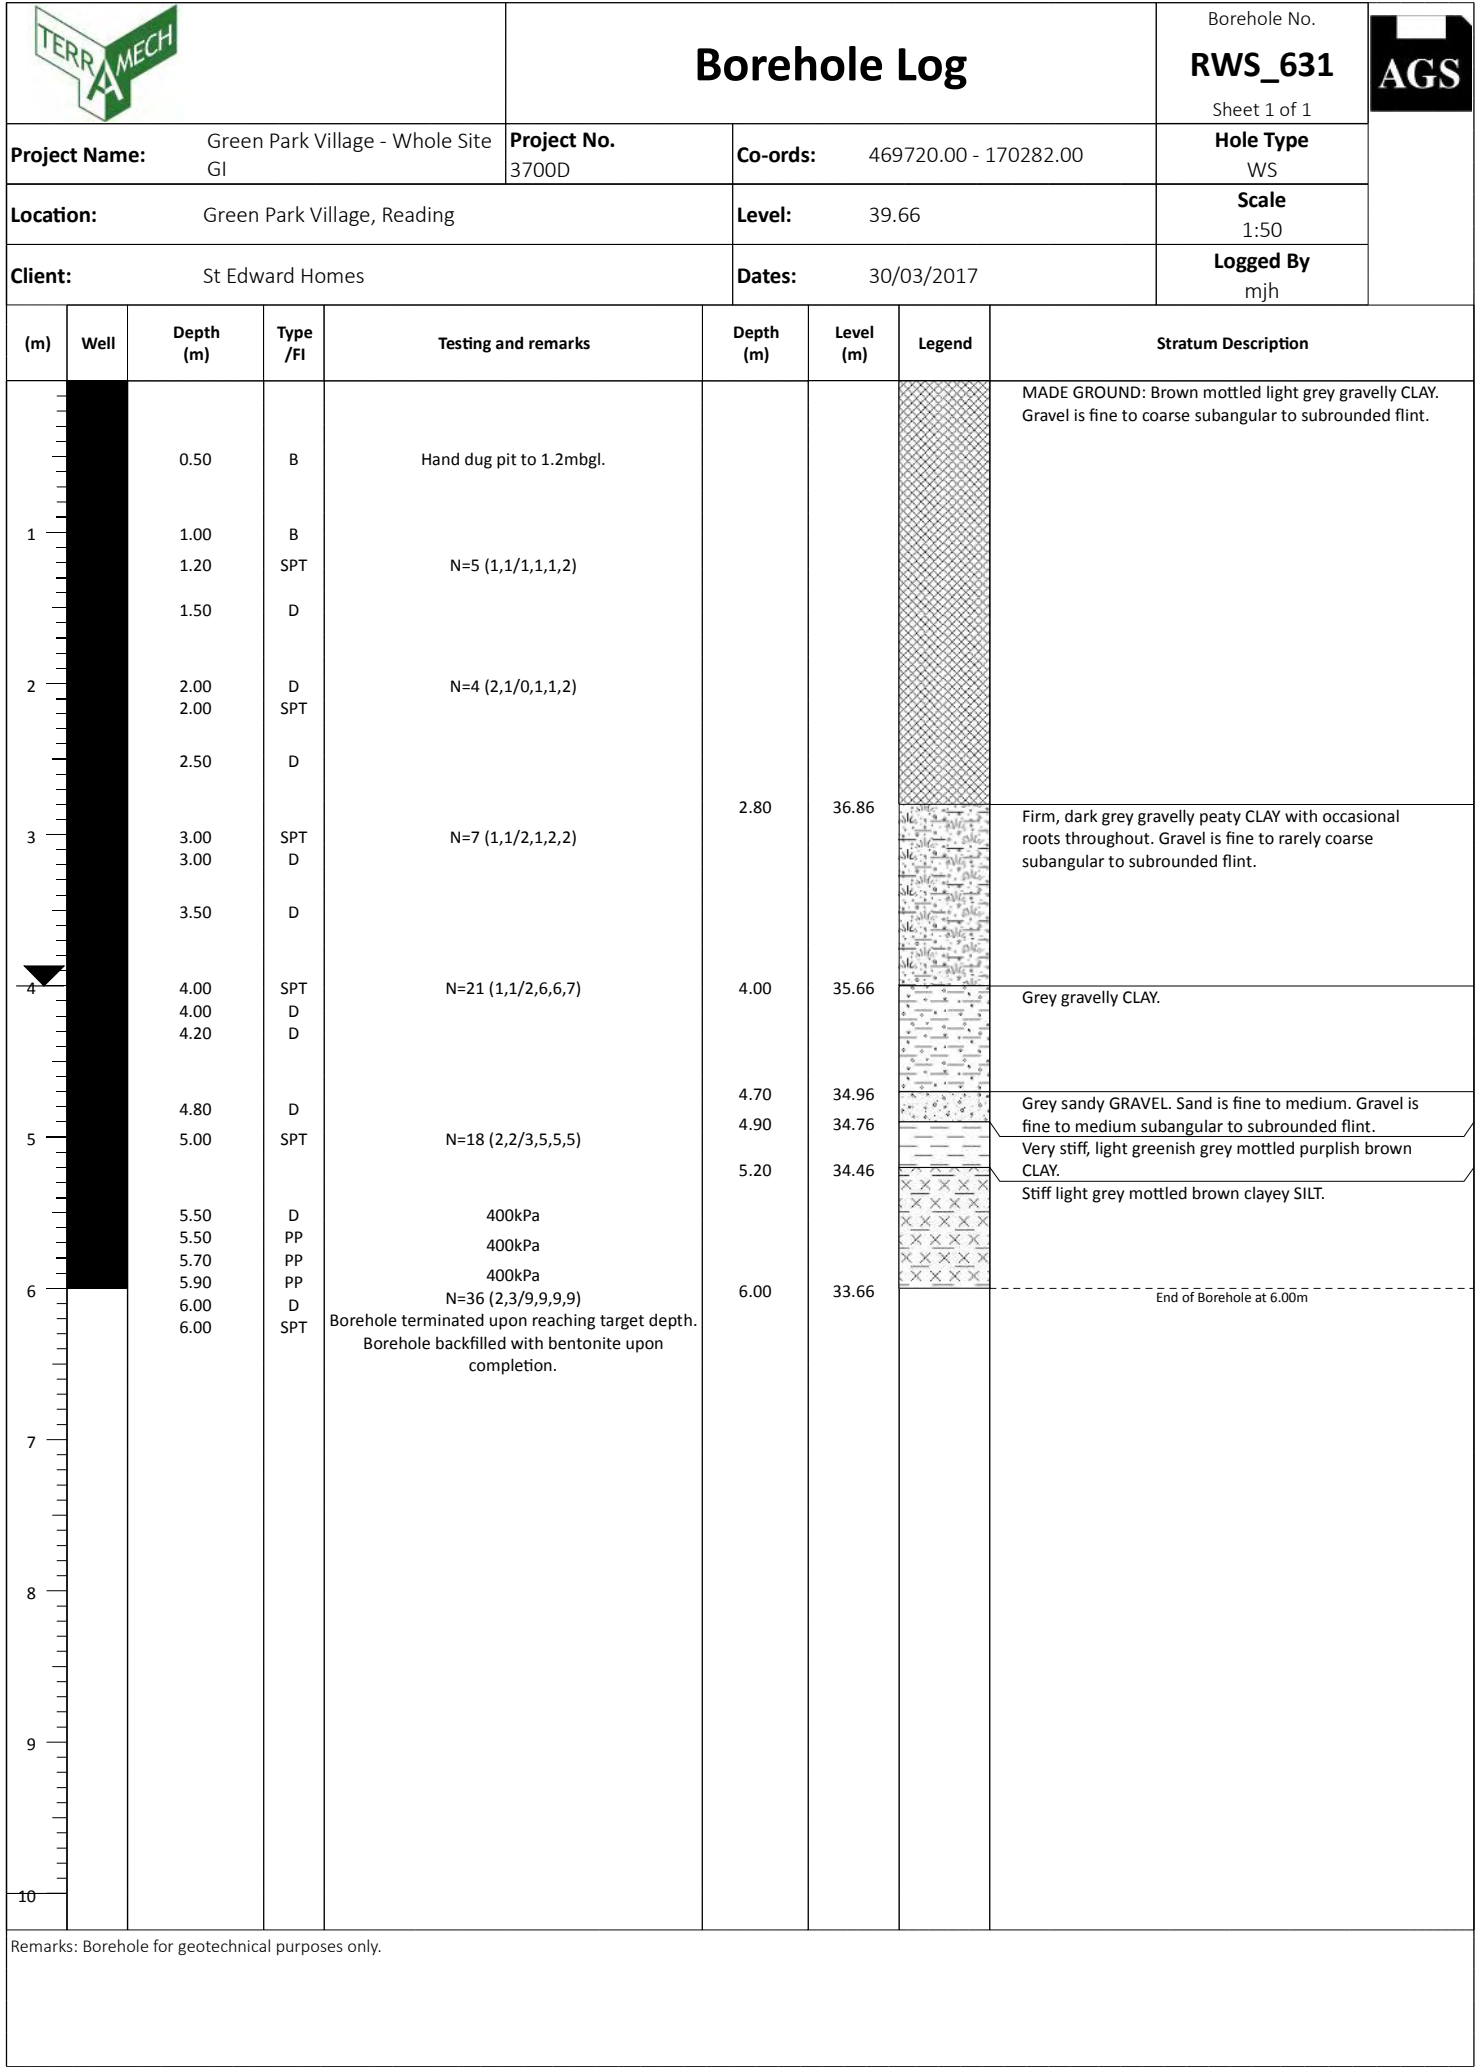





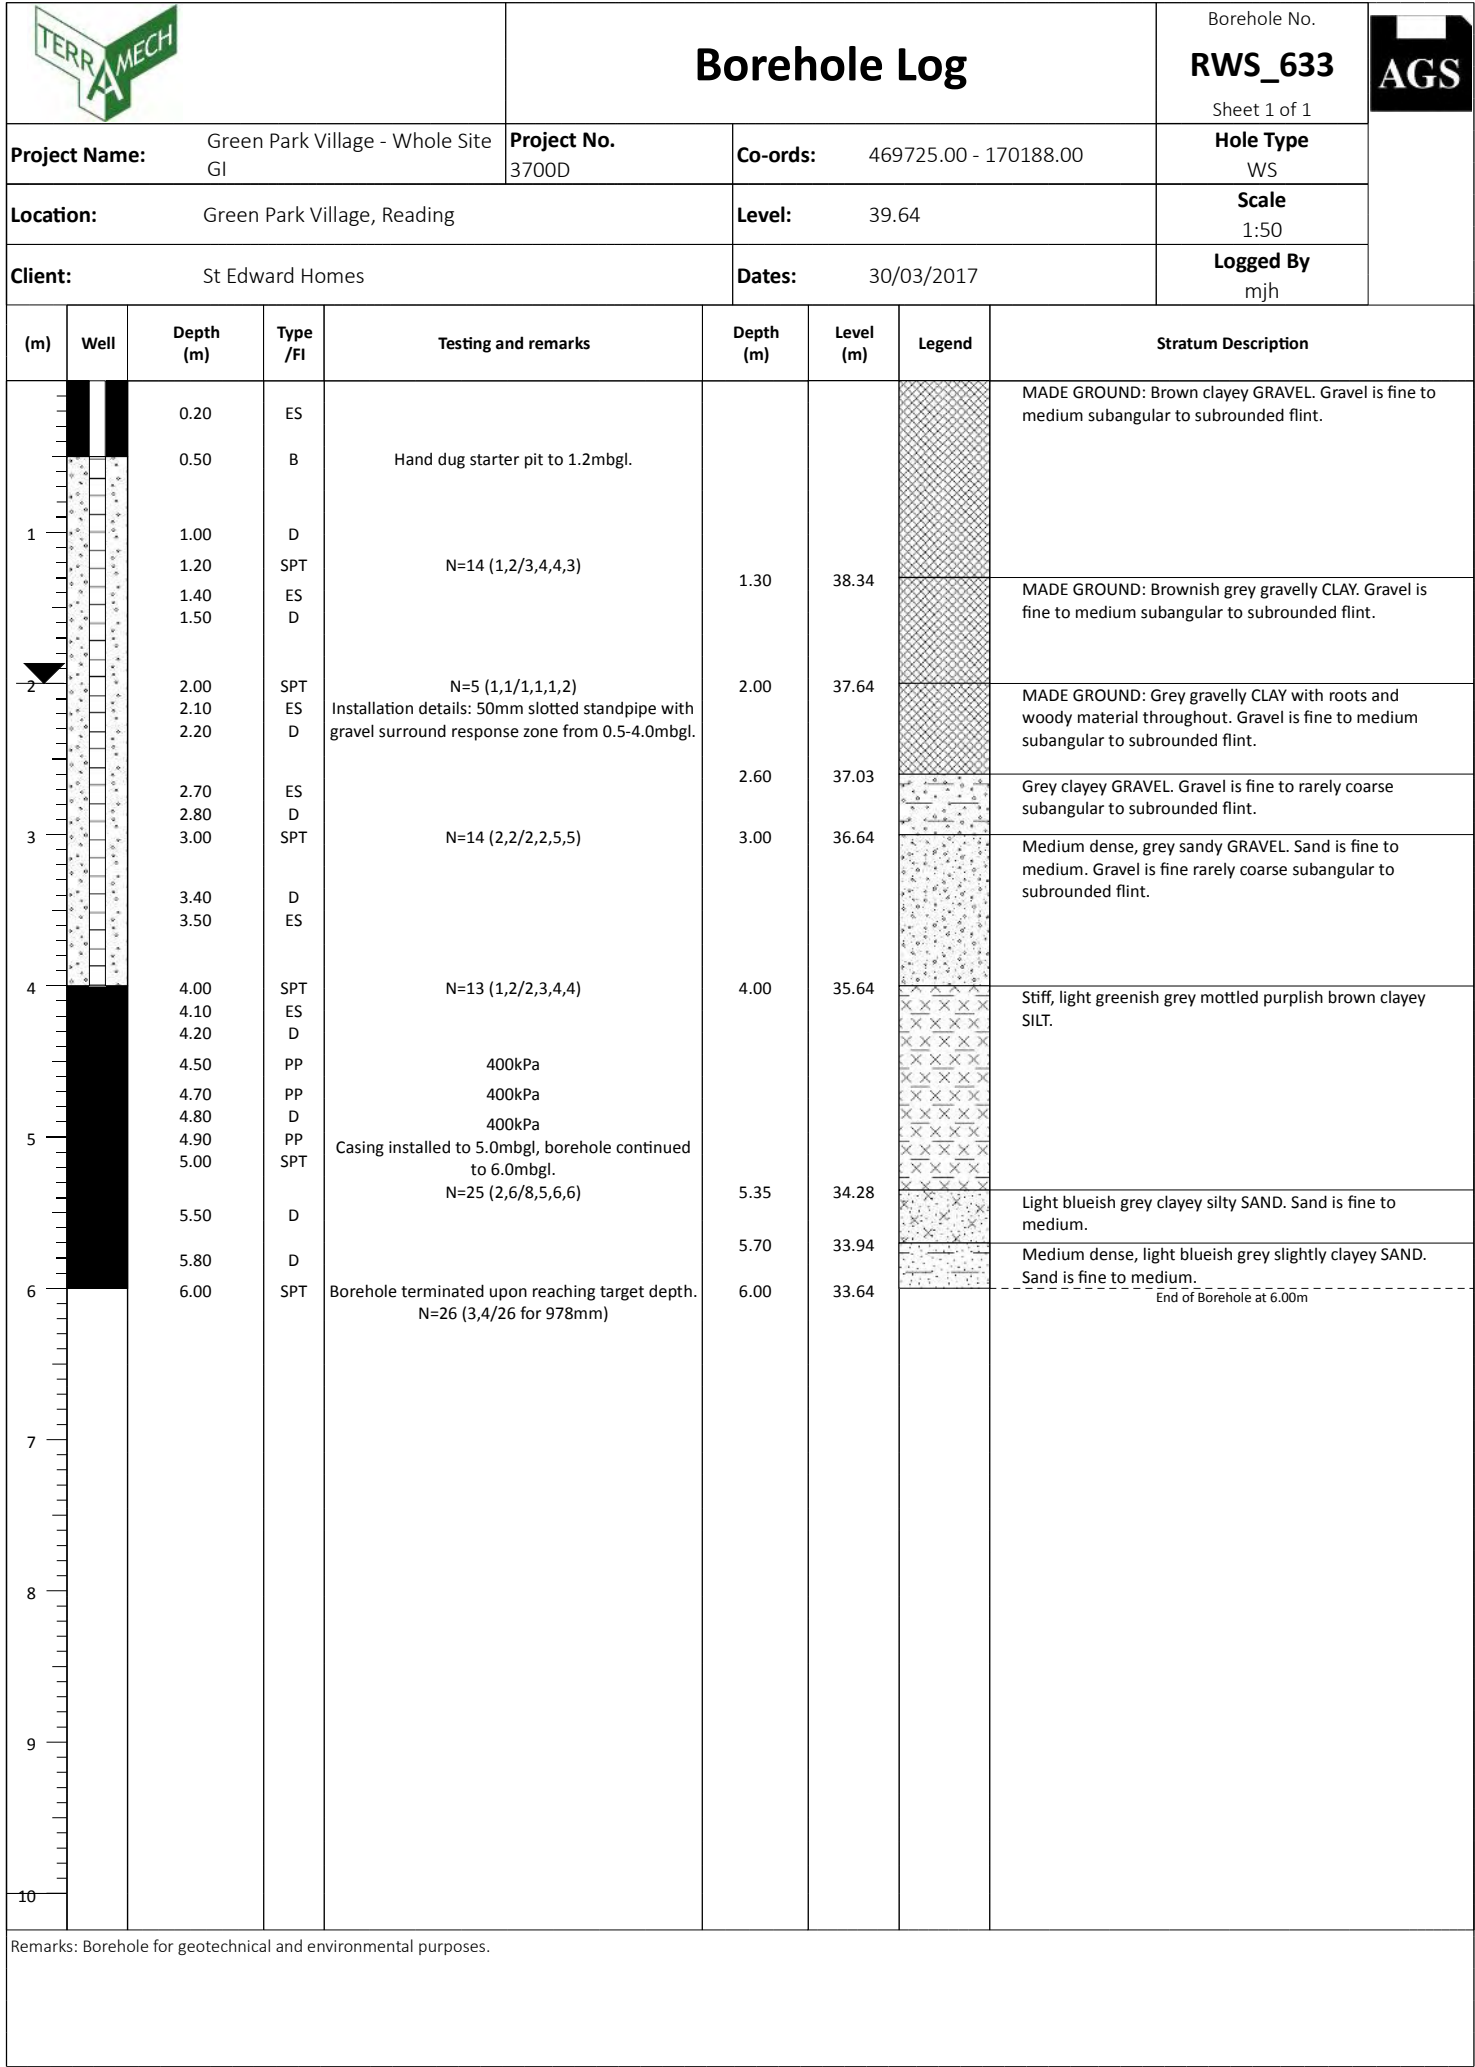
		Borehole Log				Borehole No. RWS_628				
		Sheet 1 of 1								
Project Name: Green Park Village - Whole Site GI		Project No. 3700D	Co-ords: 469685.00 - 170078.00	Hole Type WS						
Location: Green Park Village, Reading		Level: 38.94	Scale 1:50							
Client: St Edward Homes		Dates: 03/04/2017	Logged By mjh							
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
1 2 3 4 5 6 7 8 9 10		0.50	B	Hand dug pit to 1.2mbgl.	0.25	38.69		MADE GROUND: Topsoil. Dark brown sandy clayey SILT with frequent medium to coarse angular to subangular flint.		
		1.20 1.30	SPT D	N=0 (0,0/0,0,0,0)					MADE GROUND: Brown sandy silty CLAY and clayey sandy SILT with frequent medium coarse subangular to subrounded gravel of brick, concrete, chalk, occasional roots and ash. Sand is fine to medium.	
		1.80 2.00	D SPT	N=0 (0,0/0,0,0,0)						
		2.30	D		2.20	36.74			MADE GROUND: Grey sandy silty CLAY with rare gravel of brick towards base. Sand is fine to medium.	
				2.80 3.00	D SPT	N=8 (2,3/3,2,1,2)	3.00	35.94		Stiff to very stiff, light grey mottled purplish brown CLAY. Thin layer of flint gravel at top.
				3.40	D					
				4.00 4.20	SPT D	N=27 (2,4/5,6,7,9)				Blueish grey mottled brown clayey SILT / silty CLAY.
				4.60	D		4.40	34.54		
				4.90 5.00	D SPT	Casing installed to 5.0mbgl, borehole continued to 6.0mbgl. N=47 (3,5/9,10,12,16)	4.70	34.24		Very stiff to hard, brown mottled light grey sandy silty CLAY. Sand is fine to medium.
				5.50	D					
		6.00	D	Borehole terminated upon reaching target depth. Borehole collapsed back to 5.6mbgl upon completion.	6.00	32.94		End of Borehole at 6.00m		
Remarks: Borehole for geotechnical purposes only.										

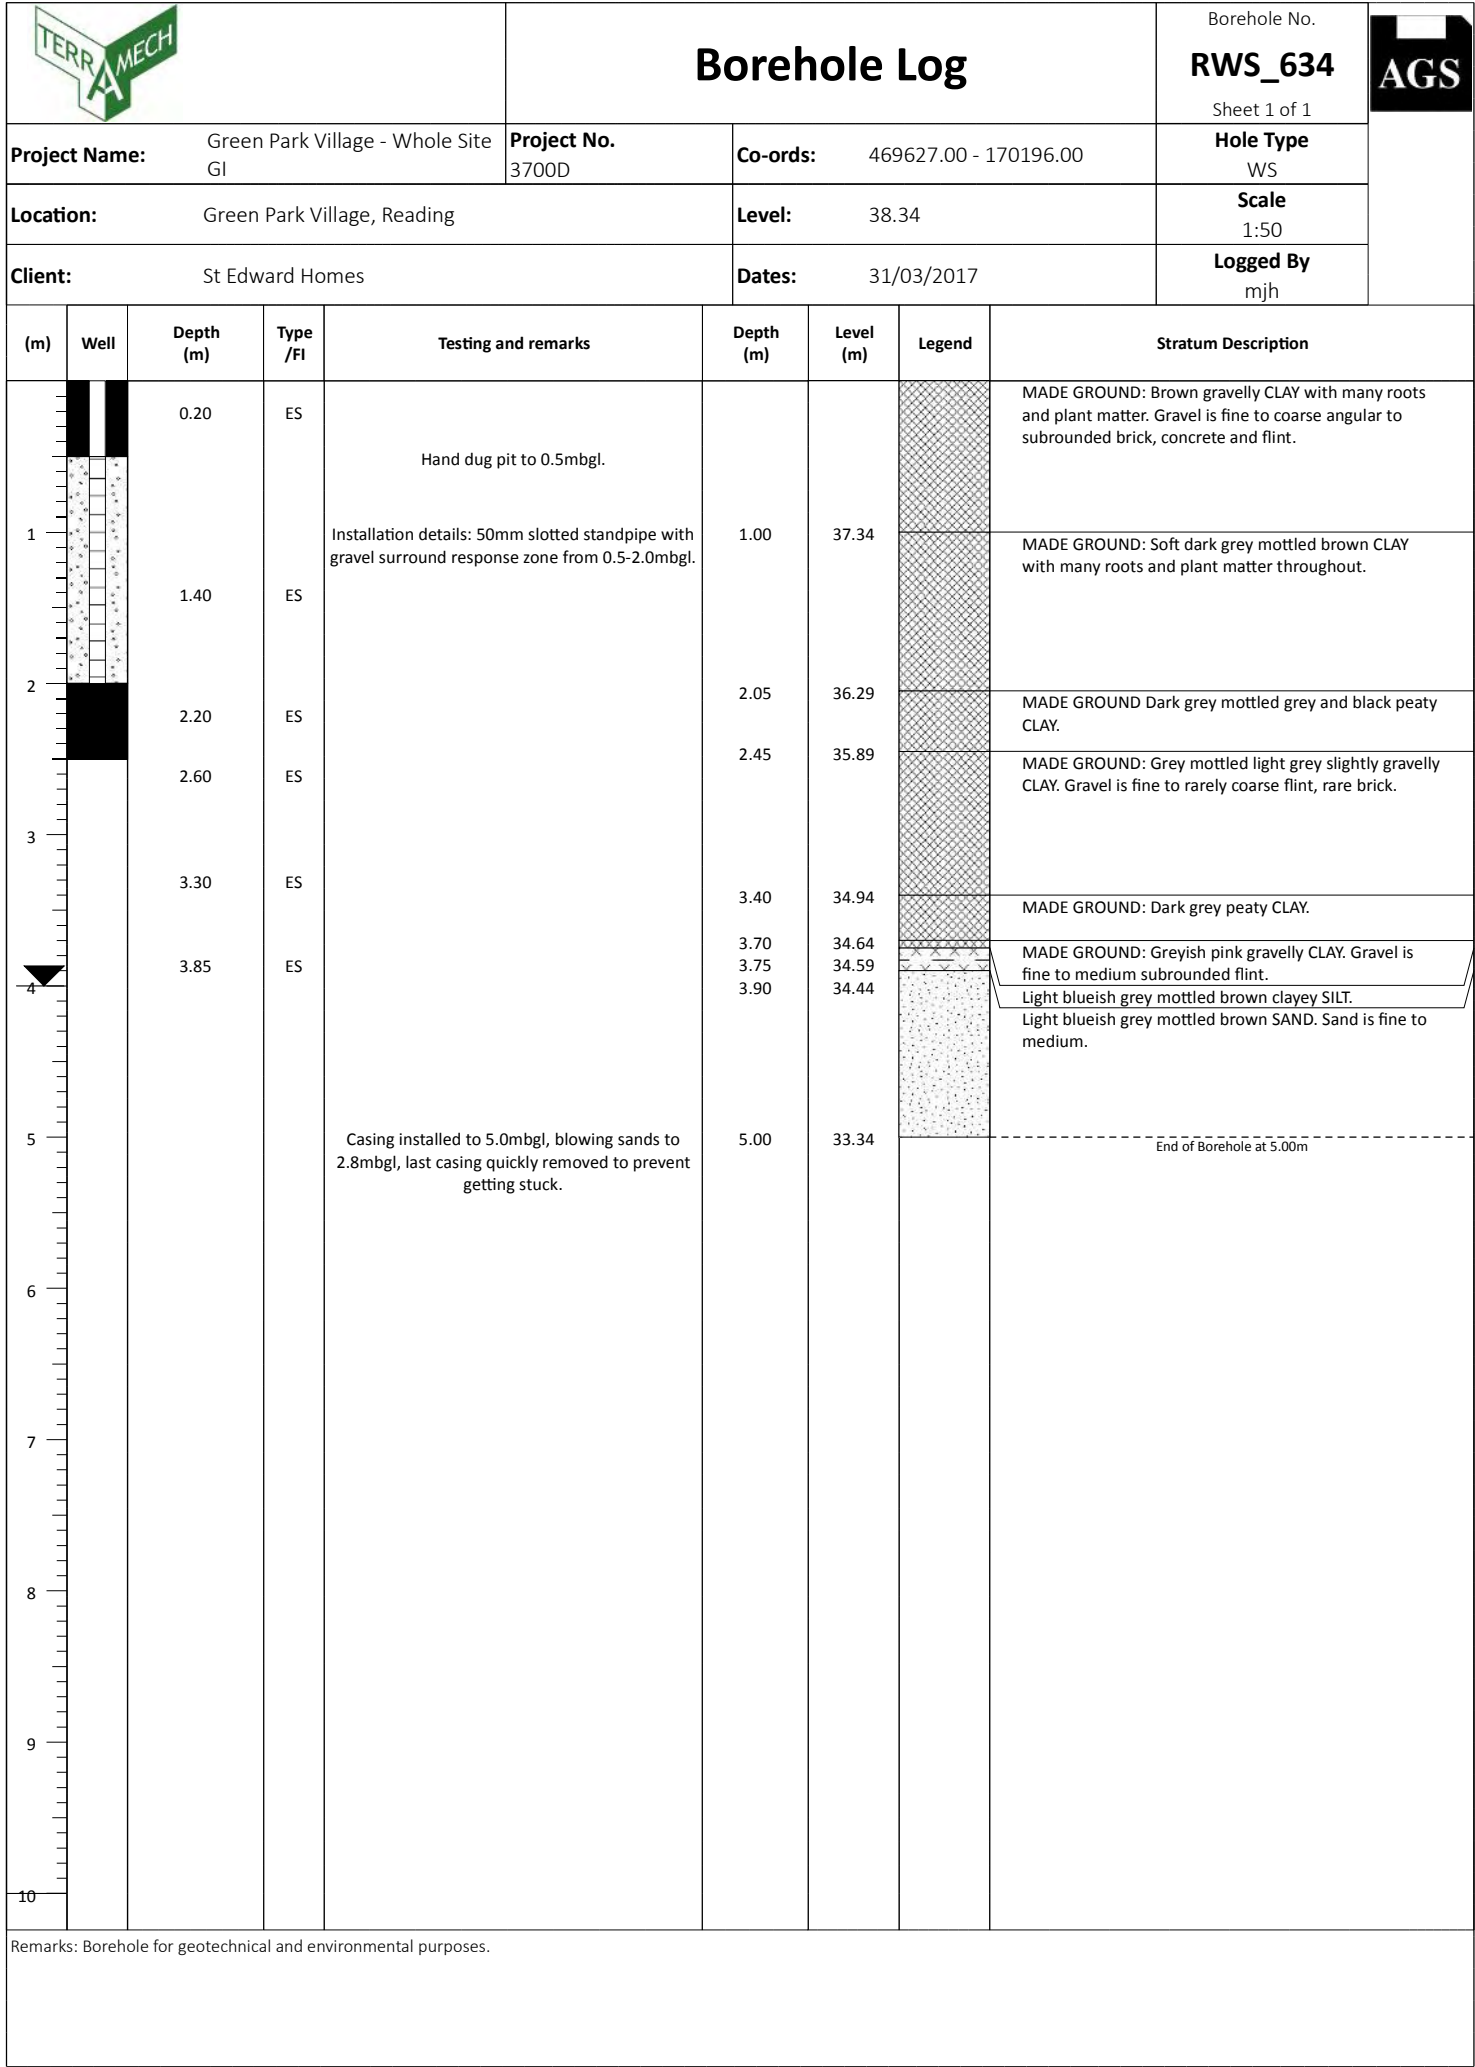














		Borehole Log				Borehole No. RWS_632					
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469724.00 - 170237.00		Sheet 1 of 1 Hole Type WS					
Location: Green Park Village, Reading		Level: 39.96		Scale 1:50		Logged By mjh					
Client: St Edward Homes		Dates: 30/03/2017									
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description			
1		0.20	ES	Hand dug pit to 1.2mbgl.				MADE GROUND: Brown occasionally mottled light grey gravelly CLAY with occasional grey silt pockets. Gravel is fine to medium subangular to subrounded flint, wood material at base.			
		0.50	B								
		1.00	ES								
		1.20	SPT	N=3 (1,0/1,1,0,1)							
		1.20	D								
		1.70	D								
		2	2.00	SPT				N=1 (1,0/0,1,0,0)			
		2.60	ES	N=0 (0,0/0,0,0,0)							
		2.80	D								
		3	3.00								SPT
3.30	D										
4	3.80	D	N=12 (2,3/5,3,2,2)								
3.90	D										
4	4.00	SPT									
4.10	D										
4.50	ES	350kPa	4.40	35.56		Soft to firm grey gravelly silty CLAY. Gravel is fine to medium subangular to subrounded flint. Medium dense, grey clayey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint. Stiff to very stiff, light greenish grey mottled purplish brown with occasion brown pockets silty CLAY.					
4.50	PP	350kPa									
4.70	PP	400kPa									
5	4.70	D	400kPa	5.95	34.01		Stiff light blueish grey clayey sandy SILT. Sand is fine to medium.				
4.90	PP	N=20 (3,3/4,5,5,6)									
5.00	D										
5.00	SPT	375kPa									
5.50	D										
5.50	PP					400kPa					
5.70	PP	400kPa	5.95	33.96		Stiff light blueish grey clayey sandy SILT. Sand is fine to medium.					
5.90	PP										
6	6.00	SPT									
7				Borehole terminated upon reaching target depth. Borehole backfilled with bentonite upon completion. N=50 (2,4/9,11,16,14)							
8											
9											
10											
Remarks: Borehole for geotechnical and environmental purposes.											

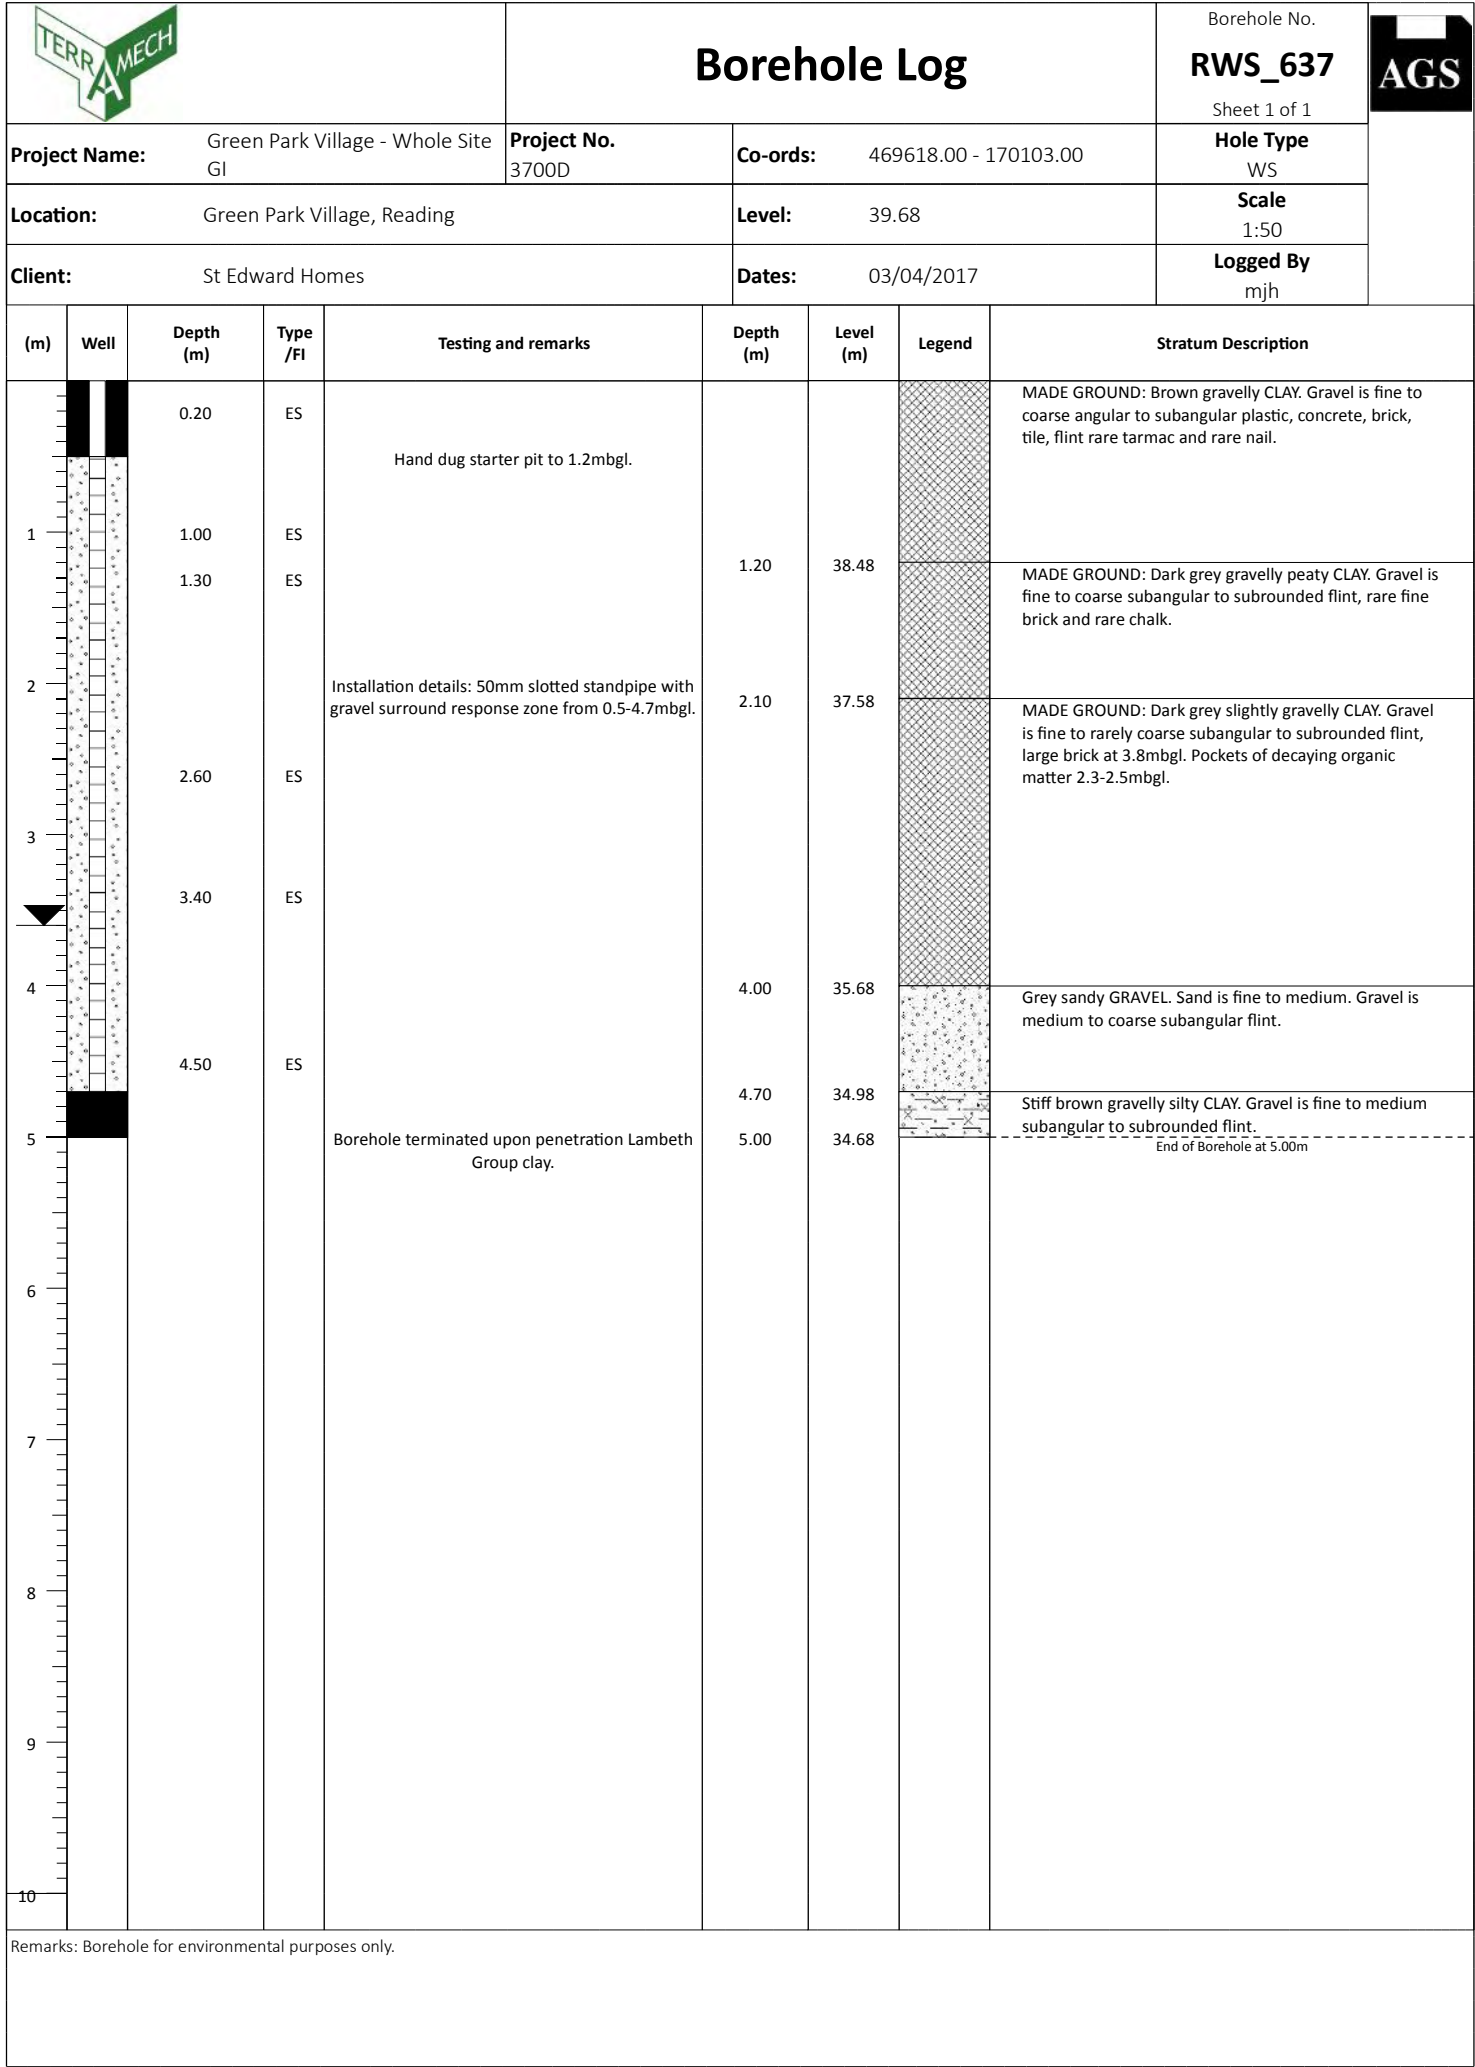


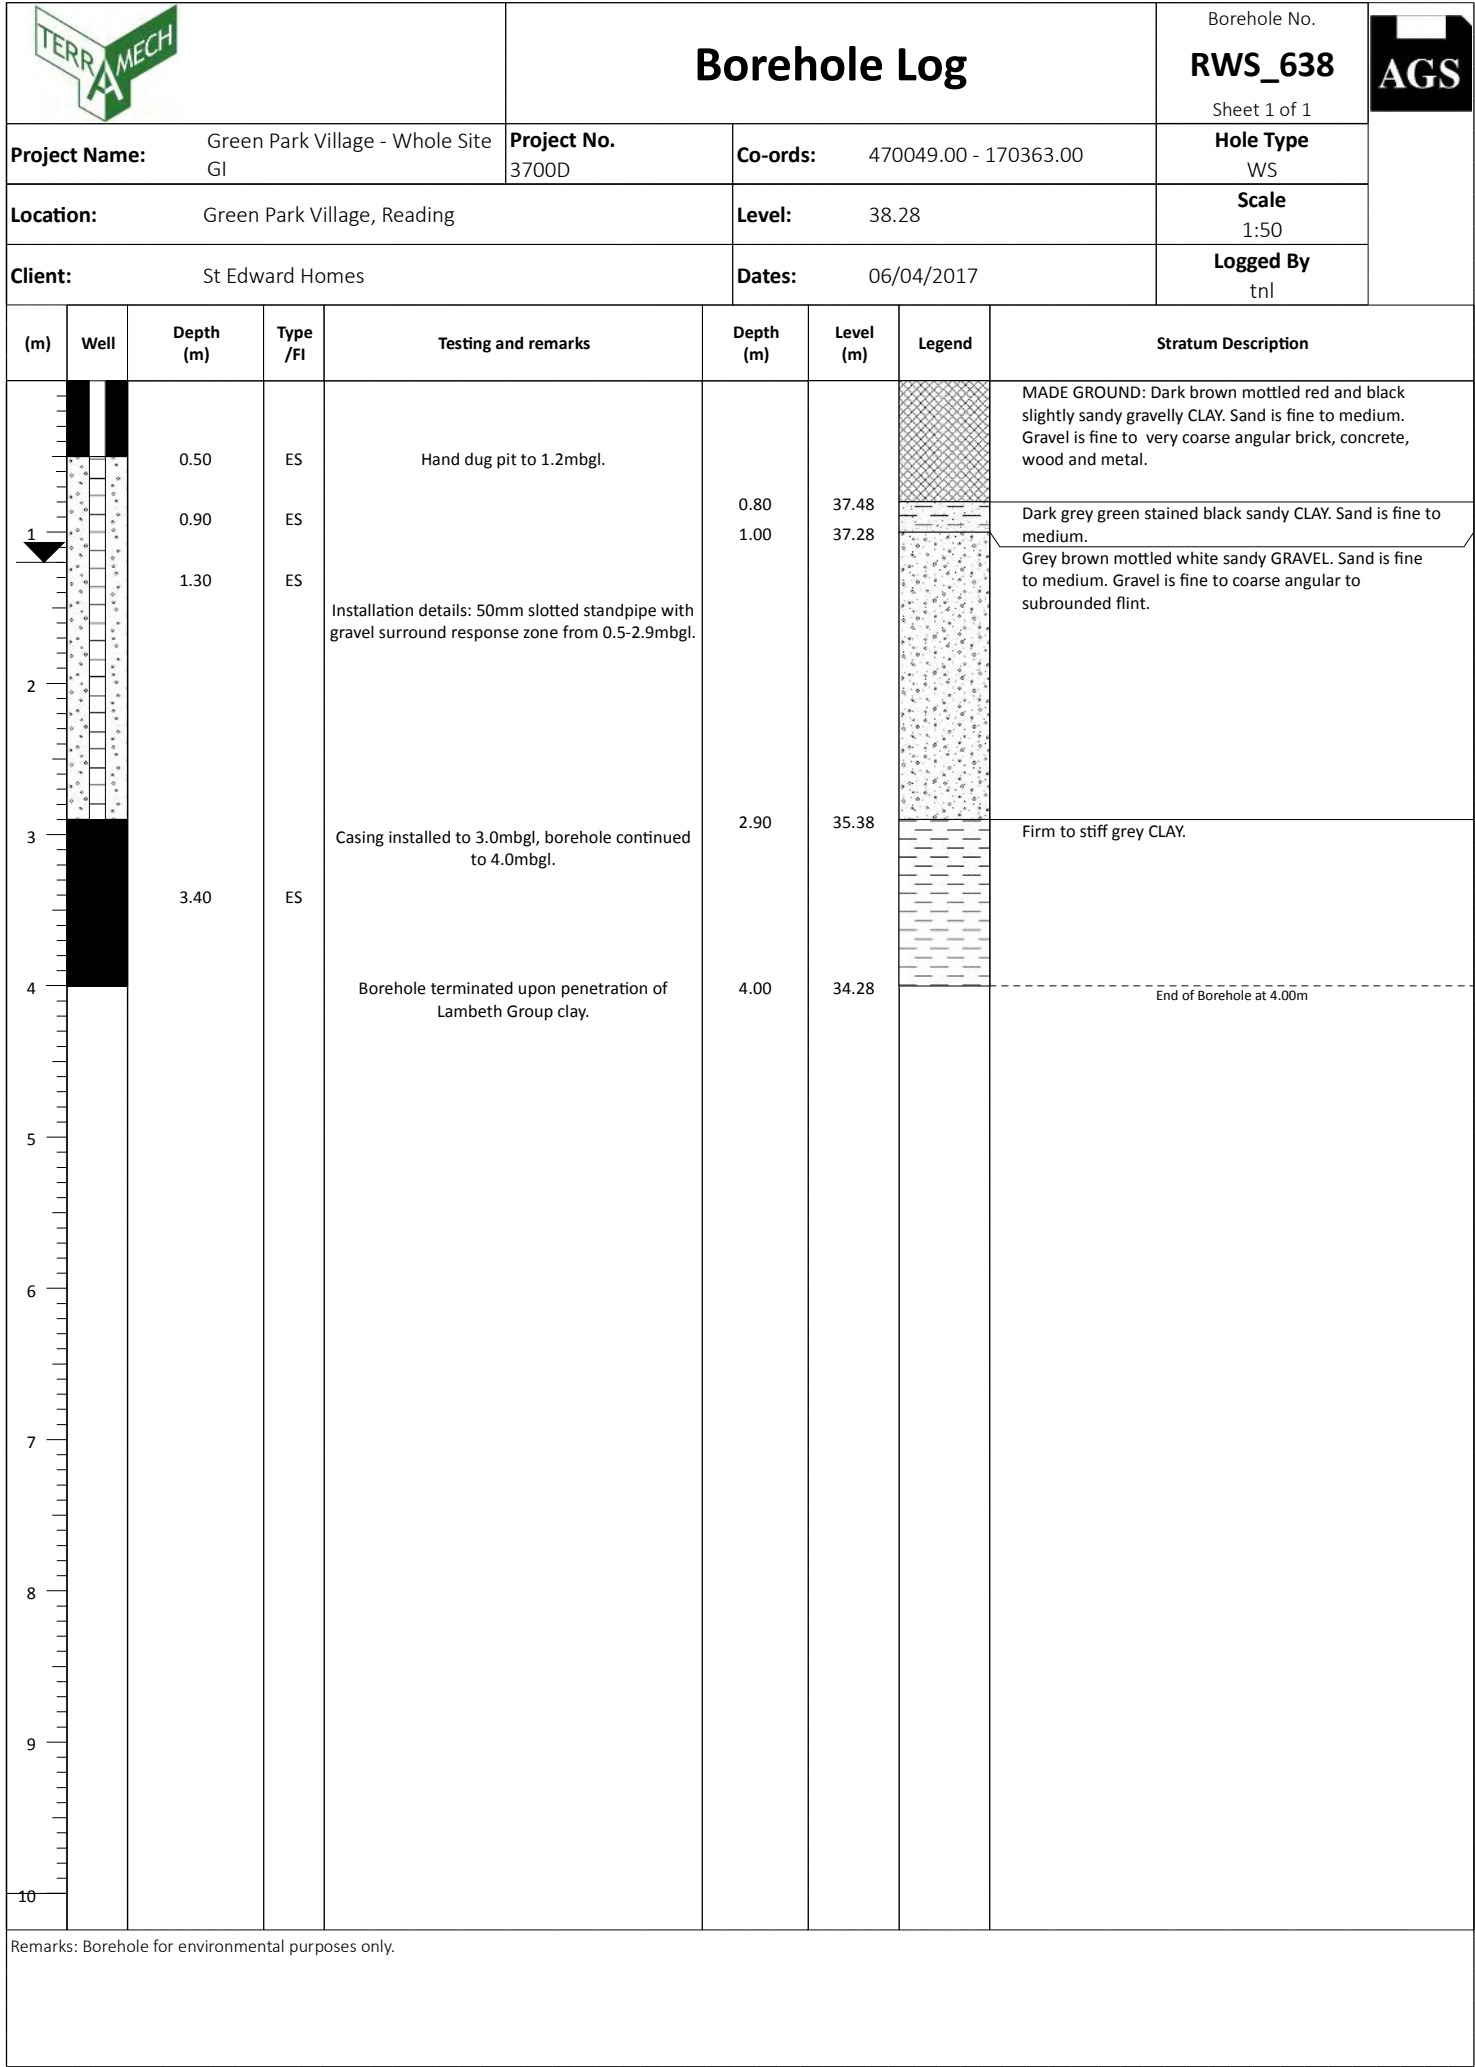




		Borehole Log				Borehole No. RWS_635 Sheet 1 of 1				
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469638.00 - 170153.00		Hole Type WS				
Location: Green Park Village, Reading				Level: 38.90		Scale 1:50				
Client: St Edward Homes				Dates: 31/03/2017		Logged By mjh				
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description		
1		0.50	B	Hand dug pit to 1.2mbgl.				MADE GROUND: Brown gravelly CLAY. Gravel is fine to very coarse brick, fine to medium tile, fine to coarse concrete, rare plastic, rare metal and rare cardboard.		
		0.70	ES							
		1.00	B	N=13 (5,9/7,3,2,1)	1.00	37.90		MADE GROUND: Brown sandy GRAVEL. Sand is fine to medium. Gravel is fine to medium subangular to subrounded flint.		
		1.20	ES							
		1.20	SPT							
		1.30	D							
		2		1.50	D	N=7 (1,1/1,2,2,2)	1.45	37.44		MADE GROUND: Light greenish grey mottled purplish brown CLAY with black peat pockets and occasional fine to medium subrounded flint.
				1.60	ES					
				2.00	D					
				2.00	SPT					
3		2.50	D	N=18 (2,6/7,6,3,2)	2.95	35.94		MADE GROUND: Dark grey gravelly peaty CLAY.		
		3.00	SPT							
		3.00							35.90	MADE GROUND: Dark grey gravel with wood and one tile. Gravel is fine to medium subrounded flint.
		3.50	PP						250kPa	3.60
4		3.70	PP	Casing installed to 4.0mbgl, borehole continued to 5.0mbgl.	4.00	34.90		Medium dense, light grey mottled brown SAND. Sand is fine to medium.		
		3.70	D						175kPa	
		3.90	PP							
		4.00	SPT							
5		4.20	D	N=30 (2,5/5,8,8,9)	5.00	33.90		Borehole terminated at 5.0mbgl upon encountering blowing sands. Borehole backfilled with bentonite upon completion.		
		4.50 - 5.00	B							
6								End of Borehole at 5.00m		
7										
8										
9										
10										
Remarks: Borehole for geotechnical and environmental purposes.										

		Borehole Log				Borehole No. RWS_636 Sheet 1 of 1						
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 469637.00 - 170127.00		Hole Type WS						
Location: Green Park Village, Reading				Level: 39.14		Scale 1:50						
Client: St Edward Homes				Dates: 03/04/2017		Logged By mjh						
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description				
1		0.20	ES	Hand dug pit to 1.2mbgl.	1.40	37.74		MADE GROUND: Dark brown to grey gravelly CLAY. Gravel is fine to very coarse brick, concrete, tile, metal and plastic.				
		0.50	B									
		1.00	ES									
		1.20	SPT									
		2		2.00	SPT	N=0 (1,0/0,0,0,0)	2.50	36.64		MADE GROUND: Dark grey gravelly peaty CLAY.		
				2.20	ES							
				2.40	D							
				2.60	ES							
				3		2.80	D	N=14 (1,2/2,3,4,5)	3.30	35.84		MADE GROUND: Light grey mottled pinkish brown CLAY.
						3.00	SPT					
3.40	ES											
3.50	PP											
4						3.60	D	325kPa	4.00	35.14		Light grey mottled pinkish brown CLAY with occasional brown silt pockets.
						3.70	PP					
		3.90	PP									
		4.00	D									
		5				4.00	SPT	Casing installed to 4.0mbgl, borehole continued to 5.0mbgl.	4.50	34.64		Stiff to very stiff, light blueish grey clayey SILT.
						4.50	D					
				4.80	D							
				4.90	D							
				6				N=21 (2,3/3,6,5,7)	5.00	34.14		Brown sandy CLAY. Sand is fine to medium.
7								Borehole terminated upon experiencing blowing sands, rising to 3.8mbgl. Borehole backfilled with bentonite upon completion.				Light blueish grey silty SAND. Sand is fine to medium.
		8										End of Borehole at 5.00m
				9								
10												





Remarks: Borehole for environmental purposes only.

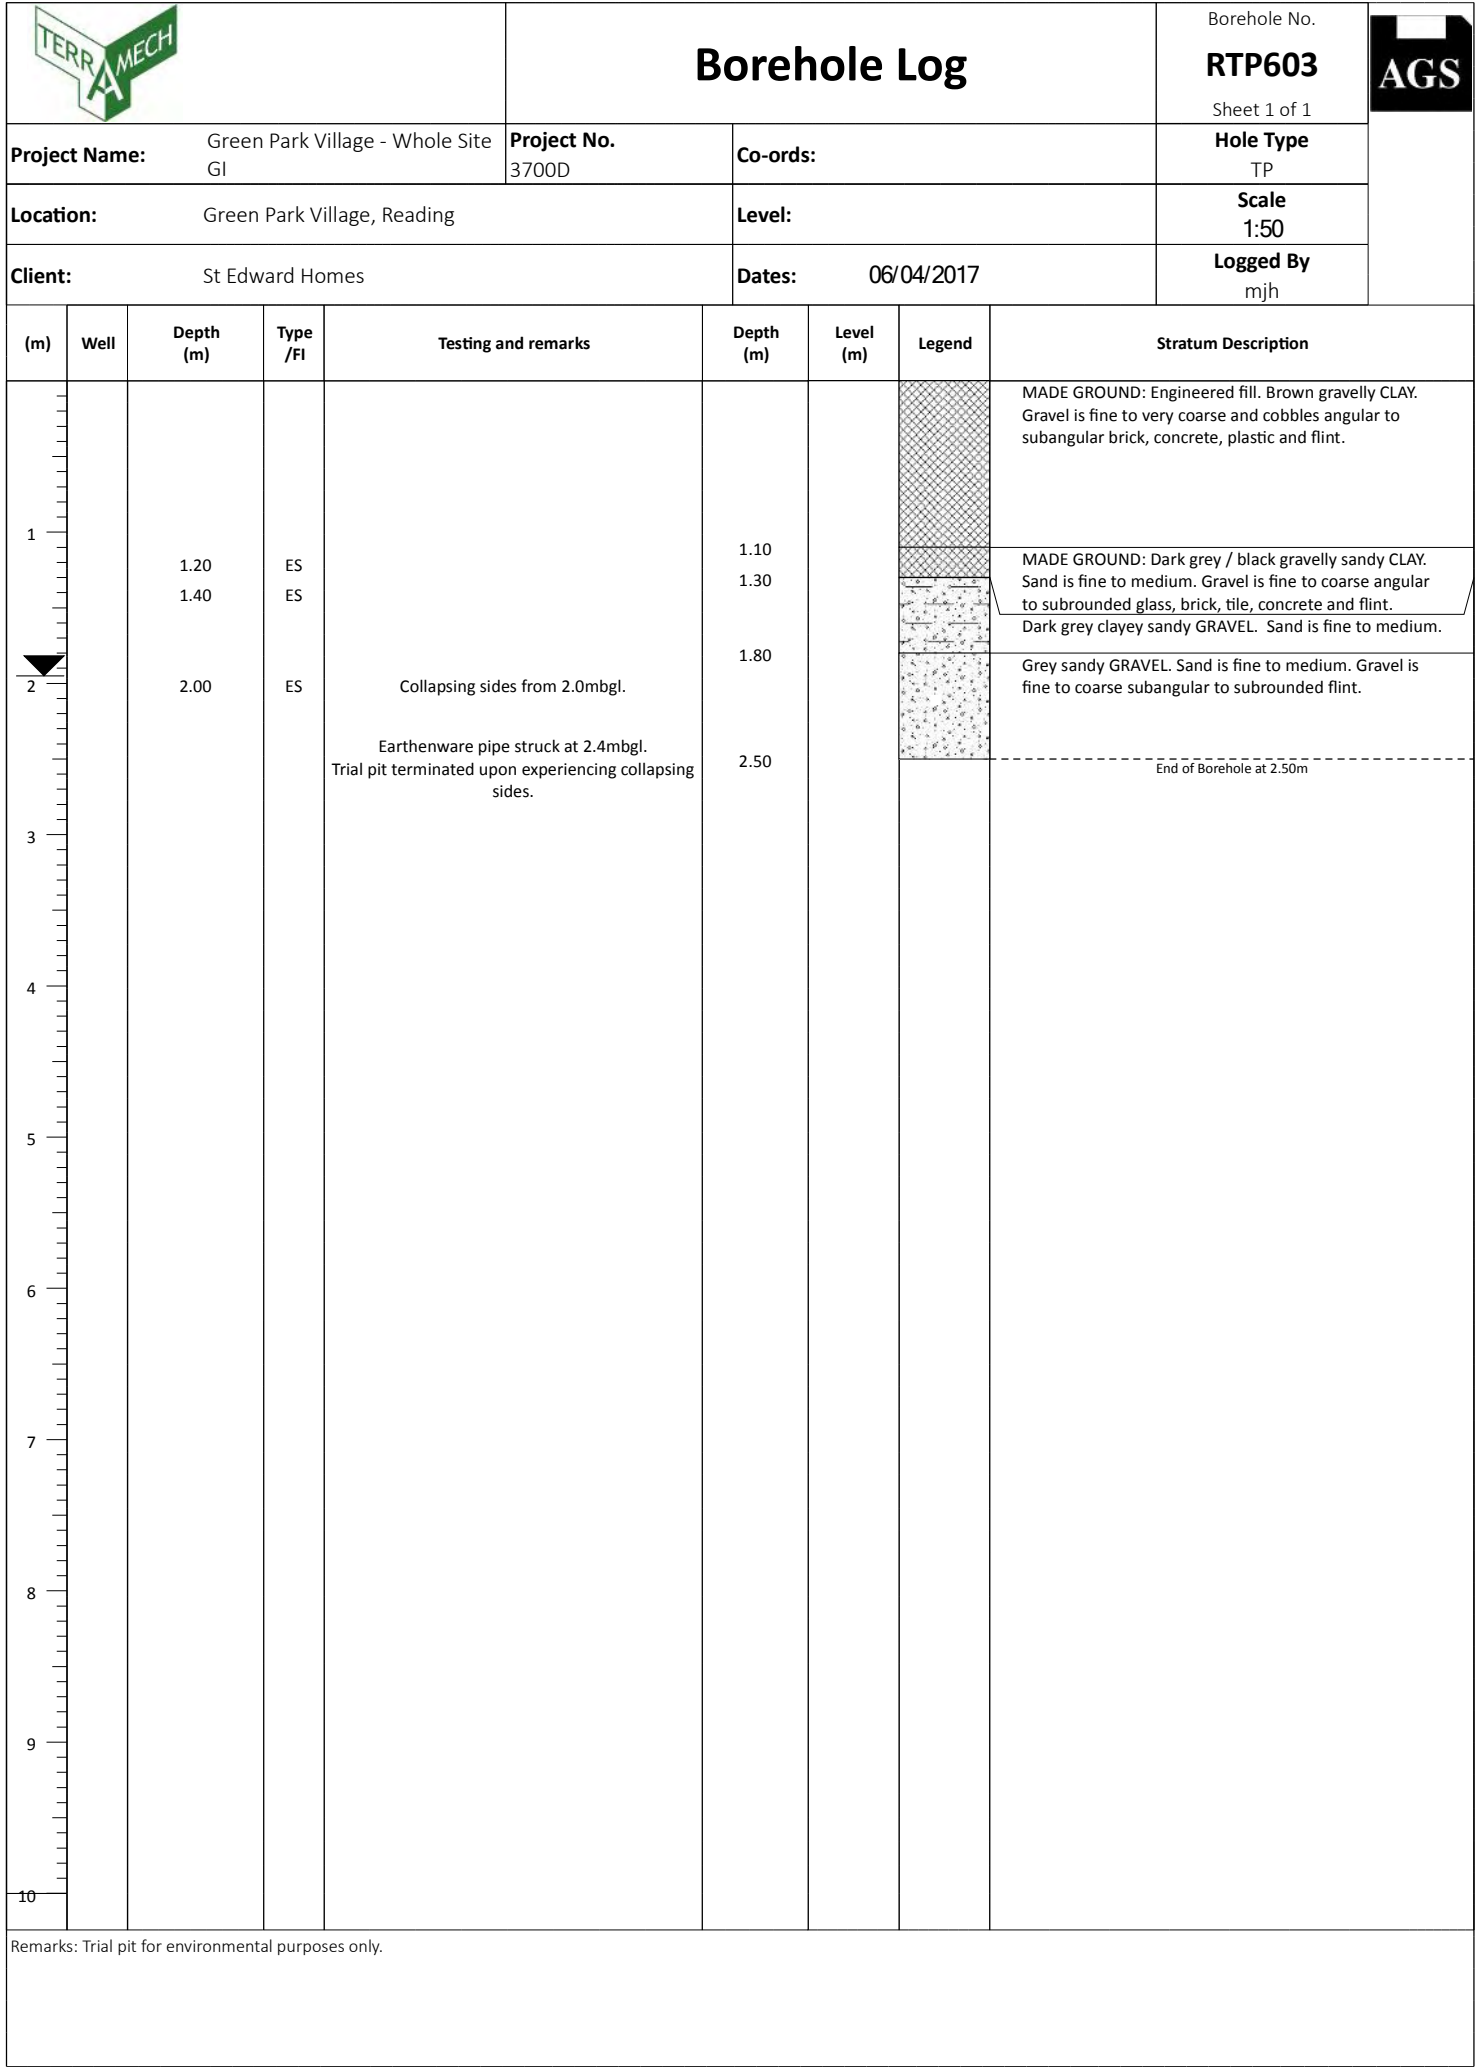







		Borehole Log				Borehole No. RWS_639			
Project Name: Green Park Village - Whole Site GI		Project No. 3700D		Co-ords: 470033.00 - 170329.00		Sheet 1 of 1			
Location: Green Park Village, Reading		Level: 38.62		Hole Type WS					
Client: St Edward Homes		Dates: 06/04/2017		Scale 1:50		Logged By tnl			
(m)	Well	Depth (m)	Type /FI	Testing and remarks	Depth (m)	Level (m)	Legend	Stratum Description	
		0.30	ES	Hand dug pit to 1.2mbgl.	0.60	38.02		MADE GROUND: Brown mottled red very gravelly sandy CLAY. Sand is fine to medium. Gravel is fine to coarse, angular brick, concrete and glass.	
		0.70	ES					MADE GROUND: Dark brown black sandy gravelly CLAY. Sand is fine to medium. Gravel is fine to coarse with cobbles angular brick, concrete and wood.	
	1	1.10	ES					Black dark grey slightly sandy slightly gravelly CLAY. Sand is fine to medium. Gravel is fine to coarse angular to subangular flint.	
		1.40	ES					Grey green mottled white very gravelly sandy CLAY. Sand is fine to medium. Gravel is fine to coarse angular to subrounded flint.	
		1.70	ES						
				Installation details: 50mm slotted standpipe with gravel surround response zone from 0.5-3.7mbgl.	1.50	37.12		Grey mottled white sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint.	
	2				3.75	34.87		Grey green mottled brown very sandy silty CLAY. Sand is fine to medium.	
	3								
	4				Casing installed to 4.0mbgl, borehole continued to 5.0mbgl.				
	5				Borehole terminated upon penetration of Lambeth Group clay.	5.00	33.62		End of Borehole at 5.00m
6									
7									
8									
9									
10									
Remarks: Borehole for environmental purposes only.									


				Trial Pit Log			TrialPit No RTP601 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 470359.00 - 170326.00 Level: 39.74		Date 06/04/2017	
Location: Green Park Village, Reading						Dimensions (m): 3.00 0.80		Scale 1:25	
Client: St Edward Homes						Depth 1.70		Logged mjh	
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
	0.30	ES		0.50	39.24		MADE GROUND: Brown gravelly CLAY. Gravel is fine to very coarse angular to subangular flint, brick, rare tile.		
	0.60	ES					MADE GROUND: Black ashy gravelly CLAY. Gravel is fine to coarse angular to subrounded flint, ash and rare tile.		
	1.30	ES		1.10	38.64		Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.		
			Collapsing sides from 1.5mbgl. Trial pit terminated upon experiencing collapsing sides.	1.70	38.04		End of Pit at 1.70m		
1 2 3 4 5									
Remarks: Trial pit for environmental purposes only.									
Stability:									

				Trial Pit Log			TrialPit No RTP602 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 470310.00 - 170299.00 Level: 39.95		Date 06/04/2017	
Location: Green Park Village, Reading						Dimensions (m): 3.00 Depth 1.85 0.80		Scale 1:25	
Client: St Edward Homes								Logged mjh	
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
▼	0.30	ES		0.40	39.55		MADE GROUND: Brown gravelly silty CLAY. Gravel is fine to coarse subangular to subrounded flint.		
	0.50	ES					Dark brownish grey gravelly CLAY. Gravel is fine to medium subangular to subrounded flint.		
	0.90	ES					Dark grey gravelly CLAY. Gravel is fine to medium subangular to subrounded flint.		
	1.00			38.95		Light grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to rarely coarse subangular to subrounded flint.			
	1.60	ES	Sides collapsing from 1.5mbgl. Trial pit terminated upon experiencing collapsing sides.	1.85	38.10		End of Pit at 1.85m		
1 2 3 4 5									
Remarks: Trial pit for environmental purposes only.									
Stability:									



				Trial Pit Log			TrialPit No RTP605 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 470092.00 - 170358.00 Level: 38.13		Date 06/04/2017	
Location: Green Park Village, Reading						Dimensions (m): 3.20 Depth 2.00		Scale 1:25 Logged mjh	
Client: St Edward Homes									
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
	0.10	ES		0.40	37.73		MADE GROUND: Brown clayey GRAVEL. Gravel is fine to very coarse and cobbles angular to subangular brick, concrete, tarmac, tile and wire.		
	0.60	ES		0.90	37.23		MADE GROUND: Brown gravelly CLAY. Gravel is fine to very coarse and cobbles angular to subangular brick, concrete, chalk and rare slate.		
	1.00	ES		1.60	36.53		Dark grey becoming grey peaty CLAY.		
	1.70	ES	Collapsing sides from 1.6mbgl.	2.00	36.13		Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint.		
			Trial pit terminated upon experiencing collapsing sides.				----- End of Pit at 2.00m -----		
1 2 3 4 5									
Remarks: Trial pit for environmental purposes only.									
Stability:									



				Trial Pit Log			Trial Pit No RTP607 Sheet 1 of 1	
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: - Level:		Date 06/04/2017
Location: Green Park Village, Reading						Dimensions (m):		Scale 1:25
Client: St Edward Homes						Depth 0.50		Logged mjh
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
				0.50			MADE GROUND: Dark grey to black silty CLAY with much roots, reeds and decomposing organic matter. No evidence of material liner.	
							End of Pit at 0.50m	
								1
								2
								3
								4
								5
Remarks: Trial pit to identify lining of lake. Observations made from bucket of excavator and not from the pit itself.								
Stability:								

				Trial Pit Log			TrialPit No RTP608 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469594.00 - 170282.00 Level: 39.53		Date 06/04/2017	
Location: Green Park Village, Reading						Dimensions (m): 4.10 0.90		Scale 1:25	
Client: St Edward Homes						Depth 3.70		Logged mjh	
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
				0.15	39.38		MADE GROUND: Pink roadstone hardcore.		
	0.30	ES					MADE GROUND: Brown clayey GRAVEL fill. Gravel is fine to very coarse angular to subangular brick, concrete, wood and rare tile.		
	0.60	ES		0.50	39.03		MADE GROUND: Dark grey mottled dark brown clayey GRAVEL fill. Gravel is fine to very coarse and cobbles angular to subrounded brick, metal, concrete, fabric, wool, tile, pipe, wood and plastic.		
	1.00	ES							
	1.50	ES		1.50	38.03		MADE GROUND: Dark grey gravelly CLAY (considered to be reworked material). Gravel is fine to coarse subangular to subrounded flint.		
	1.60	ES							
	3.70	ES	Trial pit terminated upon reaching maximum extent of excavator.	3.70	35.83		End of Pit at 3.70m		

Remarks: Trial pit for environmental purposes only.

 Stability:





Trial Pit Log

TrialPit No
RTP609
Sheet 1 of 1

Project Name: Green Park Village - Whole Site GI

Project No.
3700D

Co-ords: 469612.00 - 170264.00
Level: 39.48

Date
10/04/2017

Location: Green Park Village, Reading

Dimensions (m): 4.00


Scale
1:25

Client: St Edward Homes

Depth
3.50

0.85


Logged
mih




Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description
	Depth	Type	Results				
▼	0.30	ES	Collapsing sides from 2.0mbgl.	1.50	37.98		MADE GROUND: Brown gravelly CLAY fill. Gravel is fine to very coarse and cobbles brick, concrete, plastic, metal, tire and paving slab.
	0.90	ES					MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse subangular to subrounded flint. (considered to be reworked material)
	1.60	ES		1.90	37.58		MADE GROUND: Light grey slightly clayey sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint.
	2.30 2.30	B ES		2.30	37.18		MADE GROUND: Dark grey slightly gravelly CLAY. Gravel is fine to coarse subangular to subrounded flint and rare fine to medium subrounded brick. (considered to be reworked material).
	3.40 3.40	B ES	Trial pit terminated upon experiencing collapsing sides.	3.50	35.98	End of Pit at 3.50m	

Remarks:	Trial pit for environmental purposes only.
----------	--

Stability:




				Trial Pit Log			TrialPit No RTP610 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469595.00 - 170239.00 Level: 39.22		Date 10/04/2017	
Location: Green Park Village, Reading						Dimensions (m): 5.10 0.90		Scale 1:25	
Client: St Edward Homes						Depth 3.70		Logged mjh	
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
	0.30	ES	Trial pit extended 2.5m south to avoid hard ground encountered at 0.4mbgl.	1.00	38.22		MADE GROUND: Brown gravelly CLAY fill. Gravel is fine to coarse and cobbles concrete, brick, plastic, wood and metal.		
	0.60	ES					MADE GROUND: Dark grey slightly peaty gravelly CLAY with occasional grass / roots throughout. Gravel is fine to coarse subangular to subrounded flint. (Considered to be reworked material).		
	1.20	ES							
	1.70	ES							
	3.00	ES	Trial pit terminated upon reaching maximum extent of excavator.	3.60	35.62		Stiff grey mottled brown silty CLAY.		
	3.70	ES		3.70	35.52		End of Pit at 3.70m		
Remarks: Trial pit for environmental purposes only.									
Stability:									

				Trial Pit Log			TrialPit No RTP611 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469562.00 - 170222.00 Level: 39.10		Date 10/04/2017	
Location: Green Park Village, Reading						Dimensions (m): 3.90 Depth		Scale 1:25	
Client: St Edward Homes						Depth 2.40		Logged mjh	
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
	0.10	ES					MADE GROUND: Brown gravelly CLAY. Gravel is fine to very coarse and cobbles brick and flint.		
	0.50	ES		0.40	38.70		MADE GROUND: Dark brown clayey GRAVEL with pockets of crushed concrete. Gravel is fine to very coarse angular to subangular flint, brick, concrete and plastic.		
	1.00	ES		0.90	38.20		MADE GROUND: Grey gravelly CLAY. Gravel is fine to coarse subangular to subrounded flint and occasional brick.		
	1.50	ES	Collapsing sides from 1.4mbgl.	1.40	37.70		Dark grey gravelly peaty CLAY. Gravel is fine to coarse subangular to subrounded flint.		
	2.30	ES	Trial pit terminated upon experiencing collapsing sides.	2.00	37.10		Grey sandy GRAVEL. Sand is fine to medium. Gravel is fine to coarse subangular to subrounded flint.		
				2.40	36.70	End of Pit at 2.40m			
1 2 3 4 5									
Remarks: Trial pit for environmental purposes only.									
Stability:									

				Trial Pit Log			TrialPit No RTP612 Sheet 1 of 1	
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: - Level:		Date 10/04/2017
Location: Green Park Village, Reading						Dimensions (m): Depth 0.80		Scale 1:25
Client: St Edward Homes						Depth 0.60		Logged mjh
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
				0.60			MADE GROUND: Dark grey to black silty CLAY with much roots, reeds and decomposing organic matter. No evidence of material liner, although did appear to have clay liner composed of reworked Lambeth Group.	
							End of Pit at 0.60m	
								1
								2
								3
								4
								5
Remarks: Trial pit to identify lining of lake. Observations made from bucket of excavator and not from the pit itself.								
Stability:								

				Trial Pit Log			TrialPit No RTP614 Sheet 1 of 1	
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: - Level:		Date 10/04/2017
Location: Green Park Village, Reading						Dimensions (m): 0.90 4.20		Scale 1:25
Client: St Edward Homes						Depth 0.60		Logged mjh
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.20	ES					MADE GROUND: Brown slightly gravelly CLAY. Gravel is fine to very coarse angular to subangular brick and concrete. One fragment of potential ACM discovered.	
	0.50	B	Concrete slab encountered at 0.6m,bgl, approximately 0.2m thick. Trial pit moved 5m south.	0.60				
								1
								2
								3
								4
								5
Remarks: Trial pit for environmental purposes only.								
Stability:								

				Trial Pit Log			TrialPit No RTP614a Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469617.00 - 170097.00 Level: 39.64		Date 10/04/2017	
Location: Green Park Village, Reading						Dimensions (m):		Scale 1:25	
Client: St Edward Homes						Depth 3.50		Logged	
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
	1.30	ES	Trial pit moved 5m south from previous location.	0.50	39.14		MADE GROUND: Brown slightly gravelly CLAY. Gravel is fine to very coarse angular to subangular brick and concrete.		
							MADE GROUND: Tarmac.		
							MADE GROUND: Brick layer.		
							MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to very coarse, angular to subrounded brick, glass, concrete and fabric.		
	2.00	ES	Sides collapsing from 1.2mbgl.	2.00	37.64		MADE GROUND: Dark grey gravelly CLAY with pockets of brown sand and occasional peat. Gravel is fine to coarse subangular to subrounded flint. (considered to be reworked material).		
3.50	ES	Trial pit terminated upon maximum extent of excavator.	3.50	36.14		End of Pit at 3.50m			
Remarks: Trial pit for environmental purposes only.									
Stability:									



				Trial Pit Log			TrialPit No RTP615 Sheet 1 of 1		
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469621.00 - 170105.00 Level: 39.62		Date 10/04/2017	
Location: Green Park Village, Reading						Dimensions (m): 4.10 Depth 4.00		Scale 1:25	
Client: St Edward Homes								Logged mjh	
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
	Depth	Type	Results						
	0.20 0.20	B ES		0.60	39.02		MADE GROUND: Brown very gravelly CLAY. Gravel is fine to very coarse and cobbles angular to subangular brick, concrete, rope, plastic, metal, cable and chalk.		
	0.80	ES					MADE GROUND: Light brown slightly gravelly sandy CLAY. Sand is fine to medium. Gravel is fine to very coarse angular to subrounded brick, tile and occasional chalk.		
	1.40 1.40 1.40	B ES PID	PID=0	1.20	38.42		MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse subangular to subrounded flint. Much fine roots throughout. (considered to be reworked material).		
	2.70	ES	Sides collapsing from 2.5mbgl. Light grey sandy GRAVEL encountered from 2.6mbgl at east end of pit only. Slight hydrocarbon sheen on surface of water.						
			Trial pit terminated upon reaching maximum extent of excavator.	4.00	35.62		End of Pit at 4.00m		
									5
Remarks: Trial pit for environmental purposes only.									
Stability:									

				Trial Pit Log			TrialPit No RTP616 Sheet 1 of 1			
Project Name: Green Park Village - Whole Site GI				Project No. 3700D		Co-ords: 469614.00 - 170108.00 Level: 39.49		Date 10/04/2017		
Location: Green Park Village, Reading						Dimensions (m): 4.20 Depth 4.10 0.80		Scale 1:25		
Client: St Edward Homes								Logged mjh		
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description			
	Depth	Type	Results							
	0.40	ES	Concrete slab at 0.15mbgl, trial pit moved 1m to the east.	0.70	38.79		MADE GROUND: Brown clayey GRAVEL. Gravel is fine to very coarse and cobbles angular to subangular to brick, plastic, concrete, wool, tile, rope, metal and teddy bear.			
	0.90	ES		MADE GROUND: Dark brownish grey mottled black slightly gravelly CLAY. Gravel is fine to coarse angular to subangular brick and wood.						
	1.20	ES		MADE GROUND: Dark grey gravelly CLAY. Gravel is fine to coarse subangular to subrounded predominantly flint and rare brick.						
	1.50			MADE GROUND: Dark grey slightly gravelly CLAY with pockets of light blueish grey clay. Gravel is fine to coarse subangular to subrounded flint. (considered to be reworked material).						
	2.00			MADE GROUND: Dark grey clay with pockets of gravelly clay and silt. Gravel is fine to coarse subangular to subrounded flint.						
	2.20	ES	Trial pit terminated upon reaching maximum extent of excavator.	3.90	35.59		Light blueish grey mottled purplish brown CLAY.			
	4.10	35.39		----- End of Pit at 4.10m -----						

Remarks: Trial pit for environmental purposes only.

 Stability:



APPENDIX 2

LEGISLATIVE CONTEXT AND METHODOLOGIES

1. LEGISLATIVE CONTEXT

Environmental risks are assessed in accordance with Contaminated Land (England) (Amendment) Regulations 2012, Part IIA of the Environmental Protection Act 1990, and Environmental Protection Act 1990: Part 2A Contaminated Land Statutory Guidance, DEFRA 2012. Part IIA provides a statutory definition of contaminated land. To fall within this definition it is necessary that, as a result of the condition of the land, substances may be present on or under the land such that:

- (a) Significant harm is being caused or there is a significant possibility of such harm being caused; or
- (b) Significant pollution of controlled waters is being caused, or there is a significant possibility of such pollution being caused.

Risk from contamination is assessed by consideration of possible linkages between contaminant sources and potential receptors which could be harmed or polluted and the potential pathways between them. For a risk of pollution or environmental harm to occur as a result of ground contamination, all of the following elements must be present:

- A source - a substance that is capable of causing pollution or harm;
- A receptor - something which could be adversely affected by the contaminant; and
- A pathway - a route by which the contaminant can reach the receptor.

If one of these elements is absent there can be no significant risk. If all are present then the magnitude of the risk is a function of the magnitude and mobility of the source, the sensitivity of the receptor and the nature of the migration pathway.

The Environment Agency Contaminated Land Report CLR 11 Model Procedures for the Management of Land Contamination provides the technical framework for structured decision making about land contamination. CLR 11 advocates a phased approach to risk assessment comprising:

- Preliminary Risk Assessment (PRA) – desk study and qualitative assessment
- Generic Quantitative Risk Assessment (GQRA) – assessment of contaminant concentrations against generic assessment criteria.
- Detailed Quantitative Risk Assessment (DQRA) – detailed site specific risk assessment and development of site-specific assessment criteria.

Each of these phases follows the same basic steps but adds site specific details and further certainty into the assessment as the stages progress. The basic steps are:

- Hazard identification and hazard assessment – development or refinement of the source-pathway-receptor conceptual model, and identification of potential pollutant linkages.
- Risk Estimation – qualitative risk estimation predicting magnitude and probability of potential consequences that may arise as a result of a hazard.
- Risk Evaluation – deciding whether a risk is unacceptable.

2. RISK ESTIMATION

An assessment of environmental risks is made for each potential pollutant linkage identified.

Risk estimation has been completed in accordance with the guidance provided in:

- NHBC and Environment Agency 2008. Guidance for the Safe Development of Housing on Land Affected by Contamination. R&D Publication 66: 2008.

The following is taken directly from NHBC/EA 2008. The key to the classification is that the designation of risk is based upon the consideration of both:

- the magnitude of the potential consequence (*i.e.*, severity) [takes into account both the potential severity of the hazard and the sensitivity of the receptor];
- the magnitude of probability (*i.e.*, likelihood) [takes into account both the presence of the hazard and receptor and the integrity of the pathway].

Table 1: Classification of Consequence (after NHBC/EA 2008)

Category	Definition
Severe	Highly elevated concentrations likely to result in "significant harm" to human health as defined by the EPA 1990, Part 2A, if exposure occurs. Equivalent to EA Category 1 pollution incident including persistent and/or extensive effects on water quality; leading to closure of a potable abstraction point; major impact on amenity value or major damage to agriculture or commerce. Major damage to aquatic or other ecosystems, which is likely to result in a substantial adverse change in its functioning or harm to a species of special interest that endangers the long-term maintenance of the population. Catastrophic damage to crops, buildings or property.
Medium	Elevated concentrations which could result in "significant harm" to human health as defined by the EPA 1990, Part 2A if exposure occurs. Equivalent to EA Category 2 pollution incident including significant effect on water quality; notification required to abstractors; reduction in amenity value or significant damage to agriculture or commerce. Significant damage to aquatic or other ecosystems, which may result in a substantial adverse change in its functioning or harm to a species of special interest that may endanger the long-term maintenance of the population. Significant damage to crops, buildings or property.
Mild	Exposure to human health unlikely to lead to "significant harm". Equivalent to EA Category 3 pollution incident including minimal or short lived effect on water quality; marginal effect on amenity value, agriculture or commerce. Minor or short lived damage to aquatic or other ecosystems, which is unlikely to result in a substantial adverse change in its functioning or harm to a species of special interest that would endanger the long-term maintenance of the population. Minor damage to crops, buildings or property.
Minor	No measurable effect on humans. Equivalent to insubstantial pollution incident with no observed effect on water quality or ecosystems. Repairable effects of damage to buildings, structures and services.

* For these purposes, disease is to be taken to mean an unhealthy condition of the body or a part of it and can include, for example, cancer, liver dysfunction or extensive skin ailments. Mental dysfunction is included only insofar as it is attributable to the effects of a pollutant on the body of the person concerned.

The likelihood of an event (probability) takes into account both the presence of the hazard and target and the integrity of the pathway and has been assessed based on the categories given below.

Table 2: Classification of Probability (after NHBC/EA 2008)

Category	Definition
High Likelihood	There is pollutant linkage and an event would appear very likely in the short-term and almost inevitable over the long-term, or there is evidence at the receptor of harm or pollution.
Likely	There is pollutant linkage and all the elements are present and in the right place which means that it is probable that an event will occur. Circumstances are such that an event is not inevitable, but possible in the short-term and likely over the long-term.
Low Likelihood	There is pollutant linkage and circumstances are possible under which an event could occur. However, it is by no means certain that even over a long period such an event would take place, and is less likely in the shorter term.
Unlikely	There is pollutant linkage but circumstances are such that it is improbable that an event would occur even in the very long-term.

The potential severity of the risk and the probability of the risk occurring have been combined in accordance with the following matrix in order to give a level of risk for each potential hazard.

Table 3: The Classification of Risk (after NHBC/EA 2008)

		Consequence			
		Severe	Medium	Mild	Minor
Probability	High Likelihood	Very high	High	Moderate	Low
	Likely	High	Moderate	Moderate/ Low	Low
	Low Likelihood	Moderate	Moderate/ Low	Low	Very low
	Unlikely	Moderate/ Low	Low	Very low	Very low

Very high risk

There is a high probability that severe harm could arise to a designated receptor from an identified hazard at the site without remediation action OR there is evidence that severe harm to a designated receptor is already occurring. Realisation of that risk is likely to present a substantial liability to be site owner/or occupier. Investigation is required as a matter of urgency and remediation works likely to follow in the short-term.

High risk

Harm is likely to arise to a designated receptor from an identified hazard at the site without remediation action. Realisation of the risk is likely to present a substantial liability to the site owner/or occupier. Investigation is required as a matter of urgency to clarify the risk. Remediation works may be necessary in the short-term and are likely over the longer term.

Moderate risk

It is possible that harm could arise to a designated receptor from an identified hazard. However, it is either relatively unlikely that any such harm would be severe, and if any harm were to occur it is more likely, that the harm would be relatively mild. Further investigative work is normally required to clarify the risk and to determine the potential liability to site owner/occupier. Some remediation works may be required in the longer term.

Low risk

It is possible that harm could arise to a designated receptor from identified hazard, but it is likely at worst, that this harm if realised would normally be mild. It is unlikely that the site owner/or occupier would face substantial liabilities from such a risk. Further investigative work (which is likely to be limited) to clarify the risk may be required. Any subsequent remediation works are likely to be relatively limited.

Very low risk

It is a low possibility that harm could arise to a designated receptor, but it is likely at worst, that this harm if realised would normally be mild or minor.

No potential risk

There is no potential risk if no pollution linkage has been established.

3. GQRA METHODOLOGIES

In order to assess the significance of the chemical concentrations recorded, generic assessment criteria (GAC) must be selected. The GAC are screening concentrations which are used initially for direct comparison to the measured site concentrations.

The GAC are defined based on the critical receptors identified at the site. Receptors are considered in relation to:

- Human health receptors (*e.g.*, site users);
- The water environment (*e.g.*, groundwater and surface water).

Potential risks to human health are considered primarily using measured concentrations of chemicals in soil. Potential risks to the water environment are considered primarily using soil leachate and groundwater concentrations as indicative of the potentially mobile fraction of any soil impact.

Additional receptors may be relevant dependent on the site *e.g.*, flora/fauna, water supply pipes, buried concrete.

3.1. Human Health Assessment

3.1.1. Initial Screening Assessment

The GAC adopted for assessment of soils in relation to Human Health follow the hierarchy listed below:

- C4SLs (Category 4 Screening Levels) published by DEFRA 2014. The C4SL guidance is an update on previous DEFRA guidance with the main changes being a few alterations to human health exposure assumptions and use of 'low' risk toxicological inputs instead of the previously used 'minimal' risk inputs. C4SLs have only been generated for 6 compounds typically only at a soil organic matter content of 6%. Other guidance is therefore required.
- LQM/CIEH, 2014 S4ULs (Suitable for Use Levels). These are an update on the previous LQM/CIEH 2009 guidance, and keep the existing 'minimal' risk toxicological values alongside the DEFRA 2014 updated exposure parameters.
- EIC/AGS/CL:AIRE Dec 2009. The Soil Generic Assessment Criteria for Human Health Risk Assessment.
- Ramboll in-house screening criteria (derived in accordance with the published CLEA framework) are used if no published guideline value is available.

Soil Guideline Values (EA/DEFRA, 2009) may also be referred to if relevant.

Contaminant concentrations below the adopted GAC are not considered to present a significant risk to identified receptors and therefore are not considered to warrant further study. Contaminants which are recorded at concentrations above their respective GAC are considered to present a potential risk to identified receptors and resultantly these determinants are subject to further assessment.

3.1.2. Contaminant Distribution Assessment

Concentrations above the GAC are considered further in relation to vertical and lateral distribution across the site and through statistical analysis, where appropriate. This analysis is used to define 'averaging areas' within which contamination concentrations and distribution are considered likely to be similar.

For each averaging area, where appropriate, statistical analysis is then used to calculate a 'representative' concentration for each contaminant within that area and identify

possible outliers of the underlying distribution of contaminant concentrations. This analysis is completed in accordance with CIEH 2008 guidance.

The initial statistical tests are used to calculate the 95% probability that the true population mean falls below the critical concentration (GAC). In practise, this involves comparing the 95th Upper Confidence Limit of the true population mean with the GAC. The Maximum Value test is then used to identify whether the maximum concentration is likely to lie outside of the assumed distribution trend and as such would represent an outlier of the general population of data across the site. Outliers above the GAC may represent localised contaminant hotspots and require further consideration.

Constituent non-detects are conservatively assigned a value equal to the reported analytical laboratory limit of detection. Any identified true outliers are excluded from the datasets used in calculation of the 95%UCL value.

3.2. Assessment for the Water Environment

Assessment of risks to water resources is completed in general accordance with guidance provided in the Environment Agency 2013, Groundwater Protection Principles and Practice (GP3).

Generic assessment criteria for waters must be selected to assess potential risks to the identified environmental receptors. There are numerous UK and European guidelines for waters based on the site situation and different receptors.

For the majority of site situations, it is considered that use of UK drinking water standards (for non-hazardous substances) and minimum reporting values (for hazardous substances) will be most appropriate for assessment of risks to groundwater resources; and use of environmental quality standards for freshwater or marine waters will be most appropriate for assessment of risks to the surface water environment.

Water and leachate data may also be compared to e.g. bathing water standards etc. where this pollutant linkage may be present.

All water quality standards are sourced from the EA Chemical Standards Database online resource where possible.

4. GROUND GAS RISK ASSESSMENT

Ground gas risk is characterised using guidance provided in the following:

- CIRIA C665, 2007. Assessing risks posed by hazardous ground gases to buildings. (Supersedes CIRIA 659).
- NHBC / RSK, 2007. Guidance on evaluation of development proposals on sites where methane and carbon dioxide are present. Report Ed 4.
- BS8485: 2015. Code of practice for the design of protective measures for methane and carbon dioxide ground gases for new buildings.
- BS8576:2013. Guidance on investigations for ground gas – Permanent gases and Volatile Organic Compounds (VOCs)

The risk posed by a gas regime is assessed initially by calculating a Gas Screening Value using a combination of the gas flow rate and recorded concentrations of carbon dioxide and methane. This Gas Screening Value is then used in combination with the maximum recorded gas concentrations to determine the site's Characteristic Situation (CIRIA 665 – all site uses except low rise residential) or Traffic Light Classification (NHBC/RSK 2007 low rise residential sites only). Table A below outlines the method for defining the Characteristic Situation as detailed in CIRIA 665 and Table B outlines the method for defining the Traffic Light classification as detailed in NHBC/RSK 2007.

Table A: Proposed method for classifying gassing sites (after CIRIA C665 2007)

Characteristic Situation	Risk classification	Gas screening value of CH ₄ or CO ₂ (l/hr) ^a	Additional limiting factors	Typical source of generation
1	Very low risk	<0.07	Typically methane ≤ 1% and/or carbon dioxide ≤ 5%. Otherwise consider increase to Situation 2	Natural soils with low organic content. "Typical" Made Ground
2	Low risk	<0.7	Borehole air flow rate not to exceed 70l/hr. Otherwise consider increase to Characteristic Situation 3	Natural soil, high peat/organic content. "Typical" Made Ground
3	Moderate risk	<3.5	-	Old landfill, inert waste, mineworking flooded
4	Moderate to high risk	<15	Quantitative risk assessment required to evaluate scope of protective measures	Mineworking -susceptible to flooding, completed landfill, inert waste (WMP 26B criteria)
5	High risk	<70	-	Mineworking unflooded inactive with shallow workings near surface
6	Very high risk	>70	-	Recent landfill site

^a Gas screening value = gas concentration (%) x measured borehole flow rate (l/hr)

Table B: Proposed method for classifying gassing sites (after NHBC/RSK 2007)

Traffic Light	Methane ¹		Carbon Dioxide ¹	
	Typical Maximum Concentration ⁵ (%v/v)	Gas Screening Value (GSV) ^{2,4,6} litres per hour	Typical Maximum Concentration ⁵ (%v/v)	Gas Screening Value (GSV) ^{2,3,4,5} litres per hour
Green				
Amber 1	1	0.16	5	0.78
Amber 2	5	0.63	10	1.56
Red	20	1.56	30	3.13

The CIRIA, NHBC and BS8485 guidance documents are then used to determine requirements for gas protection measures based on the site classification.

APPENDIX 3

LABORATORY RESULTS

**Tom Smith**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

e: thomas.smith@ramboll.co.uk

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

Analytical Report Number : 16-26903

Project / Site name:	Green Park Village	Samples received on:	26/08/2016
Your job number:	1620000492	Samples instructed on:	02/09/2016
Your order number:	1620009315	Analysis completed by:	08/09/2016
Report Issue Number:	1	Report issued on:	08/09/2016
Samples Analysed:	14 soil samples		

Signed:

Rexona Rahman
Reporting Manager
For & on behalf of i2 Analytical Ltd.

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Analytical Report Number: 16-26903
Project / Site name: Green Park Village
Your Order No: 1620009315

Lab Sample Number				624752	624753	624754	624755	624756
Sample Reference				RTP23	RTP24	RTP24	RTP25	RTP25
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.30	0.15	0.40	0.10	0.30
Date Sampled				26/08/2016	26/08/2016	24/08/2016	24/08/2016	25/08/2016
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	11	14	17	6.6	11
Total mass of sample received	kg	0.001	NONE	1.2	1.2	1.0	1.3	1.4

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-	-	-
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Not-detected	Not-detected
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-	-	-
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-	-	-

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	8.3	8.2	7.9	8.6	7.9
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.11	0.29	0.094	0.37	0.21
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.0070	0.0091	0.020	0.0053	0.0092

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	mg/kg	0.1	MCERTS	0.36	< 0.10	< 0.10	< 0.10	< 0.10
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluoranthene	mg/kg	0.1	MCERTS	0.81	< 0.10	< 0.10	< 0.10	< 0.10
Pyrene	mg/kg	0.1	MCERTS	0.68	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.53	< 0.10	< 0.10	< 0.10	< 0.10
Chrysene	mg/kg	0.05	MCERTS	0.41	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	0.46	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.33	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(a)pyrene	mg/kg	0.1	MCERTS	0.49	< 0.10	< 0.10	< 0.10	< 0.10
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	0.34	< 0.10	< 0.10	< 0.10	< 0.10
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.47	< 0.05	< 0.05	< 0.05	< 0.05

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	4.88	< 1.60	< 1.60	< 1.60	< 1.60
-----------------------------	-------	-----	--------	------	--------	--------	--------	--------

Analytical Report Number: 16-26903
Project / Site name: Green Park Village
Your Order No: 1620009315

Lab Sample Number				624752	624753	624754	624755	624756
Sample Reference				RTP23	RTP24	RTP24	RTP25	RTP25
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.30	0.15	0.40	0.10	0.30
Date Sampled				26/08/2016	26/08/2016	24/08/2016	24/08/2016	25/08/2016
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	7.7	8.9	14	9.9	10
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.78	0.74	1.2	0.61	0.51
Boron (water soluble)	mg/kg	0.2	MCERTS	0.8	1.7	3.4	0.6	1.0
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	22	30	59	28	21
Copper (aqua regia extractable)	mg/kg	1	MCERTS	17	15	24	17	9.7
Lead (aqua regia extractable)	mg/kg	1	MCERTS	32	28	56	30	19
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	0.5	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	18	16	25	15	13
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	26	33	38	31	29
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	66	62	130	63	55

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	10	< 8.0	< 8.0	16	22
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	11	< 10	< 10	23	28

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	1.5	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	2.4	< 2.0	< 2.0	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	11	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	51	20	< 10	< 10	< 10
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	63	29	12	< 10	< 10

Analytical Report Number: 16-26903
Project / Site name: Green Park Village
Your Order No: 1620009315

Lab Sample Number				624757	624758	624759	624760	624761
Sample Reference				RTP26	RTP26	RTP27	RTP27	RTP28
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.10	0.25	0.15	1.10	0.10
Date Sampled				25/08/2016	25/08/2016	25/08/2016	25/08/2016	25/08/2016
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	6.2	21	10	9.6	4.9
Total mass of sample received	kg	0.001	NONE	1.3	1.0	1.1	1.3	1.3

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	Chrysotile	-	-	-	-
Asbestos in Soil	Type	N/A	ISO 17025	Detected	Not-detected	Not-detected	Not-detected	Not-detected
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	< 0.001	-	-	-	-
Asbestos Quantification Total	%	0.001	ISO 17025	< 0.001	-	-	-	-

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	9.0	7.9	6.9	8.1	7.9
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	3	< 1	< 1
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	1.3	0.025	0.031	0.0097	0.014
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.019	0.026	0.013	0.0018	0.0013

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	mg/kg	0.1	MCERTS	0.35	< 0.10	< 0.10	< 0.10	< 0.10
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluoranthene	mg/kg	0.1	MCERTS	1.1	< 0.10	< 0.10	< 0.10	< 0.10
Pyrene	mg/kg	0.1	MCERTS	0.94	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.62	< 0.10	< 0.10	< 0.10	< 0.10
Chrysene	mg/kg	0.05	MCERTS	0.67	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	1.0	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.40	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(a)pyrene	mg/kg	0.1	MCERTS	0.84	< 0.10	< 0.10	< 0.10	< 0.10
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	0.62	< 0.10	< 0.10	< 0.10	< 0.10
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.77	< 0.05	< 0.05	< 0.05	< 0.05

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	7.34	< 1.60	< 1.60	< 1.60	< 1.60
-----------------------------	-------	-----	--------	------	--------	--------	--------	--------

Analytical Report Number: 16-26903
Project / Site name: Green Park Village
Your Order No: 1620009315

Lab Sample Number				624757	624758	624759	624760	624761
Sample Reference				RTP26	RTP26	RTP27	RTP27	RTP28
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.10	0.25	0.15	1.10	0.10
Date Sampled				25/08/2016	25/08/2016	25/08/2016	25/08/2016	25/08/2016
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Heavy Metals / Metalloids								
Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	8.4	11	10	2.6	4.4
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.81	1.3	1.1	0.21	0.27
Boron (water soluble)	mg/kg	0.2	MCERTS	2.6	2.5	1.6	0.6	0.7
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	0.2	0.2	< 0.2	< 0.2	< 0.2
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	31	74	70	17	18
Copper (aqua regia extractable)	mg/kg	1	MCERTS	36	41	39	15	11
Lead (aqua regia extractable)	mg/kg	1	MCERTS	71	110	91	5.9	10
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	18	27	20	13	12
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	34	39	40	8.6	13
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	130	190	150	14	22

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	16	9.4	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	20	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	87	10	< 10	< 10	< 10
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	95	14	< 10	< 10	< 10

Analytical Report Number: 16-26903
Project / Site name: Green Park Village
Your Order No: 1620009315

Lab Sample Number				624762	624763	624764	624765	
Sample Reference				RTP28	RTP29	RTP30	RTP30	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				0.80	0.20	0.15	0.50	
Date Sampled				25/08/2016	26/08/2016	26/08/2016	26/08/2016	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	
Moisture Content	%	N/A	NONE	13	21	10	25	
Total mass of sample received	kg	0.001	NONE	1.1	1.1	0.96	0.95	

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-	-	
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Not-detected	
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-	-	
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-	-	

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.3	7.6	7.6	6.4	
Total Cyanide	mg/kg	1	MCERTS	< 1	1	< 1	< 1	
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.069	0.096	0.062	0.027	
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.017	0.022	0.019	0.028	

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
----------------------------	-------	---	--------	-------	-------	-------	-------	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Phenanthrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Benzo(a)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Benzo(a)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	< 1.60	< 1.60	< 1.60	< 1.60	
-----------------------------	-------	-----	--------	--------	--------	--------	--------	--

Analytical Report Number: 16-26903
Project / Site name: Green Park Village
Your Order No: 1620009315

Lab Sample Number				624762	624763	624764	624765	
Sample Reference				RTP28	RTP29	RTP30	RTP30	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				0.80	0.20	0.15	0.50	
Date Sampled				25/08/2016	26/08/2016	26/08/2016	26/08/2016	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Heavy Metals / Metalloids								
Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	12	13	7.4	11	
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	1.2	1.2	1.2	1.6	
Boron (water soluble)	mg/kg	0.2	MCERTS	1.4	3.2	1.2	1.9	
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	0.3	< 0.2	< 0.2	
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0	
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	48	100	48	44	
Copper (aqua regia extractable)	mg/kg	1	MCERTS	24	47	33	20	
Lead (aqua regia extractable)	mg/kg	1	MCERTS	55	130	80	40	
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	1.1	< 0.3	< 0.3	
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	21	23	21	25	
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	52	40	48	63	
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	100	230	130	100	

Monoaromatics

Benzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Toluene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Ethylbenzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
p & m-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
o-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	12	
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	12	
TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	



Analytical Report Number: 16-26903
Project / Site name: Green Park Village
Your Order No: 1620009315

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

"The analysis was carried out using our documented in-house method A006 based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
624757	RTP26	0.10	156	Loose Fibres	Chrysotile	< 0.001	< 0.001

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation



Analytical Report Number : 16-26903

Project / Site name: Green Park Village

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
624752	RTP23	None Supplied	0.30	Brown loam and clay with gravel.
624753	RTP24	None Supplied	0.15	Brown loam and clay with gravel.
624754	RTP24	None Supplied	0.40	Brown clay and loam with gravel.
624755	RTP25	None Supplied	0.10	Brown loam and sand with gravel.
624756	RTP25	None Supplied	0.30	Brown loam and sand with gravel.
624757	RTP26	None Supplied	0.10	Brown loam and sand with gravel.
624758	RTP26	None Supplied	0.25	Brown clay and loam with gravel.
624759	RTP27	None Supplied	0.15	Brown loam and clay with gravel.
624760	RTP27	None Supplied	1.10	Brown sand with gravel.
624761	RTP28	None Supplied	0.10	Brown sand with gravel.
624762	RTP28	None Supplied	0.80	Brown loam and clay with gravel.
624763	RTP29	None Supplied	0.20	Brown loam and clay with gravel.
624764	RTP30	None Supplied	0.15	Brown loam and clay with gravel.
624765	RTP30	None Supplied	0.50	Brown loam and clay with gravel.



Analytical Report Number : 16-26903

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in ouse method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Fraction of Organic Carbon in soil	Determination of fraction of organic carbon in soil by oxidising with potassium dichromate followed by titration with iron (II) sulphate.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L023-PL	D	NONE
Hexavalent chromium in soil	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in soil	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	MCERTS
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Iss No 16-26903-1 Green Park Village 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 10 of 10

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-42861

Project / Site name:	Green Park Village, Reading	Samples received on:	14/03/2017
Your job number:	1620000492	Samples instructed on:	16/03/2017
Your order number:	PO1620013202	Analysis completed by:	22/03/2017
Report Issue Number:	1	Report issued on:	22/03/2017
Samples Analysed:	2 soil samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Analytical Report Number: 17-42861

Project / Site name: Green Park Village, Reading

Your Order No: PO1620013202

Lab Sample Number				718975	718976			
Sample Reference				RWS618	RBH610			
Sample Number				None Supplied	None Supplied			
Depth (m)				0.50	0.50			
Date Sampled				13/03/2017	13/03/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1			
Moisture Content	%	N/A	NONE	14	9.6			
Total mass of sample received	kg	0.001	NONE	1.2	1.3			

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	Chrysotile & Amosite	Chrysotile & Amosite			
Asbestos in Soil	Type	N/A	ISO 17025	Detected	Detected			
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	0.002	< 0.001			
Asbestos Quantification Total	%	0.001	ISO 17025	0.002	< 0.001			

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	11.6	9.1			
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1			
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	340	3200			
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.17	1.6			

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0			
----------------------------	-------	---	--------	-------	-------	--	--	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05			
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10			
Acenaphthene	mg/kg	0.1	MCERTS	0.31	0.19			
Fluorene	mg/kg	0.1	MCERTS	0.27	0.13			
Phenanthrene	mg/kg	0.1	MCERTS	4.1	1.1			
Anthracene	mg/kg	0.1	MCERTS	0.89	0.43			
Fluoranthene	mg/kg	0.1	MCERTS	7.3	2.2			
Pyrene	mg/kg	0.1	MCERTS	5.5	2.0			
Benzo(a)anthracene	mg/kg	0.1	MCERTS	3.2	1.4			
Chrysene	mg/kg	0.05	MCERTS	2.7	1.0			
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	4.2	1.7			
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	1.3	0.65			
Benzo(a)pyrene	mg/kg	0.1	MCERTS	2.4	1.3			
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	1.4	0.79			
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	0.42	0.19			
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	1.7	0.85			

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	35.6	13.9			
-----------------------------	-------	-----	--------	------	------	--	--	--

Analytical Report Number: 17-42861

Project / Site name: Green Park Village, Reading

Your Order No: PO1620013202

Lab Sample Number				718975	718976			
Sample Reference				RWS618	RBH610			
Sample Number				None Supplied	None Supplied			
Depth (m)				0.50	0.50			
Date Sampled				13/03/2017	13/03/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	9.7	7.4			
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.50	0.42			
Boron (water soluble)	mg/kg	0.2	MCERTS	1.1	2.9			
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2			
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2			
Chromium (III)	mg/kg	1	NONE	23	17			
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	24	17			
Copper (aqua regia extractable)	mg/kg	1	MCERTS	29	54			
Lead (aqua regia extractable)	mg/kg	1	MCERTS	210	94			
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3			
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	20	14			
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0			
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	23	21			
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	330	110			

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0			
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0			
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0			
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0			
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0			
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0			

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	1.0	1.6			
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	6.7	8.5			
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	14	19			
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	99	130			
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	120	160			

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0			
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	4.9	< 2.0			
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	36	19			
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	300	98			
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	340	120			



Analytical Report Number: 17-42861
Project / Site name: Green Park Village, Reading
Your Order No: PO1620013202

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

The analysis was carried out using our documented in-house method A006 based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
718975	RWS618	0.50	127	Loose Fibres & Sheeting/ Board Debris	Chrysotile & Amosite	0.002	0.002
718976	RBH610	0.50	115	Loose Fibres	Chrysotile & Amosite	< 0.001	< 0.001

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation.



Analytical Report Number : 17-42861

Project / Site name: Green Park Village, Reading

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
718975	RWS618	None Supplied	0.50	Brown loam and clay with gravel and brick.
718976	RBH610	None Supplied	0.50	Brown loam and clay with gravel and rubble.

Analytical Report Number : 17-42861

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in ouse method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in soil	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	MCERTS
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Iss No 17-42861-1 Green Park Village, Reading 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 6 of 6

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-43197

Project / Site name:	Green Park Village, Reading	Samples received on:	17/03/2017
Your job number:	1620000492	Samples instructed on:	20/03/2017
Your order number:		Analysis completed by:	27/03/2017
Report Issue Number:	1	Report issued on:	27/03/2017
Samples Analysed:	1 leachate sample - 4 soil samples		

Signed:

Emma Winter
Assistant Reporting Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-43197

Project / Site name: Green Park Village, Reading

Lab Sample Number				720981	720982	720983	720984	
Sample Reference				RWS615	RWS616	RBH604	RBH604	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				0.20	0.50	0.10	3.00	
Date Sampled				16/03/2017	16/03/2017	16/03/2017	16/03/2017	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	
Moisture Content	%	N/A	NONE	27	16	16	20	
Total mass of sample received	kg	0.001	NONE	1.2	1.5	1.3	2.0	

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	Amosite	Chrysotile	
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Detected	Detected	
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	< 0.001	< 0.001	
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	< 0.001	< 0.001	

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.9	9.7	8.2	7.9	
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	130	860	120	290	
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.066	0.43	0.060	0.15	

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
----------------------------	-------	---	--------	-------	-------	-------	-------	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Acenaphthene	mg/kg	0.1	MCERTS	0.59	< 0.10	< 0.10	< 0.10	
Fluorene	mg/kg	0.1	MCERTS	0.28	< 0.10	< 0.10	< 0.10	
Phenanthrene	mg/kg	0.1	MCERTS	3.2	0.38	1.2	< 0.10	
Anthracene	mg/kg	0.1	MCERTS	0.42	< 0.10	0.16	< 0.10	
Fluoranthene	mg/kg	0.1	MCERTS	2.2	0.55	1.2	< 0.10	
Pyrene	mg/kg	0.1	MCERTS	1.4	0.45	0.89	< 0.10	
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.73	0.32	0.60	< 0.10	
Chrysene	mg/kg	0.05	MCERTS	0.74	0.40	0.68	< 0.05	
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	0.65	0.54	0.81	< 0.10	
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.38	0.19	0.32	< 0.10	
Benzo(a)pyrene	mg/kg	0.1	MCERTS	0.56	0.36	0.66	< 0.10	
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	0.34	0.19	0.29	< 0.10	
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.47	0.29	0.43	< 0.05	

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	11.9	3.67	7.16	< 1.60	
-----------------------------	-------	-----	--------	------	------	------	--------	--

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	13	14	13	17	
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	1.5	0.73	0.64	0.98	
Boron (water soluble)	mg/kg	0.2	MCERTS	2.5	3.4	2.7	3.7	
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	0.6	< 0.2	< 0.2	
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	
Chromium (III)	mg/kg	1	NONE	29	28	28	48	
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	29	28	28	49	
Copper (aqua regia extractable)	mg/kg	1	MCERTS	29	48	30	41	
Lead (aqua regia extractable)	mg/kg	1	MCERTS	30	96	48	71	
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	1.3	< 0.3	
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	43	18	18	22	
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	39	30	28	33	
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	92	150	110	150	

Analytical Report Number: 17-43197

Project / Site name: Green Park Village, Reading

Lab Sample Number				720981	720982	720983	720984	
Sample Reference				RWS615	RWS616	RBH604	RBH604	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				0.20	0.50	0.10	3.00	
Date Sampled				16/03/2017	16/03/2017	16/03/2017	16/03/2017	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Toluene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Ethylbenzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
p & m-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
o-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	1.1	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	2.8	3.8	< 2.0	< 2.0	
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	22	< 8.0	< 8.0	
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	48	110	< 8.0	< 8.0	
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	60	140	< 10	< 10	

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	7.3	8.3	3.1	3.0	
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	26	29	16	< 10	
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	77	100	40	30	
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	110	140	59	41	



Analytical Report Number: 17-43197

Project / Site name: Green Park Village, Reading

Lab Sample Number				720985				
Sample Reference				RBH604				
Sample Number				None Supplied				
Depth (m)				0.10				
Date Sampled				16/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.5				
Total Cyanide	µg/l	10	ISO 17025	< 10				
Sulphate as SO ₄	mg/l	0.1	ISO 17025	6.8				
Ammoniacal Nitrogen as N	µg/l	15	NONE	< 15				
Hardness - Total	mgCaCO ₃ /l	1	NONE	43.3				

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10				
----------------------------	------	----	-----------	------	--	--	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	NONE	< 0.01				
Acenaphthylene	µg/l	0.01	NONE	< 0.01				
Acenaphthene	µg/l	0.01	NONE	< 0.01				
Fluorene	µg/l	0.01	NONE	< 0.01				
Phenanthrene	µg/l	0.01	NONE	< 0.01				
Anthracene	µg/l	0.01	NONE	< 0.01				
Fluoranthene	µg/l	0.01	NONE	< 0.01				
Pyrene	µg/l	0.01	NONE	< 0.01				
Benzo(a)anthracene	µg/l	0.01	NONE	< 0.01				
Chrysene	µg/l	0.01	NONE	< 0.01				
Benzo(b)fluoranthene	µg/l	0.01	NONE	< 0.01				
Benzo(k)fluoranthene	µg/l	0.01	NONE	< 0.01				
Benzo(a)pyrene	µg/l	0.01	NONE	< 0.01				
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01				
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01				
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01				

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE	< 0.2				
-------------------	------	-----	------	-------	--	--	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1.1	ISO 17025	6.3				
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2				
Boron (dissolved)	µg/l	10	ISO 17025	56				
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08				
Chromium (hexavalent)	µg/l	5	NONE	< 5.0				
Chromium (III)	µg/l	1	NONE	3.9				
Chromium (dissolved)	µg/l	0.4	ISO 17025	3.9				
Copper (dissolved)	µg/l	0.7	ISO 17025	19				
Lead (dissolved)	µg/l	1	ISO 17025	7.5				
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5				
Nickel (dissolved)	µg/l	0.3	ISO 17025	4.2				
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0				
Vanadium (dissolved)	µg/l	1.7	ISO 17025	12				
Zinc (dissolved)	µg/l	0.4	ISO 17025	6.5				

Calcium (dissolved)	mg/l	0.012	ISO 17025	15				
Magnesium (dissolved)	mg/l	0.005	ISO 17025	1.2				



Analytical Report Number: 17-43197

Project / Site name: Green Park Village, Reading

Lab Sample Number				720985				
Sample Reference				RBH604				
Sample Number				None Supplied				
Depth (m)				0.10				
Date Sampled				16/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0				
Toluene	µg/l	1	ISO 17025	< 1.0				
Ethylbenzene	µg/l	1	ISO 17025	< 1.0				
p & m-xylene	µg/l	1	ISO 17025	< 1.0				
o-xylene	µg/l	1	ISO 17025	< 1.0				
MTBE (Methyl Tertiary Butyl Ether)	µg/l	10	NONE	< 10				

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C6 - C8	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C8 - C10	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10				

TPH-CWG - Aromatic >C5 - C7	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C7 - C8	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C8 - C10	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10				



Analytical Report Number: 17-43197
Project / Site name: Green Park Village, Reading
Your Order No:

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

The analysis was carried out using our documented in-house method A006 based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
720983	RBH604	0.10	129	Sheeting/board debris	Amosite	< 0.001	< 0.001
720984	RBH604	3.00	136	Loose fibres	Chrysotile	< 0.001	< 0.001

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation.



Analytical Report Number : 17-43197

Project / Site name: Green Park Village, Reading

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
720981	RWS615	None Supplied	0.20	Brown clay and sand with gravel.
720982	RWS616	None Supplied	0.50	Brown clay and sand with gravel.
720983	RBH604	None Supplied	0.10	Brown clay and sand with gravel and brick.
720984	RBH604	None Supplied	3.00	Brown clay and sand with gravel.

Analytical Report Number : 17-43197

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in leachate	Determination of Ammonium/Ammonia/ Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	NONE
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in ouse method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
Boron in leachate	Determination of boron in leachate. Sample acidified and followed by ICP-OES.	In-house method based on MEWAM	L039-PL	W	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in leachates (Monoaromatics)	Determination of BTEX and MTBE in leachates by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Hexavalent chromium in leachate	Determination of hexavalent chromium in leachate by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals by ICP-OES in leachate	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in leachate	Determination of phenols in leachate by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
NRA Leachate Prep	10:1 extract with de-ionised water shaken for 24 hours then filtered.	In-house method based on National Rivers Authority	L020-PL	W	NONE

Iss No 17-43197-1 Green Park Village, Reading 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 8 of 9

Analytical Report Number : 17-43197

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
pH at 20oC in leachate	Determination of pH in leachate by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L005-PL	W	ISO 17025
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in leachate	Determination of PAH compounds in leachate by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate in leachates	Determination of sulphate in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil""	L039-PL	W	ISO 17025
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in leachate	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of leachates	Determination of hardness in leachates by calculation from calcium and magnesium.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	NONE
TPHCWG (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-43760

Project / Site name:	Green Park Village, Reading	Samples received on:	24/03/2017
Your job number:	1620000492	Samples instructed on:	24/03/2017
Your order number:		Analysis completed by:	31/03/2017
Report Issue Number:	1	Report issued on:	31/03/2017
Samples Analysed:	1 leachate sample - 7 soil samples		

Signed:

Rexona Rahman
Reporting Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-43760

Project / Site name: Green Park Village, Reading

Lab Sample Number				723860	723861	723862	723863	723864
Sample Reference				RWS610	RWS608	RWS609	RWS609	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.50	2.00	1.80	2.20	2.40
Date Sampled				21/03/2017	21/03/2017	22/03/2017	22/03/2017	22/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	12	18	15	24	15
Total mass of sample received	kg	0.001	NONE	2.0	2.0	2.0	1.6	2.0

Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	-	Not-detected
------------------	------	-----	-----------	--------------	--------------	--------------	---	--------------

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	8.2	7.7	9.7	7.7	9.2
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	530	220	710	160	960
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.26	0.11	0.36	0.079	0.48

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	mg/kg	0.1	MCERTS	0.16	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	mg/kg	0.1	MCERTS	0.24	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	mg/kg	0.1	MCERTS	1.6	0.52	0.28	1.2	0.56
Anthracene	mg/kg	0.1	MCERTS	1.1	< 0.10	< 0.10	0.25	< 0.10
Fluoranthene	mg/kg	0.1	MCERTS	1.6	1.2	0.66	2.2	0.97
Pyrene	mg/kg	0.1	MCERTS	1.3	1.2	0.64	1.8	0.75
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.77	0.79	0.41	1.1	0.49
Chrysene	mg/kg	0.05	MCERTS	0.91	0.62	0.35	0.95	0.39
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	0.60	1.1	0.43	1.2	0.40
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.36	0.48	0.32	0.70	0.31
Benzo(a)pyrene	mg/kg	0.1	MCERTS	0.59	0.97	0.44	1.1	0.38
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	0.47	0.91	0.41	1.0	0.34
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	0.20	< 0.10	0.22	< 0.10
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.53	1.2	0.49	1.2	0.36

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	10.3	9.11	4.43	12.7	4.95
-----------------------------	-------	-----	--------	------	------	------	------	------

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	5.7	16	3.6	21	11
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.69	1.8	0.61	1.5	0.60
Boron (water soluble)	mg/kg	0.2	MCERTS	1.0	6.4	1.7	4.8	1.2
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	0.3	< 0.2	0.2	< 0.2
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	16	39	13	68	25
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	16	39	14	68	25
Copper (aqua regia extractable)	mg/kg	1	MCERTS	17	52	12	46	12
Lead (aqua regia extractable)	mg/kg	1	MCERTS	29	120	32	120	29
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	24	36	24	31	16
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	5.6	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	19	37	18	50	37
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	59	160	42	180	48

Analytical Report Number: 17-43760

Project / Site name: Green Park Village, Reading

Lab Sample Number				723860	723861	723862	723863	723864
Sample Reference				RWS610	RWS608	RWS609	RWS609	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.50	2.00	1.80	2.20	2.40
Date Sampled				21/03/2017	21/03/2017	22/03/2017	22/03/2017	22/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	< 10	37	25	19	< 10
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	12	41	31	27	< 10

PCBs by GC-MS

PCB Congener 28	mg/kg	0.001	MCERTS	-	-	0.004	-	-
PCB Congener 52	mg/kg	0.001	MCERTS	-	-	0.004	-	-
PCB Congener 101	mg/kg	0.001	MCERTS	-	-	0.004	-	-
PCB Congener 118	mg/kg	0.001	MCERTS	-	-	0.003	-	-
PCB Congener 138	mg/kg	0.001	MCERTS	-	-	0.004	-	-
PCB Congener 153	mg/kg	0.001	MCERTS	-	-	0.003	-	-
PCB Congener 180	mg/kg	0.001	MCERTS	-	-	< 0.001	-	-

Total PCBs by GC-MS

Total PCBs	mg/kg	0.007	MCERTS	-	-	0.021	-	-
------------	-------	-------	--------	---	---	-------	---	---

Pesticide and Herbicide Screen

Pesticides/Herbicides Screen in Soil	P/A	N/A	NONE	-	Absent	-	-	-
--------------------------------------	-----	-----	------	---	--------	---	---	---



Analytical Report Number: 17-43760

Project / Site name: Green Park Village, Reading

Lab Sample Number				723865	723884			
Sample Reference				RWS616	RWS613			
Sample Number				None Supplied	None Supplied			
Depth (m)				1.20	0.20			
Date Sampled				21/03/2017	21/03/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1			
Moisture Content	%	N/A	NONE	27	25			
Total mass of sample received	kg	0.001	NONE	2.0	2.0			

Asbestos in Soil	Type	N/A	ISO 17025	-	-			
------------------	------	-----	-----------	---	---	--	--	--

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.5	7.7			
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1			
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	170	290			
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.085	0.15			

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0			
----------------------------	-------	---	--------	-------	-------	--	--	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05			
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10			
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10			
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10			
Phenanthrene	mg/kg	0.1	MCERTS	0.25	< 0.10			
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10			
Fluoranthene	mg/kg	0.1	MCERTS	0.39	< 0.10			
Pyrene	mg/kg	0.1	MCERTS	0.32	< 0.10			
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.19	< 0.10			
Chrysene	mg/kg	0.05	MCERTS	0.16	< 0.05			
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	0.17	< 0.10			
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.15	< 0.10			
Benzo(a)pyrene	mg/kg	0.1	MCERTS	0.19	< 0.10			
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10			
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10			
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.18	< 0.05			

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	2.00	< 1.60			
-----------------------------	-------	-----	--------	------	--------	--	--	--

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	9.6	9.2			
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	1.4	1.5			
Boron (water soluble)	mg/kg	0.2	MCERTS	2.0	2.6			
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	0.2	< 0.2			
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2			
Chromium (III)	mg/kg	1	NONE	43	42			
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	44	42			
Copper (aqua regia extractable)	mg/kg	1	MCERTS	23	19			
Lead (aqua regia extractable)	mg/kg	1	MCERTS	36	28			
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3			
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	24	28			
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0			
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	61	56			
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	85	59			

Analytical Report Number: 17-43760

Project / Site name: Green Park Village, Reading

Lab Sample Number				723865	723884			
Sample Reference				RWS616	RWS613			
Sample Number				None Supplied	None Supplied			
Depth (m)				1.20	0.20			
Date Sampled				21/03/2017	21/03/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0			
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0			
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0			
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0			
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0			
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0			

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0			
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0			
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0			
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0			
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10			

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1			
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0			
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0			
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10			
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	< 10	< 10			
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10			

PCBs by GC-MS

PCB Congener 28	mg/kg	0.001	MCERTS	-	-			
PCB Congener 52	mg/kg	0.001	MCERTS	-	-			
PCB Congener 101	mg/kg	0.001	MCERTS	-	-			
PCB Congener 118	mg/kg	0.001	MCERTS	-	-			
PCB Congener 138	mg/kg	0.001	MCERTS	-	-			
PCB Congener 153	mg/kg	0.001	MCERTS	-	-			
PCB Congener 180	mg/kg	0.001	MCERTS	-	-			

Total PCBs by GC-MS

Total PCBs	mg/kg	0.007	MCERTS	-	-			
------------	-------	-------	--------	---	---	--	--	--

Pesticide and Herbicide Screen

Pesticides/Herbicides Screen in Soil	P/A	N/A	NONE	-	-			
--------------------------------------	-----	-----	------	---	---	--	--	--



Analytical Report Number: 17-43760

Project / Site name: Green Park Village, Reading

Lab Sample Number				723866				
Sample Reference				RWS609				
Sample Number				None Supplied				
Depth (m)				1.80				
Date Sampled				22/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	9.4				
Total Cyanide	µg/l	10	ISO 17025	< 10				
Sulphate as SO ₄	mg/l	0.1	ISO 17025	19				
Ammoniacal Nitrogen as N	µg/l	15	NONE	540				
Hardness - Total	mgCaCO ₃ /l	1	NONE	30.8				

Total Phenols

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10				
----------------------------	------	----	-----------	------	--	--	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	NONE	< 0.01				
Acenaphthylene	µg/l	0.01	NONE	< 0.01				
Acenaphthene	µg/l	0.01	NONE	< 0.01				
Fluorene	µg/l	0.01	NONE	< 0.01				
Phenanthrene	µg/l	0.01	NONE	< 0.01				
Anthracene	µg/l	0.01	NONE	< 0.01				
Fluoranthene	µg/l	0.01	NONE	< 0.01				
Pyrene	µg/l	0.01	NONE	< 0.01				
Benzo(a)anthracene	µg/l	0.01	NONE	< 0.01				
Chrysene	µg/l	0.01	NONE	< 0.01				
Benzo(b)fluoranthene	µg/l	0.01	NONE	< 0.01				
Benzo(k)fluoranthene	µg/l	0.01	NONE	< 0.01				
Benzo(a)pyrene	µg/l	0.01	NONE	< 0.01				
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01				
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01				
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01				

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE	< 0.2				
-------------------	------	-----	------	-------	--	--	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1.1	ISO 17025	5.6				
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2				
Boron (dissolved)	µg/l	10	ISO 17025	37				
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08				
Chromium (hexavalent)	µg/l	5	NONE	< 5.0				
Chromium (III)	µg/l	1	NONE	< 1.0				
Chromium (dissolved)	µg/l	0.4	ISO 17025	0.9				
Copper (dissolved)	µg/l	0.7	ISO 17025	9.7				
Lead (dissolved)	µg/l	1	ISO 17025	6.7				
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5				
Nickel (dissolved)	µg/l	0.3	ISO 17025	1.4				
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0				
Vanadium (dissolved)	µg/l	1.7	ISO 17025	79				
Zinc (dissolved)	µg/l	0.4	ISO 17025	6.6				



Analytical Report Number: 17-43760

Project / Site name: Green Park Village, Reading

Lab Sample Number				723866				
Sample Reference				RWS609				
Sample Number				None Supplied				
Depth (m)				1.80				
Date Sampled				22/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Leachate Analysis)				Units	Limit of detection	Accreditation Status		

Calcium (dissolved)	mg/l	0.012	ISO 17025	12				
Magnesium (dissolved)	mg/l	0.005	ISO 17025	0.24				

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0				
Toluene	µg/l	1	ISO 17025	< 1.0				
Ethylbenzene	µg/l	1	ISO 17025	< 1.0				
p & m-xylene	µg/l	1	ISO 17025	< 1.0				
o-xylene	µg/l	1	ISO 17025	< 1.0				
MTBE (Methyl Tertiary Butyl Ether)	µg/l	10	NONE	< 10				

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C6 - C8	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C8 - C10	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10				

TPH-CWG - Aromatic >C5 - C7	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C7 - C8	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C8 - C10	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10				



Analytical Report Number : 17-43760

Project / Site name: Green Park Village, Reading

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
723860	RWS610	None Supplied	1.50	Light brown sandy clay with gravel.
723861	RWS608	None Supplied	2.00	Black clay and sand with gravel.
723862	RWS609	None Supplied	1.80	Light brown sandy clay with gravel.
723863	RWS609	None Supplied	2.20	Black clay and sand with gravel.
723864	RWS607	None Supplied	2.40	Brown clay and sand with gravel.
723865	RWS616	None Supplied	1.20	Brown clay and sand with gravel.
723884	RWS613	None Supplied	0.20	Brown clay and sand with gravel.

Analytical Report Number : 17-43760

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in leachate	Determination of Ammonium/Ammonia/Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	NONE
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Boron in leachate	Determination of boron in leachate. Sample acidified and followed by ICP-OES.	In-house method based on MEWAM	L039-PL	W	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in leachates (Monoaromatics)	Determination of BTEX and MTBE in leachates by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Hexavalent chromium in leachate	Determination of hexavalent chromium in leachate by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals by ICP-OES in leachate	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in leachate	Determination of phenols in leachate by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
NRA Leachate Prep	10:1 extract with de-ionised water shaken for 24 hours then filtered.	In-house method based on National Rivers Authority	L020-PL	W	NONE
PCB's By GC-MS in soil	Determination of PCB by extraction with acetone and hexane followed by GC-MS.	In-house method based on USEPA 8082	L027-PL	D	MCERTS

Iss No 17-43760-1 Green Park Village, Reading 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 9 of 10

Analytical Report Number : 17-43760

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Pesticides and Herbicides in soil screening	In-house method	In-house method		W	NONE
pH at 20oC in leachate	Determination of pH in leachate by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L005-PL	W	ISO 17025
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in leachate	Determination of PAH compounds in leachate by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate in leachates	Determination of sulphate in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil""	L039-PL	W	ISO 17025
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in leachate	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of leachates	Determination of hardness in leachates by calculation from calcium and magnesium.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	NONE
TPHCWG (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-44063

Replaces Analytical Report Number : 17-44063, issue no. 1

Project / Site name:	Green Park Village, Reading	Samples received on:	28/03/2017
Your job number:	1620000492	Samples instructed on:	28/03/2017
Your order number:		Analysis completed by:	06/04/2017
Report Issue Number:	2	Report issued on:	06/04/2017
Samples Analysed:	2 leachate samples - 8 soil samples		

Signed:

Emma Winter
Assistant Reporting Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-44063

Project / Site name: Green Park Village, Reading

Lab Sample Number				725692	725693	725694	725695	725696
Sample Reference				RBH607	RWS605	RWS606	RWS603	RWS603
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				2.60-2.70	2.60-2.70	1.80-1.90	2.10-2.20	2.60-2.70
Date Sampled				22/03/2017	23/03/2017	23/03/2017	24/03/2017	24/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	24	12	19	15	7.1
Total mass of sample received	kg	0.001	NONE	2.0	2.0	2.0	1.5	2.0

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	Chrysotile	-	-	-
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Detected	Not-detected	Not-detected	-
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	< 0.001	-	-	-
Asbestos Quantification Total	%	0.001	ISO 17025	-	< 0.001	-	-	-

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	8.8	8.8	8.1	7.6	8.3
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	1100	1000	170	220	80
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.55	0.51	0.083	0.11	0.040
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.013	0.016	-	-	-

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	0.30	< 0.05	0.41	< 0.05
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	0.21	< 0.10	0.28	< 0.10
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	0.83	< 0.10	< 0.10	< 0.10
Fluorene	mg/kg	0.1	MCERTS	< 0.10	0.80	< 0.10	< 0.10	< 0.10
Phenanthrene	mg/kg	0.1	MCERTS	0.76	4.5	0.78	0.52	< 0.10
Anthracene	mg/kg	0.1	MCERTS	0.20	1.7	0.17	0.19	< 0.10
Fluoranthene	mg/kg	0.1	MCERTS	1.3	12	2.2	1.3	< 0.10
Pyrene	mg/kg	0.1	MCERTS	1.1	10	1.9	1.4	< 0.10
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.89	5.8	1.1	1.2	< 0.10
Chrysene	mg/kg	0.05	MCERTS	0.67	4.2	1.1	0.88	< 0.05
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	0.79	6.8	1.4	1.8	< 0.10
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.77	2.5	0.76	1.2	< 0.10
Benzo(a)pyrene	mg/kg	0.1	MCERTS	0.88	5.4	1.2	1.8	< 0.10
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	0.59	3.0	0.77	1.4	< 0.10
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	0.15	0.60	0.19	0.28	< 0.10
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.65	3.4	0.89	1.7	< 0.05

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	8.74	62.6	12.5	14.4	< 1.60
-----------------------------	-------	-----	--------	------	------	------	------	--------

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	17	9.5	19	89	4.1
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.98	0.47	1.3	9.5	0.12
Boron (water soluble)	mg/kg	0.2	MCERTS	2.0	1.4	2.1	6.5	0.6
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	0.3	0.3	1.5	< 0.2
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	25	19	52	37	17
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	26	19	52	37	18
Copper (aqua regia extractable)	mg/kg	1	MCERTS	120	12	48	7600	8.9
Lead (aqua regia extractable)	mg/kg	1	MCERTS	63	88	130	800	5.7
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	2.5	1.2	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	20	8.9	24	100	8.7
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	25	31	41	55	9.1
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	700	72	190	1700	42

Analytical Report Number: 17-44063

Project / Site name: Green Park Village, Reading

Lab Sample Number				725692	725693	725694	725695	725696
Sample Reference				RBH607	RWS605	RWS606	RWS603	RWS603
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				2.60-2.70	2.60-2.70	1.80-1.90	2.10-2.20	2.60-2.70
Date Sampled				22/03/2017	23/03/2017	23/03/2017	24/03/2017	24/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	2.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	1.5	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	2.3	< 2.0	< 2.0	2.8	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	8.5	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	24	29	15	88	< 8.0
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	33	35	15	100	< 10

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	1.5	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	3.3	16	< 2.0	< 2.0	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	68	12	< 10	< 10
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	43	170	44	44	< 10
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	57	260	58	49	< 10

Pesticide and Herbicide Screen

Pesticides/Herbicides Screen in Soil	P/A	N/A	NONE	-	-	-	-	-
--------------------------------------	-----	-----	------	---	---	---	---	---

Organochlorine Pesticides (OCP)

DDT	mg/kg	0.01	NONE	-	-	-	-	-
-----	-------	------	------	---	---	---	---	---



Analytical Report Number: 17-44063

Project / Site name: Green Park Village, Reading

Lab Sample Number				725697	725698	725699		
Sample Reference				RWS601	RWS602	RWS611		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				0.60-0.70	4.20-4.30	2.10-2.20		
Date Sampled				24/03/2017	27/03/2017	27/03/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1		
Moisture Content	%	N/A	NONE	15	12	20		
Total mass of sample received	kg	0.001	NONE	2.0	1.8	2.0		

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-		
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	-	Not-detected		
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-		
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-		

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.3	8.4	8.0		
Total Cyanide	mg/kg	1	MCERTS	2	< 1	< 1		
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	150	110	520		
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.074	0.053	0.26		
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	-	-	-		

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
----------------------------	-------	---	--------	-------	-------	-------	--	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	0.17	< 0.05	< 0.05		
Acenaphthylene	mg/kg	0.1	MCERTS	0.55	< 0.10	< 0.10		
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10		
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10		
Phenanthrene	mg/kg	0.1	MCERTS	1.2	< 0.10	< 0.10		
Anthracene	mg/kg	0.1	MCERTS	0.35	< 0.10	< 0.10		
Fluoranthene	mg/kg	0.1	MCERTS	4.6	< 0.10	0.51		
Pyrene	mg/kg	0.1	MCERTS	4.5	< 0.10	0.46		
Benzo(a)anthracene	mg/kg	0.1	MCERTS	3.3	< 0.10	0.31		
Chrysene	mg/kg	0.05	MCERTS	3.0	< 0.05	0.23		
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	5.4	< 0.10	0.29		
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	1.9	< 0.10	0.25		
Benzo(a)pyrene	mg/kg	0.1	MCERTS	4.1	< 0.10	0.35		
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	2.7	< 0.10	0.22		
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	0.61	< 0.10	< 0.10		
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	3.2	< 0.05	0.26		

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	35.5	< 1.60	2.88		
-----------------------------	-------	-----	--------	------	--------	------	--	--

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	68	5.3	27		
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	5.5	2.3	1.6		
Boron (water soluble)	mg/kg	0.2	MCERTS	5.8	1.3	2.7		
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	0.7	< 0.2	< 0.2		
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2		
Chromium (III)	mg/kg	1	NONE	47	38	61		
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	47	38	61		
Copper (aqua regia extractable)	mg/kg	1	MCERTS	320	10	33		
Lead (aqua regia extractable)	mg/kg	1	MCERTS	960	20	53		
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	4.3	< 0.3	1.5		
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	77	27	39		
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	52	51	49		
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	750	54	130		

Analytical Report Number: 17-44063

Project / Site name: Green Park Village, Reading

Lab Sample Number				725697	725698	725699		
Sample Reference				RWS601	RWS602	RWS611		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				0.60-0.70	4.20-4.30	2.10-2.20		
Date Sampled				24/03/2017	27/03/2017	27/03/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	1.5		
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	6.5		
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	15		
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	95		
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	120		

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	1.3	< 1.0	1.2		
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	2.9	< 2.0	3.9		
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	21	< 10	< 10		
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	95	< 10	35		
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	120	< 10	49		

Pesticide and Herbicide Screen

Pesticides/Herbicides Screen in Soil	P/A	N/A	NONE	Present	-	-		
--------------------------------------	-----	-----	------	---------	---	---	--	--

Organochlorine Pesticides (OCP)

DDT	mg/kg	0.01	NONE	0.08	-	-		
-----	-------	------	------	------	---	---	--	--



Analytical Report Number: 17-44063

Project / Site name: Green Park Village, Reading

Your Order No:

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

The analysis was carried out using our documented in-house method A006 based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
725693	RWS605	2.60-2.70	133	Loose Fibres	Chrysotile	< 0.001	< 0.001

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation.



Analytical Report Number: 17-44063

Project / Site name: Green Park Village, Reading

Lab Sample Number				725700	725701			
Sample Reference				RWS603	RWS611			
Sample Number				None Supplied	None Supplied			
Depth (m)				2.10-2.20	2.10-2.20			
Date Sampled				24/03/2017	27/03/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.9	7.8			
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10			
Sulphate as SO ₄	mg/l	0.1	ISO 17025	11	22			
Ammoniacal Nitrogen as N	µg/l	15	NONE	65	450			
Hardness - Total	mgCaCO ₃ /l	1	NONE	83.7	47.9			

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10			
----------------------------	------	----	-----------	------	------	--	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	NONE	< 0.01	< 0.01			
Acenaphthylene	µg/l	0.01	NONE	< 0.01	< 0.01			
Acenaphthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Fluorene	µg/l	0.01	NONE	< 0.01	< 0.01			
Phenanthrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(a)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Chrysene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(b)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(k)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(a)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01			

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE	< 0.2	< 0.2			
-------------------	------	-----	------	-------	-------	--	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1.1	ISO 17025	1.8	5.3			
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	< 0.2			
Boron (dissolved)	µg/l	10	ISO 17025	130	38			
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08			
Chromium (hexavalent)	µg/l	5	NONE	< 5.0	< 5.0			
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0			
Chromium (dissolved)	µg/l	0.4	ISO 17025	< 0.4	0.5			
Copper (dissolved)	µg/l	0.7	ISO 17025	15	18			
Lead (dissolved)	µg/l	1	ISO 17025	5.7	2.5			
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5			
Nickel (dissolved)	µg/l	0.3	ISO 17025	2.1	7.9			
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0			
Vanadium (dissolved)	µg/l	1.7	ISO 17025	2.7	9.1			
Zinc (dissolved)	µg/l	0.4	ISO 17025	11	9.9			

Calcium (dissolved)	mg/l	0.012	ISO 17025	31	18			
Magnesium (dissolved)	mg/l	0.005	ISO 17025	1.5	1.0			



Analytical Report Number: 17-44063

Project / Site name: Green Park Village, Reading

Lab Sample Number				725700	725701			
Sample Reference				RWS603	RWS611			
Sample Number				None Supplied	None Supplied			
Depth (m)				2.10-2.20	2.10-2.20			
Date Sampled				24/03/2017	27/03/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Leachate Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
MTBE (Methyl Tertiary Butyl Ether)	µg/l	10	NONE	< 10	< 10			

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C6 - C8	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C8 - C10	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10			

TPH-CWG - Aromatic >C5 - C7	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C7 - C8	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C8 - C10	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10			



Analytical Report Number : 17-44063

Project / Site name: Green Park Village, Reading

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
725692	RBH607	None Supplied	2.60-2.70	Grey clay and sand with gravel.
725693	RWS605	None Supplied	2.60-2.70	Brown clay and loam with gravel and brick.
725694	RWS606	None Supplied	1.80-1.90	Brown clay and sand with gravel.
725695	RWS603	None Supplied	2.10-2.20	Brown gravelly clay.
725696	RWS603	None Supplied	2.60-2.70	Brown sandy gravel.**
725697	RWS601	None Supplied	0.60-0.70	Brown loam and clay with gravel.
725698	RWS602	None Supplied	4.20-4.30	Light brown clay and sand.
725699	RWS611	None Supplied	2.10-2.20	Brown clay and sand with gravel.

**Non Mcerts matrix

Analytical Report Number : 17-44063

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in leachate	Determination of Ammonium/Ammonia/Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	NONE
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in ouse method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
Boron in leachate	Determination of boron in leachate. Sample acidified and followed by ICP-OES.	In-house method based on MEWAM	L039-PL	W	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in leachates (Monoaromatics)	Determination of BTEX and MTBE in leachates by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Fraction of Organic Carbon in soil	Determination of fraction of organic carbon in soil by oxidising with potassium dichromate followed by titration with iron (II) sulphate.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L023-PL	D	NONE
Hexavalent chromium in leachate	Determination of hexavalent chromium in leachate by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals by ICP-OES in leachate	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in leachate	Determination of phenols in leachate by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS

Iss No 17-44063-2 Green Park Village, Reading 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 10 of 11

Analytical Report Number : 17-44063

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
NRA Leachate Prep	10:1 extract with de-ionised water shaken for 24 hours then filtered.	In-house method based on National Rivers Authority	L020-PL	W	NONE
Organochlorine pesticides in soil	Determination of organochlorine pesticides in soil by GC-MS	In-house method		W	NONE
Pesticides and Herbicides in soil screening	In-house method	In-house method		W	NONE
pH at 20oC in leachate	Determination of pH in leachate by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L005-PL	W	ISO 17025
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in leachate	Determination of PAH compounds in leachate by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate in leachates	Determination of sulphate in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil"	L039-PL	W	ISO 17025
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in leachate	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of leachates	Determination of hardness in leachates by calculation from calcium and magnesium.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	NONE
TPHCWG (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-44433

Replaces Analytical Report Number : 17-44433, issue no. 1

Project / Site name:	Green Park Village, Reading	Samples received on:	30/03/2017
Your job number:	1620000492	Samples instructed on:	30/03/2017
Your order number:		Analysis completed by:	12/04/2017
Report Issue Number:	2	Report issued on:	12/04/2017
Samples Analysed:	3 leachate samples - 10 soil samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727635	727636	727637	727638	727639
Sample Reference				RWS615	RWS612	RWS614	RWS614	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.50	2.65	0.20	1.00	1.20
Date Sampled				29/03/2017	29/03/2017	29/03/2017	29/03/2017	29/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	7.2	20	15	11	15
Total mass of sample received	kg	0.001	NONE	2.0	2.0	2.0	2.0	1.4

Asbestos in Soil	Type	N/A	ISO 17025	-	Not-detected	Not-detected	-	Not-detected
------------------	------	-----	-----------	---	--------------	--------------	---	--------------

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.4	7.9	7.4	7.6	7.6
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	93	140	280	410	3900
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.047	0.072	0.14	0.21	1.9
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	-	-	0.016	-	-

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	1.4
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	0.45
Fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	2.9
Pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	2.6
Benzo(a)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	1.4
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	1.4
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	1.5
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	1.1
Benzo(a)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	1.6
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	0.89
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	0.20
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	1.0

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	< 1.60	< 1.60	< 1.60	< 1.60	16.4
-----------------------------	-------	-----	--------	--------	--------	--------	--------	------

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	19	12	6.4	15
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.22	2.2	0.75	0.54	0.64
Boron (water soluble)	mg/kg	0.2	MCERTS	0.4	1.8	1.5	1.2	3.1
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2	< 0.2	1.1
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	14	29	27	19	23
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	15	29	27	19	23
Copper (aqua regia extractable)	mg/kg	1	MCERTS	12	10	28	18	38
Lead (aqua regia extractable)	mg/kg	1	MCERTS	6.2	12	61	29	91
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	14	18	17	16	17
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	12	83	24	17	30
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	13	23	85	48	170

Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727635	727636	727637	727638	727639
Sample Reference				RWS615	RWS612	RWS614	RWS614	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.50	2.65	0.20	1.00	1.20
Date Sampled				29/03/2017	29/03/2017	29/03/2017	29/03/2017	29/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	63
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	72

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	20
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	130
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	150

Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727635	727636	727637	727638	727639
Sample Reference				RWS615	RWS612	RWS614	RWS614	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.50	2.65	0.20	1.00	1.20
Date Sampled				29/03/2017	29/03/2017	29/03/2017	29/03/2017	29/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		
Pesticide and Herbicide Screen								
Pesticides/Herbicides Screen in Soil				P/A	N/A	NONE	-	Present
Organochlorine Pesticides (OCP)								
DDT				mg/kg	0.01	NONE	-	0.07

Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727640	727641	727642	727643	727644
Sample Reference				RBH605	RBH605	RWS629	RWS629	RWS630
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.00	1.40	0.20	3.50	0.30
Date Sampled				29/03/2017	29/03/2017	29/03/2017	29/03/2017	29/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	15	24	20	30	14
Total mass of sample received	kg	0.001	NONE	1.7	1.8	1.8	1.8	2.0

Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	-	Not-detected	Not-detected	Not-detected
------------------	------	-----	-----------	--------------	---	--------------	--------------	--------------

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.8	7.4	7.6	7.5	8.0
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	1200	110	1500	540	380
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.62	0.055	0.75	0.27	0.19
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.012	-	-	-	-

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.48	< 0.10	0.76
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	0.21
Fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	1.4	< 0.10	1.9
Pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	1.3	< 0.10	1.7
Benzo(a)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.81	< 0.10	1.2
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.86	< 0.05	0.86
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.98	< 0.10	1.4
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.86	< 0.10	0.82
Benzo(a)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	1.2	< 0.10	1.4
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.74	< 0.10	0.75
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	0.17
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.74	< 0.05	0.99

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	< 1.60	< 1.60	9.34	< 1.60	12.1
-----------------------------	-------	-----	--------	--------	--------	------	--------	------

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	32	32	13	11	13
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	1.3	1.8	0.61	0.62	0.58
Boron (water soluble)	mg/kg	0.2	MCERTS	1.9	2.3	3.2	3.2	1.6
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	37	30	18	14	16
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	37	30	18	14	16
Copper (aqua regia extractable)	mg/kg	1	MCERTS	27	38	33	21	21
Lead (aqua regia extractable)	mg/kg	1	MCERTS	53	22	87	19	38
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	23	25	17	20	14
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	49	53	27	21	28
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	82	46	140	47	72

Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727640	727641	727642	727643	727644
Sample Reference				RBH605	RBH605	RWS629	RWS629	RWS630
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.00	1.40	0.20	3.50	0.30
Date Sampled				29/03/2017	29/03/2017	29/03/2017	29/03/2017	29/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Monoaromatics								
Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	1.1	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	27	< 8.0	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	30	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	7.6	< 2.0
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	25	15
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	12	< 10	66	69	43
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	15	< 10	77	100	58

Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727640	727641	727642	727643	727644
Sample Reference				RBH605	RBH605	RWS629	RWS629	RWS630
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.00	1.40	0.20	3.50	0.30
Date Sampled				29/03/2017	29/03/2017	29/03/2017	29/03/2017	29/03/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		
Pesticide and Herbicide Screen								
Pesticides/Herbicides Screen in Soil				P/A	N/A	NONE	-	-
Organochlorine Pesticides (OCP)								
DDT				mg/kg	0.01	NONE	-	-



Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727645	727646	727647		
Sample Reference				RWS614	RBH605	RWS630		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				0.20	1.00	0.30		
Date Sampled				29/03/2017	29/03/2017	29/03/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Leachate Analysis)				Units	Limit of detection	Accreditation Status		

General Inorganics

pH	pH Units	N/A	ISO 17025	7.6	7.8	7.9		
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10		
Sulphate as SO ₄	mg/l	0.1	ISO 17025	30	33	17		
Ammoniacal Nitrogen as N	µg/l	15	NONE	< 15	910	67		
Hardness - Total	mgCaCO ₃ /l	1	NONE	36.7	71.9	68.7		

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10		
----------------------------	------	----	-----------	------	------	------	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Acenaphthylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Acenaphthene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Fluorene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Phenanthrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01	0.74		
Pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	0.61		
Benzo(a)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	0.26		
Chrysene	µg/l	0.01	NONE	< 0.01	< 0.01	0.23		
Benzo(b)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(k)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(a)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE	< 0.2	< 0.2	1.8		
-------------------	------	-----	------	-------	-------	-----	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1.1	ISO 17025	4.1	< 1.1	2.0		
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	< 0.2	< 0.2		
Boron (dissolved)	µg/l	10	ISO 17025	30	35	40		
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08	< 0.08		
Chromium (hexavalent)	µg/l	5	NONE	< 5.0	< 5.0	< 5.0		
Chromium (III)	µg/l	1	NONE	2.0	1.0	1.0		
Chromium (dissolved)	µg/l	0.4	ISO 17025	2.0	1.0	1.0		
Copper (dissolved)	µg/l	0.7	ISO 17025	11	14	6.5		
Lead (dissolved)	µg/l	1	ISO 17025	2.3	2.4	3.0		
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5	< 0.5		
Nickel (dissolved)	µg/l	0.3	ISO 17025	2.5	2.8	0.9		
Selenium (dissolved)	µg/l	4	ISO 17025	4.1	< 4.0	< 4.0		
Vanadium (dissolved)	µg/l	1.7	ISO 17025	8.7	3.0	< 1.7		
Zinc (dissolved)	µg/l	0.4	ISO 17025	7.6	3.3	3.5		

Calcium (dissolved)	mg/l	0.012	ISO 17025	13	28	25		
Magnesium (dissolved)	mg/l	0.005	ISO 17025	0.87	0.70	1.6		



Analytical Report Number: 17-44433

Project / Site name: Green Park Village, Reading

Lab Sample Number				727645	727646	727647		
Sample Reference				RWS614	RBH605	RWS630		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				0.20	1.00	0.30		
Date Sampled				29/03/2017	29/03/2017	29/03/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Leachate Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
MTBE (Methyl Tertiary Butyl Ether)	µg/l	10	NONE	< 10	< 10	< 10		

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C6 - C8	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C8 - C10	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C5 - C7	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C7 - C8	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C8 - C10	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10		



Analytical Report Number : 17-44433

Project / Site name: Green Park Village, Reading

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
727635	RWS615	None Supplied	1.50	Light grey sandy gravel.**
727636	RWS612	None Supplied	2.65	Grey clay with gravel.
727637	RWS614	None Supplied	0.20	Brown clay and sand with gravel.
727638	RWS614	None Supplied	1.00	Grey clay and sand with gravel.
727639	RBH608	None Supplied	1.20	Brown loam and clay with gravel.
727640	RBH605	None Supplied	1.00	Brown loam and clay with gravel.
727641	RBH605	None Supplied	1.40	Brown loam and clay with gravel.
727642	RWS629	None Supplied	0.20	Brown loam and clay with gravel.
727643	RWS629	None Supplied	3.50	Brown loam and clay with gravel.
727644	RWS630	None Supplied	0.30	Light brown clay and sand.

**Non Mcerts Matrix

Analytical Report Number : 17-44433

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in leachate	Determination of Ammonium/Ammonia/ Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	NONE
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Boron in leachate	Determination of boron in leachate. Sample acidified and followed by ICP-OES.	In-house method based on MEWAM	L039-PL	W	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in leachates (Monoaromatics)	Determination of BTEX and MTBE in leachates by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Fraction of Organic Carbon in soil	Determination of fraction of organic carbon in soil by oxidising with potassium dichromate followed by titration with iron (II) sulphate.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L023-PL	D	NONE
Hexavalent chromium in leachate	Determination of hexavalent chromium in leachate by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals by ICP-OES in leachate	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in leachate	Determination of phenols in leachate by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
NRA Leachate Prep	10:1 extract with de-ionised water shaken for 24 hours then filtered.	In-house method based on National Rivers Authority	L020-PL	W	NONE

Iss No 17-44433-2 Green Park Village, Reading 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 11 of 13

Analytical Report Number : 17-44433

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Organochlorine pesticides in soil	Determination of organochlorine pesticides in soil by GC-MS	In-house method		W	NONE
Pesticides and Herbicides in soil screening	In-house method	In-house method		W	NONE
pH at 20oC in leachate	Determination of pH in leachate by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L005-PL	W	ISO 17025
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in leachate	Determination of PAH compounds in leachate by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate in leachates	Determination of sulphate in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil"	L039-PL	W	ISO 17025
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in leachate	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of leachates	Determination of hardness in leachates by calculation from calcium and magnesium.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	NONE
TPHCWG (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Sample Deviation Report



Sample ID	Other_ID	Sample Type	Job	Sample Number	Sample Deviation Code	test_name	test_ref	Test Deviation code
RWS614		S	17-44433	727638	b	BTEX and MTBE in soil (Monoaromatics)	L073B-PL	b
RWS614		S	17-44433	727638	b	TPHCWG (Soil)	L076-PL	b
RWS629		S	17-44433	727642	b	BTEX and MTBE in soil (Monoaromatics)	L073B-PL	b
RWS629		S	17-44433	727642	b	TPHCWG (Soil)	L076-PL	b
RWS629		S	17-44433	727643	b	BTEX and MTBE in soil (Monoaromatics)	L073B-PL	b
RWS629		S	17-44433	727643	b	TPHCWG (Soil)	L076-PL	b
RWS630		S	17-44433	727644	b	BTEX and MTBE in soil (Monoaromatics)	L073B-PL	b
RWS630		S	17-44433	727644	b	TPHCWG (Soil)	L076-PL	b

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404

f: 01923 237404

e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-44531

Project / Site name: Green Park Village

Samples received on: 30/03/2017

Your job number:

Samples instructed on: 03/04/2017

Your order number:

Analysis completed by: 07/04/2017

Report Issue Number: 1

Report issued on: 07/04/2017

Samples Analysed: 1 soil sample

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :

soils	- 4 weeks from reporting
leachates	- 2 weeks from reporting
waters	- 2 weeks from reporting
asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Analytical Report Number: 17-44531

Project / Site name: Green Park Village

Lab Sample Number				728088				
Sample Reference				RBH609				
Sample Number				None Supplied				
Depth (m)				1.50				
Date Sampled				29/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1				
Moisture Content	%	N/A	NONE	15				
Total mass of sample received	kg	0.001	NONE	1.5				

Asbestos in Soil	Type	N/A	ISO 17025	Not-detected				
------------------	------	-----	-----------	--------------	--	--	--	--

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.7				
Total Cyanide	mg/kg	1	MCERTS	< 1				
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	3800				
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	1.9				

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0				
----------------------------	-------	---	--------	-------	--	--	--	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05				
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10				
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10				
Fluorene	mg/kg	0.1	MCERTS	< 0.10				
Phenanthrene	mg/kg	0.1	MCERTS	0.96				
Anthracene	mg/kg	0.1	MCERTS	0.31				
Fluoranthene	mg/kg	0.1	MCERTS	1.9				
Pyrene	mg/kg	0.1	MCERTS	1.7				
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.97				
Chrysene	mg/kg	0.05	MCERTS	0.92				
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	0.91				
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.88				
Benzo(a)pyrene	mg/kg	0.1	MCERTS	1.0				
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	0.53				
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10				
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.64				

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	10.7				
-----------------------------	-------	-----	--------	------	--	--	--	--

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	12				
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.72				
Boron (water soluble)	mg/kg	0.2	MCERTS	3.4				
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2				
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2				
Chromium (III)	mg/kg	1	NONE	30				
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	31				
Copper (aqua regia extractable)	mg/kg	1	MCERTS	52				
Lead (aqua regia extractable)	mg/kg	1	MCERTS	66				
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	0.7				
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	19				
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0				
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	33				
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	140				

Analytical Report Number: 17-44531

Project / Site name: Green Park Village

Lab Sample Number				728088				
Sample Reference				RBH609				
Sample Number				None Supplied				
Depth (m)				1.50				
Date Sampled				29/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0				
Toluene	ug/kg	1	MCERTS	< 1.0				
Ethylbenzene	ug/kg	1	MCERTS	< 1.0				
p & m-xylene	ug/kg	1	MCERTS	< 1.0				
o-xylene	ug/kg	1	MCERTS	< 1.0				
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0				

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1				
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1				
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1				
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0				
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	11				
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	26				
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	220				
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	260				

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1				
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1				
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1				
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	1.4				
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	12				
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	43				
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	210				
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	260				



Analytical Report Number: 17-44531

Project / Site name: Green Park Village

Lab Sample Number				728088				
Sample Reference				RBH609				
Sample Number				None Supplied				
Depth (m)				1.50				
Date Sampled				29/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/kg	1	ISO 17025	< 1.0				
Chloroethane	µg/kg	1	NONE	< 1.0				
Bromomethane	µg/kg	1	ISO 17025	< 1.0				
Vinyl Chloride	µg/kg	1	NONE	< 1.0				
Trichlorofluoromethane	µg/kg	1	NONE	< 1.0				
1,1-Dichloroethene	µg/kg	1	NONE	< 1.0				
1,1,2-Trichloro 1,2,2-Trifluoroethane	µg/kg	1	ISO 17025	< 1.0				
Cis-1,2-dichloroethene	µg/kg	1	MCERTS	< 1.0				
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0				
1,1-Dichloroethane	µg/kg	1	MCERTS	< 1.0				
2,2-Dichloropropane	µg/kg	1	MCERTS	< 1.0				
Trichloromethane	µg/kg	1	MCERTS	< 1.0				
1,1,1-Trichloroethane	µg/kg	1	MCERTS	< 1.0				
1,2-Dichloroethane	µg/kg	1	MCERTS	< 1.0				
1,1-Dichloropropene	µg/kg	1	MCERTS	< 1.0				
Trans-1,2-dichloroethene	µg/kg	1	NONE	< 1.0				
Benzene	µg/kg	1	MCERTS	< 1.0				
Tetrachloromethane	µg/kg	1	MCERTS	< 1.0				
1,2-Dichloropropane	µg/kg	1	MCERTS	< 1.0				
Trichloroethene	µg/kg	1	MCERTS	< 1.0				
Dibromomethane	µg/kg	1	MCERTS	< 1.0				
Bromodichloromethane	µg/kg	1	MCERTS	< 1.0				
Cis-1,3-dichloropropene	µg/kg	1	ISO 17025	< 1.0				
Trans-1,3-dichloropropene	µg/kg	1	ISO 17025	< 1.0				
Toluene	µg/kg	1	MCERTS	< 1.0				
1,1,2-Trichloroethane	µg/kg	1	MCERTS	< 1.0				
1,3-Dichloropropane	µg/kg	1	ISO 17025	< 1.0				
Dibromochloromethane	µg/kg	1	ISO 17025	< 1.0				
Tetrachloroethene	µg/kg	1	NONE	< 1.0				
1,2-Dibromoethane	µg/kg	1	ISO 17025	< 1.0				
Chlorobenzene	µg/kg	1	MCERTS	< 1.0				
1,1,1,2-Tetrachloroethane	µg/kg	1	MCERTS	< 1.0				
Ethylbenzene	µg/kg	1	MCERTS	< 1.0				
p & m-Xylene	µg/kg	1	MCERTS	< 1.0				
Styrene	µg/kg	1	MCERTS	< 1.0				
Tribromomethane	µg/kg	1	NONE	< 1.0				
o-Xylene	µg/kg	1	MCERTS	< 1.0				
1,1,2,2-Tetrachloroethane	µg/kg	1	MCERTS	< 1.0				
Isopropylbenzene	µg/kg	1	MCERTS	< 1.0				
Bromobenzene	µg/kg	1	MCERTS	< 1.0				
n-Propylbenzene	µg/kg	1	ISO 17025	< 1.0				
2-Chlorotoluene	µg/kg	1	MCERTS	< 1.0				
4-Chlorotoluene	µg/kg	1	MCERTS	< 1.0				
1,3,5-Trimethylbenzene	µg/kg	1	ISO 17025	< 1.0				
tert-Butylbenzene	µg/kg	1	MCERTS	< 1.0				
1,2,4-Trimethylbenzene	µg/kg	1	ISO 17025	< 1.0				
sec-Butylbenzene	µg/kg	1	MCERTS	< 1.0				
1,3-Dichlorobenzene	µg/kg	1	ISO 17025	< 1.0				
p-Isopropyltoluene	µg/kg	1	ISO 17025	< 1.0				
1,2-Dichlorobenzene	µg/kg	1	MCERTS	< 1.0				
1,4-Dichlorobenzene	µg/kg	1	MCERTS	< 1.0				
Butylbenzene	µg/kg	1	MCERTS	< 1.0				
1,2-Dibromo-3-chloropropane	µg/kg	1	ISO 17025	< 1.0				
1,2,4-Trichlorobenzene	µg/kg	1	MCERTS	< 1.0				
Hexachlorobutadiene	µg/kg	1	MCERTS	< 1.0				
1,2,3-Trichlorobenzene	µg/kg	1	ISO 17025	< 1.0				

Analytical Report Number: 17-44531

Project / Site name: Green Park Village

Lab Sample Number				728088				
Sample Reference				RBH609				
Sample Number				None Supplied				
Depth (m)				1.50				
Date Sampled				29/03/2017				
Time Taken				None Supplied				
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	mg/kg	0.1	NONE	< 0.1				
Phenol	mg/kg	0.2	ISO 17025	< 0.2				
2-Chlorophenol	mg/kg	0.1	MCERTS	< 0.1				
Bis(2-chloroethyl)ether	mg/kg	0.2	MCERTS	< 0.2				
1,3-Dichlorobenzene	mg/kg	0.2	MCERTS	< 0.2				
1,2-Dichlorobenzene	mg/kg	0.1	MCERTS	< 0.1				
1,4-Dichlorobenzene	mg/kg	0.2	MCERTS	< 0.2				
Bis(2-chloroisopropyl)ether	mg/kg	0.1	MCERTS	< 0.1				
2-Methylphenol	mg/kg	0.3	MCERTS	< 0.3				
Hexachloroethane	mg/kg	0.05	MCERTS	< 0.05				
Nitrobenzene	mg/kg	0.3	MCERTS	< 0.3				
4-Methylphenol	mg/kg	0.2	NONE	< 0.2				
Isophorone	mg/kg	0.2	MCERTS	< 0.2				
2-Nitrophenol	mg/kg	0.3	MCERTS	< 0.3				
2,4-Dimethylphenol	mg/kg	0.3	MCERTS	< 0.3				
Bis(2-chloroethoxy)methane	mg/kg	0.3	MCERTS	< 0.3				
1,2,4-Trichlorobenzene	mg/kg	0.3	MCERTS	< 0.3				
Naphthalene	mg/kg	0.05	MCERTS	< 0.05				
2,4-Dichlorophenol	mg/kg	0.3	MCERTS	< 0.3				
4-Chloroaniline	mg/kg	0.1	NONE	< 0.1				
Hexachlorobutadiene	mg/kg	0.1	MCERTS	< 0.1				
4-Chloro-3-methylphenol	mg/kg	0.1	NONE	< 0.1				
2,4,6-Trichlorophenol	mg/kg	0.1	MCERTS	< 0.1				
2,4,5-Trichlorophenol	mg/kg	0.2	MCERTS	< 0.2				
2-Methylnaphthalene	mg/kg	0.1	NONE	< 0.1				
2-Chloronaphthalene	mg/kg	0.1	MCERTS	< 0.1				
Dimethylphthalate	mg/kg	0.1	MCERTS	< 0.1				
2,6-Dinitrotoluene	mg/kg	0.1	MCERTS	< 0.1				
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10				
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10				
2,4-Dinitrotoluene	mg/kg	0.2	MCERTS	< 0.2				
Dibenzofuran	mg/kg	0.2	MCERTS	< 0.2				
4-Chlorophenyl phenyl ether	mg/kg	0.3	ISO 17025	< 0.3				
Diethyl phthalate	mg/kg	0.2	MCERTS	< 0.2				
4-Nitroaniline	mg/kg	0.2	MCERTS	< 0.2				
Fluorene	mg/kg	0.1	MCERTS	< 0.10				
Azobenzene	mg/kg	0.3	MCERTS	< 0.3				
Bromophenyl phenyl ether	mg/kg	0.2	MCERTS	< 0.2				
Hexachlorobenzene	mg/kg	0.3	MCERTS	< 0.3				
Phenanthrene	mg/kg	0.1	MCERTS	0.96				
Anthracene	mg/kg	0.1	MCERTS	0.31				
Carbazole	mg/kg	0.3	MCERTS	< 0.3				
Dibutyl phthalate	mg/kg	0.2	MCERTS	< 0.2				
Anthraquinone	mg/kg	0.3	MCERTS	< 0.3				
Fluoranthene	mg/kg	0.1	MCERTS	1.9				
Pyrene	mg/kg	0.1	MCERTS	1.7				
Butyl benzyl phthalate	mg/kg	0.3	ISO 17025	< 0.3				
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.97				
Chrysene	mg/kg	0.05	MCERTS	0.92				
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	0.91				
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	0.88				
Benzo(a)pyrene	mg/kg	0.1	MCERTS	1.0				
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	0.53				
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10				
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.64				



Analytical Report Number : 17-44531

Project / Site name: Green Park Village

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
728088	RBH609	None Supplied	1.50	Brown loam and clay with gravel.

Analytical Report Number : 17-44531

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Semi-volatile organic compounds in soil	Determination of semi-volatile organic compounds in soil by extraction in dichloromethane and hexane followed by GC-MS.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in soil	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	MCERTS
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS
Volatile organic compounds in soil	Determination of volatile organic compounds in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS

Iss No 17-44531-1 Green Park Village

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 7 of 8



Analytical Report Number : 17-44531

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
----------------------	-------------------------------	-----------------------------	---------------	--------------------	----------------------

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-44842

Project / Site name:	Green Park Village, Reading	Samples received on:	04/04/2017
Your job number:	1620000492	Samples instructed on:	04/04/2017
Your order number:		Analysis completed by:	11/04/2017
Report Issue Number:	1	Report issued on:	11/04/2017
Samples Analysed:	2 leachate samples - 8 soil samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-44842

Project / Site name: Green Park Village, Reading

Lab Sample Number				730118	730119	730120	730121	730122
Sample Reference				RWS632	RWS633	RWS634	RBH606	RWS637
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.00	0.20	3.85	0.60	0.20
Date Sampled				30/03/2017	31/03/2017	31/03/2017	31/03/2017	03/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	21	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	8.8	8.2	11	11	12
Total mass of sample received	kg	0.001	NONE	1.9	2.0	2.0	2.0	1.9

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-	Chrysotile	Chrysotile & Amosite
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	-	Detected	Detected
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-	0.002	0.003
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-	0.002	0.003

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.7	7.9	8.7	9.5	9.6
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	970	29	82	650	3300
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.48	0.014	0.041	0.33	1.7
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	-	0.0061	-	-	-

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	0.65	1.2
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	0.40
Fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	1.0	2.9
Pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	0.90	2.5
Benzo(a)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	0.63	1.8
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	0.53	1.5
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	0.68	2.3
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	0.43	1.5
Benzo(a)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	0.60	2.1
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	0.36	1.4
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10	< 0.10	0.37
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	0.50	1.6

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	< 1.60	< 1.60	< 1.60	6.31	19.5
-----------------------------	-------	-----	--------	--------	--------	--------	------	------

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	7.7	< 1.0	13	6.9
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.86	0.53	0.56	0.49	0.97
Boron (water soluble)	mg/kg	0.2	MCERTS	0.3	1.0	0.5	2.1	1.9
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2	0.6	0.5
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	17	20	9.2	25	26
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	17	20	9.2	25	26
Copper (aqua regia extractable)	mg/kg	1	MCERTS	14	17	14	59	130
Lead (aqua regia extractable)	mg/kg	1	MCERTS	12	22	98	53	150
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	1.4	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	21	17	20	15	39
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	20	20	7.4	26	29
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	30	45	26	130	330

Analytical Report Number: 17-44842

Project / Site name: Green Park Village, Reading

Lab Sample Number				730118	730119	730120	730121	730122
Sample Reference				RWS632	RWS633	RWS634	RBH606	RWS637
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.00	0.20	3.85	0.60	0.20
Date Sampled				30/03/2017	31/03/2017	31/03/2017	31/03/2017	03/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	1.2
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	2.8	5.4
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	12	13
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	130	97
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	150	120

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	1.2	< 1.0
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	2.7
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	< 10	14	22
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	< 10	< 10	< 10	190	170
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	210	200

Analytical Report Number: 17-44842

Project / Site name: Green Park Village, Reading

Lab Sample Number				730123	730124	730125		
Sample Reference				RWS637	RWS637	RWS635		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				2.60	4.50	0.70		
Date Sampled				03/04/2017	03/04/2017	31/03/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1		
Moisture Content	%	N/A	NONE	18	7.2	13		
Total mass of sample received	kg	0.001	NONE	2.0	2.0	2.0		

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-		
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	-	Not-detected		
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-		
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-		

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.9	8.4	7.9		
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1		
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	340	92	3300		
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.17	0.046	1.7		
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.013	-	-		

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
----------------------------	-------	---	--------	-------	-------	-------	--	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05		
Acenaphthylene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.33		
Acenaphthene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10		
Fluorene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	< 0.10		
Phenanthrene	mg/kg	0.1	MCERTS	0.24	0.27	1.9		
Anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.71		
Fluoranthene	mg/kg	0.1	MCERTS	0.58	0.67	5.3		
Pyrene	mg/kg	0.1	MCERTS	0.51	0.61	4.8		
Benzo(a)anthracene	mg/kg	0.1	MCERTS	0.25	0.29	2.8		
Chrysene	mg/kg	0.05	MCERTS	0.22	0.22	2.4		
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	0.30	3.1		
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	< 0.10	0.24	2.1		
Benzo(a)pyrene	mg/kg	0.1	MCERTS	< 0.10	0.26	2.8		
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	1.6		
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	< 0.10	< 0.10	0.43		
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	1.9		

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	1.80	2.86	30.1		
-----------------------------	-------	-----	--------	------	------	------	--	--

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	8.3	11	8.6		
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.84	0.14	0.57		
Boron (water soluble)	mg/kg	0.2	MCERTS	2.2	0.4	2.4		
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2		
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2		
Chromium (III)	mg/kg	1	NONE	42	6.9	20		
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	42	7.0	20		
Copper (aqua regia extractable)	mg/kg	1	MCERTS	28	10	27		
Lead (aqua regia extractable)	mg/kg	1	MCERTS	40	6.9	80		
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	1.0	< 0.3		
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	22	11	15		
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	32	7.3	30		
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	87	17	110		

Analytical Report Number: 17-44842

Project / Site name: Green Park Village, Reading

Lab Sample Number				730123	730124	730125		
Sample Reference				RWS637	RWS637	RWS635		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				2.60	4.50	0.70		
Date Sampled				03/04/2017	03/04/2017	31/03/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Monoaromatics								
Benzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Toluene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Ethylbenzene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
p & m-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
o-xylene	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0		
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0		
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	13	56		
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	15	61		
TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	2.1		
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	5.8		
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	28		
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	13	< 10	93		
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	17	< 10	130		



Analytical Report Number: 17-44842
Project / Site name: Green Park Village, Reading
Your Order No:

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

The analysis was carried out using our documented in-house method A006 based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
730121	RBH606	0.60	131	Loose Fibrous Debris	Chrysotile	0.002	0.002
730122	RWS637	0.20	132	Loose Fibres & Sheeting/ Board Debris	Chrysotile & Amosite	0.003	0.003

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation.



Analytical Report Number: 17-44842

Project / Site name: Green Park Village, Reading

Lab Sample Number				730126	730127			
Sample Reference				RWS633	RWS637			
Sample Number				None Supplied	None Supplied			
Depth (m)				0.20	0.20			
Date Sampled				31/03/2017	03/04/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Leachate Analysis)				Units	Limit of detection	Accreditation Status		

General Inorganics

pH	pH Units	N/A	ISO 17025	7.5	7.2			
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10			
Sulphate as SO ₄	mg/l	0.1	ISO 17025	1.2	450			
Ammoniacal Nitrogen as N	µg/l	15	NONE	< 15	87			
Hardness - Total	mgCaCO ₃ /l	1	NONE	23.9	381			

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10			
----------------------------	------	----	-----------	------	------	--	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	NONE	< 0.01	< 0.01			
Acenaphthylene	µg/l	0.01	NONE	< 0.01	< 0.01			
Acenaphthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Fluorene	µg/l	0.01	NONE	< 0.01	< 0.01			
Phenanthrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(a)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Chrysene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(b)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(k)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(a)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01			

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE	< 0.2	< 0.2			
-------------------	------	-----	------	-------	-------	--	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1.1	ISO 17025	11	2.5			
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	< 0.2			
Boron (dissolved)	µg/l	10	ISO 17025	< 10	48			
Cadmium (dissolved)	µg/l	0.08	ISO 17025	0.09	< 0.08			
Chromium (hexavalent)	µg/l	5	NONE	< 5.0	< 5.0			
Chromium (III)	µg/l	1	NONE	1.6	< 1.0			
Chromium (dissolved)	µg/l	0.4	ISO 17025	1.6	0.7			
Copper (dissolved)	µg/l	0.7	ISO 17025	5.4	13			
Lead (dissolved)	µg/l	1	ISO 17025	2.7	< 1.0			
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5			
Nickel (dissolved)	µg/l	0.3	ISO 17025	1.4	1.3			
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0			
Vanadium (dissolved)	µg/l	1.7	ISO 17025	4.3	1.9			
Zinc (dissolved)	µg/l	0.4	ISO 17025	5.3	11			

Calcium (dissolved)	mg/l	0.012	ISO 17025	8.8	150			
Magnesium (dissolved)	mg/l	0.005	ISO 17025	0.49	3.9			



Analytical Report Number: 17-44842

Project / Site name: Green Park Village, Reading

Lab Sample Number				730126	730127			
Sample Reference				RWS633	RWS637			
Sample Number				None Supplied	None Supplied			
Depth (m)				0.20	0.20			
Date Sampled				31/03/2017	03/04/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
MTBE (Methyl Tertiary Butyl Ether)	µg/l	10	NONE	< 10	< 10			

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C6 - C8	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C8 - C10	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C5 - C7	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C7 - C8	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C8 - C10	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10			



Analytical Report Number : 17-44842

Project / Site name: Green Park Village, Reading

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
730118	RWS632	None Supplied	1.00	Light brown clay and sand with gravel and stones.
730119	RWS633	None Supplied	0.20	Brown clay and loam with gravel and vegetation.
730120	RWS634	None Supplied	3.85	Grey sandy clay.
730121	RBH606	None Supplied	0.60	Brown loam and clay with gravel and plastic.
730122	RWS637	None Supplied	0.20	Brown loam and clay with gravel and plastic.
730123	RWS637	None Supplied	2.60	Brown clay and loam with gravel.
730124	RWS637	None Supplied	4.50	Light brown sand with gravel.
730125	RWS635	None Supplied	0.70	Brown loam and clay with gravel and brick.

Analytical Report Number : 17-44842

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in leachate	Determination of Ammonium/Ammonia/ Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	NONE
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in ouse method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
Boron in leachate	Determination of boron in leachate. Sample acidified and followed by ICP-OES.	In-house method based on MEWAM	L039-PL	W	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in leachates (Monoaromatics)	Determination of BTEX and MTBE in leachates by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Fraction of Organic Carbon in soil	Determination of fraction of organic carbon in soil by oxidising with potassium dichromate followed by titration with iron (II) sulphate.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L023-PL	D	NONE
Hexavalent chromium in leachate	Determination of hexavalent chromium in leachate by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals by ICP-OES in leachate	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in leachate	Determination of phenols in leachate by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS

Iss No 17-44842-1 Green Park Village, Reading 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 10 of 11

Analytical Report Number : 17-44842

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
NRA Leachate Prep	10:1 extract with de-ionised water shaken for 24 hours then filtered.	In-house method based on National Rivers Authority	L020-PL	W	NONE
pH at 20oC in leachate	Determination of pH in leachate by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L005-PL	W	ISO 17025
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Speciated EPA-16 PAHs in leachate	Determination of PAH compounds in leachate by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate in leachates	Determination of sulphate in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil""	L039-PL	W	ISO 17025
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in leachate	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of leachates	Determination of hardness in leachates by calculation from calcium and magnesium.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	NONE
TPHCWG (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-44971

Replaces Analytical Report Number : 17-44971, issue no. 1

Project / Site name:	Green Park Village	Samples received on:	05/04/2017
Your job number:		Samples instructed on:	06/04/2017
Your order number:		Analysis completed by:	13/04/2017
Report Issue Number:	2	Report issued on:	13/04/2017
Samples Analysed:	3 soil samples		

Signed: 

Emma Winter
Assistant Reporting Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Analytical Report Number: 17-44971
Project / Site name: Green Park Village

Lab Sample Number				730838	730839	730840		
Sample Reference				RBH601	RBH603	RBH603		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				4.50	0.60	4.00		
Date Sampled				05/04/2017	05/04/2017	05/04/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1		
Moisture Content	%	N/A	NONE	19	11	6.8		
Total mass of sample received	kg	0.001	NONE	2.0	1.8	2.0		

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	Chrysotile	-	Amosite		
Asbestos in Soil	Type	N/A	ISO 17025	Detected	Not-detected	Detected		
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	< 0.001	-	< 0.001		
Asbestos Quantification Total	%	0.001	ISO 17025	< 0.001	-	< 0.001		

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	8.1	7.9	8.0		
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1		
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	1100	440	77		
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.57	0.22	0.038		

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
----------------------------	-------	---	--------	-------	-------	-------	--	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	0.87	< 0.05	< 0.05		
Acenaphthylene	mg/kg	0.1	MCERTS	0.43	< 0.10	< 0.10		
Acenaphthene	mg/kg	0.1	MCERTS	2.4	< 0.10	< 0.10		
Fluorene	mg/kg	0.1	MCERTS	3.0	< 0.10	< 0.10		
Phenanthrene	mg/kg	0.1	MCERTS	14	0.85	< 0.10		
Anthracene	mg/kg	0.1	MCERTS	3.5	0.21	< 0.10		
Fluoranthene	mg/kg	0.1	MCERTS	20	2.2	< 0.10		
Pyrene	mg/kg	0.1	MCERTS	16	1.8	< 0.10		
Benzo(a)anthracene	mg/kg	0.1	MCERTS	8.4	0.92	< 0.10		
Chrysene	mg/kg	0.05	MCERTS	6.4	0.88	< 0.05		
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	8.3	1.2	< 0.10		
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	4.7	0.61	< 0.10		
Benzo(a)pyrene	mg/kg	0.1	MCERTS	8.0	1.1	< 0.10		
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	4.2	0.79	< 0.10		
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	1.1	< 0.10	< 0.10		
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	5.1	0.83	< 0.05		

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	1.6	MCERTS	106	11.4	< 1.60		
-----------------------------	-------	-----	--------	-----	------	--------	--	--

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	13	21	6.9		
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.60	0.64	0.25		
Boron (water soluble)	mg/kg	0.2	MCERTS	5.5	1.6	0.5		
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	0.5	0.2	< 0.2		
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2		
Chromium (III)	mg/kg	1	NONE	32	24	16		
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	32	25	16		
Copper (aqua regia extractable)	mg/kg	1	MCERTS	56	26	8.6		
Lead (aqua regia extractable)	mg/kg	1	MCERTS	110	47	5.3		
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3		
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	18	17	18		
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	33	25	12		
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	520	99	14		

Analytical Report Number: 17-44971

Project / Site name: Green Park Village

Lab Sample Number				730838	730839	730840		
Sample Reference				RBH601	RBH603	RBH603		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				4.50	0.60	4.00		
Date Sampled				05/04/2017	05/04/2017	05/04/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	23	3.5	< 2.0		
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	66	< 8.0	< 8.0		
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	390	63	< 8.0		
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	470	75	< 10		

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1		
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	2.4	< 1.0	< 1.0		
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	32	< 2.0	< 2.0		
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	140	< 10	< 10		
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	650	50	< 10		
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	820	59	< 10		

Analytical Report Number: 17-44971
Project / Site name: Green Park Village

Lab Sample Number				730838	730839	730840		
Sample Reference				RBH601	RBH603	RBH603		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				4.50	0.60	4.00		
Date Sampled				05/04/2017	05/04/2017	05/04/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/kg	1	ISO 17025	< 1.0	-	-		
Chloroethane	µg/kg	1	NONE	< 1.0	-	-		
Bromomethane	µg/kg	1	ISO 17025	< 1.0	-	-		
Vinyl Chloride	µg/kg	1	NONE	< 1.0	-	-		
Trichlorofluoromethane	µg/kg	1	NONE	< 1.0	-	-		
1,1-Dichloroethene	µg/kg	1	NONE	< 1.0	-	-		
1,1,2-Trichloro 1,2,2-Trifluoroethane	µg/kg	1	ISO 17025	< 1.0	-	-		
Cis-1,2-dichloroethene	µg/kg	1	MCERTS	< 1.0	-	-		
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0	-	-		
1,1-Dichloroethane	µg/kg	1	MCERTS	< 1.0	-	-		
2,2-Dichloropropane	µg/kg	1	MCERTS	< 1.0	-	-		
Trichloromethane	µg/kg	1	MCERTS	< 1.0	-	-		
1,1,1-Trichloroethane	µg/kg	1	MCERTS	< 1.0	-	-		
1,2-Dichloroethane	µg/kg	1	MCERTS	< 1.0	-	-		
1,1-Dichloropropene	µg/kg	1	MCERTS	< 1.0	-	-		
Trans-1,2-dichloroethene	µg/kg	1	NONE	< 1.0	-	-		
Benzene	µg/kg	1	MCERTS	< 1.0	-	-		
Tetrachloromethane	µg/kg	1	MCERTS	< 1.0	-	-		
1,2-Dichloropropane	µg/kg	1	MCERTS	< 1.0	-	-		
Trichloroethene	µg/kg	1	MCERTS	< 1.0	-	-		
Dibromomethane	µg/kg	1	MCERTS	< 1.0	-	-		
Bromodichloromethane	µg/kg	1	MCERTS	< 1.0	-	-		
Cis-1,3-dichloropropene	µg/kg	1	ISO 17025	< 1.0	-	-		
Trans-1,3-dichloropropene	µg/kg	1	ISO 17025	< 1.0	-	-		
Toluene	µg/kg	1	MCERTS	< 1.0	-	-		
1,1,2-Trichloroethane	µg/kg	1	MCERTS	< 1.0	-	-		
1,3-Dichloropropane	µg/kg	1	ISO 17025	< 1.0	-	-		
Dibromochloromethane	µg/kg	1	ISO 17025	< 1.0	-	-		
Tetrachloroethene	µg/kg	1	NONE	< 1.0	-	-		
1,2-Dibromoethane	µg/kg	1	ISO 17025	< 1.0	-	-		
Chlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-		
1,1,1,2-Tetrachloroethane	µg/kg	1	MCERTS	< 1.0	-	-		
Ethylbenzene	µg/kg	1	MCERTS	< 1.0	-	-		
p & m-Xylene	µg/kg	1	MCERTS	< 1.0	-	-		
Styrene	µg/kg	1	MCERTS	< 1.0	-	-		
Tribromomethane	µg/kg	1	NONE	< 1.0	-	-		
o-Xylene	µg/kg	1	MCERTS	< 1.0	-	-		
1,1,2,2-Tetrachloroethane	µg/kg	1	MCERTS	< 1.0	-	-		
Isopropylbenzene	µg/kg	1	MCERTS	< 1.0	-	-		
Bromobenzene	µg/kg	1	MCERTS	< 1.0	-	-		
n-Propylbenzene	µg/kg	1	ISO 17025	< 1.0	-	-		
2-Chlorotoluene	µg/kg	1	MCERTS	< 1.0	-	-		
4-Chlorotoluene	µg/kg	1	MCERTS	< 1.0	-	-		
1,3,5-Trimethylbenzene	µg/kg	1	ISO 17025	< 1.0	-	-		
tert-Butylbenzene	µg/kg	1	MCERTS	< 1.0	-	-		
1,2,4-Trimethylbenzene	µg/kg	1	ISO 17025	< 1.0	-	-		
sec-Butylbenzene	µg/kg	1	MCERTS	< 1.0	-	-		
1,3-Dichlorobenzene	µg/kg	1	ISO 17025	< 1.0	-	-		
p-Isopropyltoluene	µg/kg	1	ISO 17025	< 1.0	-	-		
1,2-Dichlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-		
1,4-Dichlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-		
Butylbenzene	µg/kg	1	MCERTS	< 1.0	-	-		
1,2-Dibromo-3-chloropropane	µg/kg	1	ISO 17025	< 1.0	-	-		
1,2,4-Trichlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-		
Hexachlorobutadiene	µg/kg	1	MCERTS	< 1.0	-	-		
1,2,3-Trichlorobenzene	µg/kg	1	ISO 17025	< 1.0	-	-		

Analytical Report Number: 17-44971

Project / Site name: Green Park Village

Lab Sample Number	730838	730839	730840		
Sample Reference	RBH601	RBH603	RBH603		
Sample Number	None Supplied	None Supplied	None Supplied		
Depth (m)	4.50	0.60	4.00		
Date Sampled	05/04/2017	05/04/2017	05/04/2017		
Time Taken	None Supplied	None Supplied	None Supplied		
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status		

SVOCs

Aniline	mg/kg	0.1	NONE	< 0.1	-	-	
Phenol	mg/kg	0.2	ISO 17025	< 0.2	-	-	
2-Chlorophenol	mg/kg	0.1	MCERTS	< 0.1	-	-	
Bis(2-chloroethyl)ether	mg/kg	0.2	MCERTS	< 0.2	-	-	
1,3-Dichlorobenzene	mg/kg	0.2	MCERTS	< 0.2	-	-	
1,2-Dichlorobenzene	mg/kg	0.1	MCERTS	< 0.1	-	-	
1,4-Dichlorobenzene	mg/kg	0.2	MCERTS	< 0.2	-	-	
Bis(2-chloroisopropyl)ether	mg/kg	0.1	MCERTS	< 0.1	-	-	
2-Methylphenol	mg/kg	0.3	MCERTS	< 0.3	-	-	
Hexachloroethane	mg/kg	0.05	MCERTS	< 0.05	-	-	
Nitrobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	
4-Methylphenol	mg/kg	0.2	NONE	< 0.2	-	-	
Isophorone	mg/kg	0.2	MCERTS	< 0.2	-	-	
2-Nitrophenol	mg/kg	0.3	MCERTS	< 0.3	-	-	
2,4-Dimethylphenol	mg/kg	0.3	MCERTS	< 0.3	-	-	
Bis(2-chloroethoxy)methane	mg/kg	0.3	MCERTS	< 0.3	-	-	
1,2,4-Trichlorobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	
Naphthalene	mg/kg	0.05	MCERTS	0.87	-	-	
2,4-Dichlorophenol	mg/kg	0.3	MCERTS	< 0.3	-	-	
4-Chloroaniline	mg/kg	0.1	NONE	< 0.1	-	-	
Hexachlorobutadiene	mg/kg	0.1	MCERTS	< 0.1	-	-	
4-Chloro-3-methylphenol	mg/kg	0.1	NONE	< 0.1	-	-	
2,4,6-Trichlorophenol	mg/kg	0.1	MCERTS	< 0.1	-	-	
2,4,5-Trichlorophenol	mg/kg	0.2	MCERTS	< 0.2	-	-	
2-Methylnaphthalene	mg/kg	0.1	NONE	0.9	-	-	
2-Chloronaphthalene	mg/kg	0.1	MCERTS	< 0.1	-	-	
Dimethylphthalate	mg/kg	0.1	MCERTS	< 0.1	-	-	
2,6-Dinitrotoluene	mg/kg	0.1	MCERTS	< 0.1	-	-	
Acenaphthylene	mg/kg	0.1	MCERTS	0.43	-	-	
Acenaphthene	mg/kg	0.1	MCERTS	2.4	-	-	
2,4-Dinitrotoluene	mg/kg	0.2	MCERTS	< 0.2	-	-	
Dibenzofuran	mg/kg	0.2	MCERTS	1.6	-	-	
4-Chlorophenyl phenyl ether	mg/kg	0.3	ISO 17025	< 0.3	-	-	
Diethyl phthalate	mg/kg	0.2	MCERTS	< 0.2	-	-	
4-Nitroaniline	mg/kg	0.2	MCERTS	< 0.2	-	-	
Fluorene	mg/kg	0.1	MCERTS	3.0	-	-	
Azobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	
Bromophenyl phenyl ether	mg/kg	0.2	MCERTS	< 0.2	-	-	
Hexachlorobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	
Phenanthrene	mg/kg	0.1	MCERTS	14	-	-	
Anthracene	mg/kg	0.1	MCERTS	3.5	-	-	
Carbazole	mg/kg	0.3	MCERTS	1.2	-	-	
Dibutyl phthalate	mg/kg	0.2	MCERTS	< 0.2	-	-	
Anthraquinone	mg/kg	0.3	MCERTS	< 0.3	-	-	
Fluoranthene	mg/kg	0.1	MCERTS	20	-	-	
Pyrene	mg/kg	0.1	MCERTS	16	-	-	
Butyl benzyl phthalate	mg/kg	0.3	ISO 17025	< 0.3	-	-	
Benzo(a)anthracene	mg/kg	0.1	MCERTS	8.4	-	-	
Chrysene	mg/kg	0.05	MCERTS	6.4	-	-	
Benzo(b)fluoranthene	mg/kg	0.1	MCERTS	8.3	-	-	
Benzo(k)fluoranthene	mg/kg	0.1	MCERTS	4.7	-	-	
Benzo(a)pyrene	mg/kg	0.1	MCERTS	8.0	-	-	
Indeno(1,2,3-cd)pyrene	mg/kg	0.1	MCERTS	4.2	-	-	
Dibenz(a,h)anthracene	mg/kg	0.1	MCERTS	1.1	-	-	
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	5.1	-	-	



Analytical Report Number: 17-44971
Project / Site name: Green Park Village
Your Order No:

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

The analysis was carried out using our documented in-house method A006 based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
730838	RBH601	4.50	118	Loose Fibres	Chrysotile	< 0.001	< 0.001
730840	RBH603	4.00	133	Loose Fibres	Amosite	< 0.001	< 0.001

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation.



Analytical Report Number : 17-44971

Project / Site name: Green Park Village

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
730838	RBH601	None Supplied	4.50	Brown clay and loam with gravel.
730839	RBH603	None Supplied	0.60	Light brown clay and sand with gravel.
730840	RBH603	None Supplied	4.00	Light brown gravel.**

**Non MCerts matrix

Analytical Report Number : 17-44971

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in ouse method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Semi-volatile organic compounds in soil	Determination of semi-volatile organic compounds in soil by extraction in dichloromethane and hexane followed by GC-MS.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in soil	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	MCERTS
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS

Iss No 17-44971-2 Green Park Village

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 8 of 9



Analytical Report Number : 17-44971

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Volatile organic compounds in soil	Determination of volatile organic compounds in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-45490

Project / Site name:	Green Park Village, Reading	Samples received on:	11/04/2017
Your job number:	1620000492	Samples instructed on:	12/04/2017
Your order number:	1620013202	Analysis completed by:	20/04/2017
Report Issue Number:	1	Report issued on:	20/04/2017
Samples Analysed:	3 leachate samples - 19 soil samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733578	733579	733580	733581	733582
Sample Reference				RTP601	RTP602	RTP602	RTP603	RTP604
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.60	0.30	0.50	1.20	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	15	< 0.1	< 0.1	< 0.1
Moisture Content	%	N/A	NONE	16	12	12	16	12
Total mass of sample received	kg	0.001	NONE	1.6	1.6	2.0	1.7	2.0

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-	-	Chrysotile & Amosite
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	-	Not-detected	Detected
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-	-	< 0.001
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-	-	< 0.001

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.0	6.7	6.8	6.5	9.8
Total Cyanide	mg/kg	1	MCERTS	1	< 1	< 1	2	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	110	51	110	130	1100
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.053	0.025	0.057	0.065	0.55
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.051	-	0.012	0.046	0.015

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	0.63	< 0.05	< 0.05	0.56	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	0.15
Phenanthrene	mg/kg	0.05	MCERTS	0.91	< 0.05	< 0.05	0.72	1.4
Anthracene	mg/kg	0.05	MCERTS	0.39	< 0.05	< 0.05	0.41	0.41
Fluoranthene	mg/kg	0.05	MCERTS	3.7	< 0.05	0.29	3.2	3.7
Pyrene	mg/kg	0.05	MCERTS	3.5	< 0.05	0.28	3.5	3.5
Benzo(a)anthracene	mg/kg	0.05	MCERTS	2.4	< 0.05	0.12	2.4	2.0
Chrysene	mg/kg	0.05	MCERTS	2.0	< 0.05	0.12	1.7	1.5
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	3.5	< 0.05	0.19	3.5	2.4
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	1.7	< 0.05	0.09	1.5	1.3
Benzo(a)pyrene	mg/kg	0.05	MCERTS	3.0	< 0.05	0.14	3.0	2.1
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	2.4	< 0.05	< 0.05	2.3	1.6
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	0.54	< 0.05	< 0.05	0.50	0.40
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	2.8	< 0.05	< 0.05	2.8	2.0

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	27.4	< 0.80	1.23	25.9	22.5
-----------------------------	-------	-----	--------	------	--------	------	------	------

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733578	733579	733580	733581	733582
Sample Reference				RTP601	RTP602	RTP602	RTP603	RTP604
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.60	0.30	0.50	1.20	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	45	9.9	18	41	16
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	5.6	0.60	0.87	6.0	0.81
Boron (water soluble)	mg/kg	0.2	MCERTS	3.7	1.5	1.4	3.7	1.5
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	1.1	< 0.2	< 0.2	1.0	< 0.2
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	50	18	25	71	29
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	51	18	25	70	29
Copper (aqua regia extractable)	mg/kg	1	MCERTS	330	20	30	380	33
Lead (aqua regia extractable)	mg/kg	1	MCERTS	900	45	65	800	100
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	3.6	0.9	1.9	2.7	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	67	16	21	67	19
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	49	20	25	59	37
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	690	64	95	590	110

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	1.1
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	5.4
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	13
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	23	100
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	< 10	< 10	23	120

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	1.2
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	3.8
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	17	< 10	< 10	14	32
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	110	< 10	< 10	82	270
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	130	< 10	< 10	96	310



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733578	733579	733580	733581	733582
Sample Reference				RTP601	RTP602	RTP602	RTP603	RTP604
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.60	0.30	0.50	1.20	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Chloroethane	µg/kg	1	NONE	-	-	-	< 1.0	-
Bromomethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Vinyl Chloride	µg/kg	1	NONE	-	-	-	< 1.0	-
Trichlorofluoromethane	µg/kg	1	NONE	-	-	-	< 1.0	-
1,1-Dichloroethene	µg/kg	1	NONE	-	-	-	< 1.0	-
1,1,2-Trichloro 1,2,2-Trifluoroethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Cis-1,2-dichloroethene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1-Dichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
2,2-Dichloropropane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Trichloromethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,1-Trichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2-Dichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1-Dichloropropene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Trans-1,2-dichloroethene	µg/kg	1	NONE	-	-	-	< 1.0	-
Benzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Tetrachloromethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2-Dichloropropane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Trichloroethene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Dibromomethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Bromodichloromethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Cis-1,3-dichloropropene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Trans-1,3-dichloropropene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Toluene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,2-Trichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,3-Dichloropropane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Dibromochloromethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Tetrachloroethene	µg/kg	1	NONE	-	-	-	< 1.0	-
1,2-Dibromoethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Chlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,1,2-Tetrachloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Ethylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
p & m-Xylene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Styrene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Tribromomethane	µg/kg	1	NONE	-	-	-	< 1.0	-
o-Xylene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,2,2-Tetrachloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Isopropylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Bromobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
n-Propylbenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
2-Chlorotoluene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
4-Chlorotoluene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,3,5-Trimethylbenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
tert-Butylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2,4-Trimethylbenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
sec-Butylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,3-Dichlorobenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
p-Isopropyltoluene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
1,2-Dichlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,4-Dichlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Butylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2-Dibromo-3-chloropropane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
1,2,4-Trichlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Hexachlorobutadiene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2,3-Trichlorobenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733578	733579	733580	733581	733582
Sample Reference				RTP601	RTP602	RTP602	RTP603	RTP604
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.60	0.30	0.50	1.20	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	mg/kg	0.1	NONE	-	-	-	< 0.1	-
Phenol	mg/kg	0.2	ISO 17025	-	-	-	< 0.2	-
2-Chlorophenol	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
Bis(2-chloroethyl)ether	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
1,3-Dichlorobenzene	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
1,2-Dichlorobenzene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
1,4-Dichlorobenzene	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Bis(2-chloroisopropyl)ether	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
2-Methylphenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Hexachloroethane	mg/kg	0.05	MCERTS	-	-	-	< 0.05	-
Nitrobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
4-Methylphenol	mg/kg	0.2	NONE	-	-	-	< 0.2	-
Isophorone	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
2-Nitrophenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
2,4-Dimethylphenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Bis(2-chloroethoxy)methane	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
1,2,4-Trichlorobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Naphthalene	mg/kg	0.05	MCERTS	-	-	-	< 0.05	-
2,4-Dichlorophenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
4-Chloroaniline	mg/kg	0.1	NONE	-	-	-	< 0.1	-
Hexachlorobutadiene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
4-Chloro-3-methylphenol	mg/kg	0.1	NONE	-	-	-	< 0.1	-
2,4,6-Trichlorophenol	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
2,4,5-Trichlorophenol	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
2-Methylnaphthalene	mg/kg	0.1	NONE	-	-	-	< 0.1	-
2-Chloronaphthalene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
Dimethylphthalate	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
2,6-Dinitrotoluene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
Acenaphthylene	mg/kg	0.05	MCERTS	-	-	-	0.56	-
Acenaphthene	mg/kg	0.05	MCERTS	-	-	-	< 0.05	-
2,4-Dinitrotoluene	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Dibenzofuran	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
4-Chlorophenyl phenyl ether	mg/kg	0.3	ISO 17025	-	-	-	< 0.3	-
Diethyl phthalate	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
4-Nitroaniline	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Fluorene	mg/kg	0.05	MCERTS	-	-	-	< 0.05	-
Azobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Bromophenyl phenyl ether	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Hexachlorobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Phenanthrene	mg/kg	0.05	MCERTS	-	-	-	0.72	-
Anthracene	mg/kg	0.05	MCERTS	-	-	-	0.41	-
Carbazole	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Dibutyl phthalate	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Anthraquinone	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Fluoranthene	mg/kg	0.05	MCERTS	-	-	-	3.2	-
Pyrene	mg/kg	0.05	MCERTS	-	-	-	3.5	-
Butyl benzyl phthalate	mg/kg	0.3	ISO 17025	-	-	-	< 0.3	-
Benzo(a)anthracene	mg/kg	0.05	MCERTS	-	-	-	2.4	-
Chrysene	mg/kg	0.05	MCERTS	-	-	-	1.7	-
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	-	-	-	3.5	-
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	-	-	-	1.5	-
Benzo(a)pyrene	mg/kg	0.05	MCERTS	-	-	-	3.0	-
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	-	-	-	2.3	-
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	-	-	-	0.50	-
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	-	-	-	2.8	-



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733578	733579	733580	733581	733582
Sample Reference				RTP601	RTP602	RTP602	RTP603	RTP604
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.60	0.30	0.50	1.20	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		
Pesticide and Herbicide Screen								
Pesticides/Herbicides Screen in Soil				P/A	N/A	NONE	-	-
							-	-
							Absent	Absent

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733583	733584	733585	733586	733587
Sample Reference				RTP604	RTP605	RTP606	RTP606	RTP608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				2.10	0.10	0.10	0.30	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	16	33	< 0.1	< 0.1	25
Moisture Content	%	N/A	NONE	15	8.3	12	21	11
Total mass of sample received	kg	0.001	NONE	2.0	2.0	1.5	1.4	2.0

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-	-	Chrysotile & Amosite
Asbestos in Soil	Type	N/A	ISO 17025	-	Not-detected	Not-detected	-	Detected
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-	-	0.293
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-	-	0.293

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	8.2	10.9	7.8	6.6	9.9
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	2	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	250	1300	690	360	3200
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.13	0.65	0.35	0.18	1.6
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.0031	0.0072	0.017	0.029	0.0077

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	0.30
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	0.34
Phenanthrene	mg/kg	0.05	MCERTS	< 0.05	0.82	0.30	< 0.05	3.2
Anthracene	mg/kg	0.05	MCERTS	< 0.05	0.24	0.10	< 0.05	0.91
Fluoranthene	mg/kg	0.05	MCERTS	< 0.05	1.6	0.67	0.26	5.3
Pyrene	mg/kg	0.05	MCERTS	< 0.05	1.4	0.66	0.25	4.6
Benzo(a)anthracene	mg/kg	0.05	MCERTS	< 0.05	0.75	0.38	0.15	2.5
Chrysene	mg/kg	0.05	MCERTS	< 0.05	0.58	0.33	0.12	1.8
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	0.68	0.42	0.24	2.4
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	0.47	0.32	0.10	1.2
Benzo(a)pyrene	mg/kg	0.05	MCERTS	< 0.05	0.65	0.37	0.18	2.1
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	< 0.05	0.36	0.29	0.16	1.2
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	0.35
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	0.46	0.33	0.24	1.4

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	< 0.80	7.96	4.17	1.70	27.6
-----------------------------	-------	-----	--------	--------	------	------	------	------



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733583	733584	733585	733586	733587
Sample Reference				RTP604	RTP605	RTP606	RTP606	RTP608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				2.10	0.10	0.10	0.30	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Heavy Metals / Metalloids								
Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	17	18	12	21	14
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.37	0.61	1.1	1.4	0.72
Boron (water soluble)	mg/kg	0.2	MCERTS	0.6	2.7	2.1	3.6	2.8
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	< 0.2	0.4	0.4
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	15	23	41	120	20
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	15	23	41	120	21
Copper (aqua regia extractable)	mg/kg	1	MCERTS	11	60	38	62	31
Lead (aqua regia extractable)	mg/kg	1	MCERTS	21	110	76	170	71
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	2.4	2.6	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	14	15	19	28	14
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	3.1	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	21	28	42	51	28
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	27	98	130	260	100

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	1.1
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	5.4	< 2.0	< 2.0	2.4
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	12	< 8.0	< 8.0	< 8.0
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	< 8.0	78	32	25	42
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	< 10	96	34	26	53

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	1.6
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	2.6	< 2.0	< 2.0	3.6
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	14	< 10	< 10	21
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	12	79	47	13	57
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	15	96	54	16	83

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733583	733584	733585	733586	733587
Sample Reference				RTP604	RTP605	RTP606	RTP606	RTP608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				2.10	0.10	0.10	0.30	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
VOCs								
Chloromethane	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Chloroethane	µg/kg	1	NONE	< 1.0	-	-	-	< 1.0
Bromomethane	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Vinyl Chloride	µg/kg	1	NONE	< 1.0	-	-	-	< 1.0
Trichlorofluoromethane	µg/kg	1	NONE	< 1.0	-	-	-	< 1.0
1,1-Dichloroethene	µg/kg	1	NONE	< 1.0	-	-	-	< 1.0
1,1,2-Trichloro 1,2,2-Trifluoroethane	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Cis-1,2-dichloroethene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,1-Dichloroethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
2,2-Dichloropropane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Trichloromethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,1,1-Trichloroethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,2-Dichloroethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,1-Dichloropropene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Trans-1,2-dichloroethene	µg/kg	1	NONE	< 1.0	-	-	-	< 1.0
Benzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Tetrachloromethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,2-Dichloropropane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Trichloroethene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Dibromomethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Bromodichloromethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Cis-1,3-dichloropropene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Trans-1,3-dichloropropene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Toluene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,1,2-Trichloroethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,3-Dichloropropane	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Dibromochloromethane	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Tetrachloroethene	µg/kg	1	NONE	< 1.0	-	-	-	< 1.0
1,2-Dibromoethane	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
Chlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,1,1,2-Tetrachloroethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Ethylbenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
p & m-Xylene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Styrene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Tribromomethane	µg/kg	1	NONE	< 1.0	-	-	-	< 1.0
o-Xylene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,1,2,2-Tetrachloroethane	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Isopropylbenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Bromobenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
n-Propylbenzene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
2-Chlorotoluene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
4-Chlorotoluene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,3,5-Trimethylbenzene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
tert-Butylbenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,2,4-Trimethylbenzene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
sec-Butylbenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,3-Dichlorobenzene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
p-Isopropyltoluene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
1,2-Dichlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,4-Dichlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Butylbenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,2-Dibromo-3-chloropropane	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0
1,2,4-Trichlorobenzene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
Hexachlorobutadiene	µg/kg	1	MCERTS	< 1.0	-	-	-	< 1.0
1,2,3-Trichlorobenzene	µg/kg	1	ISO 17025	< 1.0	-	-	-	< 1.0

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733583	733584	733585	733586	733587
Sample Reference				RTP604	RTP605	RTP606	RTP606	RTP608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				2.10	0.10	0.10	0.30	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
SVOCs								
Aniline	mg/kg	0.1	NONE	< 0.1	-	-	-	< 0.1
Phenol	mg/kg	0.2	ISO 17025	< 0.2	-	-	-	< 0.2
2-Chlorophenol	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
Bis(2-chloroethyl)ether	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
1,3-Dichlorobenzene	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
1,2-Dichlorobenzene	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
1,4-Dichlorobenzene	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
Bis(2-chloroisopropyl)ether	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
2-Methylphenol	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
Hexachloroethane	mg/kg	0.05	MCERTS	< 0.05	-	-	-	< 0.05
Nitrobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
4-Methylphenol	mg/kg	0.2	NONE	< 0.2	-	-	-	< 0.2
Isophorone	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
2-Nitrophenol	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
2,4-Dimethylphenol	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
Bis(2-chloroethoxy)methane	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
1,2,4-Trichlorobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
Naphthalene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	< 0.05
2,4-Dichlorophenol	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
4-Chloroaniline	mg/kg	0.1	NONE	< 0.1	-	-	-	< 0.1
Hexachlorobutadiene	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
4-Chloro-3-methylphenol	mg/kg	0.1	NONE	< 0.1	-	-	-	< 0.1
2,4,6-Trichlorophenol	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
2,4,5-Trichlorophenol	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
2-Methylnaphthalene	mg/kg	0.1	NONE	< 0.1	-	-	-	< 0.1
2-Chloronaphthalene	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
Dimethylphthalate	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
2,6-Dinitrotoluene	mg/kg	0.1	MCERTS	< 0.1	-	-	-	< 0.1
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	0.30
2,4-Dinitrotoluene	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
Dibenzofuran	mg/kg	0.2	MCERTS	< 0.2	-	-	-	0.2
4-Chlorophenyl phenyl ether	mg/kg	0.3	ISO 17025	< 0.3	-	-	-	< 0.3
Diethyl phthalate	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
4-Nitroaniline	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
Fluorene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	0.34
Azobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
Bromophenyl phenyl ether	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
Hexachlorobenzene	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
Phenanthrene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	3.2
Anthracene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	0.91
Carbazole	mg/kg	0.3	MCERTS	< 0.3	-	-	-	0.3
Dibutyl phthalate	mg/kg	0.2	MCERTS	< 0.2	-	-	-	< 0.2
Anthraquinone	mg/kg	0.3	MCERTS	< 0.3	-	-	-	< 0.3
Fluoranthene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	5.3
Pyrene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	4.6
Butyl benzyl phthalate	mg/kg	0.3	ISO 17025	< 0.3	-	-	-	< 0.3
Benzo(a)anthracene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	2.5
Chrysene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	1.8
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	2.4
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	1.2
Benzo(a)pyrene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	2.1
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	1.2
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	0.35
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	-	-	-	1.4



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733583	733584	733585	733586	733587
Sample Reference				RTP604	RTP605	RTP606	RTP606	RTP608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				2.10	0.10	0.10	0.30	0.30
Date Sampled				06/04/2017	06/04/2017	06/04/2017	06/04/2017	06/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		
Pesticide and Herbicide Screen								
Pesticides/Herbicides Screen in Soil				P/A	N/A	NONE	-	-

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733588	733589	733590	733591	733592
Sample Reference				RTP609	RTP610	RTP611	RTP613	RTP613
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.90	0.30	0.50	1.50	2.10
Date Sampled				10/04/2017	07/04/2017	07/04/2017	07/04/2017	07/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	65	32	< 0.1	58
Moisture Content	%	N/A	NONE	18	9.4	8.2	18	9.2
Total mass of sample received	kg	0.001	NONE	1.8	1.9	2.0	2.0	2.0

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-	-	-
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Not-detected	Not-detected
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-	-	-
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-	-	-

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	8.1	10.0	8.2	10.3	11.8
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	810	1300	750	650	160
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.40	0.67	0.38	0.32	0.081
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	0.022	-	0.0086	0.0067	-

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	0.45	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	0.23	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	0.48	< 0.05
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	0.62	< 0.05
Phenanthrene	mg/kg	0.05	MCERTS	1.0	0.63	0.60	1.8	0.72
Anthracene	mg/kg	0.05	MCERTS	0.30	0.17	0.24	0.32	0.12
Fluoranthene	mg/kg	0.05	MCERTS	2.5	1.3	2.4	1.3	0.64
Pyrene	mg/kg	0.05	MCERTS	2.3	1.2	2.2	1.1	0.49
Benzo(a)anthracene	mg/kg	0.05	MCERTS	1.6	0.64	1.5	0.51	0.22
Chrysene	mg/kg	0.05	MCERTS	1.1	0.53	1.2	0.40	0.21
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	2.0	0.65	2.2	0.49	0.26
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	0.96	0.44	1.1	0.21	0.15
Benzo(a)pyrene	mg/kg	0.05	MCERTS	1.7	0.60	1.7	0.41	0.22
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	1.3	0.40	1.4	0.22	0.17
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	0.33	0.10	0.38	< 0.05	< 0.05
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	1.6	0.50	1.6	0.28	0.21

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	16.9	7.11	16.4	8.66	3.41
-----------------------------	-------	-----	--------	------	------	------	------	------

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733588	733589	733590	733591	733592
Sample Reference				RTP609	RTP610	RTP611	RTP613	RTP613
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.90	0.30	0.50	1.50	2.10
Date Sampled				10/04/2017	07/04/2017	07/04/2017	07/04/2017	07/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Heavy Metals / Metalloids								
Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	16	11	6.1	5.2	5.2
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	0.80	0.65	0.54	0.52	0.41
Boron (water soluble)	mg/kg	0.2	MCERTS	3.1	3.5	1.9	1.4	2.5
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	0.2	0.6	< 0.2	< 0.2	< 0.2
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2
Chromium (III)	mg/kg	1	NONE	29	25	20	22	18
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	29	25	20	22	18
Copper (aqua regia extractable)	mg/kg	1	MCERTS	52	26	32	20	17
Lead (aqua regia extractable)	mg/kg	1	MCERTS	140	66	95	34	28
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	18	14	14	6.1	11
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	37	30	27	32	26
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	210	100	98	39	96

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	1.1	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	3.3	2.4	5.1	2.8	7.3
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	< 8.0	< 8.0	< 8.0	14
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	78	28	32	22	< 8.0
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	88	34	44	27	25
TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	1.3	1.1	1.8	2.7
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	2.9	3.8	6.3	14
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	18	< 10	21	< 10	28
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	140	48	120	23	50
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	160	61	140	41	94



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733588	733589	733590	733591	733592
Sample Reference				RTP609	RTP610	RTP611	RTP613	RTP613
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.90	0.30	0.50	1.50	2.10
Date Sampled				10/04/2017	07/04/2017	07/04/2017	07/04/2017	07/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
VOCs								
Chloromethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Chloroethane	µg/kg	1	NONE	-	-	-	< 1.0	-
Bromomethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Vinyl Chloride	µg/kg	1	NONE	-	-	-	< 1.0	-
Trichlorofluoromethane	µg/kg	1	NONE	-	-	-	< 1.0	-
1,1-Dichloroethene	µg/kg	1	NONE	-	-	-	< 1.0	-
1,1,2-Trichloro 1,2,2-Trifluoroethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Cis-1,2-dichloroethene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1-Dichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
2,2-Dichloropropane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Trichloromethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,1-Trichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2-Dichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1-Dichloropropene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Trans-1,2-dichloroethene	µg/kg	1	NONE	-	-	-	< 1.0	-
Benzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Tetrachloromethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2-Dichloropropane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Trichloroethene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Dibromomethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Bromodichloromethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Cis-1,3-dichloropropene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Trans-1,3-dichloropropene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Toluene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,2-Trichloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,3-Dichloropropane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Dibromochloromethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Tetrachloroethene	µg/kg	1	NONE	-	-	-	< 1.0	-
1,2-Dibromoethane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
Chlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,1,2-Tetrachloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Ethylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
p & m-Xylene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Styrene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Tribromomethane	µg/kg	1	NONE	-	-	-	< 1.0	-
o-Xylene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,1,2,2-Tetrachloroethane	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Isopropylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Bromobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
n-Propylbenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
2-Chlorotoluene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
4-Chlorotoluene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,3,5-Trimethylbenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
tert-Butylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2,4-Trimethylbenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
sec-Butylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,3-Dichlorobenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
p-Isopropyltoluene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
1,2-Dichlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,4-Dichlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Butylbenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2-Dibromo-3-chloropropane	µg/kg	1	ISO 17025	-	-	-	< 1.0	-
1,2,4-Trichlorobenzene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
Hexachlorobutadiene	µg/kg	1	MCERTS	-	-	-	< 1.0	-
1,2,3-Trichlorobenzene	µg/kg	1	ISO 17025	-	-	-	< 1.0	-



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733588	733589	733590	733591	733592
Sample Reference				RTP609	RTP610	RTP611	RTP613	RTP613
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.90	0.30	0.50	1.50	2.10
Date Sampled				10/04/2017	07/04/2017	07/04/2017	07/04/2017	07/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
SVOCs								
Aniline	mg/kg	0.1	NONE	-	-	-	< 0.1	-
Phenol	mg/kg	0.2	ISO 17025	-	-	-	< 0.2	-
2-Chlorophenol	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
Bis(2-chloroethyl)ether	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
1,3-Dichlorobenzene	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
1,2-Dichlorobenzene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
1,4-Dichlorobenzene	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Bis(2-chloroisopropyl)ether	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
2-Methylphenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Hexachloroethane	mg/kg	0.05	MCERTS	-	-	-	< 0.05	-
Nitrobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
4-Methylphenol	mg/kg	0.2	NONE	-	-	-	< 0.2	-
Isophorone	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
2-Nitrophenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
2,4-Dimethylphenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Bis(2-chloroethoxy)methane	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
1,2,4-Trichlorobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Naphthalene	mg/kg	0.05	MCERTS	-	-	-	0.45	-
2,4-Dichlorophenol	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
4-Chloroaniline	mg/kg	0.1	NONE	-	-	-	< 0.1	-
Hexachlorobutadiene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
4-Chloro-3-methylphenol	mg/kg	0.1	NONE	-	-	-	< 0.1	-
2,4,6-Trichlorophenol	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
2,4,5-Trichlorophenol	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
2-Methylnaphthalene	mg/kg	0.1	NONE	-	-	-	0.3	-
2-Chloronaphthalene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
Dimethylphthalate	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
2,6-Dinitrotoluene	mg/kg	0.1	MCERTS	-	-	-	< 0.1	-
Acenaphthylene	mg/kg	0.05	MCERTS	-	-	-	< 0.05	-
Acenaphthene	mg/kg	0.05	MCERTS	-	-	-	0.48	-
2,4-Dinitrotoluene	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Dibenzofuran	mg/kg	0.2	MCERTS	-	-	-	0.6	-
4-Chlorophenyl phenyl ether	mg/kg	0.3	ISO 17025	-	-	-	< 0.3	-
Diethyl phthalate	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
4-Nitroaniline	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Fluorene	mg/kg	0.05	MCERTS	-	-	-	0.62	-
Azobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Bromophenyl phenyl ether	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Hexachlorobenzene	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Phenanthrene	mg/kg	0.05	MCERTS	-	-	-	1.8	-
Anthracene	mg/kg	0.05	MCERTS	-	-	-	0.32	-
Carbazole	mg/kg	0.3	MCERTS	-	-	-	0.5	-
Dibutyl phthalate	mg/kg	0.2	MCERTS	-	-	-	< 0.2	-
Anthraquinone	mg/kg	0.3	MCERTS	-	-	-	< 0.3	-
Fluoranthene	mg/kg	0.05	MCERTS	-	-	-	1.3	-
Pyrene	mg/kg	0.05	MCERTS	-	-	-	1.1	-
Butyl benzyl phthalate	mg/kg	0.3	ISO 17025	-	-	-	< 0.3	-
Benzo(a)anthracene	mg/kg	0.05	MCERTS	-	-	-	0.51	-
Chrysene	mg/kg	0.05	MCERTS	-	-	-	0.40	-
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	-	-	-	0.49	-
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	-	-	-	0.21	-
Benzo(a)pyrene	mg/kg	0.05	MCERTS	-	-	-	0.41	-
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	-	-	-	0.22	-
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	-	-	-	< 0.05	-
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	-	-	-	0.28	-



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733588	733589	733590	733591	733592
Sample Reference				RTP609	RTP610	RTP611	RTP613	RTP613
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.90	0.30	0.50	1.50	2.10
Date Sampled				10/04/2017	07/04/2017	07/04/2017	07/04/2017	07/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		
Pesticide and Herbicide Screen								
Pesticides/Herbicides Screen in Soil				P/A	N/A	NONE	-	-

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733593	733594	733595	733596	
Sample Reference				RTP614	RTP615	RTP616	RTP616	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				1.30	2.70	0.40	1.20	
Date Sampled				07/04/2017	10/07/2017	10/04/2017	10/04/2017	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1	
Moisture Content	%	N/A	NONE	17	17	13	14	
Total mass of sample received	kg	0.001	NONE	2.0	2.0	1.9	2.0	

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	Chrysotile	-	
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Detected	Not-detected	
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	< 0.001	-	
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	< 0.001	-	

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.6	7.6	8.6	7.4	
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	
Water Soluble Sulphate as SO ₄ 16hr extraction (2:1)	mg/kg	2.5	MCERTS	800	520	1900	950	
Water Soluble SO ₄ 16hr extraction (2:1 Leachate Equivalent)	g/l	0.00125	MCERTS	0.40	0.26	0.96	0.48	
Fraction Organic Carbon (FOC)	N/A	0.001	NONE	-	-	-	0.016	

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
----------------------------	-------	---	--------	-------	-------	-------	-------	--

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	
Phenanthrene	mg/kg	0.05	MCERTS	0.25	< 0.05	0.83	0.19	
Anthracene	mg/kg	0.05	MCERTS	0.11	< 0.05	0.24	< 0.05	
Fluoranthene	mg/kg	0.05	MCERTS	1.0	< 0.05	1.7	0.53	
Pyrene	mg/kg	0.05	MCERTS	0.99	< 0.05	1.6	0.54	
Benzo(a)anthracene	mg/kg	0.05	MCERTS	0.50	< 0.05	1.0	0.31	
Chrysene	mg/kg	0.05	MCERTS	0.36	< 0.05	0.71	0.23	
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	0.83	< 0.05	1.3	0.39	
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	0.48	< 0.05	0.70	0.28	
Benzo(a)pyrene	mg/kg	0.05	MCERTS	0.83	< 0.05	1.2	0.38	
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	0.61	< 0.05	0.91	0.32	
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	0.15	< 0.05	0.25	< 0.05	
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	0.83	< 0.05	1.2	0.43	

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	6.97	< 0.80	11.7	3.60	
-----------------------------	-------	-----	--------	------	--------	------	------	--

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733593	733594	733595	733596	
Sample Reference				RTP614	RTP615	RTP616	RTP616	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				1.30	2.70	0.40	1.20	
Date Sampled				07/04/2017	10/07/2017	10/04/2017	10/04/2017	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Heavy Metals / Metalloids								
Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	13	16	15	15	
Beryllium (aqua regia extractable)	mg/kg	0.06	MCERTS	1.2	0.93	0.76	0.82	
Boron (water soluble)	mg/kg	0.2	MCERTS	2.7	2.8	2.2	4.0	
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	0.5	< 0.2	
Chromium (hexavalent)	mg/kg	1.2	MCERTS	< 1.2	< 1.2	< 1.2	< 1.2	
Chromium (III)	mg/kg	1	NONE	50	47	27	39	
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	50	47	27	39	
Copper (aqua regia extractable)	mg/kg	1	MCERTS	35	32	39	30	
Lead (aqua regia extractable)	mg/kg	1	MCERTS	55	52	75	57	
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	2.2	< 0.3	< 0.3	
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	21	17	17	18	
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	3.9	< 1.0	< 1.0	
Vanadium (aqua regia extractable)	mg/kg	1	MCERTS	40	32	42	35	
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	120	110	190	110	

Monoaromatics

Benzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Toluene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
Ethylbenzene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
p & m-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
o-xylene	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
MTBE (Methyl Tertiary Butyl Ether)	ug/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >EC5 - EC6	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC6 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aliphatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aliphatic >EC12 - EC16	mg/kg	2	MCERTS	5.8	8.9	4.2	< 2.0	
TPH-CWG - Aliphatic >EC16 - EC21	mg/kg	8	MCERTS	< 8.0	11	8.2	< 8.0	
TPH-CWG - Aliphatic >EC21 - EC35	mg/kg	8	MCERTS	36	19	120	50	
TPH-CWG - Aliphatic (EC5 - EC35)	mg/kg	10	MCERTS	48	39	130	59	

TPH-CWG - Aromatic >EC5 - EC7	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC7 - EC8	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC8 - EC10	mg/kg	0.001	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	
TPH-CWG - Aromatic >EC10 - EC12	mg/kg	1	MCERTS	< 1.0	< 1.0	1.4	< 1.0	
TPH-CWG - Aromatic >EC12 - EC16	mg/kg	2	MCERTS	< 2.0	< 2.0	4.8	< 2.0	
TPH-CWG - Aromatic >EC16 - EC21	mg/kg	10	MCERTS	< 10	< 10	29	< 10	
TPH-CWG - Aromatic >EC21 - EC35	mg/kg	10	MCERTS	120	< 10	540	56	
TPH-CWG - Aromatic (EC5 - EC35)	mg/kg	10	MCERTS	120	< 10	580	64	

Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733593	733594	733595	733596
Sample Reference				RTP614	RTP615	RTP616	RTP616
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				1.30	2.70	0.40	1.20
Date Sampled				07/04/2017	10/07/2017	10/04/2017	10/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status				
VOCs							
Chloromethane	µg/kg	1	ISO 17025	-	< 1.0	-	-
Chloroethane	µg/kg	1	NONE	-	< 1.0	-	-
Bromomethane	µg/kg	1	ISO 17025	-	< 1.0	-	-
Vinyl Chloride	µg/kg	1	NONE	-	< 1.0	-	-
Trichlorofluoromethane	µg/kg	1	NONE	-	< 1.0	-	-
1,1-Dichloroethene	µg/kg	1	NONE	-	< 1.0	-	-
1,1,2-Trichloro 1,2,2-Trifluoroethane	µg/kg	1	ISO 17025	-	< 1.0	-	-
Cis-1,2-dichloroethene	µg/kg	1	MCERTS	-	< 1.0	-	-
MTBE (Methyl Tertiary Butyl Ether)	µg/kg	1	MCERTS	-	< 1.0	-	-
1,1-Dichloroethane	µg/kg	1	MCERTS	-	< 1.0	-	-
2,2-Dichloropropane	µg/kg	1	MCERTS	-	< 1.0	-	-
Trichloromethane	µg/kg	1	MCERTS	-	< 1.0	-	-
1,1,1-Trichloroethane	µg/kg	1	MCERTS	-	< 1.0	-	-
1,2-Dichloroethane	µg/kg	1	MCERTS	-	< 1.0	-	-
1,1-Dichloropropene	µg/kg	1	MCERTS	-	< 1.0	-	-
Trans-1,2-dichloroethene	µg/kg	1	NONE	-	< 1.0	-	-
Benzene	µg/kg	1	MCERTS	-	< 1.0	-	-
Tetrachloromethane	µg/kg	1	MCERTS	-	< 1.0	-	-
1,2-Dichloropropane	µg/kg	1	MCERTS	-	< 1.0	-	-
Trichloroethene	µg/kg	1	MCERTS	-	< 1.0	-	-
Dibromomethane	µg/kg	1	MCERTS	-	< 1.0	-	-
Bromodichloromethane	µg/kg	1	MCERTS	-	< 1.0	-	-
Cis-1,3-dichloropropene	µg/kg	1	ISO 17025	-	< 1.0	-	-
Trans-1,3-dichloropropene	µg/kg	1	ISO 17025	-	< 1.0	-	-
Toluene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,1,2-Trichloroethane	µg/kg	1	MCERTS	-	< 1.0	-	-
1,3-Dichloropropane	µg/kg	1	ISO 17025	-	< 1.0	-	-
Dibromochloromethane	µg/kg	1	ISO 17025	-	< 1.0	-	-
Tetrachloroethene	µg/kg	1	NONE	-	< 1.0	-	-
1,2-Dibromoethane	µg/kg	1	ISO 17025	-	< 1.0	-	-
Chlorobenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,1,1,2-Tetrachloroethane	µg/kg	1	MCERTS	-	< 1.0	-	-
Ethylbenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
p & m-Xylene	µg/kg	1	MCERTS	-	< 1.0	-	-
Styrene	µg/kg	1	MCERTS	-	< 1.0	-	-
Tribromomethane	µg/kg	1	NONE	-	< 1.0	-	-
o-Xylene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,1,2,2-Tetrachloroethane	µg/kg	1	MCERTS	-	< 1.0	-	-
Isopropylbenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
Bromobenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
n-Propylbenzene	µg/kg	1	ISO 17025	-	< 1.0	-	-
2-Chlorotoluene	µg/kg	1	MCERTS	-	< 1.0	-	-
4-Chlorotoluene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,3,5-Trimethylbenzene	µg/kg	1	ISO 17025	-	< 1.0	-	-
tert-Butylbenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,2,4-Trimethylbenzene	µg/kg	1	ISO 17025	-	< 1.0	-	-
sec-Butylbenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,3-Dichlorobenzene	µg/kg	1	ISO 17025	-	< 1.0	-	-
p-Isopropyltoluene	µg/kg	1	ISO 17025	-	< 1.0	-	-
1,2-Dichlorobenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,4-Dichlorobenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
Butylbenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,2-Dibromo-3-chloropropane	µg/kg	1	ISO 17025	-	< 1.0	-	-
1,2,4-Trichlorobenzene	µg/kg	1	MCERTS	-	< 1.0	-	-
Hexachlorobutadiene	µg/kg	1	MCERTS	-	< 1.0	-	-
1,2,3-Trichlorobenzene	µg/kg	1	ISO 17025	-	< 1.0	-	-



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733593	733594	733595	733596	
Sample Reference				RTP614	RTP615	RTP616	RTP616	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				1.30	2.70	0.40	1.20	
Date Sampled				07/04/2017	10/07/2017	10/04/2017	10/04/2017	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
SVOCs								
Aniline	mg/kg	0.1	NONE	-	< 0.1	-	-	
Phenol	mg/kg	0.2	ISO 17025	-	< 0.2	-	-	
2-Chlorophenol	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
Bis(2-chloroethyl)ether	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
1,3-Dichlorobenzene	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
1,2-Dichlorobenzene	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
1,4-Dichlorobenzene	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
Bis(2-chloroisopropyl)ether	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
2-Methylphenol	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
Hexachloroethane	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Nitrobenzene	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
4-Methylphenol	mg/kg	0.2	NONE	-	< 0.2	-	-	
Isophorone	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
2-Nitrophenol	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
2,4-Dimethylphenol	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
Bis(2-chloroethoxy)methane	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
1,2,4-Trichlorobenzene	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
Naphthalene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
2,4-Dichlorophenol	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
4-Chloroaniline	mg/kg	0.1	NONE	-	< 0.1	-	-	
Hexachlorobutadiene	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
4-Chloro-3-methylphenol	mg/kg	0.1	NONE	-	< 0.1	-	-	
2,4,6-Trichlorophenol	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
2,4,5-Trichlorophenol	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
2-Methylnaphthalene	mg/kg	0.1	NONE	-	< 0.1	-	-	
2-Chloronaphthalene	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
Dimethylphthalate	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
2,6-Dinitrotoluene	mg/kg	0.1	MCERTS	-	< 0.1	-	-	
Acenaphthylene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Acenaphthene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
2,4-Dinitrotoluene	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
Dibenzofuran	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
4-Chlorophenyl phenyl ether	mg/kg	0.3	ISO 17025	-	< 0.3	-	-	
Diethyl phthalate	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
4-Nitroaniline	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
Fluorene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Azobenzene	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
Bromophenyl phenyl ether	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
Hexachlorobenzene	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
Phenanthrene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Anthracene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Carbazole	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
Dibutyl phthalate	mg/kg	0.2	MCERTS	-	< 0.2	-	-	
Anthraquinone	mg/kg	0.3	MCERTS	-	< 0.3	-	-	
Fluoranthene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Pyrene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Butyl benzyl phthalate	mg/kg	0.3	ISO 17025	-	< 0.3	-	-	
Benzo(a)anthracene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Chrysene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Benzo(a)pyrene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	-	< 0.05	-	-	



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733593	733594	733595	733596	
Sample Reference				RTP614	RTP615	RTP616	RTP616	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				1.30	2.70	0.40	1.20	
Date Sampled				07/04/2017	10/07/2017	10/04/2017	10/04/2017	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Soil Analysis)				Units	Limit of detection	Accreditation Status		
Pesticide and Herbicide Screen								
Pesticides/Herbicides Screen in Soil				P/A	N/A	NONE	-	-



Analytical Report Number: 17-45490
Project / Site name: Green Park Village, Reading
Your Order No: 1620013202

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

The analysis was carried out using our documented in-house method A006 based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
733582	RTP604	0.30	131	Loose Fibres	Chrysotile & Amosite	< 0.001	< 0.001
733587	RTP608	0.30	162	Hard/Cement Type Material & Loose Fibres	Chrysotile & Amosite	0.293	0.293
733595	RTP616	0.40	135	Loose Fibres	Chrysotile	< 0.001	< 0.001

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation.



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733597	733598	733599		
Sample Reference				RTP601	RTP606	RTP614		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				0.60	0.10	1.30		
Date Sampled				06/04/2017	06/04/2017	07/04/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.2	7.6	7.9		
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10		
Sulphate as SO ₄	mg/l	0.1	ISO 17025	9.2	47	41		
Ammoniacal Nitrogen as N	µg/l	15	NONE	< 15	< 15	1700		
Hardness - Total	mgCaCO ₃ /l	1	NONE	28.1	80.0	62.2		

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10		
----------------------------	------	----	-----------	------	------	------	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Acenaphthylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Acenaphthene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Fluorene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Phenanthrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(a)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Chrysene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(b)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(k)fluoranthene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(a)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE	< 0.2	< 0.2	< 0.2		
-------------------	------	-----	------	-------	-------	-------	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1.1	ISO 17025	< 1.1	2.2	< 1.1		
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	< 0.2	< 0.2		
Boron (dissolved)	µg/l	10	ISO 17025	66	28	34		
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08	< 0.08		
Chromium (hexavalent)	µg/l	5	NONE	< 5.0	< 5.0	< 5.0		
Chromium (III)	µg/l	1	NONE	1.1	1.0	< 1.0		
Chromium (dissolved)	µg/l	0.4	ISO 17025	1.1	1.0	1.0		
Copper (dissolved)	µg/l	0.7	ISO 17025	19	24	15		
Lead (dissolved)	µg/l	1	ISO 17025	4.2	2.9	2.3		
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5	< 0.5		
Nickel (dissolved)	µg/l	0.3	ISO 17025	1.4	2.9	2.2		
Selenium (dissolved)	µg/l	4	ISO 17025	4.3	< 4.0	< 4.0		
Vanadium (dissolved)	µg/l	1.7	ISO 17025	< 1.7	4.6	2.3		
Zinc (dissolved)	µg/l	0.4	ISO 17025	14	8.8	4.8		

Calcium (dissolved)	mg/l	0.012	ISO 17025	9.8	29	24		
Magnesium (dissolved)	mg/l	0.005	ISO 17025	0.85	1.5	0.74		



Analytical Report Number: 17-45490

Project / Site name: Green Park Village, Reading

Your Order No: 1620013202

Lab Sample Number				733597	733598	733599		
Sample Reference				RTP601	RTP606	RTP614		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				0.60	0.10	1.30		
Date Sampled				06/04/2017	06/04/2017	07/04/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Leachate Analysis)				Units	Limit of detection	Accreditation Status		

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
MTBE (Methyl Tertiary Butyl Ether)	µg/l	10	NONE	< 10	< 10	< 10		

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10		

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10		

Analytical Report Number : 17-45490

Project / Site name: Green Park Village, Reading

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
733578	RTP601	None Supplied	0.60	Black loam with gravel.
733579	RTP602	None Supplied	0.30	Brown sandy loam with stones and vegetation.
733580	RTP602	None Supplied	0.50	Brown clay and loam with gravel and vegetation.
733581	RTP603	None Supplied	1.20	Brown loam and clay with gravel and vegetation.
733582	RTP604	None Supplied	0.30	Brown clay and sand with rubble.
733583	RTP604	None Supplied	2.10	Brown sand with gravel and stones.
733584	RTP605	None Supplied	0.10	Brown loam and sand with rubble and stones.
733585	RTP606	None Supplied	0.10	Brown clay and loam with gravel.
733586	RTP606	None Supplied	0.30	Brown clay and loam with gravel.
733587	RTP608	None Supplied	0.30	Light brown sandy clay with brick and stones.
733588	RTP609	None Supplied	0.90	Brown loam and sand with gravel and vegetation.
733589	RTP610	None Supplied	0.30	Light brown clay and sand with stones.
733590	RTP611	None Supplied	0.50	Brown clay and sand with stones.
733591	RTP613	None Supplied	1.50	Brown clay.
733592	RTP613	None Supplied	2.10	Grey clay with stones.
733593	RTP614	None Supplied	1.30	Brown clay.
733594	RTP615	None Supplied	2.70	Brown clay.
733595	RTP616	None Supplied	0.40	Brown sand with gravel and brick.
733596	RTP616	None Supplied	1.20	Brown clay and sand with gravel.

Analytical Report Number : 17-45490

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in leachate	Determination of Ammonium/Ammonia/Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	NONE
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in ouse method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
Boron in leachate	Determination of boron in leachate. Sample acidified and followed by ICP-OES.	In-house method based on MEWAM	L039-PL	W	ISO 17025
Boron, water soluble, in soil	Determination of water soluble boron in soil by hot water extract followed by ICP-OES.	In-house method based on Second Site Properties version 3	L038-PL	D	MCERTS
BTEX and MTBE in leachates (Monoaromatics)	Determination of BTEX and MTBE in leachates by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
BTEX and MTBE in soil (Monoaromatics)	Determination of BTEX in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS
Cr (III) in soil	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Fraction of Organic Carbon in soil	Determination of fraction of organic carbon in soil by oxidising with potassium dichromate followed by titration with iron (II) sulphate.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L023-PL	D	NONE
Hexavalent chromium in leachate	Determination of hexavalent chromium in leachate by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	NONE
Hexavalent chromium in soil (Lower Level)	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Metals by ICP-OES in leachate	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Moisture Content	Moisture content, determined gravimetrically.	In-house method based on BS1377 Part 2, 1990, Chemical and Electrochemical Tests	L019-UK/PL	W	NONE
Monohydric phenols in leachate	Determination of phenols in leachate by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS

Iss No 17-45490-1 Green Park Village, Reading 1620000492

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 26 of 28

Analytical Report Number : 17-45490

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
NRA Leachate Prep	10:1 extract with de-ionised water shaken for 24 hours then filtered.	In-house method based on National Rivers Authority	L020-PL	W	NONE
Pesticides and Herbicides in soil screening	In-house method	In-house method		W	NONE
pH at 20oC in leachate	Determination of pH in leachate by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L005-PL	W	ISO 17025
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	D	MCERTS
Semi-volatile organic compounds in soil	Determination of semi-volatile organic compounds in soil by extraction in dichloromethane and hexane followed by GC-MS.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Speciated EPA-16 PAHs in leachate	Determination of PAH compounds in leachate by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Sulphate in leachates	Determination of sulphate in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil"	L039-PL	W	ISO 17025
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests, 2:1 water:soil extraction, analysis by ICP-OES.	L038-PL	D	MCERTS
Total cyanide in leachate	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of leachates	Determination of hardness in leachates by calculation from calcium and magnesium.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	NONE
TPHCWG (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Soil)	Determination of hexane extractable hydrocarbons in soil by GC-MS/GC-FID.	In-house method	L076-PL	W	MCERTS
Volatile organic compounds in soil	Determination of volatile organic compounds in soil by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Sample Deviation Report



Sample ID	Other ID	Sample Type	Job	Sample Number	Sample Deviation Code	test_name	test_ref	Test Deviation code
RWS604		S	17-45490	733577	c			

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-45630

Project / Site name:	Green Park Village, Reading	Samples received on:	12/04/2017
Your job number:	1620000492	Samples instructed on:	12/04/2017
Your order number:		Analysis completed by:	18/04/2017
Report Issue Number:	1	Report issued on:	18/04/2017
Samples Analysed:	1 bulk sample		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-45630

Project / Site name: Green Park Village, Reading

Lab Sample Number				734305				
Sample Reference				RTP614				
Sample Number				None Supplied				
Depth (m)				0.50				
Date Sampled				07/04/2017				
Time Taken				None Supplied				
Analytical Parameter (Bulk Analysis)				Units	Limit of detection	Accreditation Status		
Asbestos Identification Name	Type	N/A	ISO 17025	No Asbestos Detected				



Analytical Report Number : 17-45630

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Asbestos identification in BULKs	Asbestos Identification with the use of polarised light microscopy in conjunction with dispersion staining techniques.	In house method based on HSG 248	A001-PL	W	ISO 17025

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-46932

Project / Site name:	Green Park Village	Samples received on:	28/04/2017
Your job number:		Samples instructed on:	28/04/2017
Your order number:		Analysis completed by:	08/05/2017
Report Issue Number:	1	Report issued on:	08/05/2017
Samples Analysed:	6 water samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-46932
Project / Site name: Green Park Village

Lab Sample Number				741354	741355	741356	741357	741358
Sample Reference				RWS601	RWS602	RWS603	RWS604	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				27/04/2017	27/04/2017	27/04/2017	27/04/2017	27/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	49000	39900	70500	65700	261000
Sulphate as SO ₄	mg/l	0.045	ISO 17025	49	40	71	66	260
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	7.31	7.74	7.43	9.06	14.3
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	328	295	374	331	611

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	------	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	< 0.16	< 0.16	< 0.16
-------------------	------	------	------	--------	--------	--------	--------	--------

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	4.9	11	8.5	18	10
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	< 0.2	0.3	0.2	< 0.2
Boron (dissolved)	µg/l	10	ISO 17025	130	89	110	92	160
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08	< 0.08	< 0.08	< 0.08
Calcium (dissolved)	mg/l	0.012	ISO 17025	120	110	140	120	230
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chromium (dissolved)	µg/l	0.4	ISO 17025	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4
Copper (dissolved)	µg/l	0.7	ISO 17025	4.2	1.5	1.0	0.8	2.8
Lead (dissolved)	µg/l	1	ISO 17025	1.4	2.0	3.0	1.9	2.1
Magnesium (dissolved)	mg/l	0.005	ISO 17025	8.7	7.4	8.5	7.3	11
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5
Nickel (dissolved)	µg/l	0.3	ISO 17025	20	19	6.3	7.2	32
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Vanadium (dissolved)	µg/l	1.7	ISO 17025	2.8	9.6	2.0	< 1.7	2.2
Zinc (dissolved)	µg/l	0.4	ISO 17025	6.8	4.9	26	5.2	8.7



Analytical Report Number: 17-46932

Project / Site name: Green Park Village

Lab Sample Number				741354	741355	741356	741357	741358
Sample Reference				RWS601	RWS602	RWS603	RWS604	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				27/04/2017	27/04/2017	27/04/2017	27/04/2017	27/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	23	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	190	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	140	< 10	85	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	18	< 10	35	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	370	< 10	120	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10



Analytical Report Number: 17-46932

Project / Site name: Green Park Village

Lab Sample Number				741354	741355	741356	741357	741358
Sample Reference				RWS601	RWS602	RWS603	RWS604	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				27/04/2017	27/04/2017	27/04/2017	27/04/2017	27/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vinyl Chloride	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichlorofluoromethane	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Styrene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tribromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0



Analytical Report Number: 17-46932

Project / Site name: Green Park Village

Lab Sample Number				741354	741355	741356	741357	741358
Sample Reference				RWS601	RWS602	RWS603	RWS604	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				27/04/2017	27/04/2017	27/04/2017	27/04/2017	27/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachloroethane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Nitrobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Isophorone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Nitrophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dimethylphthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibenzofuran	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Diethyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Nitroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Azobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Carbazole	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Anthraquinone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

U/S = Unsuitable Sample I/S = Insufficient Sample

Iss No 17-46932-1 Green Park Village

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 5 of 10



Analytical Report Number: 17-46932

Project / Site name: Green Park Village

Lab Sample Number				741359				
Sample Reference				RWS611				
Sample Number				None Supplied				
Depth (m)				None Supplied				
Date Sampled				27/04/2017				
Time Taken				None Supplied				
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

Total Cyanide	µg/l	10	ISO 17025	< 10				
Sulphate as SO ₄	µg/l	45	ISO 17025	86600				
Sulphate as SO ₄	mg/l	0.045	ISO 17025	87				
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	8.00				
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	351				

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10				
----------------------------	------	----	-----------	------	--	--	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01				
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01				
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01				
Fluorene	µg/l	0.01	ISO 17025	< 0.01				
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01				
Anthracene	µg/l	0.01	ISO 17025	< 0.01				
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Pyrene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01				
Chrysene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01				
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01				
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01				
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01				

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16				
-------------------	------	------	------	--------	--	--	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	26				
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2				
Boron (dissolved)	µg/l	10	ISO 17025	98				
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08				
Calcium (dissolved)	mg/l	0.012	ISO 17025	130				
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0				
Chromium (III)	µg/l	1	NONE	< 1.0				
Chromium (dissolved)	µg/l	0.4	ISO 17025	0.4				
Copper (dissolved)	µg/l	0.7	ISO 17025	1.8				
Lead (dissolved)	µg/l	1	ISO 17025	1.7				
Magnesium (dissolved)	mg/l	0.005	ISO 17025	8.7				
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5				
Nickel (dissolved)	µg/l	0.3	ISO 17025	18				
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0				
Vanadium (dissolved)	µg/l	1.7	ISO 17025	2.9				
Zinc (dissolved)	µg/l	0.4	ISO 17025	5.2				



Analytical Report Number: 17-46932

Project / Site name: Green Park Village

Lab Sample Number				741359				
Sample Reference				RWS611				
Sample Number				None Supplied				
Depth (m)				None Supplied				
Date Sampled				27/04/2017				
Time Taken				None Supplied				
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0				
Toluene	µg/l	1	ISO 17025	< 1.0				
Ethylbenzene	µg/l	1	ISO 17025	< 1.0				
p & m-xylene	µg/l	1	ISO 17025	< 1.0				
o-xylene	µg/l	1	ISO 17025	< 1.0				
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0				

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0				
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0				
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0				
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	120				
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	94				
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	210				

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0				
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0				
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0				
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10				



Analytical Report Number: 17-46932

Project / Site name: Green Park Village

Lab Sample Number				741359				
Sample Reference				RWS611				
Sample Number				None Supplied				
Depth (m)				None Supplied				
Date Sampled				27/04/2017				
Time Taken				None Supplied				
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0				
Chloroethane	µg/l	1	ISO 17025	< 1.0				
Bromomethane	µg/l	1	ISO 17025	< 1.0				
Vinyl Chloride	µg/l	1	NONE	< 1.0				
Trichlorofluoromethane	µg/l	1	NONE	< 1.0				
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0				
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0				
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0				
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0				
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0				
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0				
Trichloromethane	µg/l	1	ISO 17025	< 1.0				
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0				
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0				
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0				
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0				
Benzene	µg/l	1	ISO 17025	< 1.0				
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0				
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0				
Trichloroethene	µg/l	1	ISO 17025	< 1.0				
Dibromomethane	µg/l	1	ISO 17025	< 1.0				
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0				
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0				
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0				
Toluene	µg/l	1	ISO 17025	< 1.0				
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0				
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0				
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0				
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0				
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0				
Chlorobenzene	µg/l	1	ISO 17025	< 1.0				
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0				
Ethylbenzene	µg/l	1	ISO 17025	< 1.0				
p & m-Xylene	µg/l	1	ISO 17025	< 1.0				
Styrene	µg/l	1	ISO 17025	< 1.0				
Tribromomethane	µg/l	1	ISO 17025	< 1.0				
o-Xylene	µg/l	1	ISO 17025	< 1.0				
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0				
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0				
Bromobenzene	µg/l	1	ISO 17025	< 1.0				
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0				
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0				
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0				
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0				
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0				
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0				
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0				
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0				
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0				
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0				
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0				
Butylbenzene	µg/l	1	ISO 17025	< 1.0				
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0				
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0				
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0				
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0				



Analytical Report Number: 17-46932

Project / Site name: Green Park Village

Lab Sample Number				741359				
Sample Reference				RWS611				
Sample Number				None Supplied				
Depth (m)				None Supplied				
Date Sampled				27/04/2017				
Time Taken				None Supplied				
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05				
Phenol	µg/l	0.05	NONE	< 0.05				
2-Chlorophenol	µg/l	0.05	NONE	< 0.05				
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05				
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05				
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05				
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05				
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05				
2-Methylphenol	µg/l	0.05	NONE	< 0.05				
Hexachloroethane	µg/l	0.05	NONE	< 0.05				
Nitrobenzene	µg/l	0.05	NONE	< 0.05				
4-Methylphenol	µg/l	0.05	NONE	< 0.05				
Isophorone	µg/l	0.05	NONE	< 0.05				
2-Nitrophenol	µg/l	0.05	NONE	< 0.05				
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05				
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05				
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05				
Naphthalene	µg/l	0.01	ISO 17025	< 0.01				
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05				
4-Chloroaniline	µg/l	0.05	NONE	< 0.05				
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05				
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05				
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05				
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05				
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05				
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05				
Dimethylphthalate	µg/l	0.05	NONE	< 0.05				
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05				
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01				
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01				
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05				
Dibenzofuran	µg/l	0.05	NONE	< 0.05				
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05				
Diethyl phthalate	µg/l	0.05	NONE	< 0.05				
4-Nitroaniline	µg/l	0.05	NONE	< 0.05				
Fluorene	µg/l	0.01	ISO 17025	< 0.01				
Azobenzene	µg/l	0.05	NONE	< 0.05				
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05				
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05				
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01				
Anthracene	µg/l	0.01	ISO 17025	< 0.01				
Carbazole	µg/l	0.05	NONE	< 0.05				
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05				
Anthraquinone	µg/l	0.05	NONE	< 0.05				
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Pyrene	µg/l	0.01	ISO 17025	< 0.01				
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05				
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01				
Chrysene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01				
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01				
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01				
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01				

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number : 17-46932

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Boron in water	Determination of boron in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW	In-house method based on MEWAM	L039-PL	W	ISO 17025
BTEX and MTBE in water (Monoaromatics)	Determination of BTEX and MTBE in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
Cr (III) in water	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
Dissolved Organic Carbon in water	Determination of dissolved inorganic carbon in water by TOC/DOC NDIR Analyser.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L037-PL	W	NONE
Hexavalent chromium in water	Determination of hexavalent chromium in water by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method by continuous flow analyser. Accredited Matrices SW, GW, PW.	L080-PL	W	ISO 17025
Metals in water by ICP-MS (dissolved)	Determination of metals in water by acidification followed by ICP-MS. Accredited Matrices: SW, GW, PW except B=SW,GW, Hg=SW,PW, Al=SW,PW.	In-house method based on USEPA Method 6020 & 200.8 "for the determination of trace elements in water by ICP-MS.	L012-PL	W	ISO 17025
Metals in water by ICP-OES (dissolved)	Determination of metals in water by acidification followed by ICP-OES. Accredited Matrices SW, GW, PW, PrW.(Al, Cu,Fe,Zn).	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Monohydric phenols in water	Determination of phenols in water by continuous flow analyser. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Semi-volatile organic compounds in water	Determination of semi-volatile organic compounds in leachate by extraction in dichloromethane followed by GC-MS.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in water	Determination of PAH compounds in water by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards. Accredited matrices: SW PW GW	In-house method based on USEPA 8270	L0102B-PL	W	NONE
Sulphate in water	Determination of sulphate in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW, PrW.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Sulphate in water	Determination of sulphate in water by ICP-OES	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil""	L039-PL	W	ISO 17025
Total cyanide in water	Determination of total cyanide by distillation followed by colorimetry. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of water	Determination of hardness in waters by calculation from calcium and magnesium. Accredited Matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	ISO 17025
TPHCWG (Waters)	Determination of dichloromethane extractable hydrocarbons in water by GC-MS, speciation by interpretation.	In-house method	L070-PL	W	NONE
Volatile organic compounds in water	Determination of volatile organic compounds in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Iss No 17-46932-1 Green Park Village

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 10 of 10

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-47153

Project / Site name:	Green Park Village	Samples received on:	02/05/2017
Your job number:	1620000442	Samples instructed on:	02/05/2017
Your order number:		Analysis completed by:	09/05/2017
Report Issue Number:	1	Report issued on:	09/05/2017
Samples Analysed:	8 water samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-47153

Project / Site name: Green Park Village

Lab Sample Number				742423	742424	742425	742426	742427
Sample Reference				RBH605	RBH606	RBH601	RBH607	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				02/05/2017	02/05/2017	02/05/2017	02/05/2017	02/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.0	7.7	7.0	6.9	7.0
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	163000	36800	474000	1110000	470000
Sulphate as SO ₄	mg/l	0.045	ISO 17025	160	37	470	1100	470
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	1900	370	8500	5600	4000
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	69.0	24.2	190	168	111
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	587	206	1910	1740	1240

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	------	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.39	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.42	< 0.01	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.33	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.75	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.19	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.28	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.16	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	2.52	< 0.16	< 0.16
-------------------	------	------	------	--------	--------	------	--------	--------

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	8.3	3.7	13	13	10
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	< 0.2	0.2	< 0.2	< 0.2
Boron (dissolved)	µg/l	10	ISO 17025	150	110	610	250	310
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08	< 0.08	< 0.08	< 0.08
Calcium (dissolved)	mg/l	0.012	ISO 17025	210	60	680	610	430
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	1.8	< 1.0
Chromium (dissolved)	µg/l	0.4	ISO 17025	0.5	< 0.4	0.6	1.8	0.7
Copper (dissolved)	µg/l	0.7	ISO 17025	1.3	0.8	1.5	1.9	1.3
Lead (dissolved)	µg/l	1	ISO 17025	1.1	1.2	2.2	4.7	3.1
Magnesium (dissolved)	mg/l	0.005	ISO 17025	13	14	52	52	44
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5
Nickel (dissolved)	µg/l	0.3	ISO 17025	10	2.6	9.3	19	9.0
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Vanadium (dissolved)	µg/l	1.7	ISO 17025	< 1.7	< 1.7	3.8	< 1.7	1.9
Zinc (dissolved)	µg/l	0.4	ISO 17025	13	12	11	9.0	6.3



Analytical Report Number: 17-47153
Project / Site name: Green Park Village

Lab Sample Number				742423	742424	742425	742426	742427
Sample Reference				RBH605	RBH606	RBH601	RBH607	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				02/05/2017	02/05/2017	02/05/2017	02/05/2017	02/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	700	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	700	< 10	< 10	< 10	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10



Analytical Report Number: 17-47153

Project / Site name: Green Park Village

Lab Sample Number				742423	742424	742425	742426	742427
Sample Reference				RBH605	RBH606	RBH601	RBH607	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				02/05/2017	02/05/2017	02/05/2017	02/05/2017	02/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vinyl Chloride	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichlorofluoromethane	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Styrene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tribromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0



Analytical Report Number: 17-47153

Project / Site name: Green Park Village

Lab Sample Number				742423	742424	742425	742426	742427
Sample Reference				RBH605	RBH606	RBH601	RBH607	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				02/05/2017	02/05/2017	02/05/2017	02/05/2017	02/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachloroethane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Nitrobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Isophorone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Nitrophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.39	< 0.01	< 0.01
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dimethylphthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.42	< 0.01	< 0.01
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibenzofuran	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Diethyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Nitroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.33	< 0.01	< 0.01
Azobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.75	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.19	< 0.01	< 0.01
Carbazole	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Anthraquinone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.28	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.16	< 0.01	< 0.01
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

U/S = Unsuitable Sample I/S = Insufficient Sample

Iss No 17-47153-1 Green Park Village 1620000442

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 5 of 11



Analytical Report Number: 17-47153

Project / Site name: Green Park Village

Lab Sample Number				742428	742429	742430		
Sample Reference				RBH602S	RBH610D	RBH604D		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				None Supplied	None Supplied	None Supplied		
Date Sampled				02/05/2017	02/05/2017	02/05/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.1	7.4	7.5		
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10		
Sulphate as SO ₄	µg/l	45	ISO 17025	44400	22200	47700		
Sulphate as SO ₄	mg/l	0.045	ISO 17025	44	22	48		
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	880	580	370		
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	37.0	46.1	42.1		
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	241	320	253		

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	23	< 10		
----------------------------	------	----	-----------	------	----	------	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	< 0.16		
-------------------	------	------	------	--------	--------	--------	--	--

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	4.5	4.7	4.3		
Beryllium (dissolved)	µg/l	0.2	ISO 17025	0.3	0.4	0.3		
Boron (dissolved)	µg/l	10	ISO 17025	78	81	130		
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08	< 0.08		
Calcium (dissolved)	mg/l	0.012	ISO 17025	82	110	69		
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0		
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
Chromium (dissolved)	µg/l	0.4	ISO 17025	< 0.4	< 0.4	< 0.4		
Copper (dissolved)	µg/l	0.7	ISO 17025	1.3	0.7	< 0.7		
Lead (dissolved)	µg/l	1	ISO 17025	2.0	1.4	1.4		
Magnesium (dissolved)	mg/l	0.005	ISO 17025	8.8	13	20		
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5	< 0.5		
Nickel (dissolved)	µg/l	0.3	ISO 17025	0.5	6.8	3.3		
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0	< 4.0		
Vanadium (dissolved)	µg/l	1.7	ISO 17025	3.5	< 1.7	< 1.7		
Zinc (dissolved)	µg/l	0.4	ISO 17025	3.3	5.1	5.1		



Analytical Report Number: 17-47153

Project / Site name: Green Park Village

Lab Sample Number				742428	742429	742430		
Sample Reference				RBH602S	RBH610D	RBH604D		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				None Supplied	None Supplied	None Supplied		
Date Sampled				02/05/2017	02/05/2017	02/05/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10		

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10		
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10		



Analytical Report Number: 17-47153

Project / Site name: Green Park Village

Lab Sample Number				742428	742429	742430		
Sample Reference				RBH602S	RBH610D	RBH604D		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				None Supplied	None Supplied	None Supplied		
Date Sampled				02/05/2017	02/05/2017	02/05/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Chloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Bromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Vinyl Chloride	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
Trichlorofluoromethane	µg/l	1	NONE	< 1.0	< 1.0	< 1.0		
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Trichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Trichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Dibromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Chlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
p & m-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Styrene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Tribromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
o-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Bromobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0		



Analytical Report Number: 17-47153

Project / Site name: Green Park Village

Lab Sample Number				742428	742429	742430		
Sample Reference				RBH602S	RBH610D	RBH604D		
Sample Number				None Supplied	None Supplied	None Supplied		
Depth (m)				None Supplied	None Supplied	None Supplied		
Date Sampled				02/05/2017	02/05/2017	02/05/2017		
Time Taken				None Supplied	None Supplied	None Supplied		
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Phenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2-Chlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Hexachloroethane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Nitrobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
4-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Isophorone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2-Nitrophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
4-Chloroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Dimethylphthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Dibenzofuran	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Diethyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
4-Nitroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Azobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Carbazole	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Anthraquinone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05		
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01		
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01		

U/S = Unsuitable Sample I/S = Insufficient Sample

Iss No 17-47153-1 Green Park Village 1620000442

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 9 of 11



Analytical Report Number : 17-47153

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in water	Determination of Ammonium/Ammonia/ Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method. Accredited matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	ISO 17025
Boron in water	Determination of boron in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW	In-house method based on MEWAM	L039-PL	W	ISO 17025
BTEX and MTBE in water (Monoaromatics)	Determination of BTEX and MTBE in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
Cr (III) in water	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
Dissolved Organic Carbon in water	Determination of dissolved inorganic carbon in water by TOC/DOC NDIR Analyser.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L037-PL	W	NONE
Hexavalent chromium in water	Determination of hexavalent chromium in water by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method by continuous flow analyser. Accredited Matrices SW, GW, PW.	L080-PL	W	ISO 17025
Metals in water by ICP-MS (dissolved)	Determination of metals in water by acidification followed by ICP-MS. Accredited Matrices: SW, GW, PW except B=SW,GW, Hg=SW,PW, Al=SW,PW.	In-house method based on USEPA Method 6020 & 200.8 "for the determination of trace elements in water by ICP-MS.	L012-PL	W	ISO 17025
Metals in water by ICP-OES (dissolved)	Determination of metals in water by acidification followed by ICP-OES. Accredited Matrices SW, GW, PW, PrW.(Al, Cu,Fe,Zn).	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Monohydric phenols in water	Determination of phenols in water by continuous flow analyser. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
pH at 20oC in water (automated)	Determination of pH in water followed by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	W	ISO 17025
Semi-volatile organic compounds in water	Determination of semi-volatile organic compounds in leachate by extraction in dichloromethane followed by GC-MS.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in water	Determination of PAH compounds in water by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards. Accredited matrices: SW PW GW	In-house method based on USEPA 8270	L0102B-PL	W	NONE
Sulphate in water	Determination of sulphate in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW, PrW.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Sulphate in water	Determination of sulphate in water by ICP-OES	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil""	L039-PL	W	ISO 17025
Total cyanide in water	Determination of total cyanide by distillation followed by colorimetry. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of water	Determination of hardness in waters by calculation from calcium and magnesium. Accredited Matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	ISO 17025
TPHCWG (Waters)	Determination of dichloromethane extractable hydrocarbons in water by GC-MS, speciation by interpretation.	In-house method	L070-PL	W	NONE

Iss No 17-47153-1 Green Park Village 1620000442

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 10 of 11



Analytical Report Number : 17-47153

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Volatile organic compounds in water	Determination of volatile organic compounds in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-47157

Project / Site name:	Green Park Village	Samples received on:	02/05/2017
Your job number:	1620000442	Samples instructed on:	02/05/2017
Your order number:		Analysis completed by:	09/05/2017
Report Issue Number:	1	Report issued on:	09/05/2017
Samples Analysed:	12 water samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number	742472	742473	742474	742475	742476
Sample Reference	RWS612	RWS614	RWS613	RWS615	RWS618
Sample Number	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled	28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status		

General Inorganics

Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	475000	419000	219000	289000	71200
Sulphate as SO ₄	mg/l	0.045	ISO 17025	480	420	220	290	71
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	47.7	57.5	72.9	44.4	90.7
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	733	651	633	552	573

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	------	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	< 0.16	< 0.16	< 0.16
-------------------	------	------	------	--------	--------	--------	--------	--------



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742472	742473	742474	742475	742476
Sample Reference				RWS612	RWS614	RWS613	RWS615	RWS618
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	11	7.2	16	5.9	15
Beryllium (dissolved)	µg/l	0.2	ISO 17025	0.3	0.3	< 0.2	< 0.2	< 0.2
Boron (dissolved)	µg/l	10	ISO 17025	120	170	180	120	150
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08	< 0.08	< 0.08	< 0.08
Calcium (dissolved)	mg/l	0.012	ISO 17025	280	240	230	200	210
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chromium (dissolved)	µg/l	0.4	ISO 17025	0.4	0.4	0.6	< 0.4	0.9
Copper (dissolved)	µg/l	0.7	ISO 17025	1.5	1.8	1.1	4.2	1.1
Lead (dissolved)	µg/l	1	ISO 17025	2.2	2.1	2.0	1.3	2.7
Magnesium (dissolved)	mg/l	0.005	ISO 17025	9.0	12	13	10	12
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5
Nickel (dissolved)	µg/l	0.3	ISO 17025	6.1	13	9.9	22	3.7
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Vanadium (dissolved)	µg/l	1.7	ISO 17025	2.2	< 1.7	< 1.7	3.2	2.0
Zinc (dissolved)	µg/l	0.4	ISO 17025	8.7	11	10	8.7	9.8

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	57	< 10	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10	890	< 10	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	950	< 10	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742472	742473	742474	742475	742476
Sample Reference				RWS612	RWS614	RWS613	RWS615	RWS618
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vinyl Chloride	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichlorofluoromethane	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Styrene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tribromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742472	742473	742474	742475	742476
Sample Reference				RWS612	RWS614	RWS613	RWS615	RWS618
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachloroethane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Nitrobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Isophorone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Nitrophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dimethylphthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibenzofuran	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Diethyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Nitroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Azobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Carbazole	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Anthraquinone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

U/S = Unsuitable Sample I/S = Insufficient Sample

Iss No 17-47157-1 Green Park Village 1620000442

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number	742477	742478	742479	742480	742481
Sample Reference	RWS629	RWS633	RWS637	RWS608	RWS621
Sample Number	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled	28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status		

General Inorganics

Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	8210	79500	296000	260000	65700
Sulphate as SO ₄	mg/l	0.045	ISO 17025	8.2	79	300	260	66
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	1.49	50.8	118	83.4	11.9
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	1020	347	1000	707	250

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	------	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.37	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	1.43	< 0.01	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.51	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.37	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.09	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	2.77	< 0.16	< 0.16
-------------------	------	------	------	--------	--------	------	--------	--------



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742477	742478	742479	742480	742481
Sample Reference				RWS629	RWS633	RWS637	RWS608	RWS621
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	18	8.7	11	90	18
Beryllium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	< 0.2	0.3	< 0.2	0.3
Boron (dissolved)	µg/l	10	ISO 17025	160	160	210	180	110
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08	< 0.08	< 0.08	< 0.08
Calcium (dissolved)	mg/l	0.012	ISO 17025	380	120	370	260	88
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0	1.3	< 1.0	1.2
Chromium (dissolved)	µg/l	0.4	ISO 17025	0.5	< 0.4	1.3	0.7	1.2
Copper (dissolved)	µg/l	0.7	ISO 17025	0.9	0.9	7.9	1.0	< 0.7
Lead (dissolved)	µg/l	1	ISO 17025	3.1	1.4	< 1.0	3.0	2.2
Magnesium (dissolved)	mg/l	0.005	ISO 17025	20	11	20	12	7.6
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5
Nickel (dissolved)	µg/l	0.3	ISO 17025	3.8	2.1	8.1	11	3.9
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Vanadium (dissolved)	µg/l	1.7	ISO 17025	3.8	< 1.7	5.1	< 1.7	5.4
Zinc (dissolved)	µg/l	0.4	ISO 17025	6.0	9.4	11	5.4	6.4

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	51	< 10	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10	370	< 10	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	420	< 10	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742477	742478	742479	742480	742481
Sample Reference				RWS629	RWS633	RWS637	RWS608	RWS621
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Vinyl Chloride	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichlorofluoromethane	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Chlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Styrene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Tribromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Bromobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742477	742478	742479	742480	742481
Sample Reference				RWS629	RWS633	RWS637	RWS608	RWS621
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				28/04/2017	28/04/2017	28/04/2017	28/04/2017	28/04/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachloroethane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Nitrobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Isophorone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Nitrophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.37	< 0.01	< 0.01
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dimethylphthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	1.4	< 0.01	< 0.01
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibenzofuran	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Diethyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
4-Nitroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.51	< 0.01	< 0.01
Azobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.37	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	0.09	< 0.01	< 0.01
Carbazole	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Anthraquinone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

U/S = Unsuitable Sample I/S = Insufficient Sample

Iss No 17-47157-1 Green Park Village 1620000442

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 9 of 14



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742482	742483			
Sample Reference				RWS617	RWS616			
Sample Number				None Supplied	None Supplied			
Depth (m)				None Supplied	None Supplied			
Date Sampled				28/04/2017	28/04/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

Total Cyanide	µg/l	10	ISO 17025	< 10	< 10			
Sulphate as SO ₄	µg/l	45	ISO 17025	110000	284000			
Sulphate as SO ₄	mg/l	0.045	ISO 17025	110	280			
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	5.66	14.0			
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	298	397			

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10			
----------------------------	------	----	-----------	------	------	--	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01			

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16			
-------------------	------	------	------	--------	--------	--	--	--



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742482	742483			
Sample Reference				RWS617	RWS616			
Sample Number				None Supplied	None Supplied			
Depth (m)				None Supplied	None Supplied			
Date Sampled				28/04/2017	28/04/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	6.5	11			
Beryllium (dissolved)	µg/l	0.2	ISO 17025	0.3	< 0.2			
Boron (dissolved)	µg/l	10	ISO 17025	130	130			
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08	< 0.08			
Calcium (dissolved)	mg/l	0.012	ISO 17025	110	130			
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0			
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0			
Chromium (dissolved)	µg/l	0.4	ISO 17025	< 0.4	0.5			
Copper (dissolved)	µg/l	0.7	ISO 17025	1.5	1.6			
Lead (dissolved)	µg/l	1	ISO 17025	1.9	4.0			
Magnesium (dissolved)	mg/l	0.005	ISO 17025	7.3	15			
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5	< 0.5			
Nickel (dissolved)	µg/l	0.3	ISO 17025	7.5	6.0			
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0	< 4.0			
Vanadium (dissolved)	µg/l	1.7	ISO 17025	< 1.7	< 1.7			
Zinc (dissolved)	µg/l	0.4	ISO 17025	9.6	6.7			

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0			

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0			
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0			
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0			
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	150			
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	910			
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	1100			

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0			
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0			
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0			
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10			
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10			



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742482	742483			
Sample Reference				RWS617	RWS616			
Sample Number				None Supplied	None Supplied			
Depth (m)				None Supplied	None Supplied			
Date Sampled				28/04/2017	28/04/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Chloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Bromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Vinyl Chloride	µg/l	1	NONE	< 1.0	< 1.0			
Trichlorofluoromethane	µg/l	1	NONE	< 1.0	< 1.0			
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0			
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Trichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Trichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Dibromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Chlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
p & m-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Styrene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Tribromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
o-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0			
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Bromobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0			
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0	< 1.0			
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0			



Analytical Report Number: 17-47157

Project / Site name: Green Park Village

Lab Sample Number				742482	742483			
Sample Reference				RWS617	RWS616			
Sample Number				None Supplied	None Supplied			
Depth (m)				None Supplied	None Supplied			
Date Sampled				28/04/2017	28/04/2017			
Time Taken				None Supplied	None Supplied			
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05	< 0.05			
Phenol	µg/l	0.05	NONE	< 0.05	< 0.05			
2-Chlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05			
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05			
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05			
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05			
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05			
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05			
2-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05			
Hexachloroethane	µg/l	0.05	NONE	< 0.05	< 0.05			
Nitrobenzene	µg/l	0.05	NONE	< 0.05	< 0.05			
4-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05			
Isophorone	µg/l	0.05	NONE	< 0.05	< 0.05			
2-Nitrophenol	µg/l	0.05	NONE	< 0.05	< 0.05			
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05	< 0.05			
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05	< 0.05			
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05			
Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05			
4-Chloroaniline	µg/l	0.05	NONE	< 0.05	< 0.05			
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05	< 0.05			
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05			
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05			
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05			
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05			
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05			
Dimethylphthalate	µg/l	0.05	NONE	< 0.05	< 0.05			
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05			
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05			
Dibenzofuran	µg/l	0.05	NONE	< 0.05	< 0.05			
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05			
Diethyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05			
4-Nitroaniline	µg/l	0.05	NONE	< 0.05	< 0.05			
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Azobenzene	µg/l	0.05	NONE	< 0.05	< 0.05			
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05			
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05			
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Carbazole	µg/l	0.05	NONE	< 0.05	< 0.05			
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05			
Anthraquinone	µg/l	0.05	NONE	< 0.05	< 0.05			
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05			
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01			
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01			
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01			
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01			

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number : 17-47157

Project / Site name: Green Park Village

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Boron in water	Determination of boron in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW	In-house method based on MEWAM	L039-PL	W	ISO 17025
BTEX and MTBE in water (Monoaromatics)	Determination of BTEX and MTBE in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
Cr (III) in water	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
Dissolved Organic Carbon in water	Determination of dissolved inorganic carbon in water by TOC/DOC NDIR Analyser.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L037-PL	W	NONE
Hexavalent chromium in water	Determination of hexavalent chromium in water by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method by continuous flow analyser. Accredited Matrices SW, GW, PW.	L080-PL	W	ISO 17025
Metals in water by ICP-MS (dissolved)	Determination of metals in water by acidification followed by ICP-MS. Accredited Matrices: SW, GW, PW except B=SW,GW, Hg=SW,PW, Al=SW,PW.	In-house method based on USEPA Method 6020 & 200.8 "for the determination of trace elements in water by ICP-MS.	L012-PL	W	ISO 17025
Metals in water by ICP-OES (dissolved)	Determination of metals in water by acidification followed by ICP-OES. Accredited Matrices SW, GW, PW, PrW.(Al, Cu,Fe,Zn).	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Monohydric phenols in water	Determination of phenols in water by continuous flow analyser. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Semi-volatile organic compounds in water	Determination of semi-volatile organic compounds in leachate by extraction in dichloromethane followed by GC-MS.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in water	Determination of PAH compounds in water by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards. Accredited matrices: SW PW GW	In-house method based on USEPA 8270	L0102B-PL	W	NONE
Sulphate in water	Determination of sulphate in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW, PrW.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Sulphate in water	Determination of sulphate in water by ICP-OES	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil""	L039-PL	W	ISO 17025
Total cyanide in water	Determination of total cyanide by distillation followed by colorimetry. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of water	Determination of hardness in waters by calculation from calcium and magnesium. Accredited Matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	ISO 17025
TPHCWG (Waters)	Determination of dichloromethane extractable hydrocarbons in water by GC-MS, speciation by interpretation.	In-house method	L070-PL	W	NONE
Volatile organic compounds in water	Determination of volatile organic compounds in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Iss No 17-47157-1 Green Park Village 1620000442

This certificate should not be reproduced, except in full, without the express permission of the laboratory.

The results included within the report are representative of the samples submitted for analysis.

Page 14 of 14

BACTERIOLOGICAL TEST REPORT



NON LEGIONELLA SAMPLES
RECEIVED OUTSIDE OF 24 HOURS
THEREFORE RESULTS MAY BE INVALID

Client: i2 Analytical LTD
Address: 7 Woodshots Meadow
Croxley Green Business Park
Croxley Green
Hertfordshire
WD18 8YS
Site: 17-4776
FAO: Trevor Hill
Order No: 8867,1747776

Job Number: M/182/47390
Report No.: 49471.1
Date Taken: Tue, 9th May 2017 12:00
Date Rec'd: Thu, 11th May 2017



Stansted Laboratories LTD
Unit 9-10, Riverside Industrial Estate
27 Thames Road
Barking, Essex
IG11 0ND
Tel: +44 (0)20 8594 5104
Fax: +44 (0)20 8591 8762
sales@stanstedlabs.co.uk
www.stanstedlabs.co.uk

Directors: B. Patel, K.Patel

Items Marked □ are not included in the UKAS Schedule

Sample ID	Description & Temperatures	Analysis	Result	Tested	Notes / Species
SL215222 <i>Water - Open</i>	745809	TVC @ 37°C - 2 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Init Temp □	TVC @ 22°C - 3 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Temp > 1 Min □	Coliforms	1203 MPN/100ml	11/05/2017	
	Temp > 2 Min □	E.Coli	0 MPN/100ml	11/05/2017	
		Faecal Coliforms □	649 MPN/100ml	11/05/2017	
SL215223 <i>Water - Open</i>	745810	TVC @ 37°C - 2 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Init Temp □	TVC @ 22°C - 3 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Temp > 1 Min □	Coliforms	11 MPN/100ml	11/05/2017	
	Temp > 2 Min □	E.Coli	0 MPN/100ml	11/05/2017	
		Faecal Coliforms □	161 MPN/100ml	11/05/2017	
SL215224 <i>Water - Open</i>	745814	TVC @ 37°C - 2 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Init Temp □	TVC @ 22°C - 3 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Temp > 1 Min □	Coliforms	19 MPN/100ml	11/05/2017	
	Temp > 2 Min □	E.Coli	0 MPN/100ml	11/05/2017	
		Faecal Coliforms □	125 MPN/100ml	11/05/2017	
SL215225 <i>Water - Open</i>	745818	TVC @ 37°C - 2 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Init Temp □	TVC @ 22°C - 3 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Temp > 1 Min □	Coliforms	3 MPN/100ml	11/05/2017	
	Temp > 2 Min □	E.Coli	0 MPN/100ml	11/05/2017	
		Faecal Coliforms □	579 MPN/100ml	11/05/2017	
SL215226 <i>Water - Open</i>	745819	TVC @ 37°C - 2 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Init Temp □	TVC @ 22°C - 3 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
	Temp > 1 Min □	Coliforms	980 MPN/100ml	11/05/2017	
	Temp > 2 Min □	E.Coli	0 MPN/100ml	11/05/2017	
		Faecal Coliforms □	162 MPN/100ml	11/05/2017	

BACTERIOLOGICAL TEST REPORT



NON LEGIONELLA SAMPLES
RECEIVED OUTSIDE OF 24 HOURS
THEREFORE RESULTS MAY BE INVALID

Client: i2 Analytical LTD
Address: 7 Woodshots Meadow
Croxley Green Business Park
Croxley Green
Hertfordshire
WD18 8YS
Site: 17-4776
FAO: Trevor Hill
Order No: 8867,1747776

Job Number: M/182/47390
Report No.: 49471.1
Date Taken: Tue, 9th May 2017 12:00
Date Rec'd: Thu, 11th May 2017



2266

Stansted Laboratories LTD
Unit 9-10, Riverside Industrial Estate
27 Thames Road
Barking, Essex
IG11 0ND
Tel: +44 (0)20 8594 5104
Fax: +44 (0)20 8591 8762
sales@stanstedlabs.co.uk
www.stanstedlabs.co.uk

Directors: B. Patel, K. Patel

SL215227 Water - Open	745822 Init Temp ▢	Temp > 1 Min ▢	Temp > 2 Min ▢	TVC @ 37°C - 2 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
				TVC @ 22°C - 3 Day	>300 cfu/ml	11/05/2017	Estimated Counts: >3000 cfu/ml
				Coliforms	188 MPN/100ml	11/05/2017	
				E.Coli	12 MPN/100ml	11/05/2017	
				Faecal Coliforms ▢	411 MPN/100ml	11/05/2017	

Method Codes
SLM/B312/M - Coliforms and Escherichia coli
SLM/B350/M - TVC - Colony count at 22°C and 37°C

Legend & Footnotes
cfu = Colony Forming Units
mpn = Most Probable Number
TNTC = Too Numerous to Count

Sampling is not included in our UKAS Schedule.
All Samples Analysed as received.

Disclaimer
Results relate to water samples tested and should not be reproduced except in full, without the written approval of the laboratory. Interpretations and opinions are not included in our UKAS schedule.

Test report authorised by :

B. Patel

Director

Date: 16/05/2017 11:39:21

Test Report checked by : Theepa Supikaran
16/05/2017 10:22:31

----- END OF REPORT -----

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-47776

Project / Site name:	Green Park Village, Reading	Samples received on:	09/05/2017
Your job number:	1620000492	Samples instructed on:	09/05/2017
Your order number:		Analysis completed by:	16/05/2017
Report Issue Number:	1	Report issued on:	16/05/2017
Samples Analysed:	14 water samples		

Signed:

Dr Irma Doyle
Senior Account Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-47776

Project / Site name: Green Park Village, Reading

Lab Sample Number				745809	745810	745811	745812	745813
Sample Reference				RWS601	RWS602	RWS603	RWS604	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				09/05/2017	09/05/2017	09/05/2017	09/05/2017	09/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.3	7.2	7.1	7.1	6.7
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	32100	40600	76200	73100	253000
Sulphate as SO ₄	mg/l	0.045	ISO 17025	32	41	76	73	250
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	52	270	420	240	1600
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	8.51	8.79	5.17	11.8	41.4
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	327	365	446	397	792

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	------	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	< 0.16	< 0.16	< 0.16
-------------------	------	------	------	--------	--------	--------	--------	--------



Analytical Report Number: 17-47776

Project / Site name: Green Park Village, Reading

Lab Sample Number				745809	745810	745811	745812	745813
Sample Reference				RWS601	RWS602	RWS603	RWS604	RWS607
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				09/05/2017	09/05/2017	09/05/2017	09/05/2017	09/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	0.15	ISO 17025	2.41	9.94	6.81	11.9	21.4
Beryllium (dissolved)	µg/l	0.1	ISO 17025	< 0.1	< 0.1	< 0.1	0.2	< 0.1
Boron (dissolved)	µg/l	10	ISO 17025	120	110	160	100	170
Cadmium (dissolved)	µg/l	0.02	ISO 17025	0.02	< 0.02	< 0.02	0.13	0.03
Calcium (dissolved)	mg/l	0.012	ISO 17025	120	130	160	150	300
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	2.1
Chromium (dissolved)	µg/l	0.2	ISO 17025	0.5	0.7	0.5	1.0	2.1
Copper (dissolved)	µg/l	0.5	ISO 17025	4.5	1.4	3.2	2.7	1.9
Lead (dissolved)	µg/l	0.2	ISO 17025	0.5	0.6	0.4	1.1	0.6
Magnesium (dissolved)	mg/l	0.005	ISO 17025	9.1	8.2	10	8.3	12
Mercury (dissolved)	µg/l	0.05	ISO 17025	0.08	0.14	< 0.05	0.20	0.11
Nickel (dissolved)	µg/l	0.5	ISO 17025	11	13	7.6	11	12
Selenium (dissolved)	µg/l	0.6	ISO 17025	3.5	1.3	1.4	2.6	1.9
Vanadium (dissolved)	µg/l	0.2	ISO 17025	2.4	5.1	2.0	4.6	0.7
Zinc (dissolved)	µg/l	0.5	ISO 17025	3.5	3.5	38	4.6	6.8

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	92	27	< 10	42	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	790	240	< 10	390	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	890	270	< 10	430	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10

Pesticides/Herbicides Screen in Water	P/A	N/A	NONE	Absent	-	-	-	-
---------------------------------------	-----	-----	------	--------	---	---	---	---

Microbiological (Subcontracted)

Total Coliforms	mpn/100ml	1	NONE	1200	11	-	-	-
Faecal Coliforms	mpn/100ml	N/A	NONE	649	161	-	-	-
E. Coli	mpn/100ml	1	NONE	< 1.0	< 1.0	-	-	-
TVC @ 22°C	cfu/ml	N/A	NONE	>300	>300	-	-	-
TVC @ 37°C	cfu/ml	N/A	NONE	>300	>300	-	-	-

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number: 17-47776

Project / Site name: Green Park Village, Reading

Lab Sample Number				745814	745815	745816	745817	745818
Sample Reference				RWS608	RWS611	RWS612	RWS613	RWS614
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				09/05/2017	09/05/2017	09/05/2017	09/05/2017	09/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.0	7.2	6.8	6.8	6.7
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	226000	83700	393000	259000	286000
Sulphate as SO ₄	mg/l	0.045	ISO 17025	230	84	390	260	290
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	2400	390	1200	800	830
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	37.2	13.0	13.1	14.7	12.6
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	750	352	792	680	599

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	------	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	< 0.16	< 0.16	< 0.16
-------------------	------	------	------	--------	--------	--------	--------	--------



Analytical Report Number: 17-47776

Project / Site name: Green Park Village, Reading

Lab Sample Number				745814	745815	745816	745817	745818
Sample Reference				RWS608	RWS611	RWS612	RWS613	RWS614
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				09/05/2017	09/05/2017	09/05/2017	09/05/2017	09/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	0.15	ISO 17025	60.4	19.5	11.6	10.3	2.92
Beryllium (dissolved)	µg/l	0.1	ISO 17025	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Boron (dissolved)	µg/l	10	ISO 17025	190	110	150	200	160
Cadmium (dissolved)	µg/l	0.02	ISO 17025	0.05	0.02	< 0.02	0.03	0.05
Calcium (dissolved)	mg/l	0.012	ISO 17025	280	120	300	250	220
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	1.1	< 1.0	1.7	< 1.0	1.4
Chromium (dissolved)	µg/l	0.2	ISO 17025	1.1	0.6	1.7	0.9	1.4
Copper (dissolved)	µg/l	0.5	ISO 17025	3.3	1.0	1.5	1.8	2.4
Lead (dissolved)	µg/l	0.2	ISO 17025	1.1	0.4	0.8	0.3	1.2
Magnesium (dissolved)	mg/l	0.005	ISO 17025	12	10	10	15	13
Mercury (dissolved)	µg/l	0.05	ISO 17025	0.09	< 0.05	< 0.05	< 0.05	< 0.05
Nickel (dissolved)	µg/l	0.5	ISO 17025	35	7.6	8.5	10	17
Selenium (dissolved)	µg/l	0.6	ISO 17025	5.1	1.8	1.2	1.1	1.1
Vanadium (dissolved)	µg/l	0.2	ISO 17025	4.5	2.3	2.2	0.5	2.0
Zinc (dissolved)	µg/l	0.5	ISO 17025	7.4	4.5	8.8	9.8	8.8

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	21
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	310
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	330

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10

Pesticides/Herbicides Screen in Water	P/A	N/A	NONE	-	-	Absent	-	-
---------------------------------------	-----	-----	------	---	---	--------	---	---

Microbiological (Subcontracted)

Total Coliforms	mpn/100ml	1	NONE	19	-	-	-	3
Faecal Coliforms	mpn/100ml	N/A	NONE	125	-	-	-	579
E. Coli	mpn/100ml	1	NONE	< 1.0	-	-	-	< 1.0
TVC @ 22°C	cfu/ml	N/A	NONE	>300	-	-	-	>300
TVC @ 37°C	cfu/ml	N/A	NONE	>300	-	-	-	>300

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number: 17-47776

Project / Site name: Green Park Village, Reading

Lab Sample Number				745819	745820	745821	745822	
Sample Reference				RWS615	RWS616	RWS617	RWS618	
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	
Date Sampled				09/05/2017	09/05/2017	09/05/2017	09/05/2017	
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	6.8	6.7	6.9	7.0	
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	
Sulphate as SO ₄	µg/l	45	ISO 17025	292000	229000	122000	89600	
Sulphate as SO ₄	mg/l	0.045	ISO 17025	290	230	120	90	
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	44	960	880	3300	
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	10.1	13.1	9.92	53.7	
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	544	595	321	583	

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	
----------------------------	------	----	-----------	------	------	------	------	--

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	< 0.16	< 0.16	
-------------------	------	------	------	--------	--------	--------	--------	--



Analytical Report Number: 17-47776

Project / Site name: Green Park Village, Reading

Lab Sample Number	745819	745820	745821	745822	
Sample Reference	RWS615	RWS616	RWS617	RWS618	
Sample Number	None Supplied	None Supplied	None Supplied	None Supplied	
Depth (m)	None Supplied	None Supplied	None Supplied	None Supplied	
Date Sampled	09/05/2017	09/05/2017	09/05/2017	09/05/2017	
Time Taken	None Supplied	None Supplied	None Supplied	None Supplied	
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status		

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	0.15	ISO 17025	1.48	4.92	8.84	13.8	
Beryllium (dissolved)	µg/l	0.1	ISO 17025	< 0.1	< 0.1	< 0.1	< 0.1	
Boron (dissolved)	µg/l	10	ISO 17025	140	140	150	160	
Cadmium (dissolved)	µg/l	0.02	ISO 17025	0.11	< 0.02	< 0.02	< 0.02	
Calcium (dissolved)	mg/l	0.012	ISO 17025	200	210	120	210	
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	
Chromium (III)	µg/l	1	NONE	< 1.0	< 1.0	1.1	< 1.0	
Chromium (dissolved)	µg/l	0.2	ISO 17025	1.0	0.5	1.1	0.9	
Copper (dissolved)	µg/l	0.5	ISO 17025	4.5	1.1	1.3	3.3	
Lead (dissolved)	µg/l	0.2	ISO 17025	0.5	< 0.2	0.3	1.9	
Magnesium (dissolved)	mg/l	0.005	ISO 17025	11	16	8.0	12	
Mercury (dissolved)	µg/l	0.05	ISO 17025	< 0.05	< 0.05	< 0.05	0.05	
Nickel (dissolved)	µg/l	0.5	ISO 17025	20	16	7.2	6.1	
Selenium (dissolved)	µg/l	0.6	ISO 17025	1.9	1.7	1.0	0.9	
Vanadium (dissolved)	µg/l	0.2	ISO 17025	2.0	0.2	4.2	3.8	
Zinc (dissolved)	µg/l	0.5	ISO 17025	7.0	3.8	5.0	2.5	

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	17	25	< 10	
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	160	100	180	
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	180	130	180	

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	

Pesticides/Herbicides Screen in Water	P/A	N/A	NONE	-	-	-	-	
---------------------------------------	-----	-----	------	---	---	---	---	--

Microbiological (Subcontracted)

Total Coliforms	mpn/100ml	1	NONE	980	-	-	188	
Faecal Coliforms	mpn/100ml	N/A	NONE	162	-	-	411	
E. Coli	mpn/100ml	1	NONE	< 1.0	-	-	12.0	
TVC @ 22°C	cfu/ml	N/A	NONE	>300	-	-	>300	
TVC @ 37°C	cfu/ml	N/A	NONE	>300	-	-	>300	

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number : 17-47776

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW) Process Water (PrW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in water	Determination of Ammonium/Ammonia/ Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method. Accredited matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	ISO 17025
Boron in water	Determination of boron in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW	In-house method based on MEWAM	L039-PL	W	ISO 17025
BTEX and MTBE in water (Monoaromatics)	Determination of BTEX and MTBE in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
Cr (III) in water	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
Dissolved Organic Carbon in water	Determination of dissolved inorganic carbon in water by TOC/DOC NDIR Analyser.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L037-PL	W	NONE
E.Coli in water Subcon Stansted Labs	E.Coli in Water - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE
Faecal Coliforms in water Subcon Stansted Labs	Faecal Coliforms in Water - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE
Hexavalent chromium in water	Determination of hexavalent chromium in water by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method by continuous flow analyser. Accredited Matrices SW, GW, PW.	L080-PL	W	ISO 17025
Metals in water by ICP-MS (dissolved)	Determination of metals in water by acidification followed by ICP-MS. Accredited Matrices: SW, GW, PW except B=SW,GW, Hg=SW,PW, Al=SW,PW.	In-house method based on USEPA Method 6020 & 200.8 "for the determination of trace elements in water by ICP-MS.	L012-PL	W	ISO 17025
Metals in water by ICP-OES (dissolved)	Determination of metals in water by acidification followed by ICP-OES. Accredited Matrices SW, GW, PW, PrW.(Al, Cu,Fe,Zn).	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Monohydric phenols in water	Determination of phenols in water by continuous flow analyser. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025



Analytical Report Number : 17-47776

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW) Process Water (PrW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Pesticides and Herbicides in water screening	In-house method	In-house method		W	NONE
pH at 20oC in water (automated)	Determination of pH in water followed by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	W	ISO 17025
Speciated EPA-16 PAHs in water	Determination of PAH compounds in water by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards. Accredited matrices: SW PW GW	In-house method based on USEPA 8270	L0102B-PL	W	NONE
Sulphate in water	Determination of sulphate in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW, PrW.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Sulphate in water	Determination of sulphate in water by ICP-OES	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil"	L039-PL	W	ISO 17025
Total Coliforms in water Subcon Stansted Labs	Total Coliforms in Water - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE
Total cyanide in water	Determination of total cyanide by distillation followed by colorimetry. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of water	Determination of hardness in waters by calculation from calcium and magnesium. Accredited Matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	ISO 17025
TPHCWG (Waters)	Determination of dichloromethane extractable hydrocarbons in water by GC-MS, speciation by interpretation.	In-house method	L070-PL	W	NONE
TVC in water Subcon Stansted Labs	TVC in Wwater - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

**Jørn Pace**

Ramboll Environ UK Limited
240
Blackfriars Road
London
SE1 8NW

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: Jørn Pace

Analytical Report Number : 17-47945

Project / Site name:	Green Park Village, Reading	Samples received on:	10/05/2017
Your job number:	1620000492	Samples instructed on:	10/05/2017
Your order number:		Analysis completed by:	17/05/2017
Report Issue Number:	1	Report issued on:	17/05/2017
Samples Analysed:	11 water samples		

Signed:

Emma Winter
Assistant Reporting Manager
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :	soils	- 4 weeks from reporting
	leachates	- 2 weeks from reporting
	waters	- 2 weeks from reporting
	asbestos	- 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746807	746808	746809	746810	746811
Sample Reference				RWS621	RWS633	RWS637	RBH601	RBH602
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				10/05/2017	10/05/2017	10/05/2017	10/05/2017	10/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	6.7	7.1	7.0	7.1	7.2
Total Cyanide	µg/l	10	ISO 17025	-	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	74400	77800	213000	239000	51400
Sulphate as SO ₄	mg/l	0.045	ISO 17025	74	78	210	240	51
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	-	860	11000	4200	680
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	-	49.2	49.2	30.2	27.2
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	-	385	1730	1760	383

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	-	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	---	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	-	< 0.01	0.26	0.34	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	-	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	-	< 0.01	1.43	0.68	< 0.01
Fluorene	µg/l	0.01	ISO 17025	-	< 0.01	0.47	0.50	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	-	< 0.01	0.39	0.83	< 0.01
Anthracene	µg/l	0.01	ISO 17025	-	< 0.01	0.10	0.23	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	-	< 0.01	0.11	0.69	< 0.01
Pyrene	µg/l	0.01	ISO 17025	-	< 0.01	< 0.01	0.49	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	-	< 0.01	< 0.01	0.33	< 0.01
Chrysene	µg/l	0.01	ISO 17025	-	< 0.01	< 0.01	0.36	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	-	< 0.01	< 0.01	0.43	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	-	< 0.01	< 0.01	0.16	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	-	< 0.01	< 0.01	0.24	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	-	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	-	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	-	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	-	< 0.16	2.76	5.28	< 0.16
-------------------	------	------	------	---	--------	------	------	--------



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746807	746808	746809	746810	746811
Sample Reference				RWS621	RWS633	RWS637	RBH601	RBH602
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				10/05/2017	10/05/2017	10/05/2017	10/05/2017	10/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	0.15	ISO 17025	0.87	4.63	5.14	3.35	1.04
Beryllium (dissolved)	µg/l	0.1	ISO 17025	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Boron (dissolved)	µg/l	10	ISO 17025	120	150	210	360	77
Cadmium (dissolved)	µg/l	0.02	ISO 17025	< 0.02	< 0.02	0.02	< 0.02	< 0.02
Calcium (dissolved)	mg/l	0.012	ISO 17025	110	140	660	630	140
Chromium (hexavalent)	µg/l	5	ISO 17025	1/5	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	1/5	< 1.0	2.4	< 1.0	< 1.0
Chromium (dissolved)	µg/l	0.2	ISO 17025	0.2	0.5	2.4	0.5	0.2
Copper (dissolved)	µg/l	0.5	ISO 17025	< 0.5	2.1	2.7	0.8	1.4
Lead (dissolved)	µg/l	0.2	ISO 17025	1.3	1.7	3.8	2.1	< 0.2
Magnesium (dissolved)	mg/l	0.005	ISO 17025	-	11	22	48	10
Mercury (dissolved)	µg/l	0.05	ISO 17025	0.13	< 0.05	0.06	< 0.05	< 0.05
Nickel (dissolved)	µg/l	0.5	ISO 17025	0.6	4.0	8.1	8.5	1.3
Selenium (dissolved)	µg/l	0.6	ISO 17025	< 0.6	< 0.6	3.0	1.7	< 0.6
Vanadium (dissolved)	µg/l	0.2	ISO 17025	0.3	2.7	3.7	2.1	< 0.2
Zinc (dissolved)	µg/l	0.5	ISO 17025	0.6	7.5	11	5.9	3.4

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	-	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	-	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	-	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	-	< 10	120	< 10	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	-	< 10	120	< 10	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	-	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	-	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	-	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	-	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	-	< 10	< 10	< 10	< 10



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746807	746808	746809	746810	746811
Sample Reference				RWS621	RWS633	RWS637	RBH601	RBH602
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				10/05/2017	10/05/2017	10/05/2017	10/05/2017	10/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Microbiological (Subcontracted)

Total Coliforms	mpn/100ml	1	NONE	-	> 2420	291	276	150
Faecal Coliforms	mpn/100ml	N/A	NONE	-	233	866	> 2420	361
E. Coli	mpn/100ml	1	NONE	-	< 1.0	< 1.0	2.0	< 1.0
TVC @ 22°C	cfu/ml	N/A	NONE	-	>300	>300	>300	>300
TVC @ 37°C	cfu/ml	N/A	NONE	-	>300	>300	>300	>300

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746812	746813	746814	746815	746816
Sample Reference				RBH604	RBH605	RBH606	RBH607	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				10/05/2017	10/05/2017	10/05/2017	10/05/2017	10/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.5	7.0	7.5	6.9	7.1
Total Cyanide	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
Sulphate as SO ₄	µg/l	45	ISO 17025	37300	135000	30100	874000	465000
Sulphate as SO ₄	mg/l	0.045	ISO 17025	37	130	30	870	460
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	290	1700	350	5100	3500
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	38.8	14.3	25.7	34.8	21.8
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	282	599	282	1290	1540

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10	< 10	< 10	< 10	< 10
----------------------------	------	----	-----------	------	------	------	------	------

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16	< 0.16	< 0.16	< 0.16	< 0.16
-------------------	------	------	------	--------	--------	--------	--------	--------



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746812	746813	746814	746815	746816
Sample Reference				RBH604	RBH605	RBH606	RBH607	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				10/05/2017	10/05/2017	10/05/2017	10/05/2017	10/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	0.15	ISO 17025	0.76	2.36	0.50	4.17	4.02
Beryllium (dissolved)	µg/l	0.1	ISO 17025	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Boron (dissolved)	µg/l	10	ISO 17025	150	130	92	220	300
Cadmium (dissolved)	µg/l	0.02	ISO 17025	< 0.02	0.03	< 0.02	< 0.02	< 0.02
Calcium (dissolved)	mg/l	0.012	ISO 17025	75	220	93	430	540
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	< 1.0	1.1	< 1.0	1.1	< 1.0
Chromium (dissolved)	µg/l	0.2	ISO 17025	< 0.2	1.1	0.3	1.1	0.9
Copper (dissolved)	µg/l	0.5	ISO 17025	< 0.5	2.3	0.9	0.8	1.8
Lead (dissolved)	µg/l	0.2	ISO 17025	< 0.2	0.7	< 0.2	2.3	2.2
Magnesium (dissolved)	mg/l	0.005	ISO 17025	23	14	12	52	46
Mercury (dissolved)	µg/l	0.05	ISO 17025	< 0.05	0.05	< 0.05	< 0.05	< 0.05
Nickel (dissolved)	µg/l	0.5	ISO 17025	5.6	6.1	4.0	14	7.8
Selenium (dissolved)	µg/l	0.6	ISO 17025	0.8	< 0.6	< 0.6	4.2	2.2
Vanadium (dissolved)	µg/l	0.2	ISO 17025	1.0	2.0	0.7	1.6	5.5
Zinc (dissolved)	µg/l	0.5	ISO 17025	2.5	8.1	17	20	5.5

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	160	< 10	< 10	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	160	< 10	< 10	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10	< 10	< 10



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746812	746813	746814	746815	746816
Sample Reference				RBH604	RBH605	RBH606	RBH607	RBH608
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Date Sampled				10/05/2017	10/05/2017	10/05/2017	10/05/2017	10/05/2017
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)				Units	Limit of detection	Accreditation Status		

Microbiological (Subcontracted)

Total Coliforms	mpn/100ml	1	NONE	45	> 2420	1120	-	-
Faecal Coliforms	mpn/100ml	N/A	NONE	218	1300	88	-	-
E. Coli	mpn/100ml	1	NONE	2.0	12.0	3.0	-	-
TVC @ 22°C	cfu/ml	N/A	NONE	>300	>300	>300	-	-
TVC @ 37°C	cfu/ml	N/A	NONE	>300	>300	>300	-	-

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746817				
Sample Reference				RBH610				
Sample Number				None Supplied				
Depth (m)				None Supplied				
Date Sampled				10/05/2017				
Time Taken				None Supplied				
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

General Inorganics

pH	pH Units	N/A	ISO 17025	7.1				
Total Cyanide	µg/l	10	ISO 17025	< 10				
Sulphate as SO ₄	µg/l	45	ISO 17025	72500				
Sulphate as SO ₄	mg/l	0.045	ISO 17025	73				
Ammoniacal Nitrogen as N	µg/l	15	ISO 17025	1900				
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	83.1				
Hardness - Total	mgCaCO ₃ /l	1	ISO 17025	636				

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	< 10				
----------------------------	------	----	-----------	------	--	--	--	--

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01				
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01				
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01				
Fluorene	µg/l	0.01	ISO 17025	< 0.01				
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01				
Anthracene	µg/l	0.01	ISO 17025	< 0.01				
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Pyrene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01				
Chrysene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01				
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01				
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01				
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01				
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01				

Total PAH

Total EPA-16 PAHs	µg/l	0.16	NONE	< 0.16				
-------------------	------	------	------	--------	--	--	--	--



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746817				
Sample Reference				RBH610				
Sample Number				None Supplied				
Depth (m)				None Supplied				
Date Sampled				10/05/2017				
Time Taken				None Supplied				
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	0.15	ISO 17025	1.17				
Beryllium (dissolved)	µg/l	0.1	ISO 17025	< 0.1				
Boron (dissolved)	µg/l	10	ISO 17025	110				
Cadmium (dissolved)	µg/l	0.02	ISO 17025	< 0.02				
Calcium (dissolved)	mg/l	0.012	ISO 17025	220				
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0				
Chromium (III)	µg/l	1	NONE	< 1.0				
Chromium (dissolved)	µg/l	0.2	ISO 17025	0.7				
Copper (dissolved)	µg/l	0.5	ISO 17025	1.5				
Lead (dissolved)	µg/l	0.2	ISO 17025	0.3				
Magnesium (dissolved)	mg/l	0.005	ISO 17025	18				
Mercury (dissolved)	µg/l	0.05	ISO 17025	< 0.05				
Nickel (dissolved)	µg/l	0.5	ISO 17025	17				
Selenium (dissolved)	µg/l	0.6	ISO 17025	1.1				
Vanadium (dissolved)	µg/l	0.2	ISO 17025	0.8				
Zinc (dissolved)	µg/l	0.5	ISO 17025	14				

Monoaromatics

Benzene	µg/l	1	ISO 17025	< 1.0				
Toluene	µg/l	1	ISO 17025	< 1.0				
Ethylbenzene	µg/l	1	ISO 17025	< 1.0				
p & m-xylene	µg/l	1	ISO 17025	< 1.0				
o-xylene	µg/l	1	ISO 17025	< 1.0				
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0				

Petroleum Hydrocarbons

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	NONE	< 1.0				
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	NONE	< 1.0				
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	NONE	< 1.0				
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10				
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10				

TPH-CWG - Aromatic >C5 - C7	µg/l	1	NONE	< 1.0				
TPH-CWG - Aromatic >C7 - C8	µg/l	1	NONE	< 1.0				
TPH-CWG - Aromatic >C8 - C10	µg/l	1	NONE	< 1.0				
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10				
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10				



Analytical Report Number: 17-47945

Project / Site name: Green Park Village, Reading

Lab Sample Number				746817				
Sample Reference				RBH610				
Sample Number				None Supplied				
Depth (m)				None Supplied				
Date Sampled				10/05/2017				
Time Taken				None Supplied				
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status					

Microbiological (Subcontracted)

Total Coliforms	mpn/100ml	1	NONE	187				
Faecal Coliforms	mpn/100ml	N/A	NONE	> 2420				
E. Coli	mpn/100ml	1	NONE	2.0				
TVC @ 22°C	cfu/ml	N/A	NONE	>300				
TVC @ 37°C	cfu/ml	N/A	NONE	>300				

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number : 17-47945

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW) Process Water (PrW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Ammoniacal Nitrogen as N in water	Determination of Ammonium/Ammonia/ Ammoniacal Nitrogen by the discrete analyser (colorimetric) salicylate/nitroprusside method. Accredited matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L082-PL	W	ISO 17025
Boron in water	Determination of boron in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW	In-house method based on MEWAM	L039-PL	W	ISO 17025
BTEX and MTBE in water (Monoaromatics)	Determination of BTEX and MTBE in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
Cr (III) in water	In-house method by calculation from total Cr and Cr VI.	In-house method by calculation	L080-PL	W	NONE
Dissolved Organic Carbon in water	Determination of dissolved inorganic carbon in water by TOC/DOC NDIR Analyser.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L037-PL	W	NONE
E.Coli in water Subcon Stansted Labs	E.Coli in Water - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE
Faecal Coliforms in water Subcon Stansted Labs	Faecal Coliforms in Water - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE
Hexavalent chromium in water	Determination of hexavalent chromium in water by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method by continuous flow analyser. Accredited Matrices SW, GW, PW.	L080-PL	W	ISO 17025
Metals in water by ICP-MS (dissolved)	Determination of metals in water by acidification followed by ICP-MS. Accredited Matrices: SW, GW, PW except B=SW,GW, Hg=SW,PW, Al=SW,PW.	In-house method based on USEPA Method 6020 & 200.8 "for the determination of trace elements in water by ICP-MS.	L012-PL	W	ISO 17025
Metals in water by ICP-OES (dissolved)	Determination of metals in water by acidification followed by ICP-OES. Accredited Matrices SW, GW, PW, PrW.(Al, Cu,Fe,Zn).	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Monohydric phenols in water	Determination of phenols in water by continuous flow analyser. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
pH at 20oC in water (automated)	Determination of pH in water followed by electrometric measurement.	In-house method based on BS1377 Part 3, 1990, Chemical and Electrochemical Tests	L099-PL	W	ISO 17025



Analytical Report Number : 17-47945

Project / Site name: Green Park Village, Reading

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW) Process Water (PrW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Speciated EPA-16 PAHs in water	Determination of PAH compounds in water by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards. Accredited matrices: SW PW GW	In-house method based on USEPA 8270	L0102B-PL	W	NONE
Sulphate in water	Determination of sulphate in water by acidification followed by ICP-OES. Accredited matrices: SW PW GW, PrW.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Sulphate in water	Determination of sulphate in water by ICP-OES	In-house method based on MEWAM 1986 Methods for the Determination of Metals in Soil""	L039-PL	W	ISO 17025
Total Coliforms in water Subcon Stansted Labs	Total Coliforms in Water - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE
Total cyanide in water	Determination of total cyanide by distillation followed by colorimetry. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
Total Hardness of water	Determination of hardness in waters by calculation from calcium and magnesium. Accredited Matrices SW, GW, PW.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L045-PL	W	ISO 17025
TPHCWG (Waters)	Determination of dichloromethane extractable hydrocarbons in water by GC-MS, speciation by interpretation.	In-house method	L070-PL	W	NONE
TVC in water Subcon Stansted Labs	TVC in Wwater - Subcontracted Analysis	Subcontracted Analysis - See Attached Subcon Report.		W	NONE

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

APPENDIX 4

SOIL AND GROUNDWATER DATA ASESSEMENTS

Lab Certificate		Residential with homogeneous production Year 2		17-4197		17-4413		17-4197		17-4190		17-4361		16-2693		16-2693		16-2693		16-2693		16-2693		16-2693		16-2693		16-2693			
Sample Reference		RW015	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058	RW058		
Depth (m)		0.2	1.5	0.1	1.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
Status		MGS	KTD	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS	MGS		
Date Sampled		10/01/2017	29/01/2017	10/01/2017	21/01/2017	11/01/2017	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016	25/01/2016			
Analytical Parameter		Units	Limit of Detection	Accreditation Status																											
Adhesives		Type	N/A	A001.PL	Not detected																										
Adhesives in Soil Screen / Identification Name		Type	N/A	A001.PL	Detected Chrysotile B																										
Adhesives Quantification		%	0.001	A006.PL	0.002																										
Adhesives Quantification (Stage 2)		%	0.001	A006.PL	0.002																										
BTEX, MTBE																															
Benzene (TPH Aromatic C5-7)		mg/kg	1	L03B.PL	150	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1		
Ethylbenzene		mg/kg	1	L03B.PL	24,000	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1		
m & p - Xylene		mg/kg	1	L03B.PL	28,000	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1		
Methyl tert-butyl ether		mg/kg	1	L03B.PL	31,000	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1		
Toluene (TPH Aromatic C6-8)		mg/kg	1	L03B.PL	260,000	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1		
Xylene-o		mg/kg	1	L03B.PL	31,000	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1		
Inorganics																															
Fraction Organic Carbon		N/A	0.001	L023.PL																											
Moisture Content		%	N/A	L019-KRPL	27	7.2	36	27	14	62	25	30	9.6	4.9	13	21	19	25													
Total Solids		N/A	N/A	L009-PL	7.4	7.7	7.4	9.7	7.5	11.6	9	7.9	8.1	7.8	7.3	7.6	7.4	6.4													
Sulfate (SO4)		mg/kg	2.5	L03B.PL	130	93	860	170	340	1.3	0.025	0.031	0.0097	0.014	0.069	0.096	0.062	0.027													
Metals																															
Antimony		mg/kg	1	L03B.PL	37	13	<1	14	9.6	9.7	8.4	11	10	2.6	4.4	12	13	7.4	11												
Barium		mg/kg	0.06	L03B.PL	17	1.5	0.22	0.73	1.4	0.5	0.81	5.3	1.3	0.21	0.37	1.2	1.2	1.2	1.2												
Boron		mg/kg	0.2	L03B.PL	204	2.5	0.4	0.1	2	1.1	2.6	2.5	0.4	0.2	1.4	1.2	1.4	1.2	1.6												
Cadmium		mg/kg	0.2	L03B.PL	22	<1	<1	0.6	0.6	0.2	<1	0.2	0.2	<1	<1	<1	0.3	<1	<1												
Chromium (Total)		mg/kg	1	L03B.PL	933	29	15	28	44	24	33	74	70	17	18	48	10	48	44												
Cobalt		mg/kg	1.2	L03B.PL	1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1												
Copper		mg/kg	1	L03B.PL	2,400	29	12	48	23	29	36	41	39	15	13	24	47	33	20												
Cyanide		mg/kg	1	L080.PL	26	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1												
Lead		mg/kg	1	L03B.PL	200	30	6.2	96	36	230	71	130	81	5.9	10	55	130	80	40												
Mercury		mg/kg	0.3	L03B.PL	40	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1												
Nickel		mg/kg	1	L03B.PL	180	43	14	38	24	20	18	27	20	13	12	25	23	25	25												
Nitrogen		mg/kg	1	L03B.PL	120	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1												
Vanadium		mg/kg	1	L03B.PL	430	39	12	80	65	23	34	39	40	8.6	13	52	40	48	63												
Zinc		mg/kg	1	L03B.PL	3,700	92	13	150	85	330	130	190	150	14	22	100	230	130	100												
Miles																															
Asphalt/Concrete, 0.1b		mg/kg	0.3	L064.PL																											
Polychlorinated Biphenyls (PCB)		mg/kg	0.007	L027.PL																											
Trichloro-1,2,2-trifluoroethane, 1,1,2		ug/kg	1	L73B.PL																											
Others																															
Aroclor		mg/kg	0.1	L064.PL																											
Stone Content		%	0.1	L024-KRPL																											
Total Mass of Sample received		kg	0.005	N/A	1.5	2	1.2	1.3	1	1.1	1.3	1.3	1.1	1.1	0.96	0.95															
Total Phosphorus (monophosphate)		mg/kg	1	L080.PL																											
TPH CWC - Asphalt (C5 - C10)		mg/kg	10	L076.PL	60	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1												
TPH CWC - Asphalt (C5 - C10)		mg/kg	10	L076.PL	130	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1											
Water Soluble Sulfate (2x Leachate Equivalent)		g/l	0.00125	L03B.PL																											
Polyaromatic Hydrocarbons (PAHs)																															
Acenaphthene		mg/kg	0.05	L064.PL	200	0.59	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1												
Acenaphthylene		mg/kg	0.05	L064.PL	130	0.42	<1	<1	<1	<1	0.81	<1	<1	<1	<1	<1	<1	<1	<1	<1											
Anthracene		mg/kg	0.05	L064.PL	1,260	0.40	<1	<1	<1	<1	0.39	<1	<1	<1	<1	<1	<1	<1	<1	<1											
Benz[a]anthracene (yuse BaP surrogate)		mg/kg	0.05	L064.PL	7.5	0.73	<1	<1	<1	0.32	0.19	0.2	0.62	<1	<1	<1	<1	<1	<1	<1											
Benz[a]pyrene		mg/kg	0.05	L064.PL	5	0.56	<1	<1	<1	0.36	0.19	2.4	0.84	<1	<1	<1	<1	<1	<1	<1											
Benz[a]fluoranthene (yuse BaP surrogate)		mg/kg	0.05	L064.PL	1.4	0.45	<1	<1	<1	0.17	0.10	0.27	0.42	<1	<1	<1	<1	<1	<1	<1											
Benzofluoranthene (yuse BaP surrogate)		mg/kg	0.05	L064.PL	330	0.47	<1	<1	<1	0.29	0.18	1.7	0.77	<1	<1	<1	<1	<1	<1	<1											
Benzofluoranthene (yuse BaP surrogate)		mg/kg	0.05	L064.PL	77	0.18	<1	<1	<1	0.19	0.15	1.1	0.4	<1	<1	<1	<1	<1	<1	<1											
Pyrene (yuse BaP surrogate)		mg/kg	0.05	L064.PL	0.74	0.17	<1	<1	<1	0.16	0.17	0.67	0.4	<1	<1	<1	<1	<1	<1	<1											
Dibenz[a,h]anthracene (yuse BaP surrogate)		mg/kg	0.05	L064.PL	0.24	<1	<1	<1	<1	0.02	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1											
Fluorene		mg/kg	0.05	L064.PL	280	2.2	<1	<1	<1	0.55	0.39	1.1	<1	<1	<1	<1	<1	<1	<1	<1											
Pyrene		mg/kg	0.05	L064.PL	130	0.28	<1	<1	<1	0.27	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1											
Indeno[1,2,3-cd]pyrene (yuse BaP surrogate)		mg/kg	0.05	L064.PL	27	0.34	<1	<1	<1	0.19	<1	1.4	0.62	<1	<1	<1	<1	<1	<1	<1											
Naphthalene		mg/kg	0.05	L064.PL	59	0.39	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1											
Phenanthrene		mg/kg	0.05	L064.PL	7	0.3	<1	<1	<1	0.38	0.25	4.1	0.35	<1	<1	<1	<1	<1	<1	<1											
Pyrene		mg/kg	0.05	L064.PL	820	1.4	<1	<1	<1	0.45	0.32	5.5	0.94	<1	<1	<1	<1	<1	<1	<1											
Total PAHs (PAH)		mg/kg	0.8	L064.PL	11.8	<1	<1	<1	<1	9.67	3	95.8	7.34	<1	<1	<1	<1	<1	<1	<1	<1										
Total Petroleum Hydrocarbons (TPH)																															
TPH Asphalt C10-12		mg/kg	1	L076.PL	62	3.3	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1												
TPH Asphalt C12-16		mg/kg	2	L076.PL	630	2.8	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1											
TPH Asphalt C16-21		mg/kg	8	L076.PL	8	<1	<1	<1	<1	22	<1	34	<1	<1	<1	<1	<1	<1	<1	<1											
TPH Asphalt C21-35		mg/kg	8	L076.PL	48	<1	<1	<1	<1	<1	100	<1	16	<1	<1	<1	<1	<1	<1	<1	<1										
TPH Asphalt C5-6		mg/kg	0.001	L076.PL	24	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1											
TPH Asphalt C6-8		mg/kg	0.001	L076.PL	93	<1	<1	<1	<1	<1	<1	<1																			

Soil Leachate Results
Green Park Village

Lab Sample Number						599305	599306	599307	599308
Sample Reference						RTP704	RTP710	RTP716	RTP721
Sample Number						None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)						0.3	2.4	0.5	0.1
Phase						5	5	5	5
Date Sampled						06/07/2016	06/07/2016	07/07/2016	07/07/2016
Time Taken						None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accretiation Status	WQS	Source				

General Inorganics

pH	pH Units	N/A	ISO 17025			7.9	8	7.6	7.4
Total Cyanide	µg/l	10	ISO 17025			< 10	< 10	< 10	< 10
Sulphate as SO ₄	mg/l	0.1	ISO 17025	188	GGWQ	24.2	3.5	3.6	105
Ammoniacal Nitrogen as N	µg/l	15	NONE			500	450	470	340
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE			7.02	4.57	5.4	5.09
Hardness - Total	mgCaCO3/l	1	NONE			42.5	2.7	25.2	136

Total Phenols

Total Phenols (monohydric)	µg/l	10	ISO 17025	7.7	EQS	< 3.5	< 3.5	< 3.5	< 3.5
----------------------------	------	----	-----------	-----	-----	-------	-------	-------	-------

Speciated PAHs

Naphthalene	µg/l	0.01	NONE	0.07	GGWQ	< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthylene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Fluorene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Phenanthrene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	NONE	0.1	ISWAA	< 0.01	< 0.01	< 0.01	< 0.01
Fluoranthene	µg/l	0.01	NONE	0.075	GGWQ	< 0.01	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)anthracene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	NONE	0.0075	GGWQ	< 0.01	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Dibenzo(a,h)anthracene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE			< 0.01	< 0.01	< 0.01	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE			< 0.2	< 0.2	< 0.2	< 0.2
-------------------	------	-----	------	--	--	-------	-------	-------	-------

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1.1	ISO 17025	7.5	GGWQ	7	10	3.6	3.9
Boron (dissolved)	µg/l	10	ISO 17025			56	< 10	< 10	60
Cadmium (dissolved)	µg/l	0.08	ISO 17025	0.25	ISWAA	< 0.08	< 0.08	< 0.08	< 0.08
Chromium (hexavalent)	µg/l	5	NONE	3.4	EQS	< 5.0	< 5.0	< 5.0	< 5.0
Chromium (III)	µg/l	1	NONE	4.7	EQS	1.6	< 0.4	0.4	2.4
Copper (dissolved)	µg/l	0.7	ISO 17025	1500	GGWQ	19	2.1	5	13
Lead (dissolved)	µg/l	1	ISO 17025	7.5	GGWQ	7.8	< 1.0	< 1.0	6.2
Mercury (dissolved)	µg/l	0.5	ISO 17025	0.07	EQS	< 0.5	< 0.5	< 0.5	< 0.5
Nickel (dissolved)	µg/l	0.3	ISO 17025	15	GGWQ	3.1	1.5	2.1	3.2
Selenium (dissolved)	µg/l	4	ISO 17025			< 4.0	11	< 4.0	< 4.0
Vanadium (dissolved)	µg/l	1.7	ISO 17025			29	9.5	5.7	4.7
Zinc (dissolved)	µg/l	0.4	ISO 17025			6.1	3.4	5	14

Calcium (dissolved)	mg/l	0.012	ISO 17025			16	1.2	9.7	49
Magnesium (dissolved)	mg/l	0.005	ISO 17025			0.51	< 0.005	0.2	3.4

Petroleum Hydrocarbons

TPH1 (C10 - C40)	µg/l	10	NONE	10	DWS	< 10	< 10	< 10	< 10
------------------	------	----	------	----	-----	------	------	------	------

TPH2 (C6 - C10)	µg/l	10	NONE	10	DWS	< 10	< 10	< 10	< 10
-----------------	------	----	------	----	-----	------	------	------	------

TPH C6 - C40	ug/l	10	NONE	10	DWS	< 10	< 10	< 10	< 10
--------------	------	----	------	----	-----	------	------	------	------

Groundwater Results
Green Park Village, Reading

AS Sample Number				75025		75051		75053		75055		75057		75059		75061		75063		75065		75067		75069		75071		75073		75075		75077		75079		75081		75083		75085		75087		75089		75091		75093		75095		75097		75099		75101		75103		75105		75107		75109		75111		75113		75115		75117		75119		75121		75123		75125		75127		75129		75131		75133		75135		75137		75139		75141		75143		75145		75147		75149		75151		75153		75155		75157		75159		75161		75163		75165		75167		75169		75171		75173		75175		75177		75179		75181		75183		75185		75187		75189		75191		75193		75195		75197		75199		75201		75203		75205		75207		75209		75211		75213		75215		75217		75219		75221		75223		75225		75227		75229		75231		75233		75235		75237		75239		75241		75243		75245		75247		75249		75251		75253		75255		75257		75259		75261		75263		75265		75267		75269		75271		75273		75275		75277		75279		75281		75283		75285		75287		75289		75291		75293		75295		75297		75299		75301		75303		75305		75307		75309		75311		75313		75315		75317		75319		75321		75323		75325		75327		75329		75331		75333		75335		75337		75339		75341		75343		75345		75347		75349		75351		75353		75355		75357		75359		75361		75363		75365		75367		75369		75371		75373		75375		75377		75379		75381		75383		75385		75387		75389		75391		75393		75395		75397		75399		75401		75403		75405		75407		75409		75411		75413		75415		75417		75419		75421		75423		75425		75427		75429		75431		75433		75435		75437		75439		75441		75443		75445		75447		75449		75451		75453		75455		75457		75459		75461		75463		75465		75467		75469		75471		75473		75475		75477		75479		75481		75483		75485		75487		75489		75491		75493		75495		75497		75499		75501		75503		75505		75507		75509		75511		75513		75515		75517		75519		75521		75523		75525		75527		75529		75531		75533		75535		75537		75539		75541		75543		75545		75547		75549		75551		75553		75555		75557		75559		75561		75563		75565		75567		75569		75571		75573		75575		75577		75579		75581		75583		75585		75587		75589		75591		75593		75595		75597		75599		75601		75603		75605		75607		75609		75611		75613		75615		75617		75619		75621		75623		75625		75627		75629		75631		75633		75635		75637		75639		75641		75643		75645		75647		75649		75651		75653		75655		75657		75659		75661		75663		75665		75667		75669		75671		75673		75675		75677		75679		75681		75683		75685		75687		75689		75691		75693		75695		75697		75699		75701		75703		75705		75707		75709		75711		75713		75715		75717		75719		75721		75723		75725		75727		75729		75731		75733		75735		75737		75739		75741		75743		75745		75747		75749		75751		75753		75755		75757		75759		75761		75763		75765		75767		75769		75771		75773		75775		75777		75779		75781		75783		75785		75787		75789		75791		75793		75795		75797		75799		75801		75803		75805		75807		75809		75811		75813		75815		75817		75819		75821		75823		75825		75827		75829		75831		75833		75835		75837		75839		75841		75843		75845		75847		75849		75851		75853		75855		75857		75859		75861		75863		75865		75867		75869		75871		75873		75875		75877		75879		75881		75883		75885		75887		75889		75891		75893		75895		75897		75899		75901		75903		75905		75907		75909		75911		75913		75915		75917		75919		75921		75923		75925		75927		75929		75931		75933		75935		75937		75939		75941		75943		75945		75947		75949		75951		75953		75955		75957		75959		75961		75963		75965		75967		75969		75971		75973		75975		75977		75979		75981		75983		75985		75987		75989		75991		75993		75995		75997		75999		76001		76003		76005		76007		76009		76011		76013		76015		76017		76019		76021		76023		76025		76027		76029		76031		76033		76035		76037		76039		76041		76043		76045		76047		76049		76051		76053		76055		76057		76059		76061		76063		76065		76067		76069		76071		76073		76075		76077		76079		76081		76083		76085		76087		76089		76091		76093		76095		76097		76099		76101		76103		76105		76107		76109		76111		76113		76115		76117		76119		76121		76123		76125		76127		76129		76131		76133		76135		76137		76139		76141		76143		76145		76147		76149		76151		76153		76155		76157		76159		76161		76163		76165		76167		76169		76171		76173		76175		76177		76179		76181		76183		76185		76187		76189		76191		76193		76195		76197		76199		76201		76203		76205		76207		76209		76211		76213		76215		76217		76219		76221		76223		76225		76227		76229		76231		76233		76235		76237		76239		76241		76243		76245		76247		76249		76251		76253		76255		76257		76259		76261		76263		76265		76267		76269		76271		76273		76275		76277		76279		76281		76283		76285		76287		76289		76291		76293		76295		76297		76299		76301		76303		76305		76307		76309		76311		76313		76315		76317		76319		76321		76323		76325		76327		76329		76331		76333		76335		76337		76339		76341		76343		76345		76347		76349		76351		76353		76355		76357		76359		76361		76363		76365		76367		76369		76371		76373		76375		76377		76379		76381		76383		76385		76387		76389		76391		76393		76395		76397		76399		76401		76403		76405		76407		76409		76411		76413		76415		76417		76419		76421		76423		76425		76427		76429		76431		76433		76435		76437		76439		76441		76443		76445		76447		76449		76451		76453		76455		76457		76459		76461		76463		76465		76467		76469		76471		76473		76475		76477		76479		76481		76483		76485		76487		76489		76491		76493		76495		76497		76499		76501		76503		76505		76507		76509		76511		76513		76515		76517		76519		76521		76523		76525		76527		76529		76531		76533		76535		76537		76539		76541		76543		76545		76547		76549		76551		76553		76555		76557		76559		76561		76563		76565		76567		76569		76571		76573		76575		76577		76579		76581		76583		76585		76587		76589		76591		76593		76595		76597		76599		76601		76603		76605		76607		76609		76611		76613		76615		76617		76619		76621		76623		76625		76627		76629		76631		76633		76635		76637		76639		76641		76643		76645		76647		76649		76651		76653		76655		76657		76659		76661		76663		76665		76667		76669		76671		76673		76675		76677		76679		76681		76683		76685		76687		76689		76691		76693		76695		76697		76699		76701		76703		76705		76707		76709		76711		76713		76715		76717		76719		76721		76723		76725		76727		76729		76731		76733		76735		76737		76739		76741		76743		76745		76747		76749		76751		76753		76755		76757		76759		76761		76763		76765		76767		76769		76771		76773		76775		76777		76779		76781		76783		76785		76787		76789		76791		76793		76795		76797		76799		76801		76803		76805		76807		76809		76811		76813		76815		76817		76819		76821		76823		76825		76827		76829		76831		76833		76835		76837		76839		76841		76843		76845		76847		76849		76851		76853		76855		76857		76859		76861		76863		76865		76867		76869		76871		76873		76875		76877		76879		76881		76883		76885		76887		76889		76891		76893		76895		76897		76899		76901		76903		76905		76907		76909		76911		76913		76915		76917		76919		76921		76923		76925		76927		76929		76931		76933		76935		76937		76939		76941		76943		76945		76947		76949		7	
------------------	--	--	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	---	--

Test Results

Lead

Client/client ref: St Edwards Hor Site ref: Green Park Village - Phase 5


Project ref: 1620000492

Data description: Made Ground Soils

Date: 23-May-2017


User details: JP

Dataset:	Lead	
Sample mean	$\bar{x}$	86.8
Sample standard deviation, s		57.053
Sample size, n		10
Critical concentration, Cc		200



Outliers & non-detects

Outliers present?	No
Significance level	5%
Outliers excluded	0
Non-detects	0




Normality test

Significance level: 5%

Normal distribution

Use: Auto: One-sample t-test

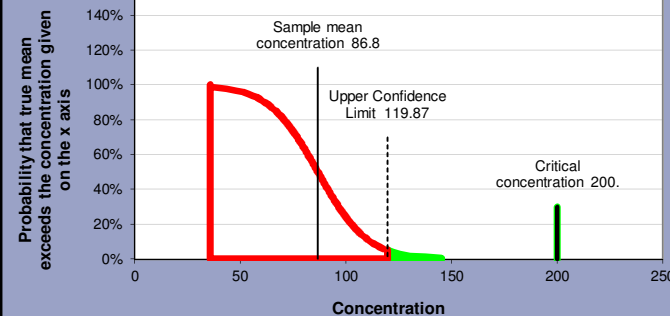


Test scenario:

Planning: is true mean lower than critical concentration ($\mu < C_c$)?

Null hypothesis: The true mean concentration is equal to or greater than the critical concentration: $\mu \geq C_c$

Alternative hypothesis: The true mean concentration is less than the critical concentration: $\mu < C_c$



Evidence against Null hypothesis:

100%

Base decision on: evidence level

Evidence level required:

95%

Balance of probability?

N/A

Reject Null Hypothesis?

Yes

$\mu < C_c$ (re this dataset)

Back to data

Back to summary

Go to outlier test

Go to normality test

APPENDIX 5

GAS AND GROUNDWATER MONITORING DATA

Ground Gas Risk Assessment
1620000492 Green Park Village

Notes: Assessment based on Guidance published in CIRIA C665 "Assessing risks posed by hazardous ground gases to buildings"

Information from Table 8.5 of CIRIA C665

Characteristic Situation 1 Conditions

Gas Screening Value (CH4 or CO2) <0.7

Typically methane <1% by volume

Typically carbon dioxide <5% by volume

Characteristic Situation 2 Conditions

Gas screening values (CH4 or CO2) <0.7

Borehole air flow rate <70l/h

Characteristic Situation 3 Conditions

Gas screening values (CH4 or CO2) <3.5

Key for Shading

CO2 > 5% by volume

CH4 > 1% by volume

GSV < 0.07l/hr i.e. CS1

GSV > or = 0.07l/hr i.e. CS2

GSV> or = 0.7l/hr i.e. CS3

Approach

Maximum concentrations and flow rates are used in the assessment below (minimum values for oxygen)

Where no detectable flow the instrument limit of detection is used (0.1l/hr)

Where concentrations are recorded below LoD, the instrument LoD is used in the assessment (0.5%)

BH ID	Phase	Height m OD	Response Zone	Water Depth mbgl	Water Depth mAOD	Round	Date	Atmos. Pressure mB	Peak Gas Flow	SS CH4	SS CO2	SS O2	SS CO	SS H2S	VOCs	CH4	CO2	O2	GSV CH4	GSV CO2	Characteristic Situation CH4	Characteristic Situation CO2
									I/h	%v/v	%v/v	%v/v	ppm	ppm	ppm	Peak %v/v	Peak %v/v	Min %v/v				
RWS615	485	39.66	0.5 to 4.0 m AIV and RTD	1.85	37.81	1	04.04.2017	1020	0.0	0.2	6.2	14.1	3	0	-	0.2	6.2	14.1	0.00	0.00	1	2
				1.49	38.17	2	19.04.2017	1032	0.1	0.1	8.1	13	2	0	0.7	0.2	8.1	13	0.00	0.01	1	2
				1.55	38.11	3	25.04.2017	1010	0.0	0.1	8.6	13.1	2	0	0.5	0.1	8.6	13.1	0.00	0.00	1	2
				1.59	38.07	4	05.05.2017	1019	0.0	0.1	8.1	13.7	2	0	0.6	0.1	8.1	13.7	0.00	0.00	1	2
				1.55	38.11	5	15.05.2017	1019	0.0	0.1	10.9	11	1	0	0.5	0.1	10.9	11	0.00	0.00	1	2
				1.42	38.24	6	19.05.2017	1007	0.0	0.2	11.3	7.2	0	0	0.5	0.2	11.3	7.2	0.00	0.00	1	2
RWS616	485	39.73	0.5 to 4.5 m MG, ALV and RTD	2.59	37.14	1	27.03.2017	1017	0.0	1.8	8.3	14.4	6	1	2.2	1.8	8.3	14.4	0.00	0.00	2	2
				2.05	37.68	2	04.04.2017	1020	0.0	0.4	1.3	18.2	2	0	-	0.4	1.3	18.2	0.00	0.00	1	1
				2.52	37.21	3	05.05.2017	1019	0.0	0.1	1	18.3	2	0	0.4	0.1	1	18.3	0.00	0.00	1	1
				2.63	37.10	4	15.05.2017	1019	0.0	0.1	0.8	17.7	1	0	0.3	0.1	0.8	17.7	0.00	0.00	1	1
				2.45	37.28	5	19.05.2017	1007	0.0	1.6	0.8	7	2	0	0.5	1.6	0.8	7	0.00	0.00	2	1
				2.70	37.03	6	24.05.2017	1022	0.0	0.1	0.4	19.1	2	0	0.4	0.1	0.4	19.1	0.00	0.00	1	1
RWS617	5	40.4	1.5 5.0 m MG, ALV and RTD	3.30	37.10	1	27.03.2017	1017	0.0	0	3.3	4.2	5	10	2.7	0	3.3	4.2	0.00	0.00	1	1
				3.37	37.03	2	04.04.2017	1020	0.0	0.2	0.4	19	3	0	-	0.2	0.4	19	0.00	0.00	1	1
				3.47	36.93	3	19.04.2017	1032	0.0	0.2	1.1	17.2	3	0	0.9	0.2	1.1	17.2	0.00	0.00	1	1
				3.45	36.95	4	26.04.2017	1010	0.0	0.1	3.5	11.5	2	0	0.9	0.1	3.6	12.9	0.00	0.00	1	1
				3.24	37.16	5	05.05.2017	1019	0.0	0.1	4.3	5.5	3	0	0.8	0.1	4.3	5.5	0.00	0.00	1	1
				3.25	37.15	6	15.05.2017	1019	0.0	0.1	4	12	2	2	0.8	0.1	4	12	0.00	0.00	1	1
RWS618	5	38.62	1.0 to 3.5 m ALV, RTD and LMBE	1.79	36.83	1	27.03.2017	1017	0.0	0	3.6	15.6	2	1	2.1	0	3.6	15.6	0.00	0.00	1	1
				1.85	36.77	2	04.04.2017	1020	0.0	0.2	0.1	20.7	2	0	-	0.2	0.1	20.7	0.00	0.00	1	1
				1.96	36.66	3	19.04.2017	1032	-0.1	0.2	2.1	18.4	1	0	0.4	0.2	2.2	18.2	0.00	0.00	1	1
				1.97	36.65	4	26.04.2017	1010	0.0	0.1	5.7	12.6	2	0	0.7	0.1	5.7	12.6	0.00	0.00	1	2
				1.94	36.68	5	05.05.2017	1019	0.0	0.1	5.6	1.8	2	0	0.5	0.1	5.6	13.8	0.00	0.00	1	2
				1.92	36.70	6	15.05.2017	1019	0.0	0.1	1.8	16.9	1	0	0.3	0.1	1.8	16.9	0.00	0.00	1	1
RWS620	5	40.18	2.0 to 5.0 m MG, ALV and RTD	3.30	36.88	1	04.04.2017	1020	0.0	0.2	0.4	19.8	3	0	-	0.2	0.4	19.8	0.00	0.00	1	1
				3.41	36.77	2	26.04.2017	1014	0.0	0.1	0.6	20.3	1	0	0.3	0.1	0.6	20.2	0.00	0.00	1	1
				3.30	36.88	3	05.05.2017	1019	0.0	0.1	0.1	21.2	1	0	0.4	0.1	0.1	21.2	0.00	0.00	1	1
				3.36	36.82	4	15.05.2017	1019	0.0	0.1	0.3	19.7	2	0	0.7	0.1	0.3	19.7	0.00	0.00	1	1
				3.12	37.06	5	19.05.2017	1007	0.0	0.1	0.2	18.2	2	0	0.8	0.1	0.2	18.2	0.00	0.00	1	1
				—	—	6	24.05.2017	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
RWS621	5	40.3	1.0 to 7.5 m MG, ALV, RTD and LMBE	3.32	36.98	1	04.04.2017	1020	0.0	0.1	0	18.3	11	0	-	0.1	0.1	18.3	0.00	0.00	1	1
				3.41	36.89	2	26.04.2017	1014	0.0	0.1	1.5	18.1	1	0	0.8	0.1	1.5	18.1	0.00	0.00	1	1
				3.24	37.06	3	05.05.2017	1019	0.0	0.1	1.2	19.1	1	0	0.7	0.1	1.7	15.9	0.00	0.00	1	1
				3.28	37.02	4	15.05.2017	1019	0.0	0.1	0.2	20.6	2	0	0.9	0.1	0.2	20.6	0.00	0.00	1	1
				2.96	37.34	5	19.05.2017	1007	0.0	0.1	0.3	20.9	1	0	0.2	0.1	0.3	20.9	0.00	0.00	1	1
				—	—	6	24.05.2017	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

Worst Case	0.1	1.8	11.3	1.8	11	10	2.7	1.8	11.3	4.2	0.0018	0.0113	2	2
------------	-----	-----	------	-----	----	----	-----	-----	------	-----	--------	--------	---	---

APPENDIX 6

REPORT RELIANCE

Notwithstanding any other provisions of this report and in consideration of the sum of ten pounds (£10.00) paid by both St Edward Homes Limited, Berkeley Homes (Western) Limited and Berkeley Homes plc, we Ramboll UK Limited hereby acknowledge receipt of the aforementioned consideration and hereby irrevocably acknowledge and agree that St Edward Homes Limited, Berkeley Homes (Western) Limited and Berkeley Homes plc and any parties acquiring an interest in the works to be carried out at the site and/or the property/properties in respect of which this report has been carried out and/or the property and/or the land in respect of which this report has been carried out or any part or parts thereof (the Project) and/or any party providing finance and/or refinance in connection with the Project and any contractors involved in the development of the site/property to which this report relates and their assigns shall have relied and will continue to rely on the findings of this report and in so doing we acknowledge a duty of care to them provided that the duty of care shall be no greater in terms of obligation than that owed to the company/body who has commissioned the report from us as if the beneficiary had been named jointly with the company/body who have commissioned the report in such commission/appointment.