


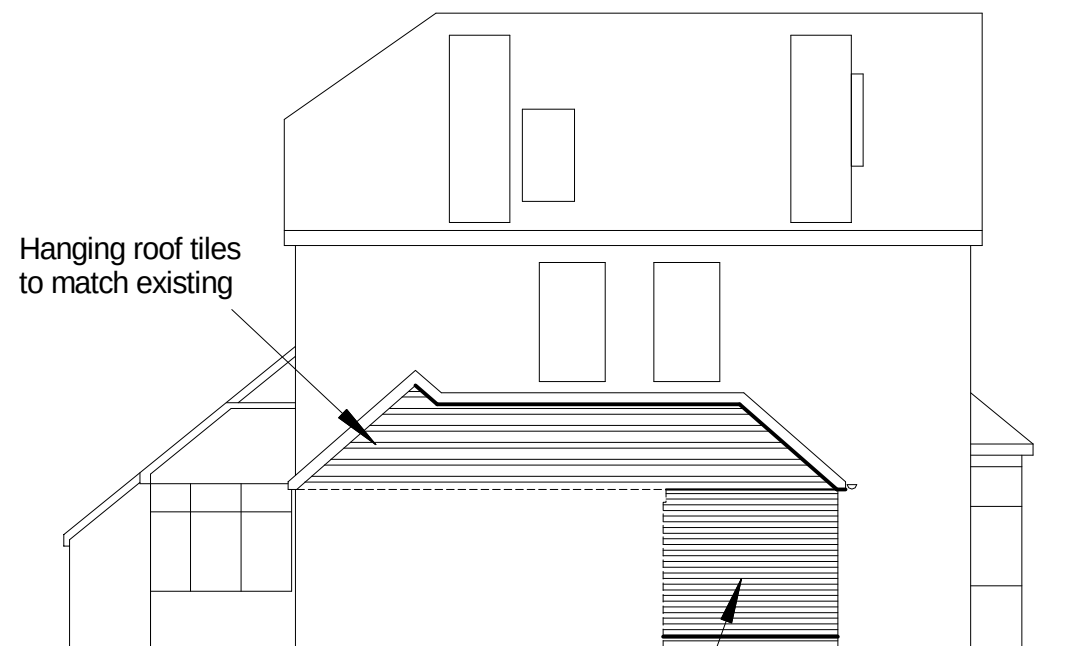

SIDE

Red brickwork
to match existing

Velux windows to be installed
in accordance with manufacturer's
instructions. Double rafters each side
of structural opening.

Tiles to match existing house colour
on battens and breathable felt
(e.g. Klover Permo Air open underlay
roofing breather felt - or similar)

dpc

150 mm
(min)




FRONT

All 70mm dia rwp's to soakaway(s) 5m (min) from
building. Soakaway to be 1 cubic metre (min) filled
with brick hardcore only, taken down to a previous
sub-strata and capped with concrete. Guttering to be
115mm half-round or equivalent.




REAR

Tiles to match existing house colour
on battens and breathable felt
(e.g. Klover Permo Air open underlay
roofing breather felt - or similar)

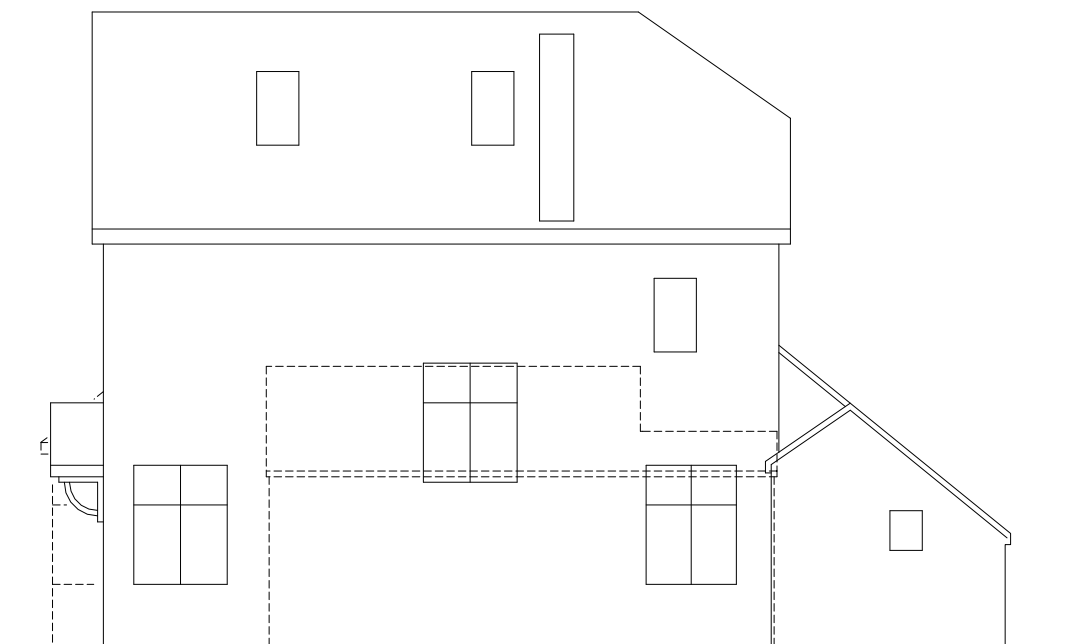

SIDE



	STEPHEN BIDDLE CHARTERED CIVIL ENGINEER 1, Wilwyne Close, Caversham, Reading, Berks RG4 5EP Tel: 07864 122 313 Email: housealterations@gmail.com			
Title:	PROPOSED ELEVATIONS			
Drwg No:	FIELDS-0418-02	Scale: (A3)	1:100	Rev: