


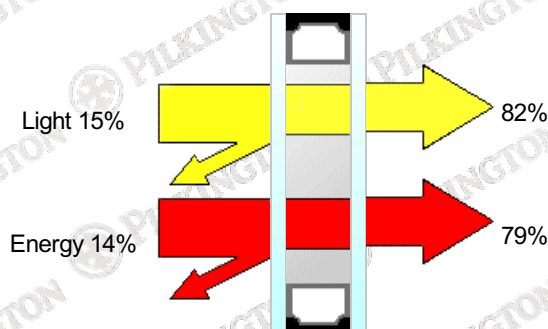

DESCRIPTION

Position	Product	Process	Thickness (nominal) mm	Weight kg/m ²
Pilkington Insulight™ Therm				
Glass 1	Pilkington Optifloat™ Clear	Annealed	4.0	
Cavity 1	Air		20.0	
Glass 2	Pilkington Optifloat™ Clear	Annealed	4.0	
Product Code	4-20-4		28.0	20.00

PERFORMANCE

Light		
Transmittance	LT	82%
	UV %	55%
Reflectance Out	LR out	15%
Reflectance In	LR in	15%
Performance Code		
U _g -value/Light/Energy	2.7 / 82 / 79	
Ra	98	
The values of some of characteristics are displayed as NPD. This stands for No Performance Determined.		

Energy		
Direct Transmittance	ET	76%
Reflectance	ER	14%
Absorptance	EA	10%
Total Transmittance	g	79%
Shading Coefficient Total	0.91	
Shading Coefficient Shortwave	0.87	
Sound Reduction	R _w (C;C _{tr}) dB	31 (-2; -5)
Thermal Transmittance	W/m ² K	2.7

Carbon Footprint

GWP	kgCO ₂ e/m ²	32
Global Warming Potential (GWP) values derived from the Life Cycle Assessment (LCA) that underpins the third-party verified product Environmental Product Declarations (EPDs). They are declared for modules A1 to A3; the scope of the EPDs is cradle-to-grave and module D in accordance with the requirements of Product Category Rules EN 15804:2012+A2:2019/AC:2021 and EN17074:2019. As noted in the EPD, indicators for modules A1 to A3 should not be used without considering indicators for module C.		

Comments

FRIAR STREET

Pilkington Spectrum allows you to combine a wide range of products available from Pilkington and determine their key properties such as light transmittance, g value and U value. The program includes restrictions that prevent some combinations being selected that may be considered unwise or impractical. Even with these restrictions, it is still possible to create product combinations that may not be available from your supplier. Please check with your supplier that your chosen product combination is possible, available in the sizes required and in a timescale appropriate to your project. Furthermore, it is essential that you check that your product combination is appropriate for satisfying local, regional, national and other project-specific requirements.

Calculations are made according to EN standards 410 and 673/12898

Pilkington Spectrum Version UK:7.3.1

25/07/2024

