


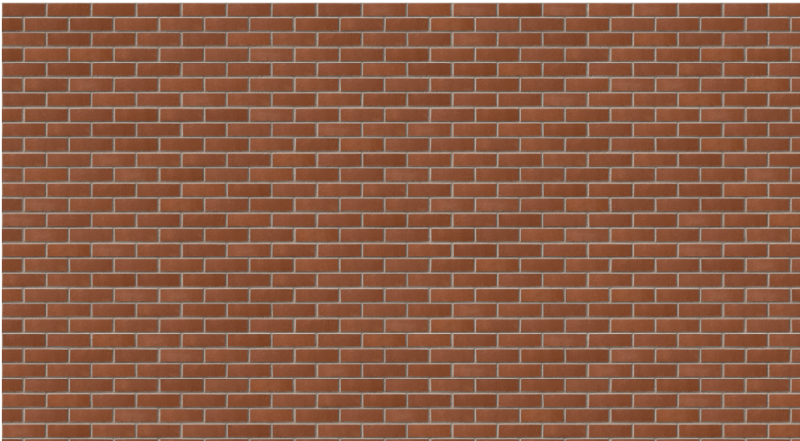

## Product Information

|                        |                  |
|------------------------|------------------|
| Ibstock Code:          | A0272A           |
| Type:                  | Wirecut Extruded |
| Facing Description:    | Smooth           |
| Dry Brick Weight (kg): | 2.4kg            |
| Pack Quantity:         | 316              |
| Packaging (standard):  | Banded (Plastic) |
| Factory:               | Aldridge         |

## Technical Specification (to BS EN 771-1)

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Brick Dimensions (L x W x H mm):                       | 215x102x65            |
| Size Tolerances Mean & Range:                          | T2 R1                 |
| Configuration:                                         | Vertically perforated |
| Voids (%):                                             | NPD                   |
| Compressive Strength (N/mm²):                          | 55                    |
| Active Soluble Salts:                                  | S2                    |
| Water Absorption (% weight):                           | 12                    |
| Durability:                                            | F2                    |
| Gross Dry Density (Sound Insulation) (Kg/m³):          | 1500                  |
| Equivalent Thermal Conductivity "K" value 5% Exposed:  | 1.1                   |
| Initial Rate of Absorption (Suction Rate) (Kg/m²/min): | 0.6                   |
| EAN:                                                   | 5036335003251         |