


R02 Rectangular Silencers

R02 - 5 - Attenuator

Available in seven standard lengths R02 5 Rectangular Duct Mounted Silencers have excellent attenuation properties, achieved with sound absorbing infill splitters, retained in the attenuator casing by a perforated liner. The resistance to airflow is a function of the face velocity and length. It is not recommended to select the R02 5 Silencers with a face velocity above 3.5 metres per second without asking advice regarding re-generated self noise. We can advise on the selections and can perform system analysis to ensure the correct unit is specified.

- High performance rectangular duct silencer
- Seven standard lengths
- Many connection options
- Cross section dimensions in 1mm increments
- System pressure within ducted systems to 1500 Pa
- Special lengths on request

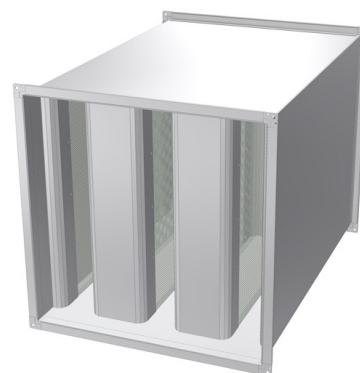

Insertion Loss (dB) - Centre Band Frequency

Product Code	Length (mm)	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
R02 - 5 - 600	600	4	6	11	19	24	23	18	12
R02 - 5 - 900	900	4	6	12	26	30	31	22	16
R02 - 5 - 1200	1200	5	9	18	32	40	39	28	19
R02 - 5 - 1500	1500	7	11	23	37	45	45	32	22
R02 - 5 - 1800	1800	8	13	25	44	50	50	37	24
R02 - 5 - 2100	2100	9	16	28	50	50	50	45	29
R02 - 5 - 2400	2400	11	19	33	50	50	50	50	32

Insertion loss data is derived from continual testing to BS4718 and other standards in independent UKAS certified laboratories, which includes where appropriate, re-generated or self noise testing in both forward and reverse flow conditions. If you request system analysis from our technicians all predictions will be assessed using the relevant certified insertion loss data together with relevant dynamic corrections.

Dimensional Data

Code	A Min	A Max	B Min	B Max	C Min	C Max
R02 - 5	100	1200	100	1200	400	2400

Resistance to Airflow (Pa)

Product Code	1.0m/s	1.5m/s	2.0m/s	2.5m/s	3.0m/s
R02 - 5 - 600	10	16	22	39	60
R02 - 5 - 900	10	16	23	40	62
R02 - 5 - 1200	11	16	24	40	64
R02 - 5 - 1500	11	17	25	40	66
R02 - 5 - 1800	11	18	26	42	67
R02 - 5 - 2100	12	19	26	43	69
R02 - 5 - 2400	13	19	28	48	71

