




Rooflight Layout

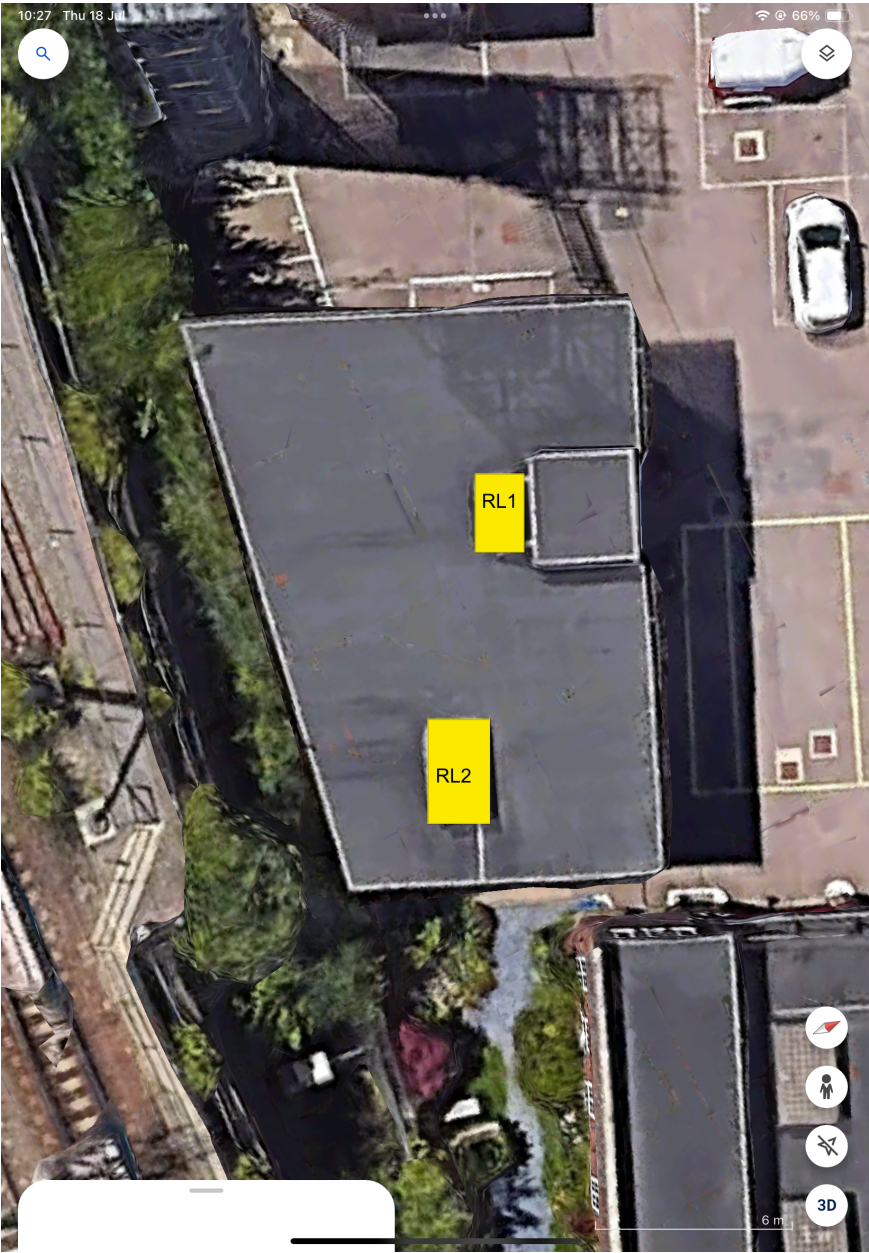

# Schedule of works (with sizes)

Project Title:   Caversham Fire Station  
Bauder

Thursday, 18 July 2024



| Rooflight No | Proposed Internal Size | Proposed External Size | Existing Internal Size | Existing External Size | Proposed Kerb Height | Existing Kerb Height | Shape            | Design          | Ventilation    | Rooflight Shape | Glaz Mat           | Skin            | Glazing Glass           | Sec Fix             | Sec Opt     |                                                                                     |
|--------------|------------------------|------------------------|------------------------|------------------------|----------------------|----------------------|------------------|-----------------|----------------|-----------------|--------------------|-----------------|-------------------------|---------------------|-------------|-------------------------------------------------------------------------------------|
| 1            | X                      | 2030 X 1200            | X                      | 1930 X 1100            | 0                    | 0                    | Square/Rectangle | X2 - UPVC Range | O1 -Hit & Miss | DM - Dome       | PC - Polycarbonate | 3 - Triple Skin | Diffused - Std Diffused | SF - Security Frame | None - None |  |
| 2            | X                      | 3000 X 1600            | X                      | 2900 X 1500            | 0                    | 0                    | Square/Rectangle | X2 - UPVC Range | O1 -Hit & Miss | DM - Dome       | PC - Polycarbonate | 3 - Triple Skin | Diffused - Std Diffused | SF - Security Frame | None - None |  |

General Notes:

EUROGLAZE ROOFLIGHT

Typical Glazing Specification:  
Outer - 3mm thick clear UV protected polycarbonate  
Mid - 2mm thick clear polycarbonate  
Inner - 2mm thick clear or diffused polycarbonate (T.B.C.)


| X2 ROOFLIGHT SPECIFICATION                        |       |
|---------------------------------------------------|-------|
| (FABRICATED FROM SELF FINISH WHITE EXTRUDED uPVC) |       |
| Quantity of Rooflight(s)                          | 1no   |
| Roof Opening - Length (mm)                        | Dim A |
| Roof Opening - Width (mm)                         | Dim B |
| Roof Insulation Depth (mm)                        | Dim C |
| Kerb Ventilation?<br>(Hit and miss ventilation)   | ✓     |
| Opening Frame?                                    | ✗     |

WHITE POLYESTER POWDER COATED  
ALUMINIUM SECURITY FRAME


uPVC WEATHER FLANGE; REMOVE, APPLY  
WEATHER PROOFING MEMBRANE TO KERB,  
AND RE-FIT WITH FIXINGS PROVIDED

ROOF FINISHES DRESSED UP  
EXTERNAL FACE OF X2 KERB  
BY ROOFING CONTRACTOR

X2 KERB SECURED USING  
SUITABLE FIXINGS @ 300mm  
CENTRES (FIXINGS BY INSTALLER)

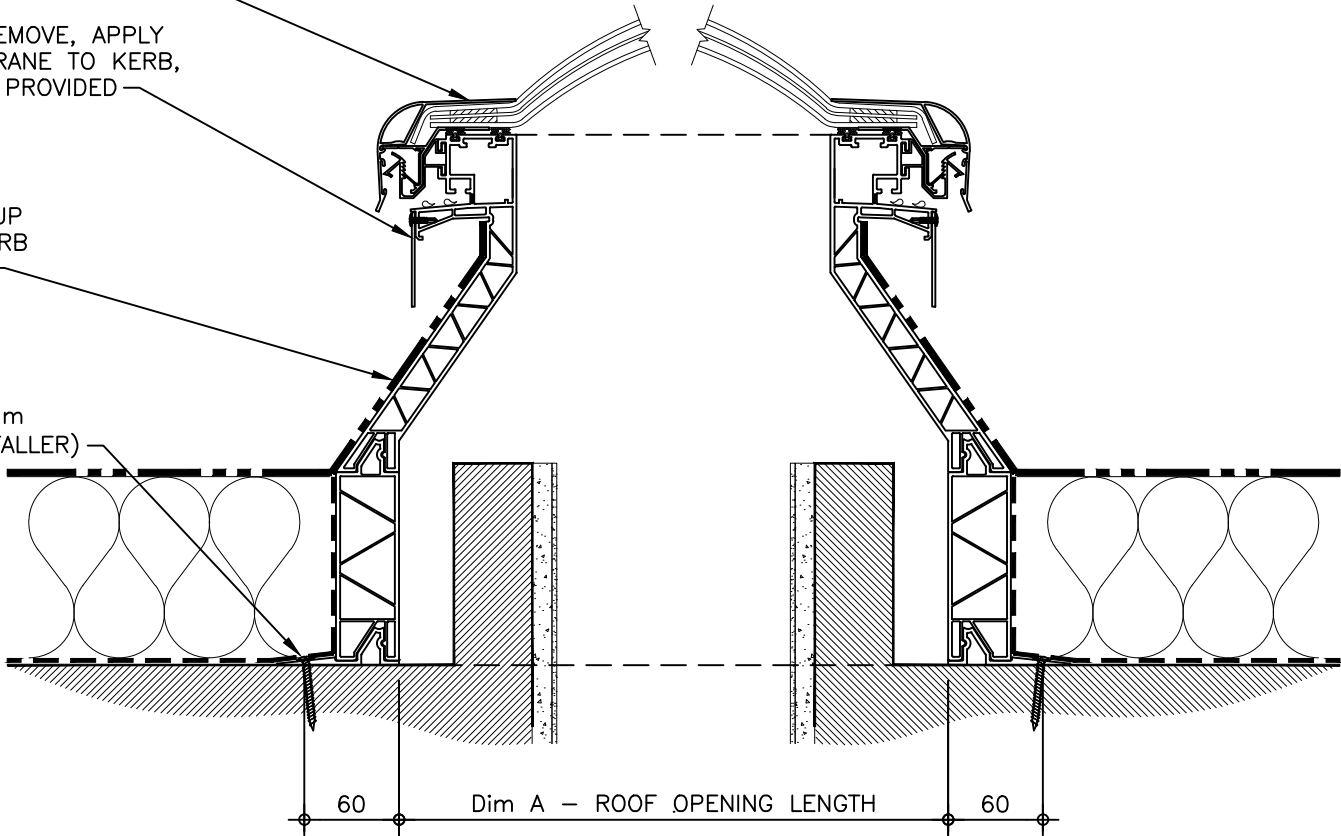

SECTION THROUGH LENGTH

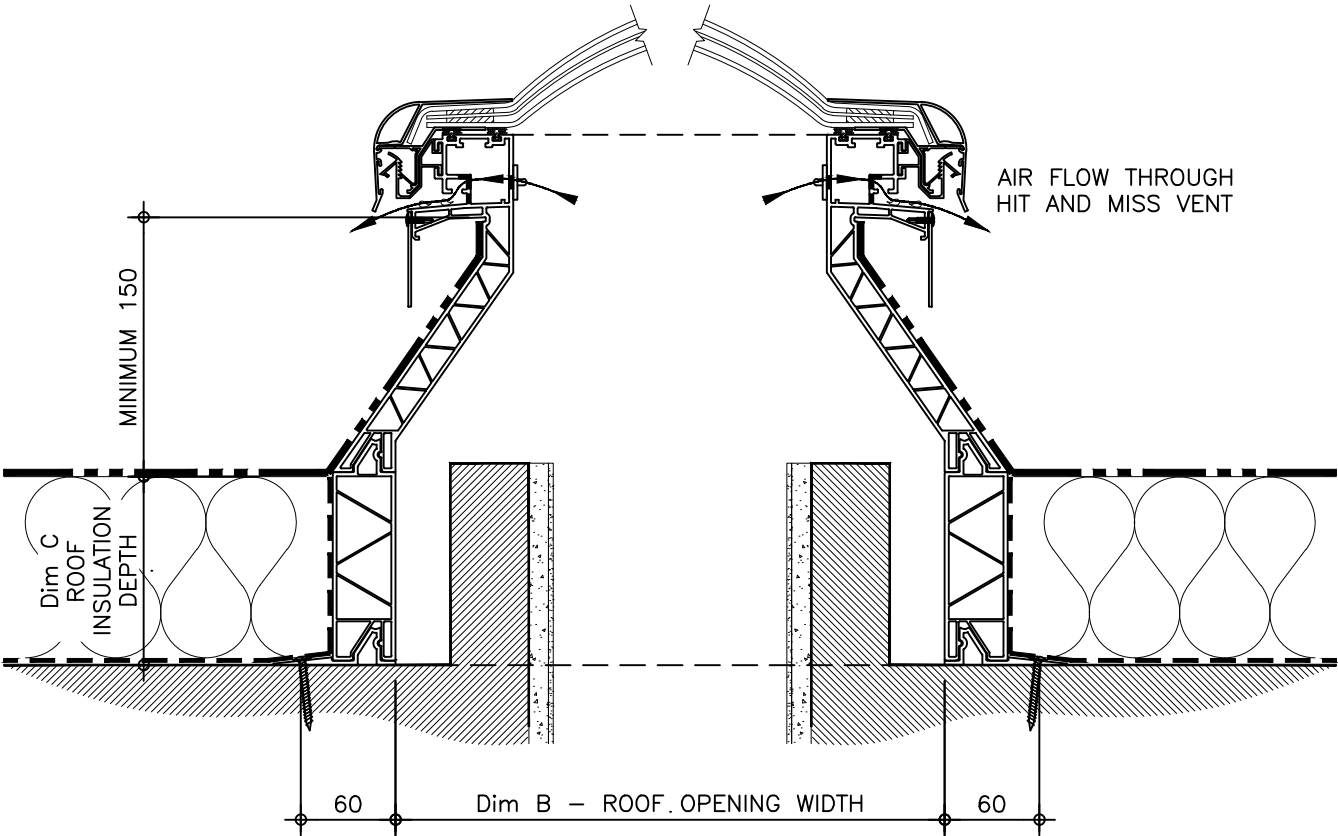

SECTION THROUGH WIDTH

| REV:                                                                                                                                                                                   | DATE:    | DESCRIPTION:                | DRN BY | DESCRIPTION:                                                                                                                                                                                               |                |             |          |           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------|----------|-----------|
| 0                                                                                                                                                                                      | 15.10.15 | First issue of this drawing | IW     | Euroglaze hit and miss ventilated uPVC kerb fixed direct to roof to 'sleeve over' existing upstand. Complete with 120mm uPVC extension piece, triple skin polycarbonate dome and aluminium security frame. |                |             |          |           |
|                                                                                                                                                                                        |          |                             |        | DRAWN BY:                                                                                                                                                                                                  | CREATION DATE: | CHECKED BY: | SCALE(S) | REVISION: |
|                                                                                                                                                                                        |          |                             |        | IW                                                                                                                                                                                                         | 15.10.15       | RT          | 1:5 @ A3 | 0         |
| <b>Bauder Limited - UK Office</b><br>70 Landseer Road, Ipswich, Suffolk, IP3 0DH, England<br>T: +44(0)1473 257 671 F: +44(0)1473 230 761<br>E: Technical@bauder.co.uk www.bauder.co.uk |          |                             |        | <b>Bauder Limited - Ireland Office</b><br>O'Duffy Centre, Cross Lane, Carrickmacross, Co.Monaghan, Ireland<br>T: +353(0)42 9692 333 F: +353(0)42 9692 839<br>E: Technical@bauder.ie www.bauder.ie          |                |             |          |           |

