





Images

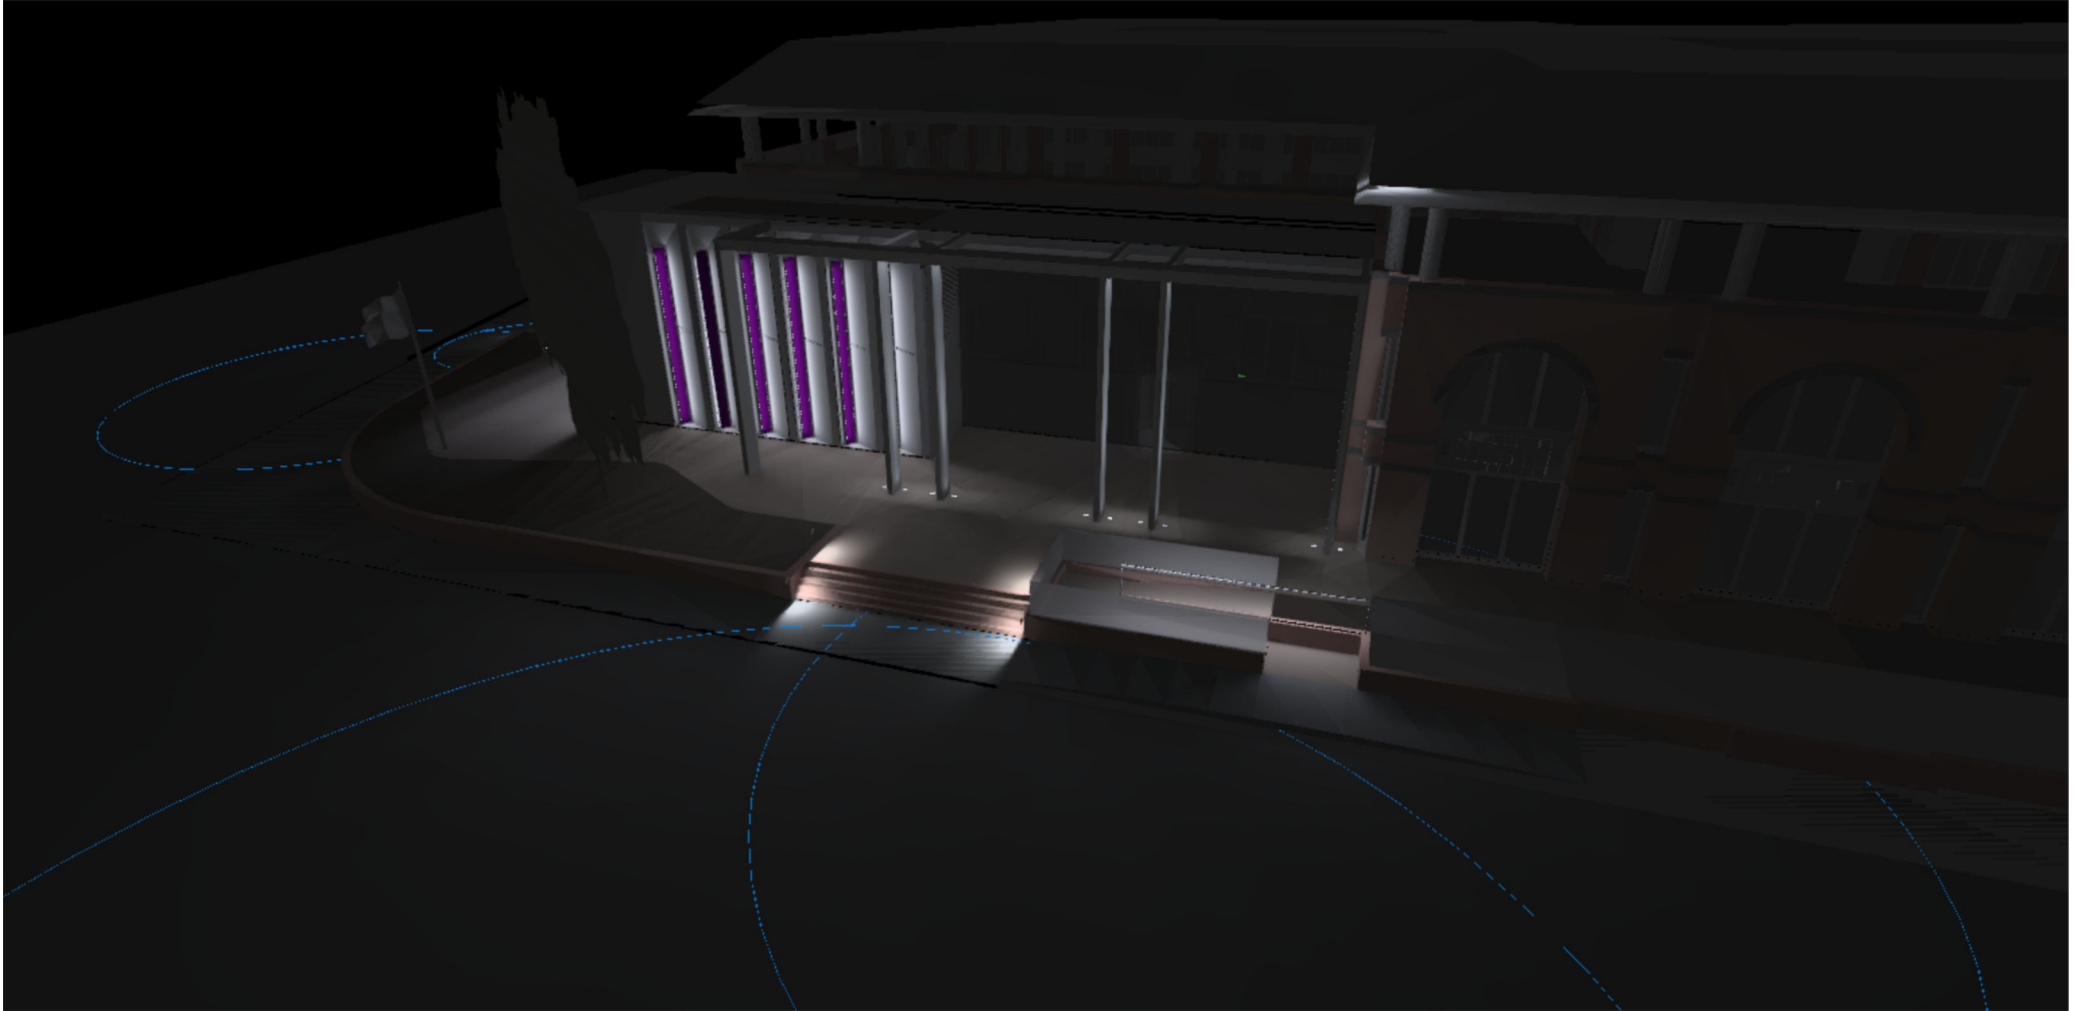



Images

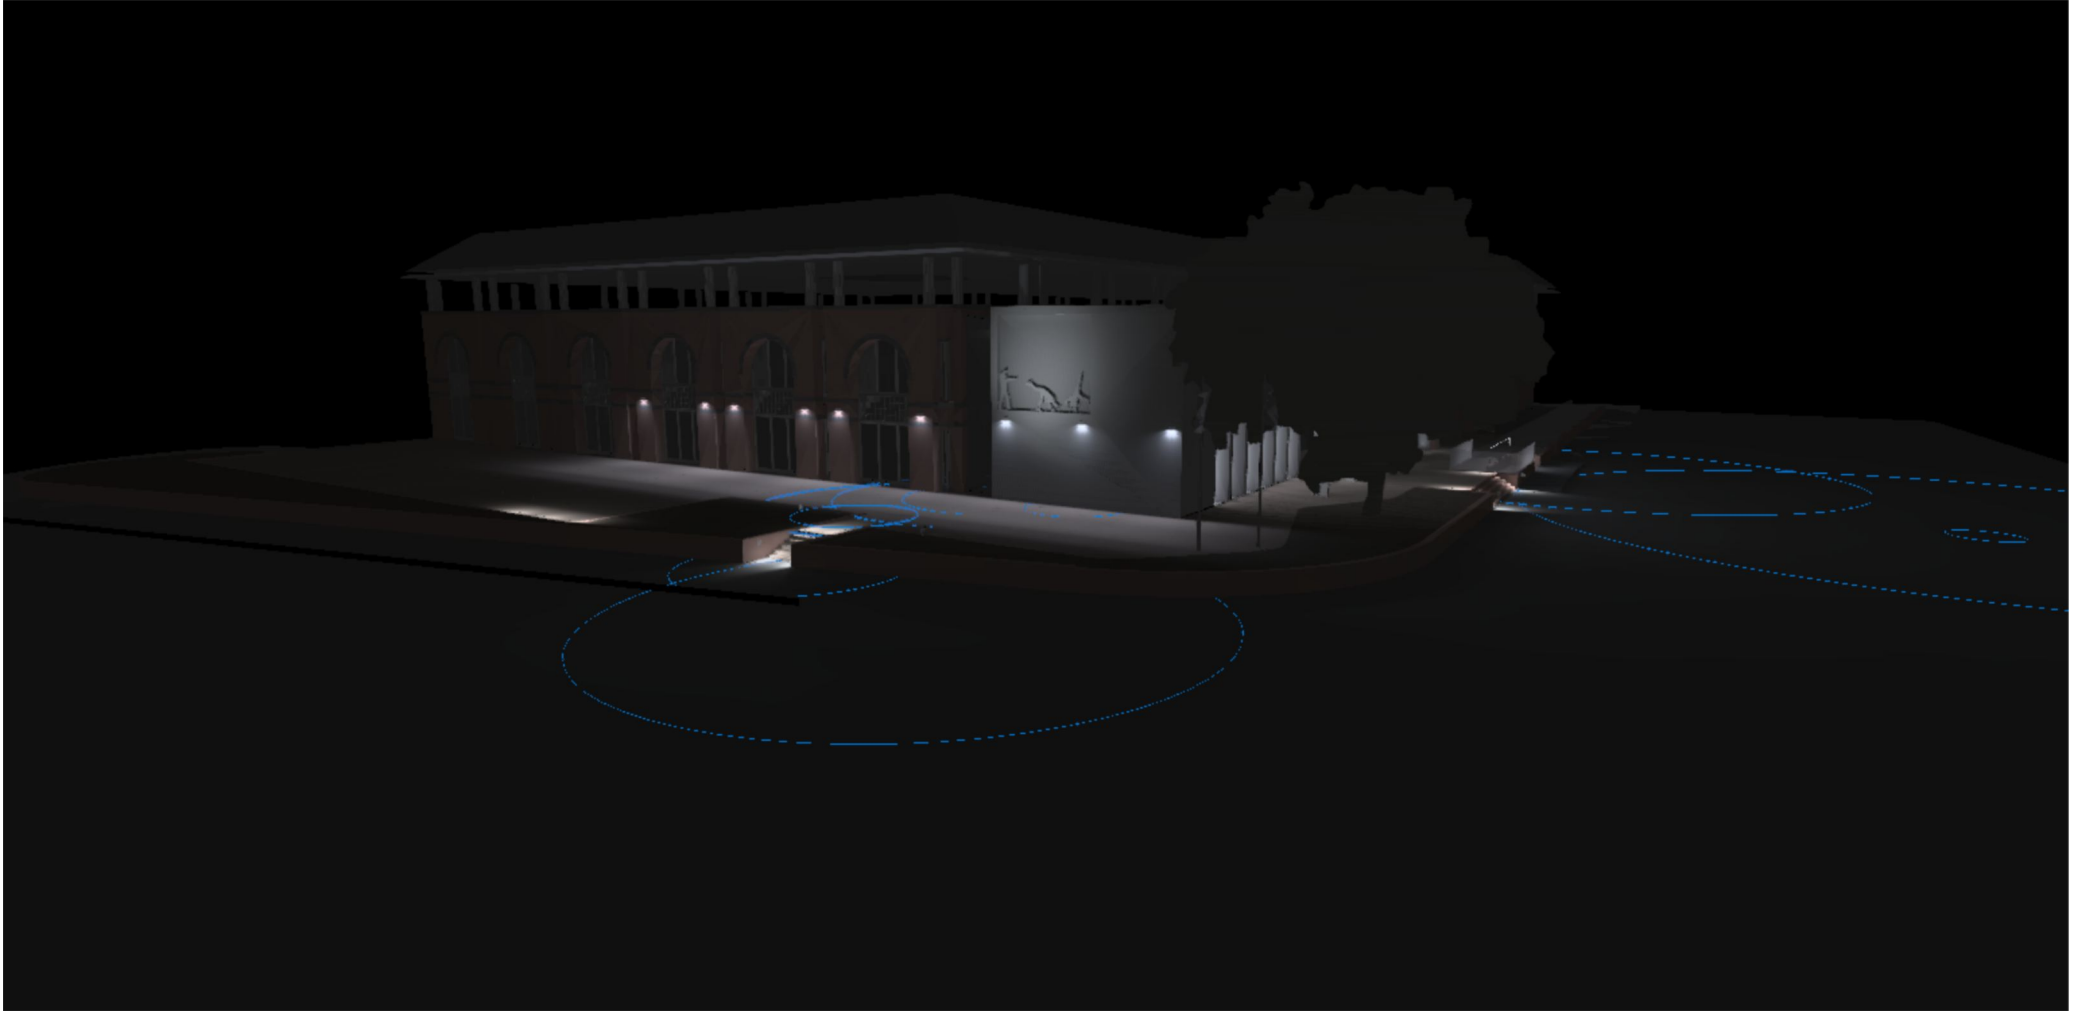



Images

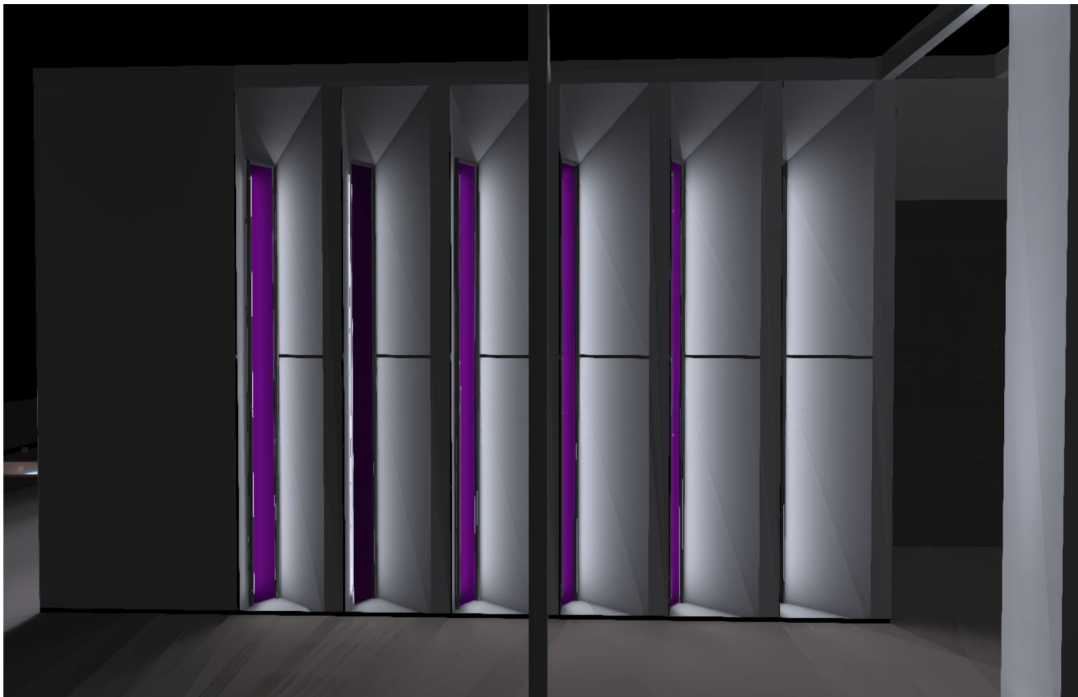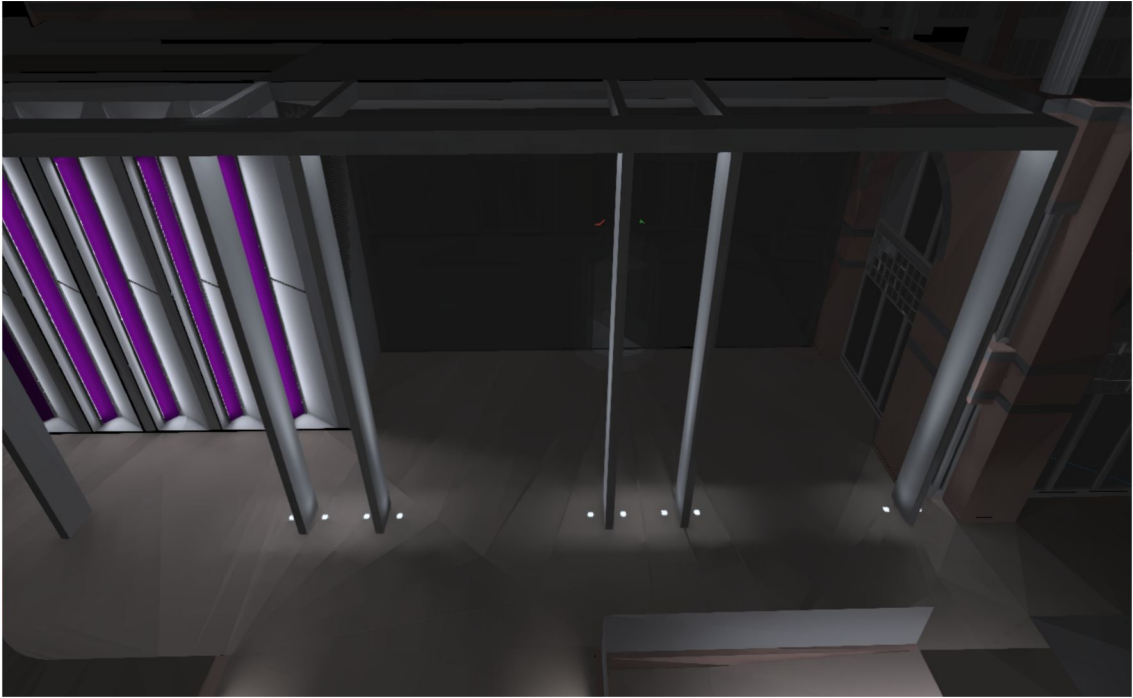


Images

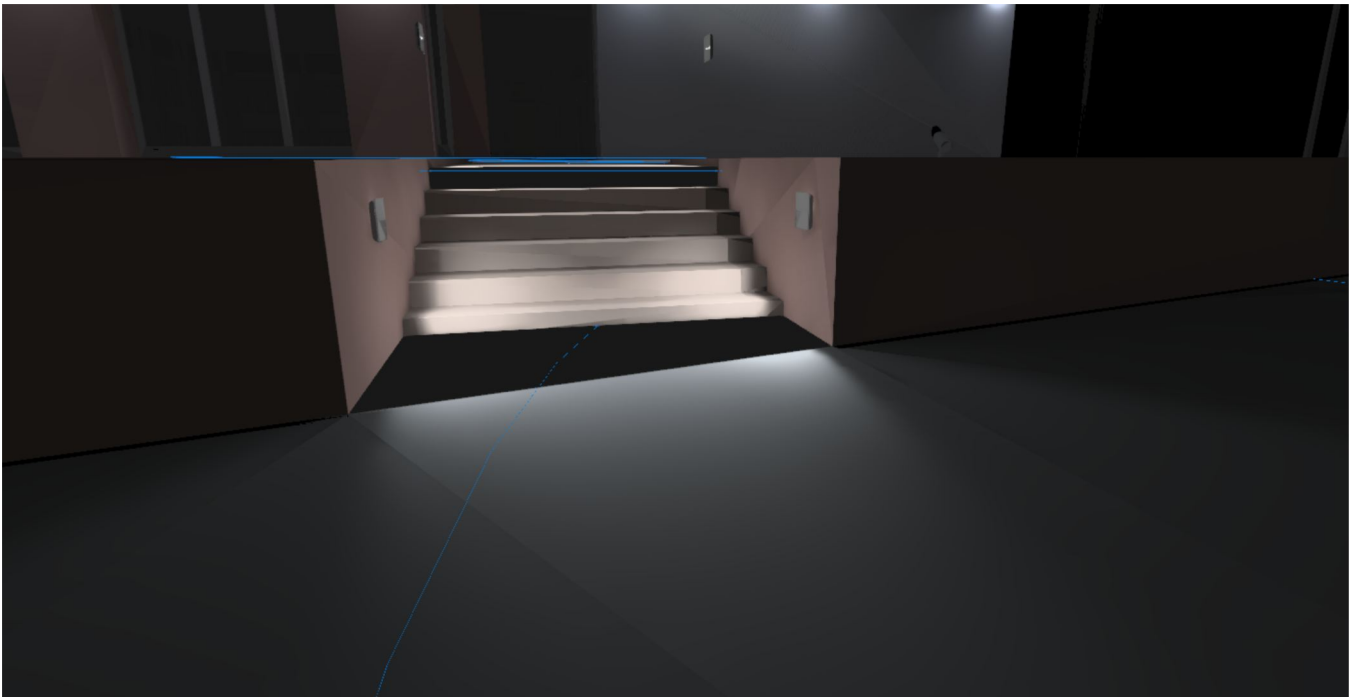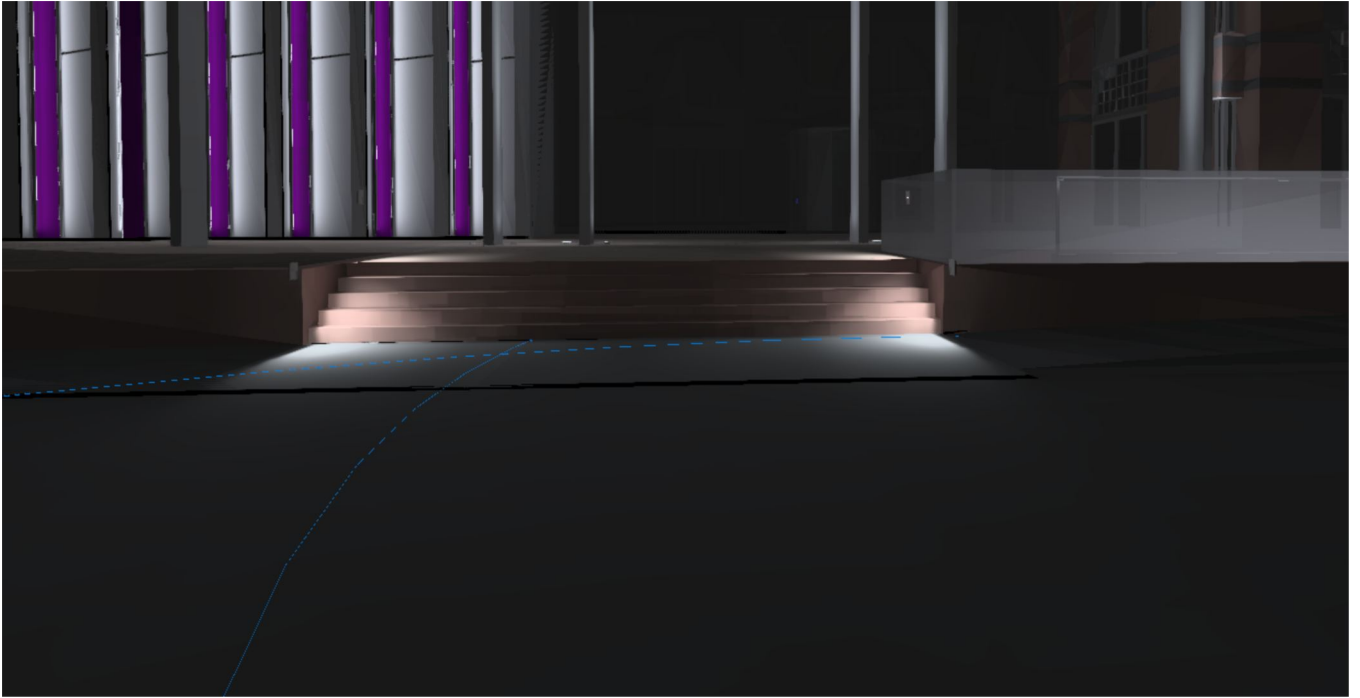


Images

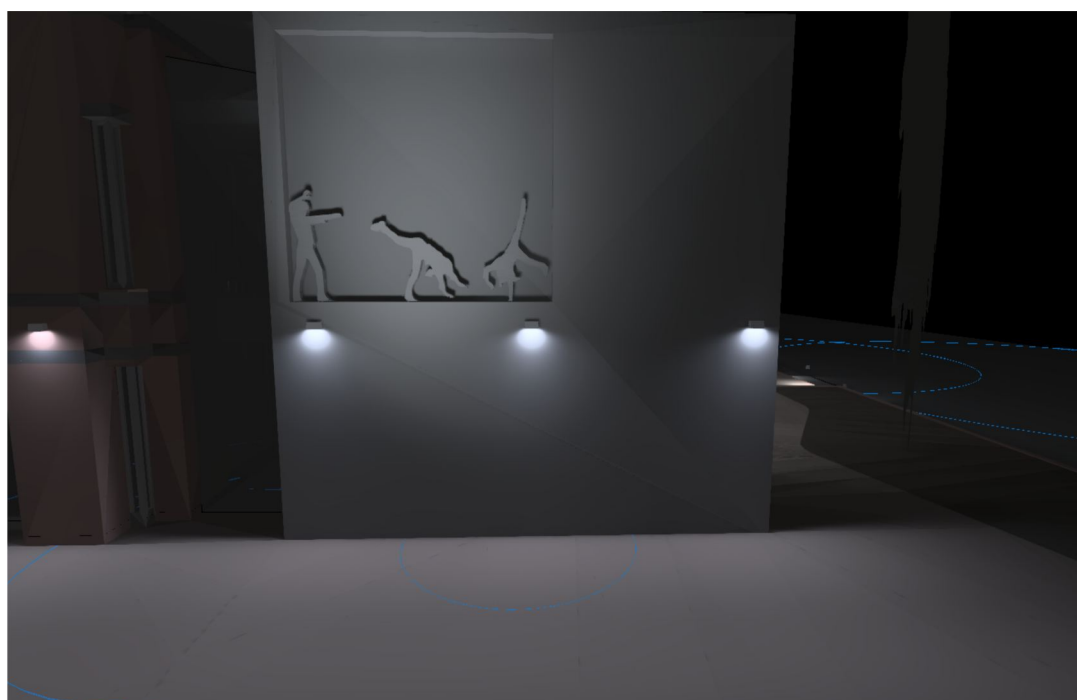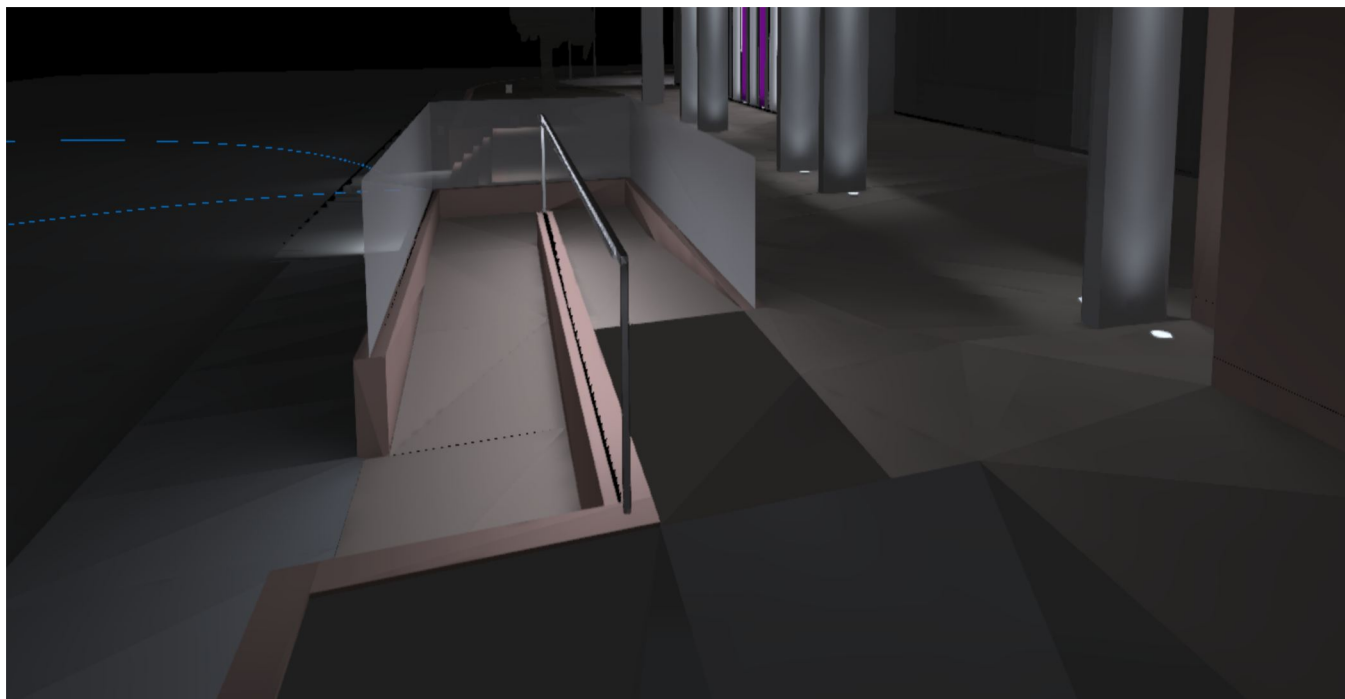

Images

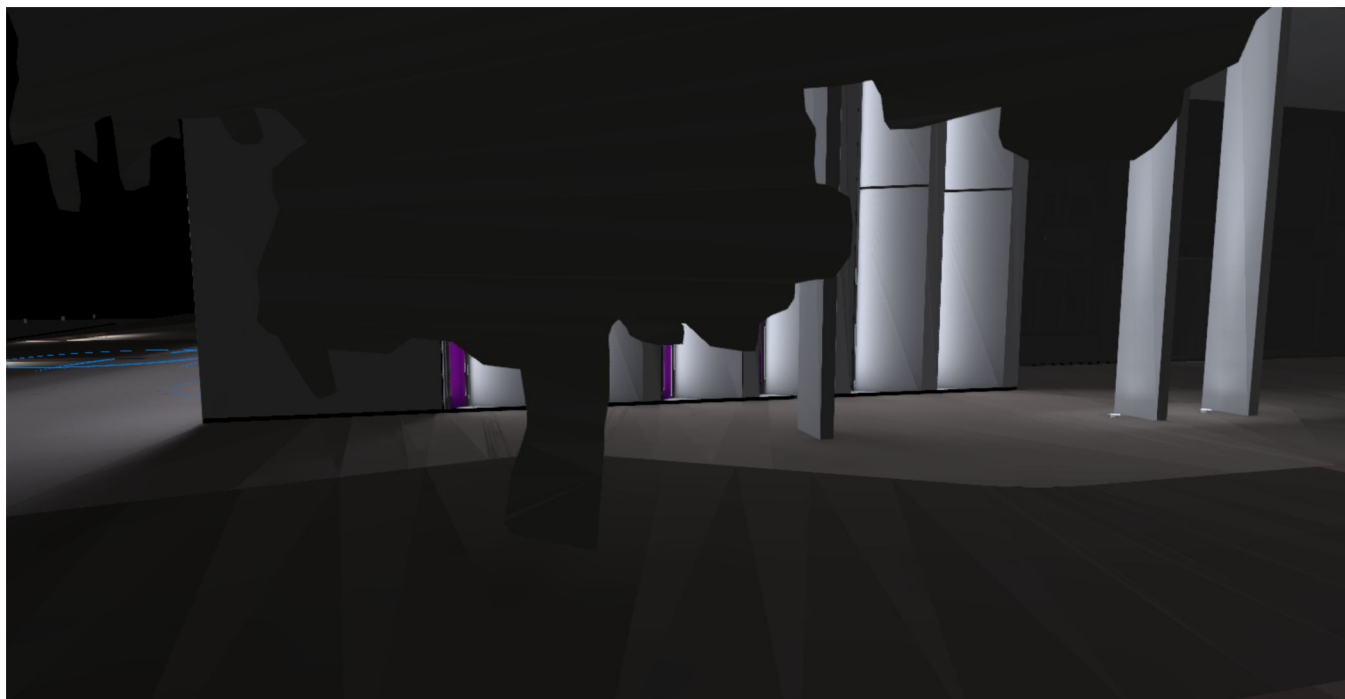

Site 1 (Light scene 1)

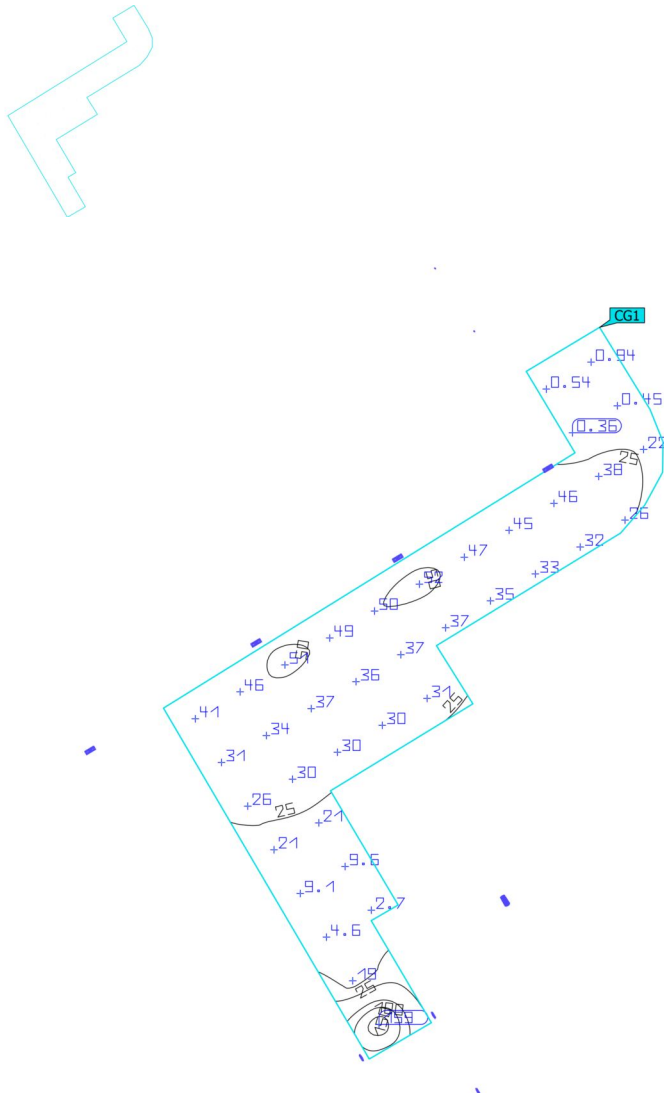
Walkway (B)

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Walkway (B) Perpendicular illuminance Height: 0.867 m	32.1 lx	0.36 lx	159 lx	0.011	0.002	CG1

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))

Site 1 (Light scene 1)


Adjacent Surrounding

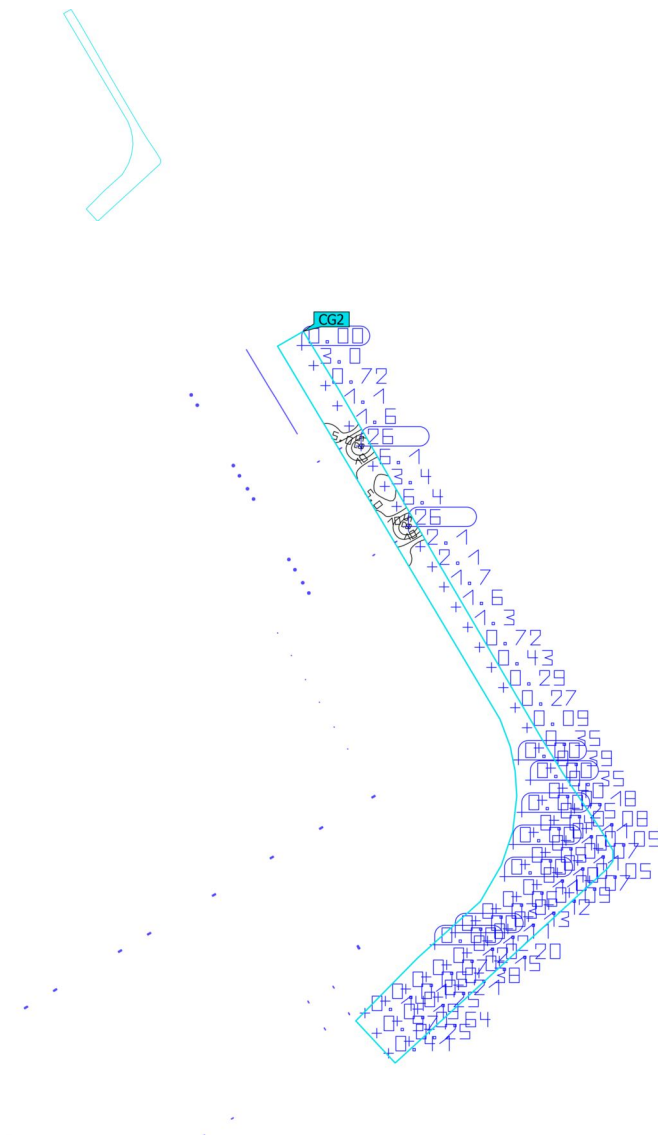

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Adjacent Surrounding Perpendicular illuminance Height: 0.170 m	1.37 lx	0.00 lx	25.9 lx	0.00	0.00	CG2

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))


Site 1 (Light scene 1)

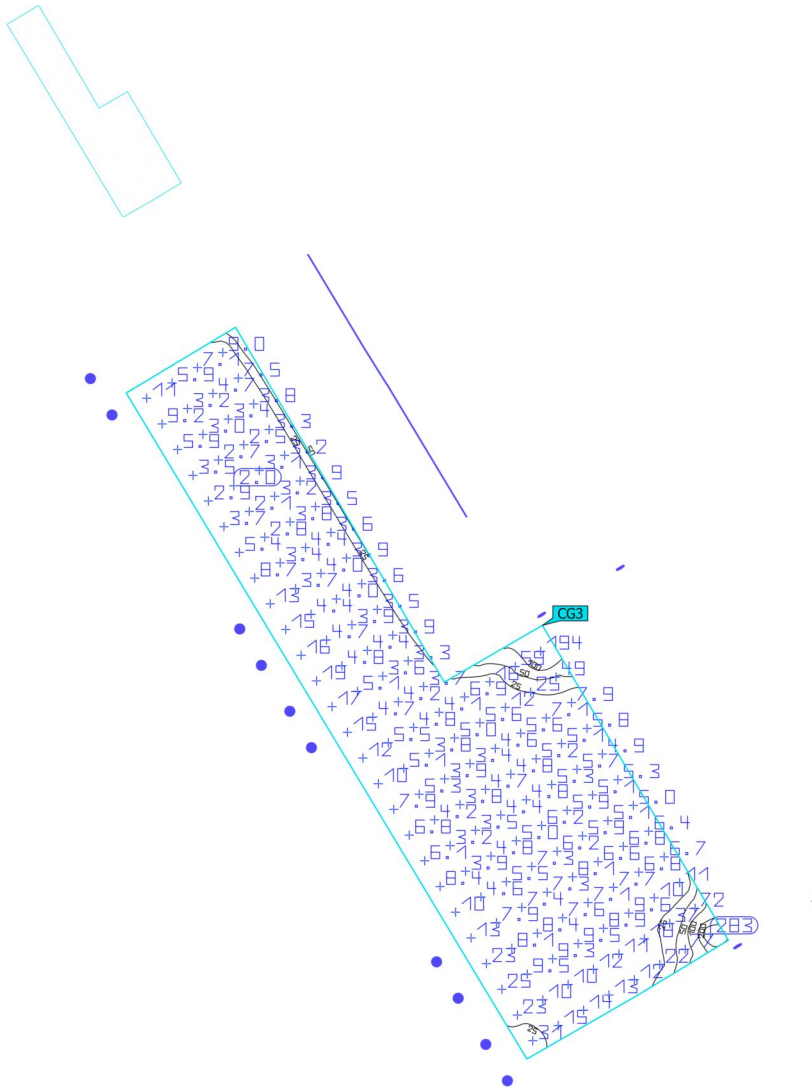Walkway in front of Canopy

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Walkway in front of Canopy Perpendicular illuminance Height: 0.900 m	12.1 lx	2.03 lx	283 lx	0.17	0.007	CG3

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))


(Light scene 1)

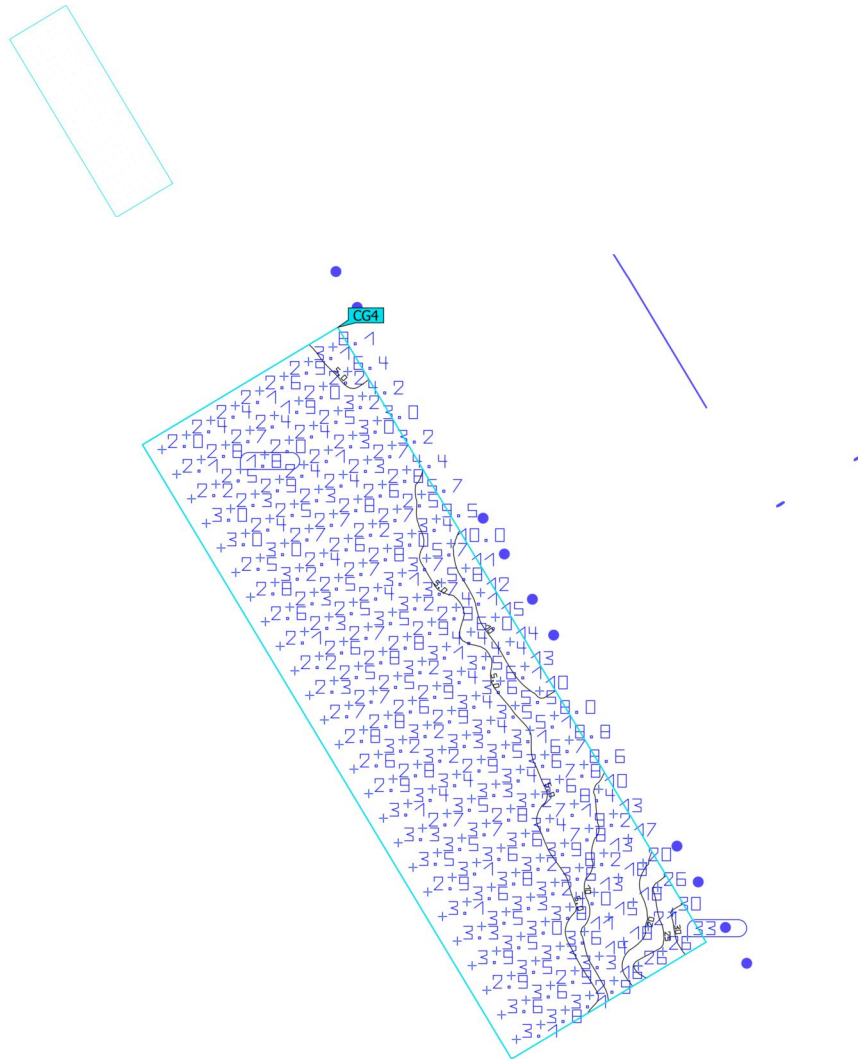Under entrance canopy

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Under entrance canopy Perpendicular illuminance Height: 0.900 m	5.23 lx	1.78 lx	32.5 lx	0.34	0.055	CG4

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))

Site 1 (Light scene 1)

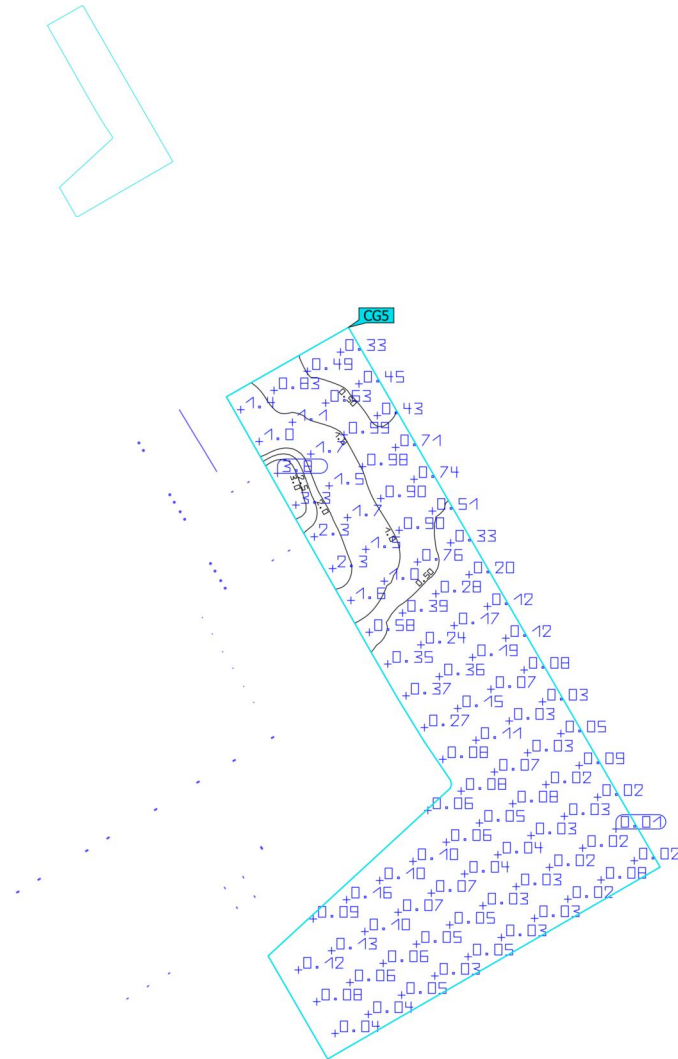
Street / Roadway Surface

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Street / Roadway Surface Perpendicular illuminance Height: 0.000 m	0.44 lx	0.013 lx	3.77 lx	0.030	0.003	CG5

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))

Site 1 (Light scene 1)

Vertical surface opposite building on Bridge Street 02


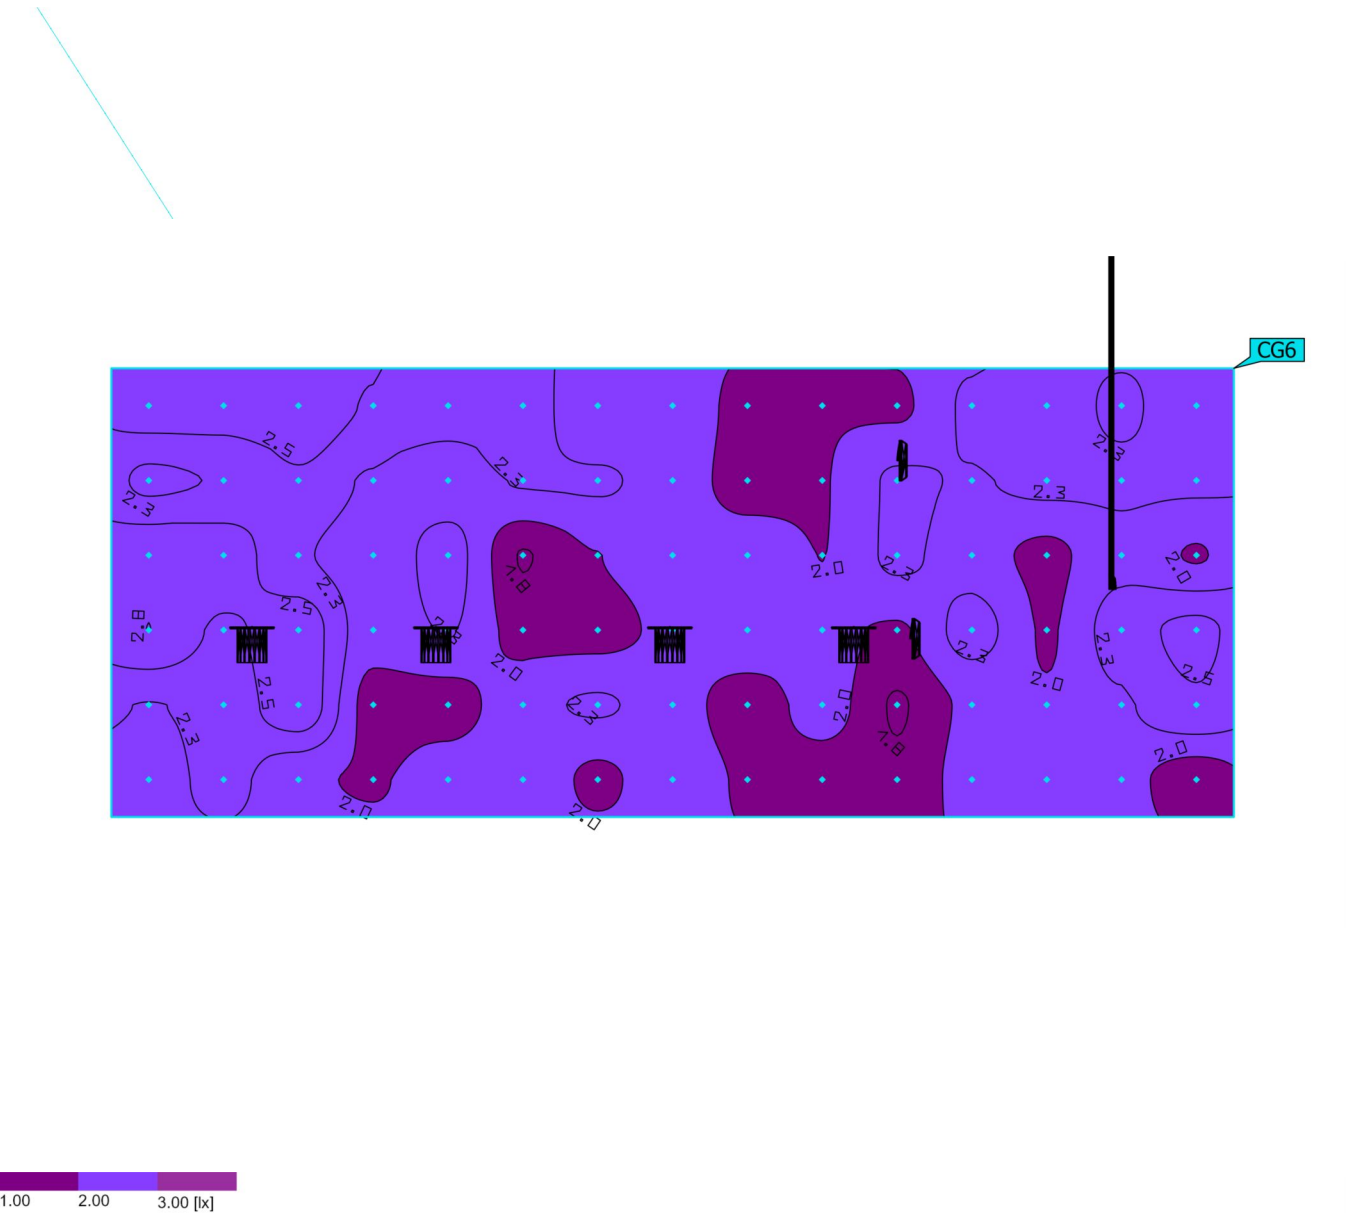


Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Vertical surface opposite building on Bridge Street 02 Perpendicular illuminance Height: 1.000 m	2.19 lx	1.78 lx	2.75 lx	0.81	0.65	CG6

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))

Site 1 (Light scene 1)

Vertical surface opposite building on Fobney Street

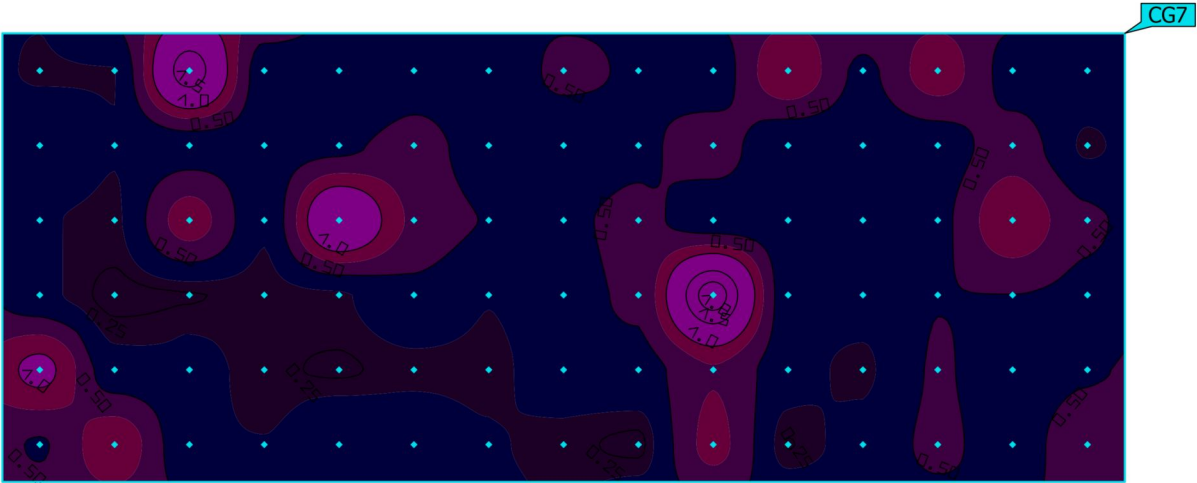



Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Vertical surface opposite building on Fobney Street Perpendicular illuminance Height: 1.000 m	0.48 lx	0.24 lx	1.88 lx	0.50	0.13	CG7

Utilisation profile: DIALux presetting (5.1.4-Standard (outdoor transportation area))

Site 1 (Light scene 1)

Vertical surface opposite building on Bridge Street 01

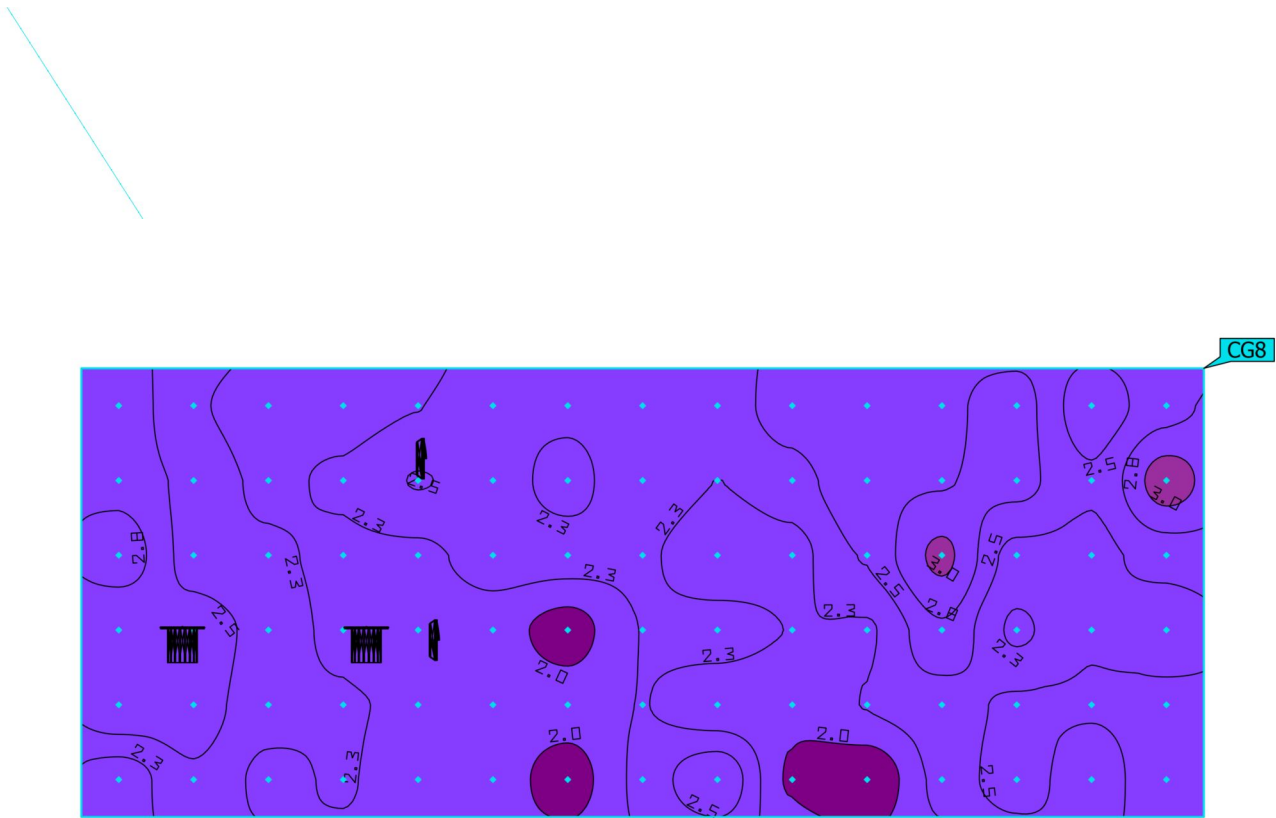


Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Vertical surface opposite building on Bridge Street 01 Perpendicular illuminance Height: 1.000 m	2.38 lx	1.80 lx	3.12 lx	0.76	0.58	CG8

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))

(Light scene 1)


Secondary Steps - Typical Step (B)

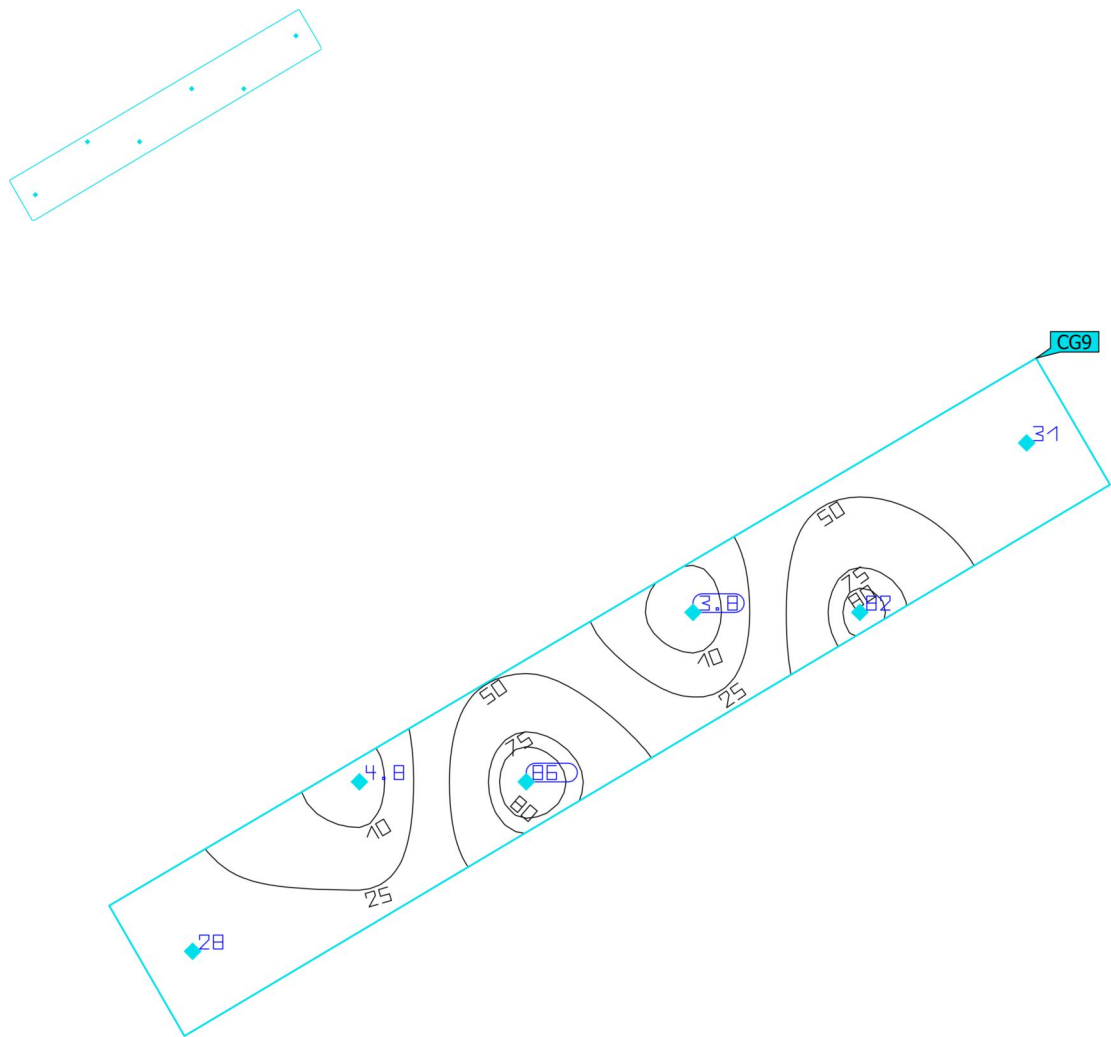

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Secondary Steps - Typical Step (B) Perpendicular illuminance Height: 0.381 m	39.2 lx	3.79 lx	85.7 lx	0.097	0.044	CG9

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))


(Light scene 1)

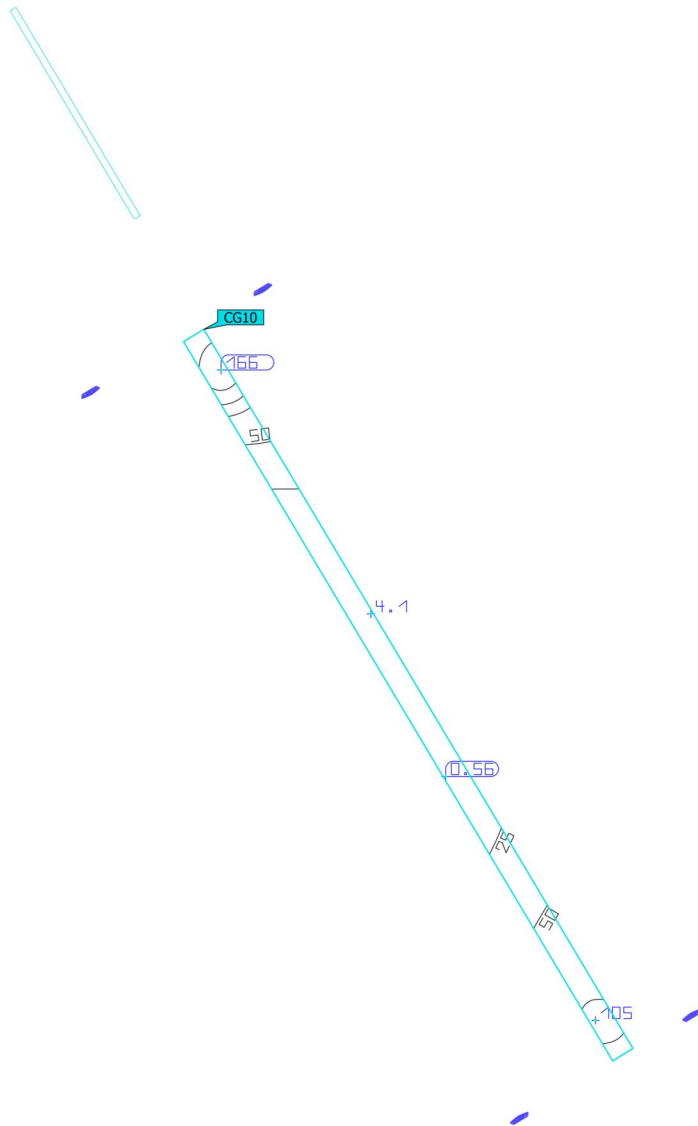Main Steps - Typical Step (A)

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Main Steps - Typical Step (A) Perpendicular illuminance Height: 0.330 m	69.0 lx	0.56 lx	166 lx	0.008	0.003	CG10

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))


(Light scene 1)

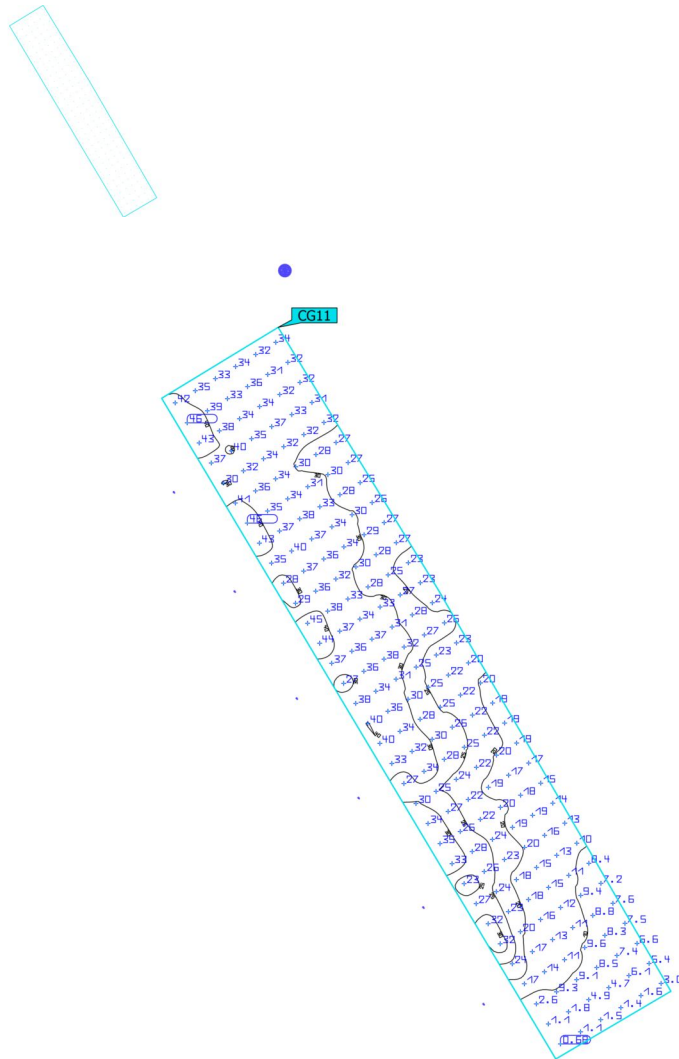Walkway (A)

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Walkway (A) Perpendicular illuminance Height: 0.900 m	25.4 lx	0.68 lx	46.2 lx	0.027	0.015	CG11

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))


(Light scene 1)

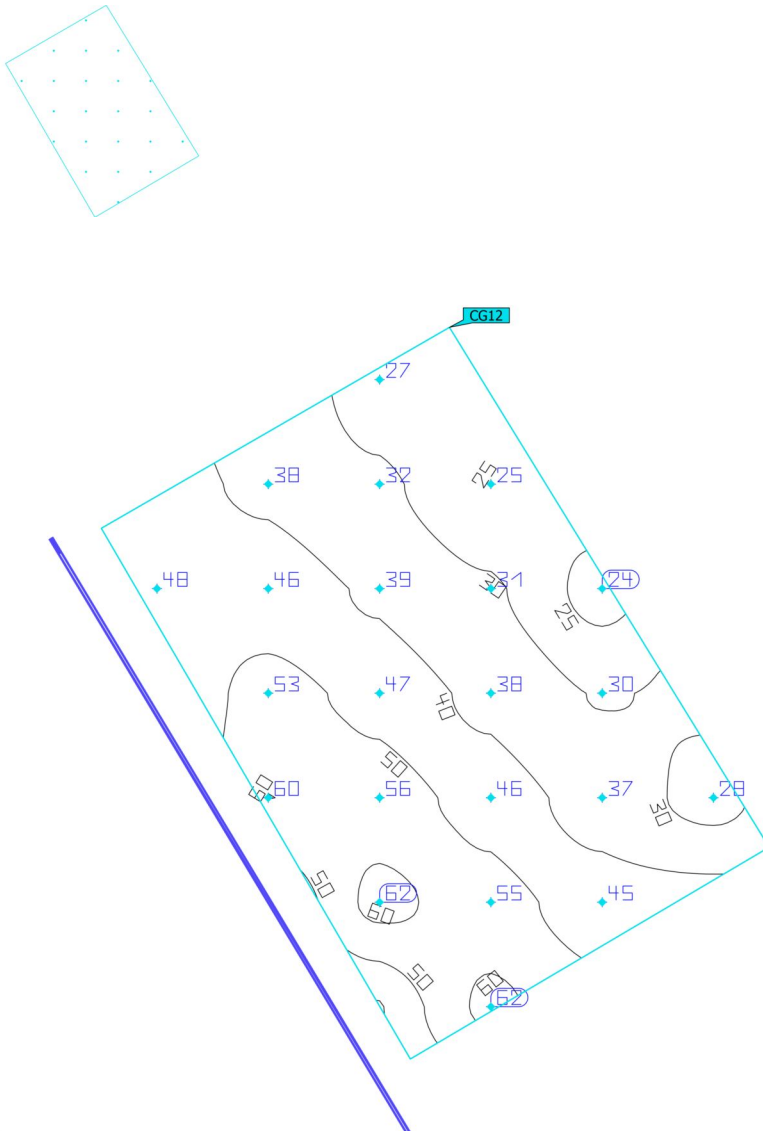Bottom of Ramp Access

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Bottom of Ramp Access Perpendicular illuminance Height: 0.160 m	42.2 lx	23.8 lx	62.0 lx	0.56	0.38	CG12

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))

(Light scene 1)

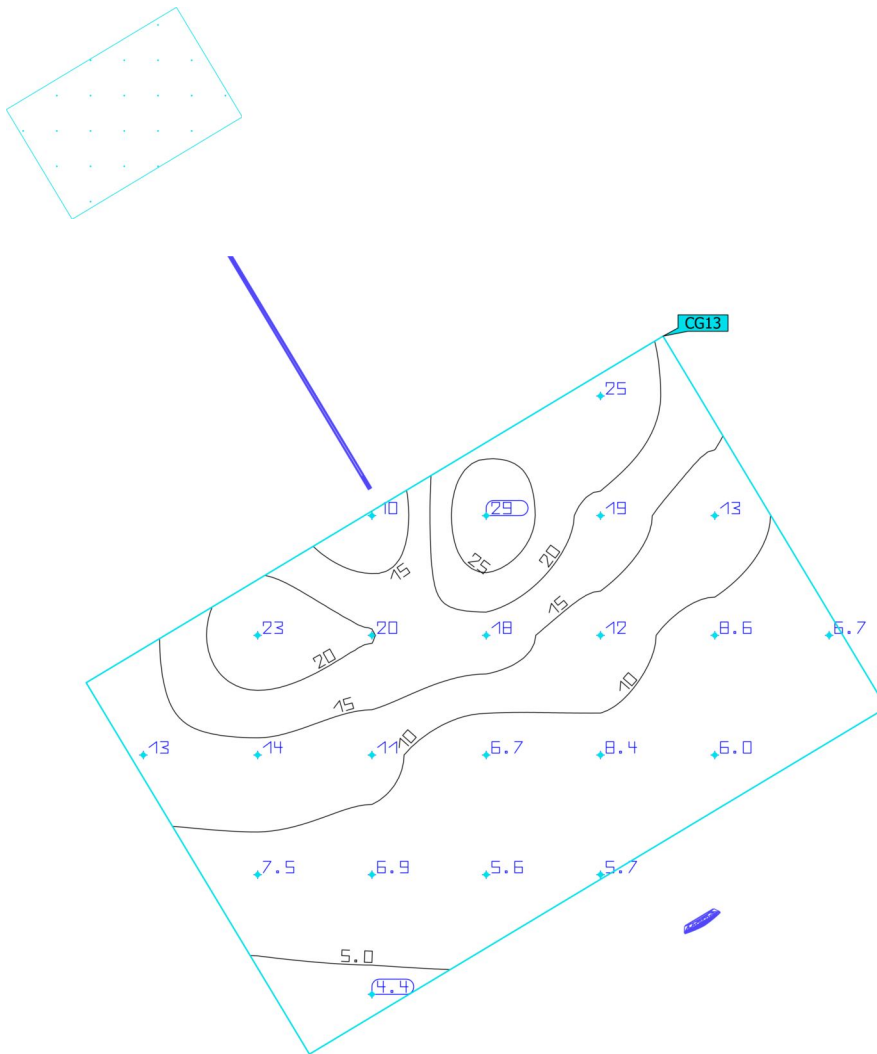
Midway of Ramp Access

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Midway of Ramp Access Perpendicular illuminance Height: 0.445 m	12.4 lx	4.42 lx	29.2 lx	0.36	0.15	CG13

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))

(Light scene 1)

Lower Ramp Access (slope)

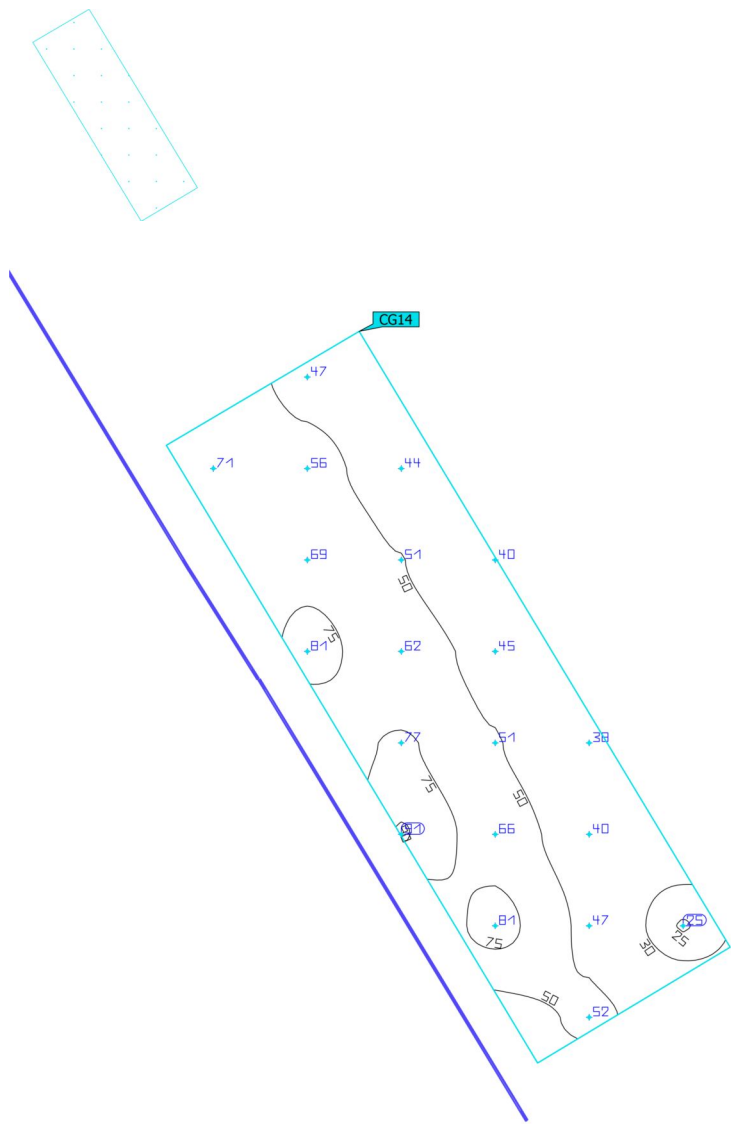

Properties	$\bar{E}$	E_{min}	E_{max}	$U_o (g_1)$	g_2	Index
Lower Ramp Access (slope) Perpendicular illuminance Height: 0.510 m	56.7 lx	24.8 lx	90.7 lx	0.44	0.27	CG14

Utilisation profile: DIALux presetting (5.1.4 Standard (outdoor transportation area))