



Paul Coughlan
JJF Group Ltd

HARRIS ARCADE

Colour Change

Tuesday, 6 May 2025

Prepared For MAPP

6 Issues Identified



HARRIS ARCADE TIMBER COLOUR CHANGE

Assigned To JJF Group Ltd

Specification for the colour change to the internal timber panelling.




PREPARATION:

Assigned To JJF group Ltd

All existing brown timber panelling are to be sanded down using 80 grit sandpaper.

Brush down timber with a soft brush and wipe down with a damp cloth.

This is to ensure a “keyed” and clean surface to work with.

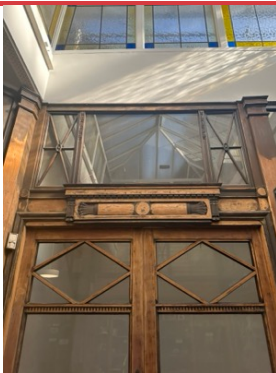

PREPARATION:

Assigned To JJF Group Ltd

H&S signage will be required during the works.

Floor protection required and barriers.



PREPARATION:

Assigned To JJF Group Ltd

Coordination with all shop owners relating to programme of works Required.

Working areas are to be left clean, protected and tidy after each working shift.



UNDERCOAT:

Assigned To JJF Group Ltd

Apply an external oil based flexible undercoat (Brilliant White) to all existing prepared timber panelling.

Undercoat is microporous and crack resisting.

Undercoat has up to 8 years life expectancy.



TOP COAT / FINISH

Assigned To JJF Group Ltd

Apply GORI 88 compact opaque wood finish.

Colour - Willow Tree By Dulux.

Up to 8 years life.

For cladding, fences and exterior structures

With slow release technology for longer protection.

Robust, non-drip, durable, water repellent and weather resisting.

For new and old wood.