


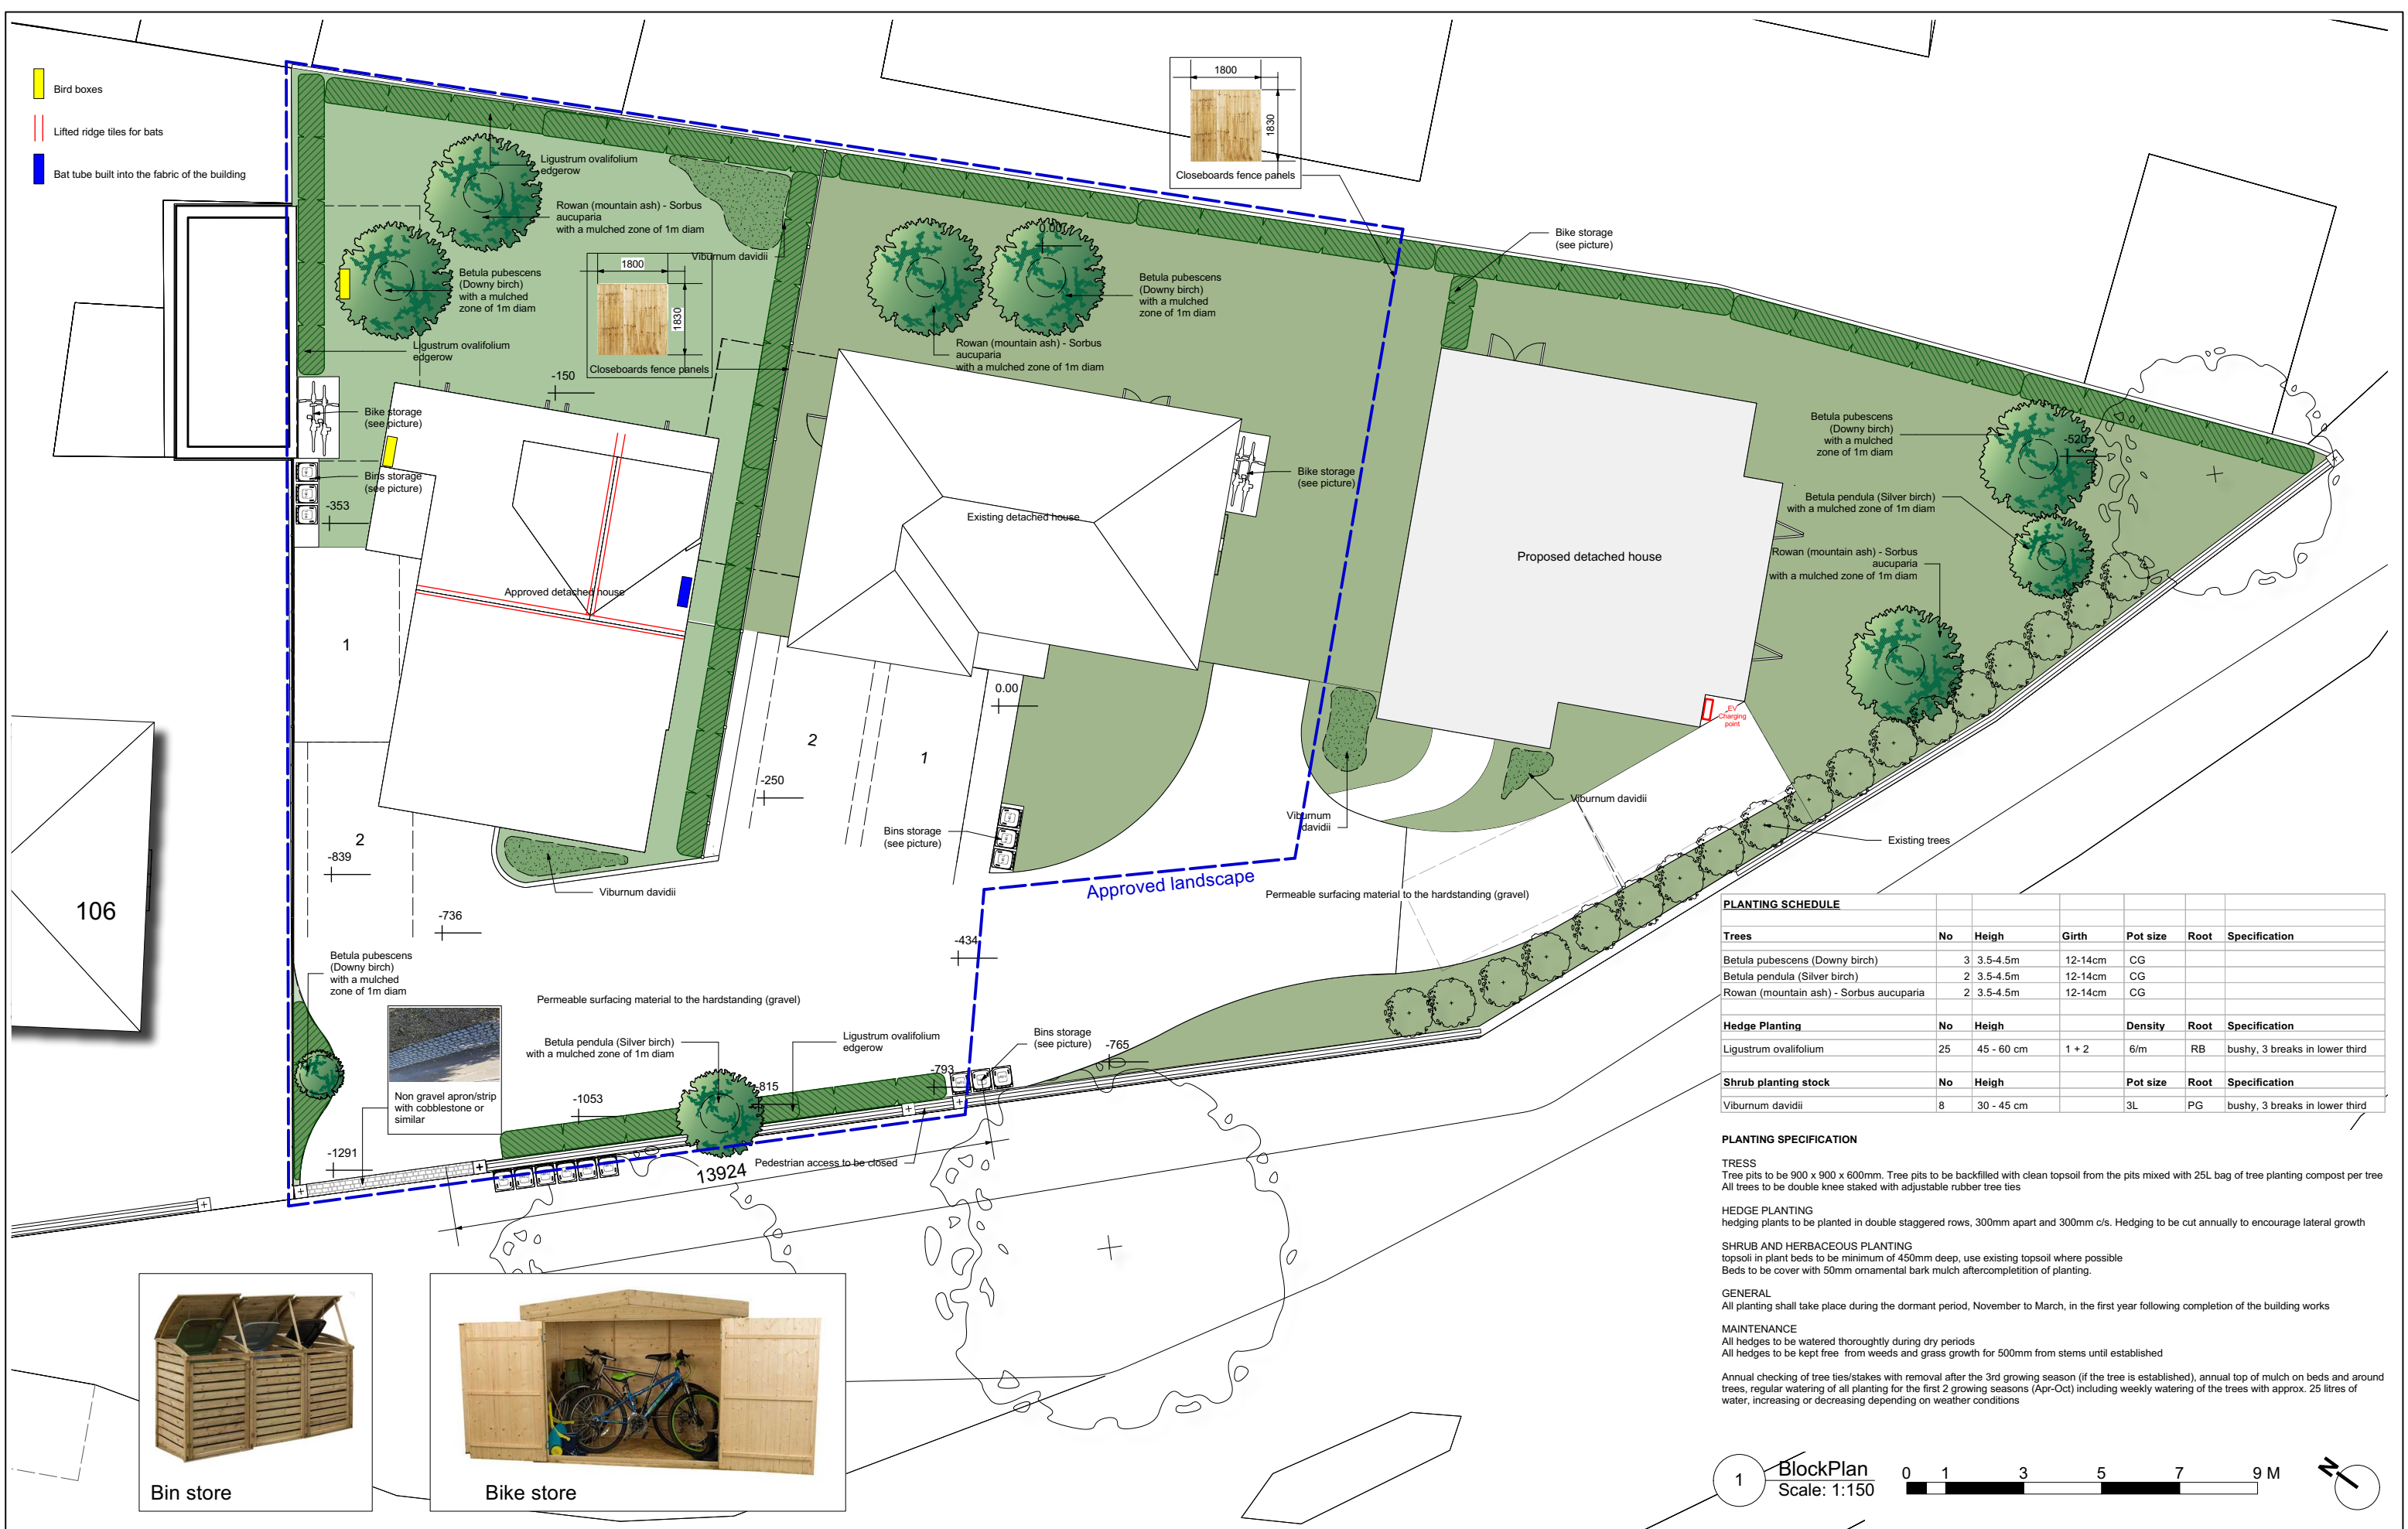

PLANTING SCHEDULE						
Trees	No	Heigh	Girth	Pot size	Root	Specification
Betula pubescens (Downy birch)	3	3.5-4.5m	12-14cm	CG		
Betula pendula (Silver birch)	2	3.5-4.5m	12-14cm	CG		
Rowan (mountain ash) - Sorbus aucuparia	2	3.5-4.5m	12-14cm	CG		
Hedge Planting	No	Heigh		Density	Root	Specification
Ligustrum ovalifolium	25	45 - 60 cm	1 + 2	6/m	RB	bushy, 3 breaks in lower third
Shrub planting stock	No	Heigh		Pot size	Root	Specification
Viburnum davidii	8	30 - 45 cm		3L	PG	bushy, 3 breaks in lower third

PLANTING SPECIFICATION

TRESS
Tree pits to be 900 x 900 x 600mm. Tree pits to be backfilled with clean topsoil from the pits mixed with 25L bag of tree planting compost per tree
All trees to be double knee staked with adjustable rubber tree ties


HEDGE PLANTING
hedging plants to be planted in double staggered rows, 300mm apart and 300mm c/s. Hedging to be cut annually to encourage lateral growth

SHRUB AND HERBACEOUS PLANTING
topsoil in plant beds to be minimum of 450mm deep, use existing topsoil where possible
Beds to be cover with 50mm ornamental bark mulch after completion of planting.

GENERAL
All planting shall take place during the dormant period, November to March, in the first year following completion of the building works

MAINTENANCE
All hedges to be watered thoroughly during dry periods
All hedges to be kept free from weeds and grass growth for 500mm from stems until established

Annual checking of tree ties/stakes with removal after the 3rd growing season (if the tree is established), annual top of mulch on beds and around trees, regular watering of all planting for the first 2 growing seasons (Apr-Oct) including weekly watering of the trees with approx. 25 litres of water, increasing or decreasing depending on weather conditions



104 B - Berkeley Ave 2024 v2.wks