




BLOCK PLAN
Scale 1:500

0 10 20
metres

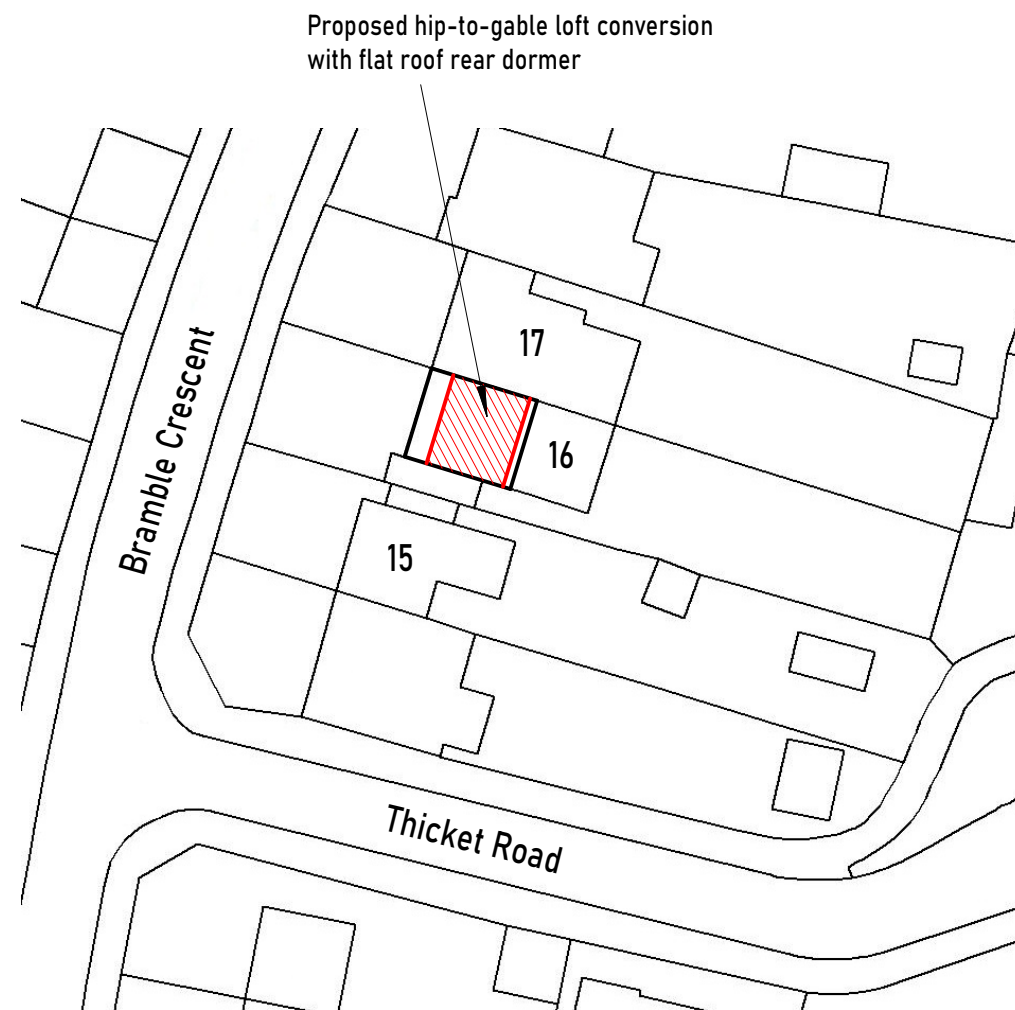

PARTY WALL ACT 1996 The owner, has a duty to serve a Party Structure Notice on an adjoining owner prior to the commencement of work if building work on, or near an existing Party Wall involves any of the following: Beam support, insertion of DPC, raising a wall or removing projections, demolition and rebuilding, underpinning or insertion of lead flashings, excavations within 3 metres of a neighbouring structure with shallower foundations, or within 6 metres of a neighbouring structure where the new foundations are to be substantially deeper.

INSPECTION AND COMPLETION OF WORKS Contractor to notify Building Control Department at all relevant stages of construction for inspection. This should include commencement, all interim stages and completion of works. Completion certificate to be obtained from Building Control at the end of the contract for handover to client.

PUBLIC SEWERS AND OTHER SERVICES. It is the homeowner's responsibility to determine whether there are any public sewers or manholes (typically owned by Thames Water) on the property and to advise S Biddle accordingly as the position of sewers or manholes could have a significant impact on the final design if they cannot be moved. Any 'Build-over Agreement' required for building within 3m or over a public sewer is the responsibility of the homeowner to secure from Thames Water. It is also the homeowner's responsibility to contact any other utility services (water, gas, electricity) where the utilities are suspected of crossing the site and to notify their contractor accordingly.

	STEPHEN BIDDLE BSc CEng FICE Email: stephen@sbiddle.co.uk Mob: 07864 122 313 Web: www.sbiddle.co.uk	
Title:	BLOCK PLAN	Scale: (A3) 1:500
Drwg No:	BROWN-0524-09	Rev: