




LEGEND:



CATEGORY 'B' TREES & TREE GROUP'S: Those of moderate quality and value; in such a condition as to make significant contribution (a minimum of 20 years is suggested)

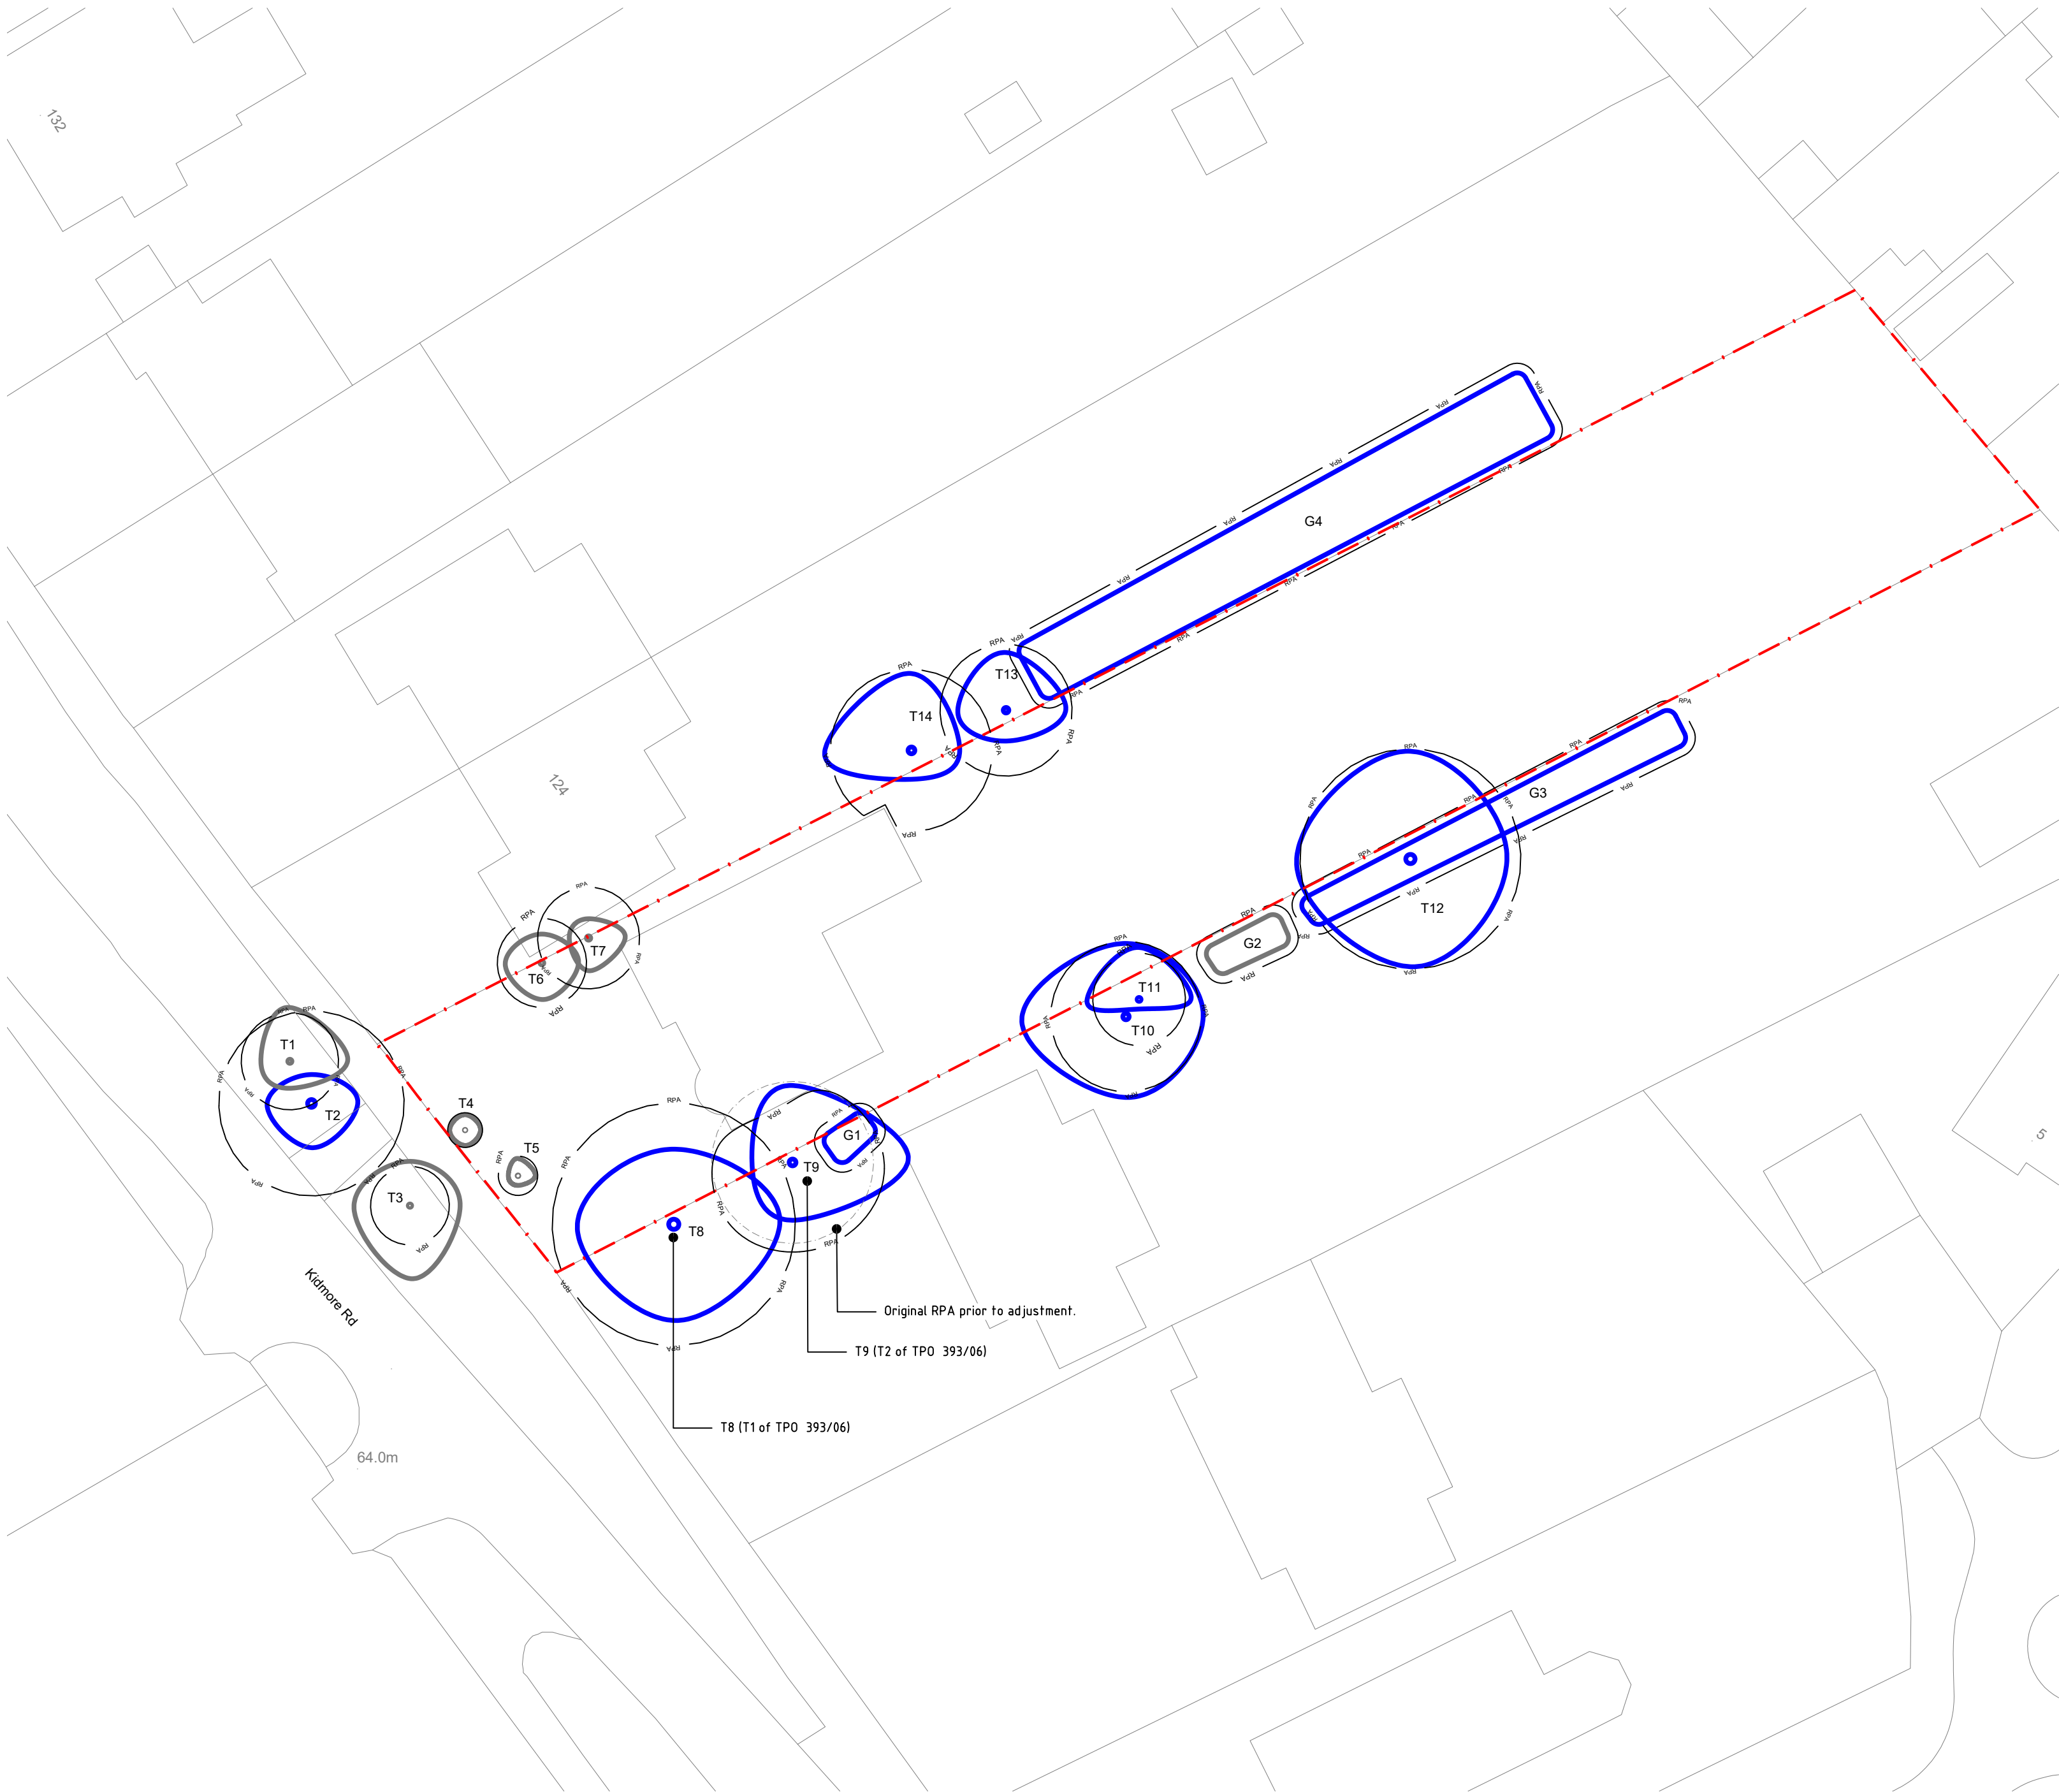

CATEGORY 'C' TREES & TREE GROUPS: Those of low quality and value; currently in adequate condition to remain until new planting could be established (a minimum of 10 years is suggested), or young trees with a stem diameter below 150 mm



Root Protection Area (RPA)



Site Boundary

NOTES:

1. Tree survey carried out on behalf of HAC Designs LTD for the proposed extension.
2. Tree survey was carried out on 14th of March 2023 by Mr Morgan Davies Ground Control's Arboricultural Surveyor.
3. Tree survey based on HAC DESIGNS LTD existing Location Plan 22048.S.PP-07.
4. Tree survey has been carried out in accordance with BS:5837:2012 'Trees in relation to design, demolition and construction - Recommendations' part 4.4. Please refer to these sections for further details.
5. Tree canopies outlines as shown on the plan are in accordance with the branch spread details within the tree schedule.
6. The location of trees and tree groups are based on visual inspection & estimation of location only due to not being supplied with Topographical drawing.

A	RPA amended for T14 to reflect pre existing site conditions	09.05.24	IH	LG
Rev.	Changes	Date	Dr.by	Ap.by



Ground Control®
Professional Services

Arboriculture
Ecology
Landscape Architecture
GIS & Mapping

Ground Control Ltd, Kingfisher House, Radford Way, Billericay, Essex CM12 0EQ
T: 01277 650 697 E: info@ground-control.co.uk www.ground-control.co.uk

Client
HAC DESIGNS LTD

Project (Address)
**122 Kidmore Road
Caversham, Reading
RG4 7NB**

Drawing title
Tree Constraints Plan

Date 15 March 2023	Drawn by IH	Checked by LG	Scale(s) 1:250@A2
Drawing No. J230306-GC-A-DR-3-001	Rev A	Issue status Planning	

- Notes:
1. © This drawing is the copyright of Ground Control Ltd and cannot be reproduced in any form without express consent of the company.
 2. Do not scale off this drawing. All written dimensions are to be checked on site prior to commencing works.
 3. All discrepancies, errors or omissions are to be reported for clarification before proceeding.

Tree Constraints Plan SCALE:1:250 @ A2

