



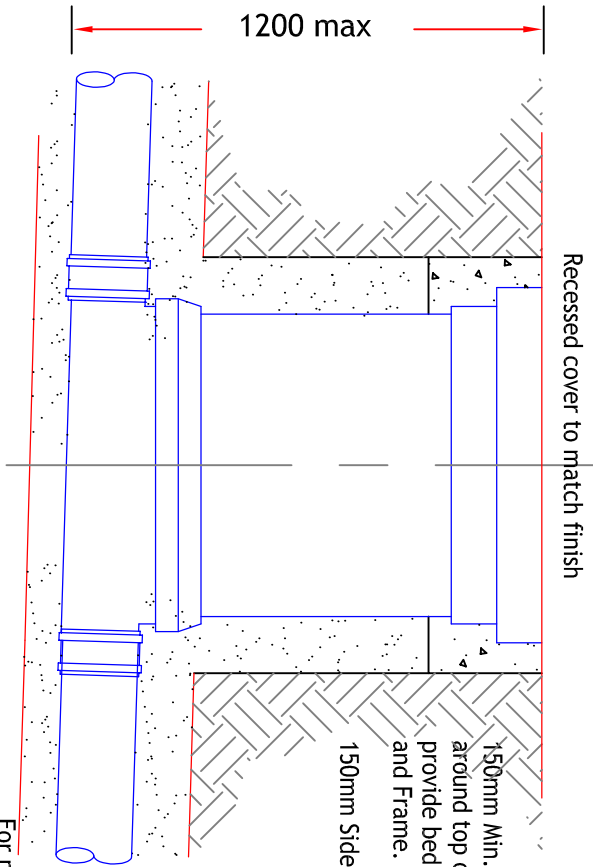


450mmØ INSPECTION CHAMBER TYPICAL INSTALLATION

(1:10)

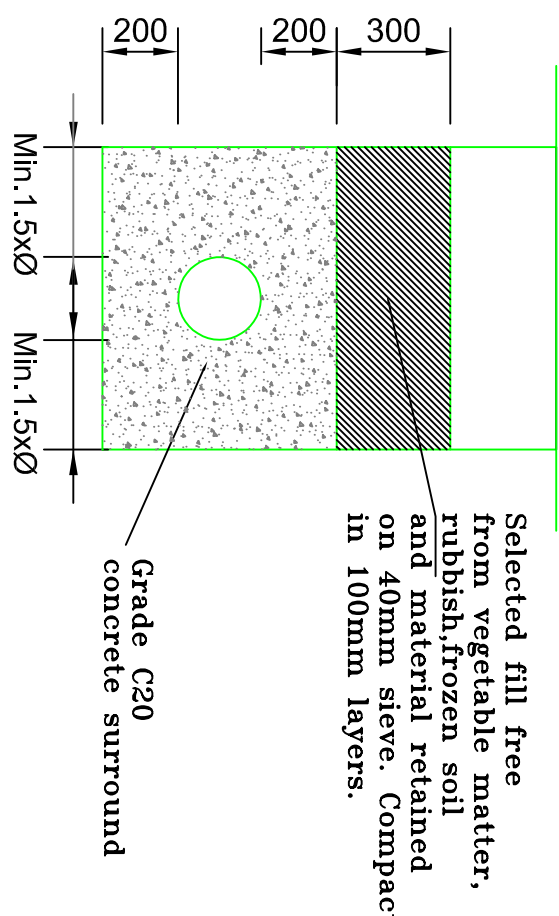


BEDDING FOR FLEXIBLE PIPES NEAR/UNDER FOUNDATIONS AND ROADS

Scale 1:20

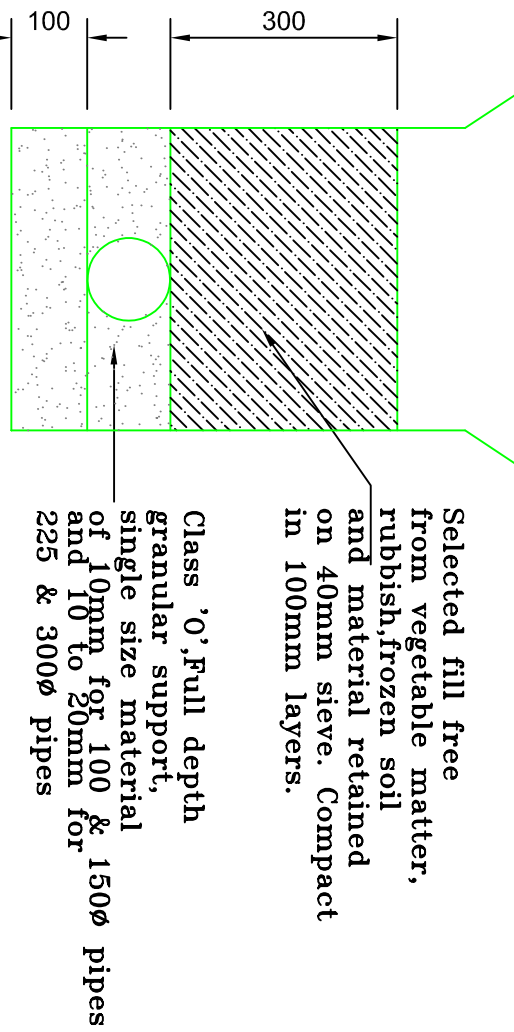

BEDDING FOR FLEXIBLE PIPES UNDER ROADS 900 to 1200mm DEEP

Scale 1:10

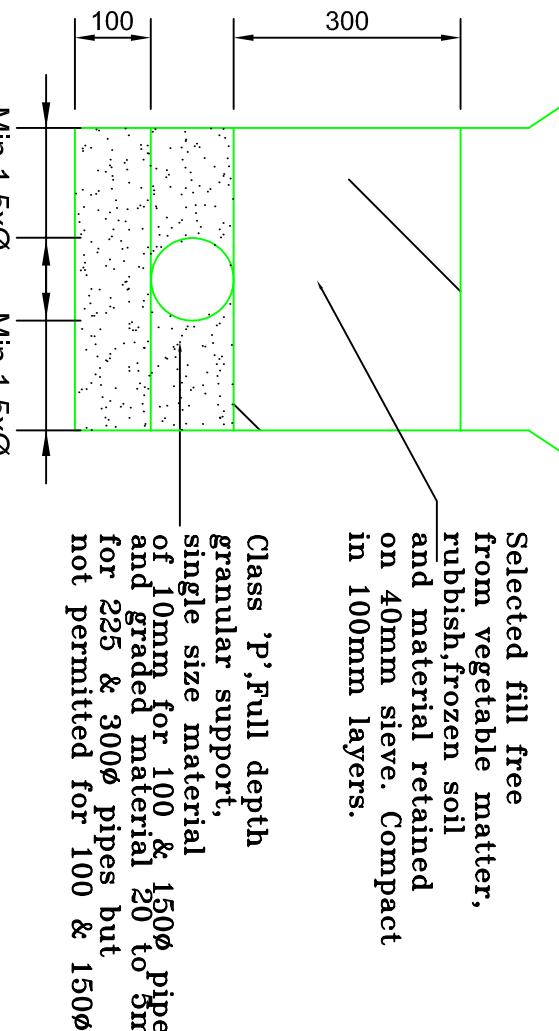

BEDDING FOR OTHER FLEXIBLE PIPES

Scale 1:10

NOTES

1. This drawing is to be read in conjunction with all relevant Engineers and Architects drawings, and the Specification.
2. All dimensions are in millimetres unless noted otherwise. All levels are in Metres Above an arbitrary datum and not to Ordnance Datum.
3. In accordance with CDM 2015 the Contractor is to:
 - Identify HSE of works.
 - Comply with the requirements of Health and Safety Plan(if applicable)
 - Provide risk assessments and method statements for all potential hazards relevant to this project.
4. The main contractor shall be responsible for the setting out and accuracy of all dimensions. He shall satisfy himself that the information given is correct and any discrepancies should be noted to the Engineer immediately.
5. DO NOT SCALE. If discrepancy or query arises on dimensions consult Engineer.
6. The Contractor is responsible for specifying product and codes and ordering of drainage materials.
7. All drainage to be installed to BS5955 Pt6 and in strict accordance with the manufacturers instructions.
8. All pipework to be vitrified clay not plastic.
9. All drainage pipes on this dwg to be 100mmØ unless shown otherwise. Min. falls 1/80 for foul and 1/100 for storm drainage.
10. Cover grades - D400 - drainways. B125 - drainways for light traffic. A15 - inaccessible to vehicles
11. Sewer runs and manholes to be adopted are to be in accordance with Sewers for Adoption, 6th Edition.
12. Any drainage laid less than 600mm below FGL to be covered with minimum 150mm Gen 3 grade concrete to half diameter.
13. Stormwater soakaways to be a minimum of 5.0m from new buildings.
14. Provide 100x100 PCC lintel max span 650mm where syp exit the building.
15. No new foul drainage connection to be made until the Contractor has obtained the required permissions from Southern Water.

