

Balanced Vertical Slider (BVS).

Vertical sliding secondary glazing units designed specifically to accompany sash windows. These discreet units house self-supporting panes that remain in place at any chosen position.

NEW: Slidepass feature available, which enables both panels to slide entirely past one another, ensuring the whole of the secondary unit can be accessed and cleaned.

Features

- Slim, unobtrusive aluminium profile
- Smooth sliding action utilising spring balances to ensure ease of use and to support the weight of panel
- Improved noise and thermal installation
- Enhanced security
- Suitable for arched applications
- Suitable to have bevelled timber subframe to fix in to bays / splayed reveals
- Can be coupled or stacked with other units in the range to treat large areas of glazing or long runs of windows

Specification


- Glazing options: 4mm in our Classic range
- Glazing options: 6mm – 10.8mm in our Enhanced range
- Choice of timber subframes
- Pre-drilled and countersunk for face fix and reveal fix through timber. Reveal fix through aluminum is self-drilled
- Woolpile & Q-Lon inserted into panel section groove for additional noise and thermal insulation
- Gasket colour – white as standard, black also available upon request
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour 9003 Satin White
- Push button lock located centrally on mid rail

Variations of Basic Unit

- Slide pass version of the unit available
- Standard and acoustic trickle vents are available
- Larger trims and timber trims available at additional costs
- Variety of stock colours available, plus access to over 200 RAL Colours (charges apply)
- Curved in plan option available

Optimum Noise Reduction: 50dB (Rw)
Using 6mm toughened primary glazing and 6.8mm acoustic laminate secondary glazing.

Optimum U Value: 1.5 W/m2K
Using 4mm toughened Low E glazing, with 80mm glass-to-glass

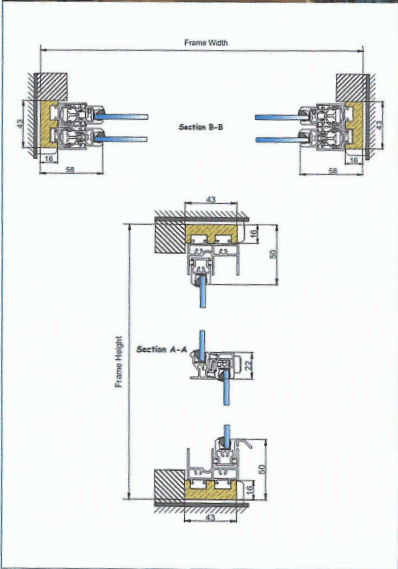

BVS

MAX WIDTH
1,575mm
MAX HEIGHT
3,025mm

www.grnadaglazing.com

Horizontal Slider.

A slim and versatile horizontal sliding system that provides easy access for cleaning and ventilation, and is suitable for treating most window types. Available with 2, 3, 4 or 5 sliding panels.

Features


- Slim, unobtrusive aluminium profile
- Smooth sliding action on panels for easy operation using brass wheels
- All panels lift out for complete access to primary window
- Improved noise and thermal installation
- Suitable to have bevelled timber subframe to fix in to bays/splayed reveals
- Can be coupled or stacked with other units in the range to treat large areas of glazing or long runs of windows
- Available in right hand (RH) or left hand (LH) orientation

Specification

- Glazing options: 4mm in our Classic range
- Glazing options: 6mm – 10.8mm in our Enhanced range
- Choice of timber subframes
- Pre-drilled and countersunk for face fix and reveal fix through timber. Reveal fix through aluminum is self-drilled
- Woolpile inserted in to panel section groove to create outer frame seal
- Gasket colour – white as standard, black also available upon request
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour 9003 Satin White

Variations of Basic Unit

- Locking push button available to secure panels (fitted to the interlock sections)
- Standard and acoustic trickle vents are available
- Unit available with no subframe – reveal fix only and self-drilled
- Larger trims and timber trims available at additional cost
- Variety of stock colours available, plus access to over 200 RAL Colours (charges apply).

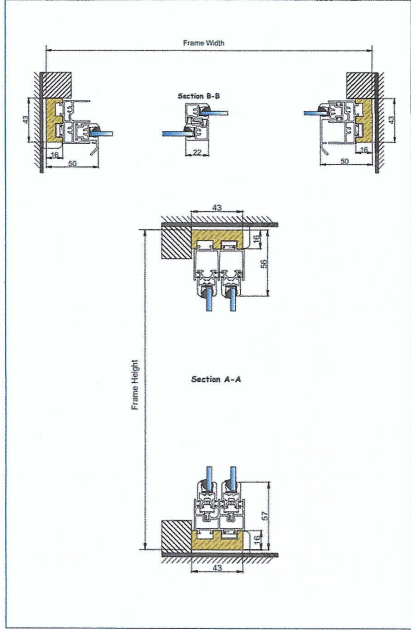


HS2




MAX WIDTH
4,934mm
MAX HEIGHT
2,768mm

HS3




MAX WIDTH
4,934mm
MAX HEIGHT
2,768mm

HS4



MAX WIDTH
4,934mm
MAX HEIGHT
2,768mm

HS5



MAX WIDTH
4,934mm
MAX HEIGHT
2,768mm



Optimum Noise Reduction: 49dB (Rw)
Using 6mm toughened primary glazing and 6.8mm acoustic laminate secondary glazing.



Optimum U Value: 1.5 W/m2K
Using 4mm toughened Low E glazing, with 80mm glass-to-glass

www.grnadaglazing.com

© This drawing remains the property of The Keen Partnership and shall not be copied without prior written consent.

All dimensions to be checked on site and any discrepancies to be reported before work commences.

Notes:

Date	Rev	Comments	By	Chk'd

--

THE KEEN PARTNERSHIP
The Courtyard
Edinburgh Road
Reading RG30 2UA
Tel: 0118 9510 855
Fax: 0118 9510 866
chris@keenpartnership.co.uk
www.keenpartnership.co.uk



Job Title:

at 155 Oxford Rd, Reading RG1 7UY

Drawing Title:

Structure - Grenada Windows

Drawing Date:

19/02/24

Issue Date:

11/12/2025

Status:

Structure - Drainage

Drawn By:

CM

Scale:

1:50@A3

Drawing No:

BR-200.2

Rev: