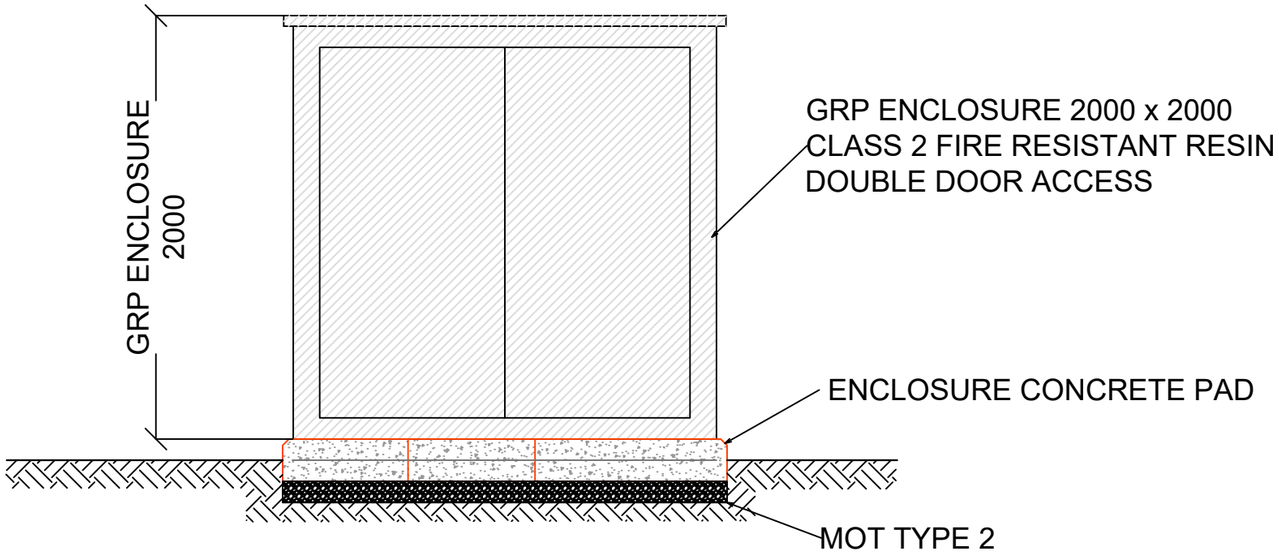

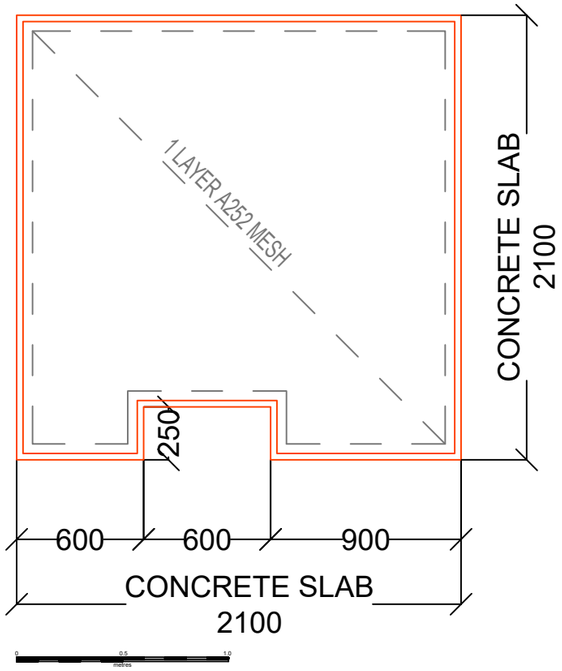

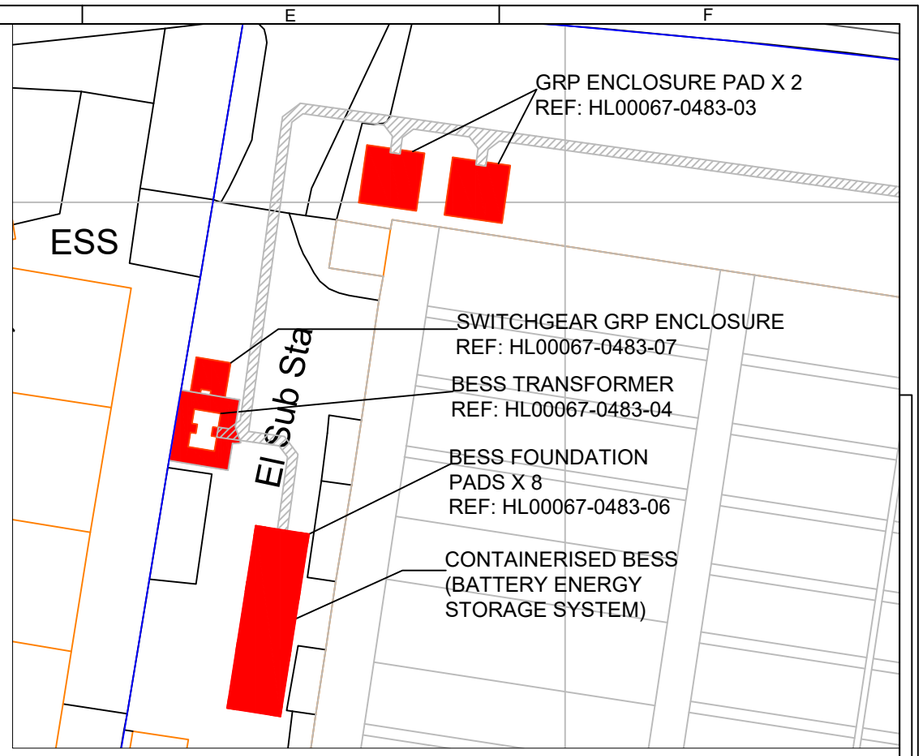

TYPICAL GRP ENCOSURE ON BASE

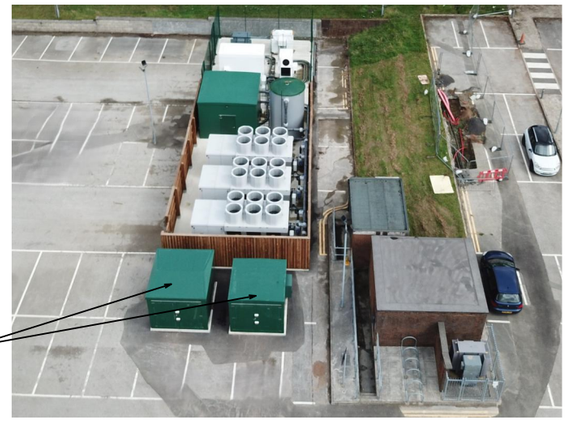

100MM MOT TYPE 2 SUB BASE LAID AND COMPACTED ONTO PREPARED BED LAYER.
1NO. A252 MESH GRID INCORPORATED INTO CONCRETE WITH MINIMUM COVER OF 75MM.
C40 CONCRETE SLAB (MINIMUM 200MM).

REV	DESCRIPTION	BY	CHECKED	DATE
02	GRP ENCLOSURE ADDED FOR PLANNING	MLB		23-03-26
01	ISSUED FOR TENDER	MLB	LB	05-12-25

AMENDMENTS

DRAWING STATUS: F - FOR INFORMATION, T - TENDER, C - CONSTRUCTION, A - AS BUILT

Site	Project	Drawing	Sheet	Discipline	Site	Prefix	Suffix	Status	Revision
ACTIVATE LEARNING - READING COLLEGE CAMPUS	HL00067	0483	07_of_09	C	RC	GA	GEN	T	01

Title	Date	Originator	Scale	
SWITCHGEAR GRP ENCLOSURE PAD - BESS	13-11-25	MLB	NTS	A3

HI GROUP

The HI Group
Century House
Daleside Road
Nottingham
NG2 4DH
T:+44 (0)331 360 9060
W: higroupltd.co.uk