


_InsightLighting Room Schedule										
Daylight Factor Whole Building Results: Reading, UK										
15% of points are between 2.0-20.0%										
Daylight Factor Sky (unshaded horizontal 100%)										
Level	Name	Include In Daylighting	Automate d Shades	DF Sky threshold results						ADF %
				within threshold		above threshold		below threshold		
				%	Area	%	Area	%	Area	
Level 0	Bedroom 4	Yes	No	15	1 m²	0	0 m²	85	8 m²	1.3

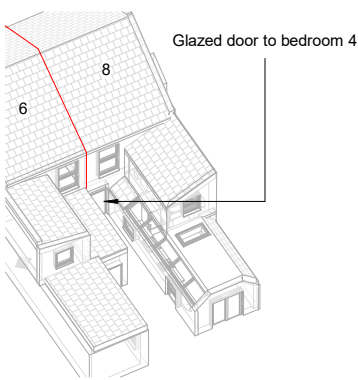

Crescent Road 6 & 8 3D model

This drawing has been based upon a measure survey by others. The contractor is responsible for checking dimensions, tolerances and references.

Any discrepancy to be verified with the Architect before proceeding with the works. Where an item is covered by drawings to different scales the larger scale drawing is to be worked to.

CDM REGULATIONS 2015.
All current drawings and specifications for the project must be read in conjunction with the Designer's Hazard and Environment Assessment Record.
All intellectual property rights reserved.

Rev	Description	Date
1	Planning Submission	06/08/24

STATUS	PURPOSE OF ISSUE
--------	------------------



PROJECT	8 Crescent Road - C3 to C4
---------	----------------------------


TITLE	Daylight Factor Analysis
-------	--------------------------

CLIENT	Giorgi Chitidze
--------	-----------------

DRAWN BY Author	CHECKED BY Checker	DATE 07/22/24
--------------------	-----------------------	------------------

SCALE (@ A3)	PROJECT NUMBER AA011
--------------	-------------------------

DRAWING NUMBER PL300	REV 1
-------------------------	----------

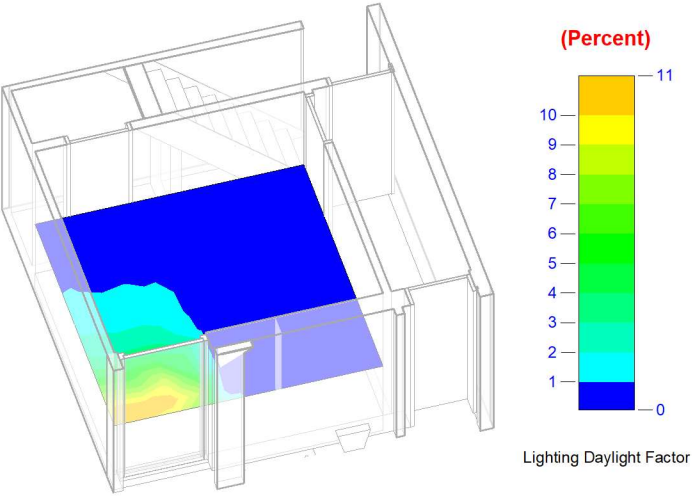

_InsightLighting Model View Bedroom 4