




1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL.

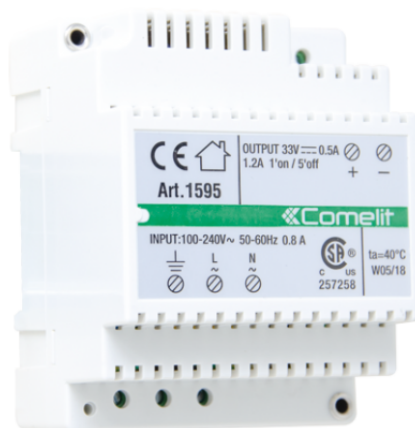

Power supply unit with 110-230V primary and 33Vdc 500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 28.2"x3.5"x2.4". (4 DIN modules)

**1595****33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL.****MAIN FEATURES**

Supply voltage	120÷230
Applicable to DIN rail	Yes
Number of DIN modules (n°)	4
Max. current delivered (A)	1.2

GENERAL DATA

Height (mm)	62
Width (mm)	71.7
Depth (mm)	90
Type of finish	Plastic
Operating temperature (°C)	-20 ÷ 40

COMPATIBILITY

Simplebus 2 audio/video system	Yes
Building Kit audio/video system	Yes
Simplebus 2 audio system	Yes
Simplebus 1 audio system	Yes
Vip system	Yes
Kit audio/video system	Yes

ELECTRICAL SPECIFICATIONS

Maximum power delivered (W)	60
-----------------------------	----