


Inset Location Plan

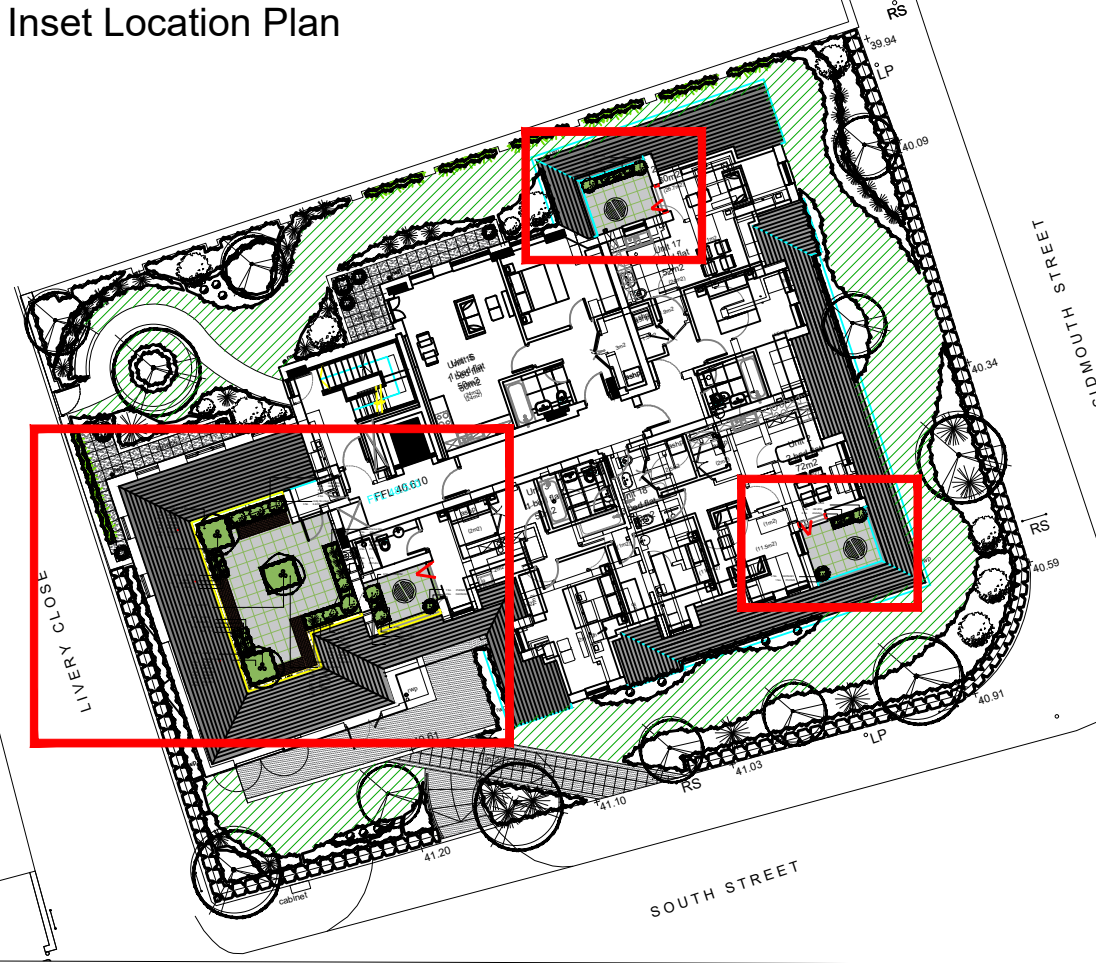

Planting Schedule

Trees						
Number	Abbreviation	Species	Specification	Girth	Height	
1 -	B u j	Betula utilis jacquemontii	Advanced Nursery Stock: Multistem 3 stems :Clear Stem min. 150 :C		3.0-3.5m	
1 -	CERCAFP	Cercis canadensis 'Forest Pansy'	Advanced Nursery Stock: Multistem 3 stems :Clear Stem min. 150 :C		3.0-3.5m	
1 -	MAGST	Magnolia stellata	3 Stems :3/5 brks		150-175cm	
Total :3 -						

Shrubs						
Number	Abbreviation	Species	Specification	Height	Pot Size	Density
1 -	AMELAM	Amelanchier lamarckii	Multistem 3 stems :3/5 brks :C	175-200cm	15-20L	Counted
1 -	Ccn	Convulvulus cneorum	Bushy :3/4 brks	30-40cm	10L	Counted
3 -	FATJAVA	Fatsia japonica 'Variegata'	Branched :4/6 brks	100-125cm	15L	Counted
4 -	ILECR	Ilex crenata	Bushy: Clipped Holly box ball :3/6 brks	40-60cm	10L	Counted
2 -	PHOMS	Phormium 'Maori Sunrise'	Bushy :5/6 brks	30-40cm	10L	Counted
2 -	SARHODIPS	Sarcococca hookerana digy: 'Purple Stem'	Bushy :3/6 brks :C	30-40cm	10L	Counted
2 -	SJRu	Skimmia japonica 'Rubella'	Bushy :5/6 brks	30-40cm	10L	Counted
1 -	VIBOPCO	Viburnum opulus 'Compactum'				Counted

Herbaceous				
Number	Abbreviation	Species	Specification	Pot Size
6 -	AGAALL	Agapanthus albus	Full Pot :C	10L
6 -	GEROXATJ	Geranium oxonianum 'A T Johnson'	4 Buds :Full Pot	3L
2 -	HAKAURA	Hakonechloa macra 'Aureola'	4 Buds :Full Pot	5-7.5L
17 -	HEUPM	Heuchera 'Pewter Moon'	Full Pot	5L
6 -	HEUPM	Heuchera 'Pewter Moon'	Full Pot	5L

Ferns				
Number	Abbreviation	Species	Specification	Pot Size
6 -	DRYER	Dryopteris erythrosora	Full Pot	3L

Planter Mix						
Number	Abbreviation	Species	Specification	Density	Height	Pot Size
6 -	ASn	Astilbe 'Snowdrift'	Full Pot	12/m²		3L
10 -	EUOFOHA	Euonymus fortunei 'Harlequin'	Bushy :4/6 brks :C	12/m²	30-40cm	3L
10 -	HEBALRE	Hebe 'Red Edge'	Bushy :4/6 brks :C	12/m²	30-40cm	3L
8 -	HEMCD	Hemerocallis 'Cream Drop'	Full Pot	12/m²		5-7.5L
8 -	PENSEP	Pennisetum setaceum 'Purpureum'	Full Pot	12/m²		3L
10 -	POLSE	Polystichum setiferum	Full Pot	12/m²		3L
Total :52 -						

Planter Shade Mix 1						
Number	Abbreviation	Species	Specification	Density	Height	Pot Size
6 -	ACAMO	Acanthus mollis	Full Pot Bushy Specimen	12/m²		5-7.5L
9 -	BLESP	Blechnum spicant	Full Pot	12/m²		5-7.5L
6 -	BRUMAV	Brunnera macrophylla 'Variegata'	Full Pot Bushy Specimen	12/m²		5-7.5L
6 -	DRY MAS	Dryopteris filix-mas	Full Pot	12/m²		5-7.5L
9 -	EUPAMP	Euphorbia amygdaloides 'Purpurea'	Full Pot Bushy Specimen	12/m²		5-7.5L
9 -	HEUCHR	Heuchera 'Chocolate Ruffles'	Full Pot Bushy Specimen	12/m²		5-7.5L
9 -	PULOFFA	Pulmonaria officinalis 'Sissinghurst White'	Full Pot Bushy Specimen	12/m²		5-7.5L
6 -	V d	Viburnum davidii	Bushy :5/7 brks :C	12/m²	30-40cm	5L
Total :60 -						

PLANTING NOTES

All plants to be supplied in accordance with the HTA 'National Plant Specification' and from a HTA certified nursery. All plants and trees to be planted in accordance with BS5308 and BS8545. Delivery and handling of all plant material to be in accordance with BS4428/JCLIPSE Code of Practice for 'Handling and Establishing Landscape Plants' Parts I, II and III and BS8545.

Copyright reserved

1:20 @ A1

0m 0.2m 0.4m 0.8m

KEY:

- Proposed Trees (to be underground guyed within base of planter)
- Proposed Multistem Trees (to be underground guyed within base of planter)
- Proposed Feature Shrub
- Proposed Ornamental Shrubs (50mm Bark mulch to be included around planting)
- Proposed Sheldon Timber Bench
- Proposed Aluminium Stratum Planter
- Proposed Braemar Flag Paving
- Illustrative Bistro Patio Table

Planting and associated operations shall comply with BS4043, BS4428, BS5837 and BS8545.


Watering

All plants shall be watered in to field capacity immediately after planting and mulched with 50mm depth of medium grade crushed mulch. The Contractor shall water the trees, shrubs and hedges once planted so that the entire tree pit or planted area is moistened to field capacity, i.e. 'the amount of water retained by previously saturated soil once full drainage has ceased'. Watering to field capacity shall continue frequently and on a regular basis as considered necessary by the landscape contractor and as necessary to ensure the successful establishment and continued thriving of all planting. Additional watering shall be undertaken during summer months and/or periods of drought. Post planting management and maintenance specifically for new tree planting shall include ongoing irrigation and formative pruning as outlined in BS8545. The period over which regular irrigation required for transplanted trees is likely to be at least two full growing seasons to ensure successful establishment. As the root system develops the frequency of irrigation can be reduced.

Staking

Trees within planters to be underground guyed unless otherwise specified.

N.B. All planting proposals including tree planting have been developed in order to create a high quality environment and gain planning consent for the development. All tree species have been reviewed in line with NHBC guidance (2017) and in the absence of any building foundation depths or detailed soil analysis information for the site. Where possible only low and moderate water demand species are proposed in close proximity to new buildings. A number of varied cultivars of these species as well as ornamental species that have a smaller overall mature height (which are not currently assessed within NHBC guidance 2017) are proposed to provide variety in the scheme and engineer's should consider these locations & species. Where necessary new building foundation depths shall be designed to accommodate the approved tree species, site specific soil shrinkage and tree water demand in line with NHBC standards 2017 (Chapter 4.2 - Building Near Trees). Planting plans have been prepared for planning purposes and in the absence of fully detailed ground investigations, geological or hydrological surveys and planting design or species choice may be subject to change - suitability should be confirmed on site by the landscape contractor. Detailed site specific soil analysis and suitable site drainage should be checked by landscape contractor to ensure planting can be implemented in accordance with approved drawings prior to implementation.

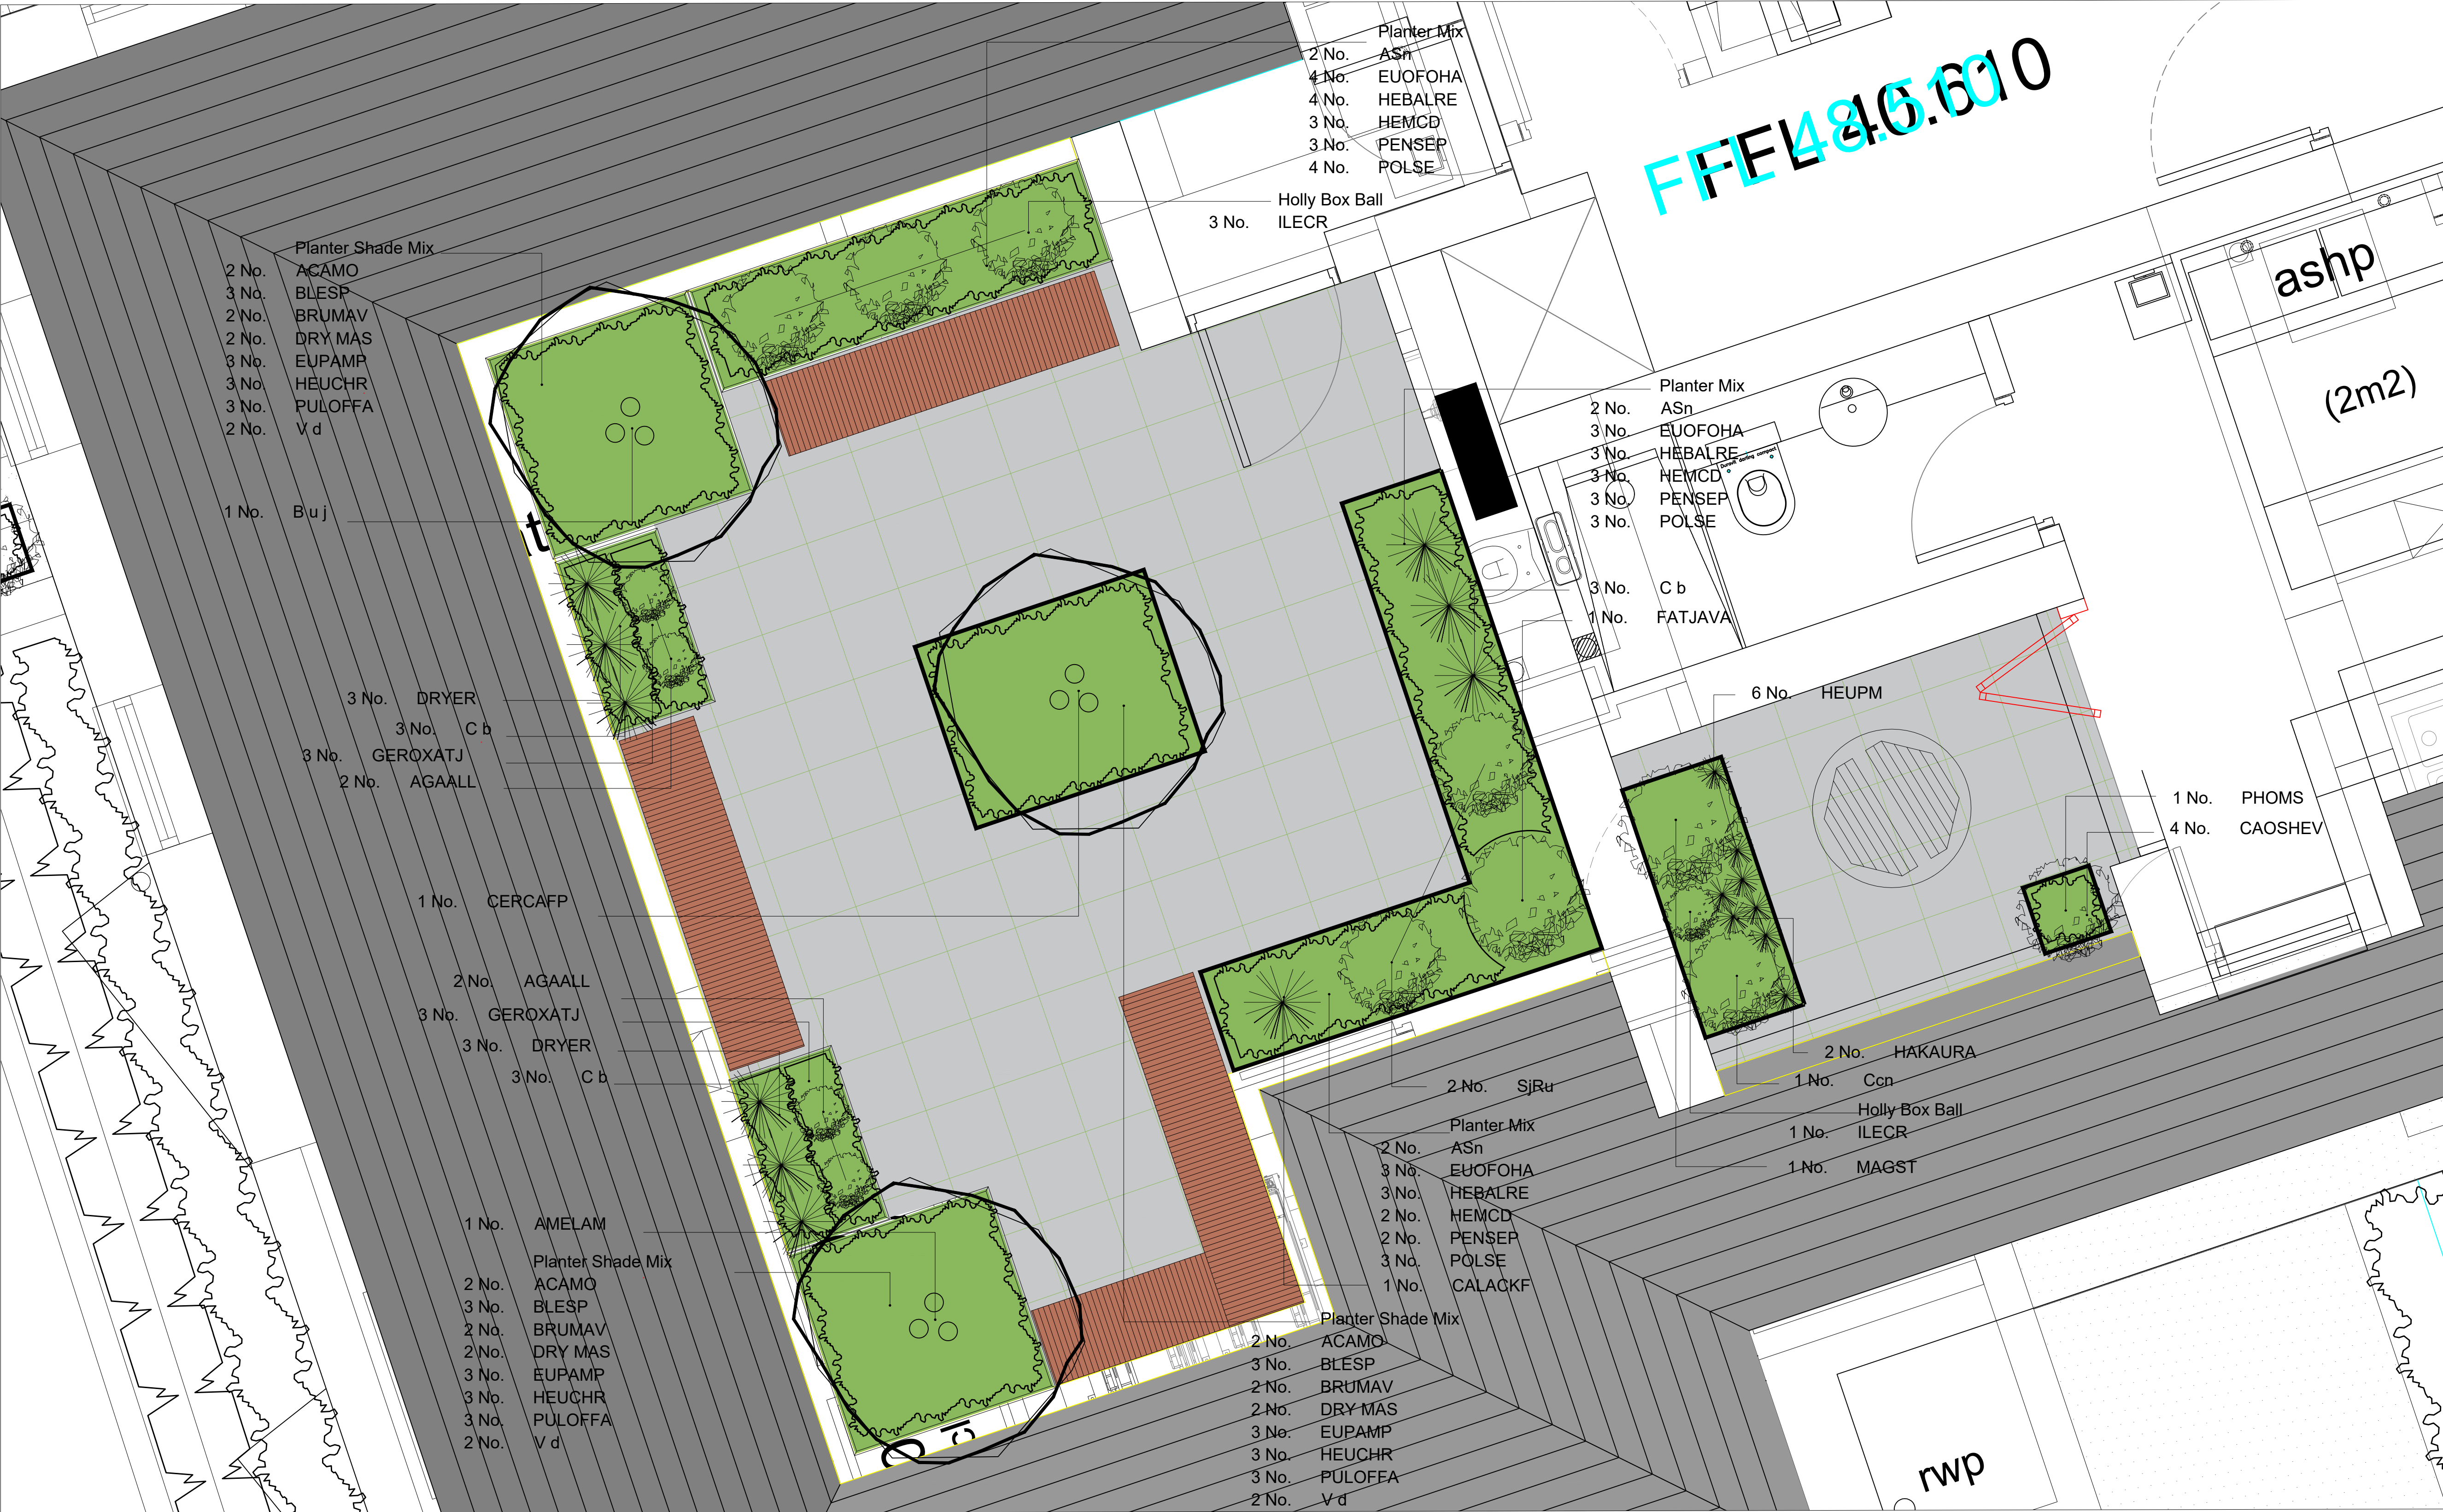

NB: Species within planting mixes to be planted in groups or 3, 5, and 7's in random positions ensuring that contrasting blocks are provided.

Decorative Bark mulch to be supplied in 30-40mm chip size and applied at a depth of 50mm around landscaping to restrict weed growth and retain moisture.

FOR PLANNING

REV	DATE	NOTE	Drawn/Chkd

aspect landscape planning

TITLE

Trinity Hall, South Street Reading
3rd Floor & Roof Terrace Landscape Plan

CLIENT

Paul Butt Planning Ltd

SCALE 1:20@A1

DATE JUL 2024

DRAWN CW

CHKD CW

DRAWING NUMBER 8493.PP.2.0

REVISION