
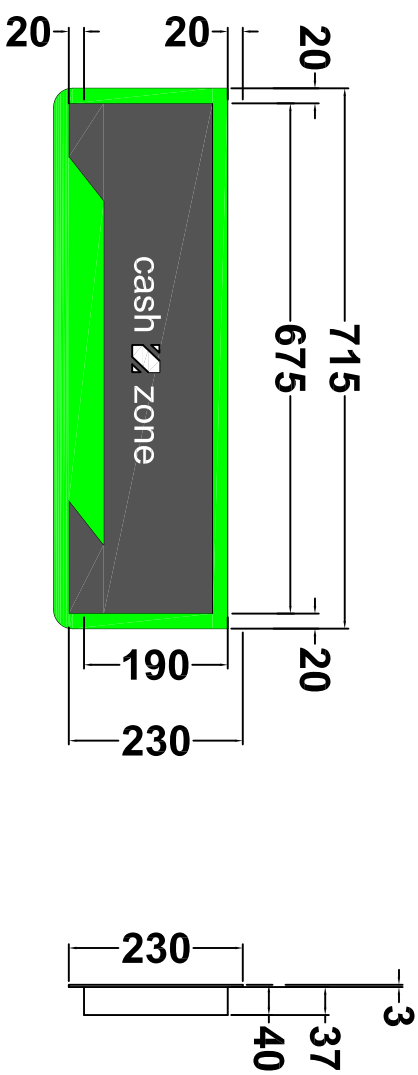


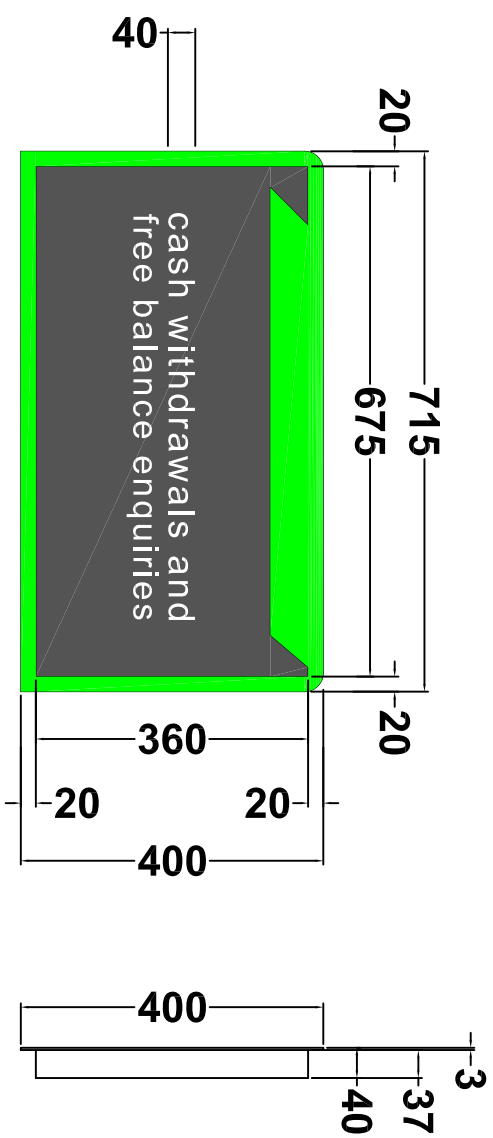


TECHNICAL INFORMATION:

- CONSTRUCTED USING GRP MANUFACTURING PROCESS. DURALITE IS USED FOR THE SURROUND, AND INSET LOGO/LETTERING.

METHOD OF ILLUMINATION:

- LED - ROWS OF LED LIGHTS BEHIND THE TEXT AND TO THE EDGE OF THE BLACK RAISED AREA
- WHITE LETTERING IS TRANSLUCENT
- STATIC ILLUMINATION
- INTERNAL ILLUMINATION
- APPROX. >60 lux @ 1.0 METRE AND WITH AMBIENT LIGHTING >80 lux
- BLACK AND GREEN - PMS 369



drawing approval									
TITLE		03					NAME:-		
PTU ILLUMINATED UNIVERSAL TOP & BOTTOM SIGN (6625 CAE, 6625 ADV, 6625 STD, WINCOR 285 & 5887)		02		6625 STD ADDED TO DESCRIPTION			CT	20/11/25	
DRAWN		DATE		SCALE		DRAWING CHECK AND LOGO UPDATE		14/08/25	CT
NC & MK		01/12/2022		1:10 @ A3					
REF/ORG No.		SHEET No.		REVISION				DATE	BY
NCRA0002		SHEET 1		2				DATE:-	SIGNED:-
				REVISION DESCRIPTION					



NCR ATLEOS