


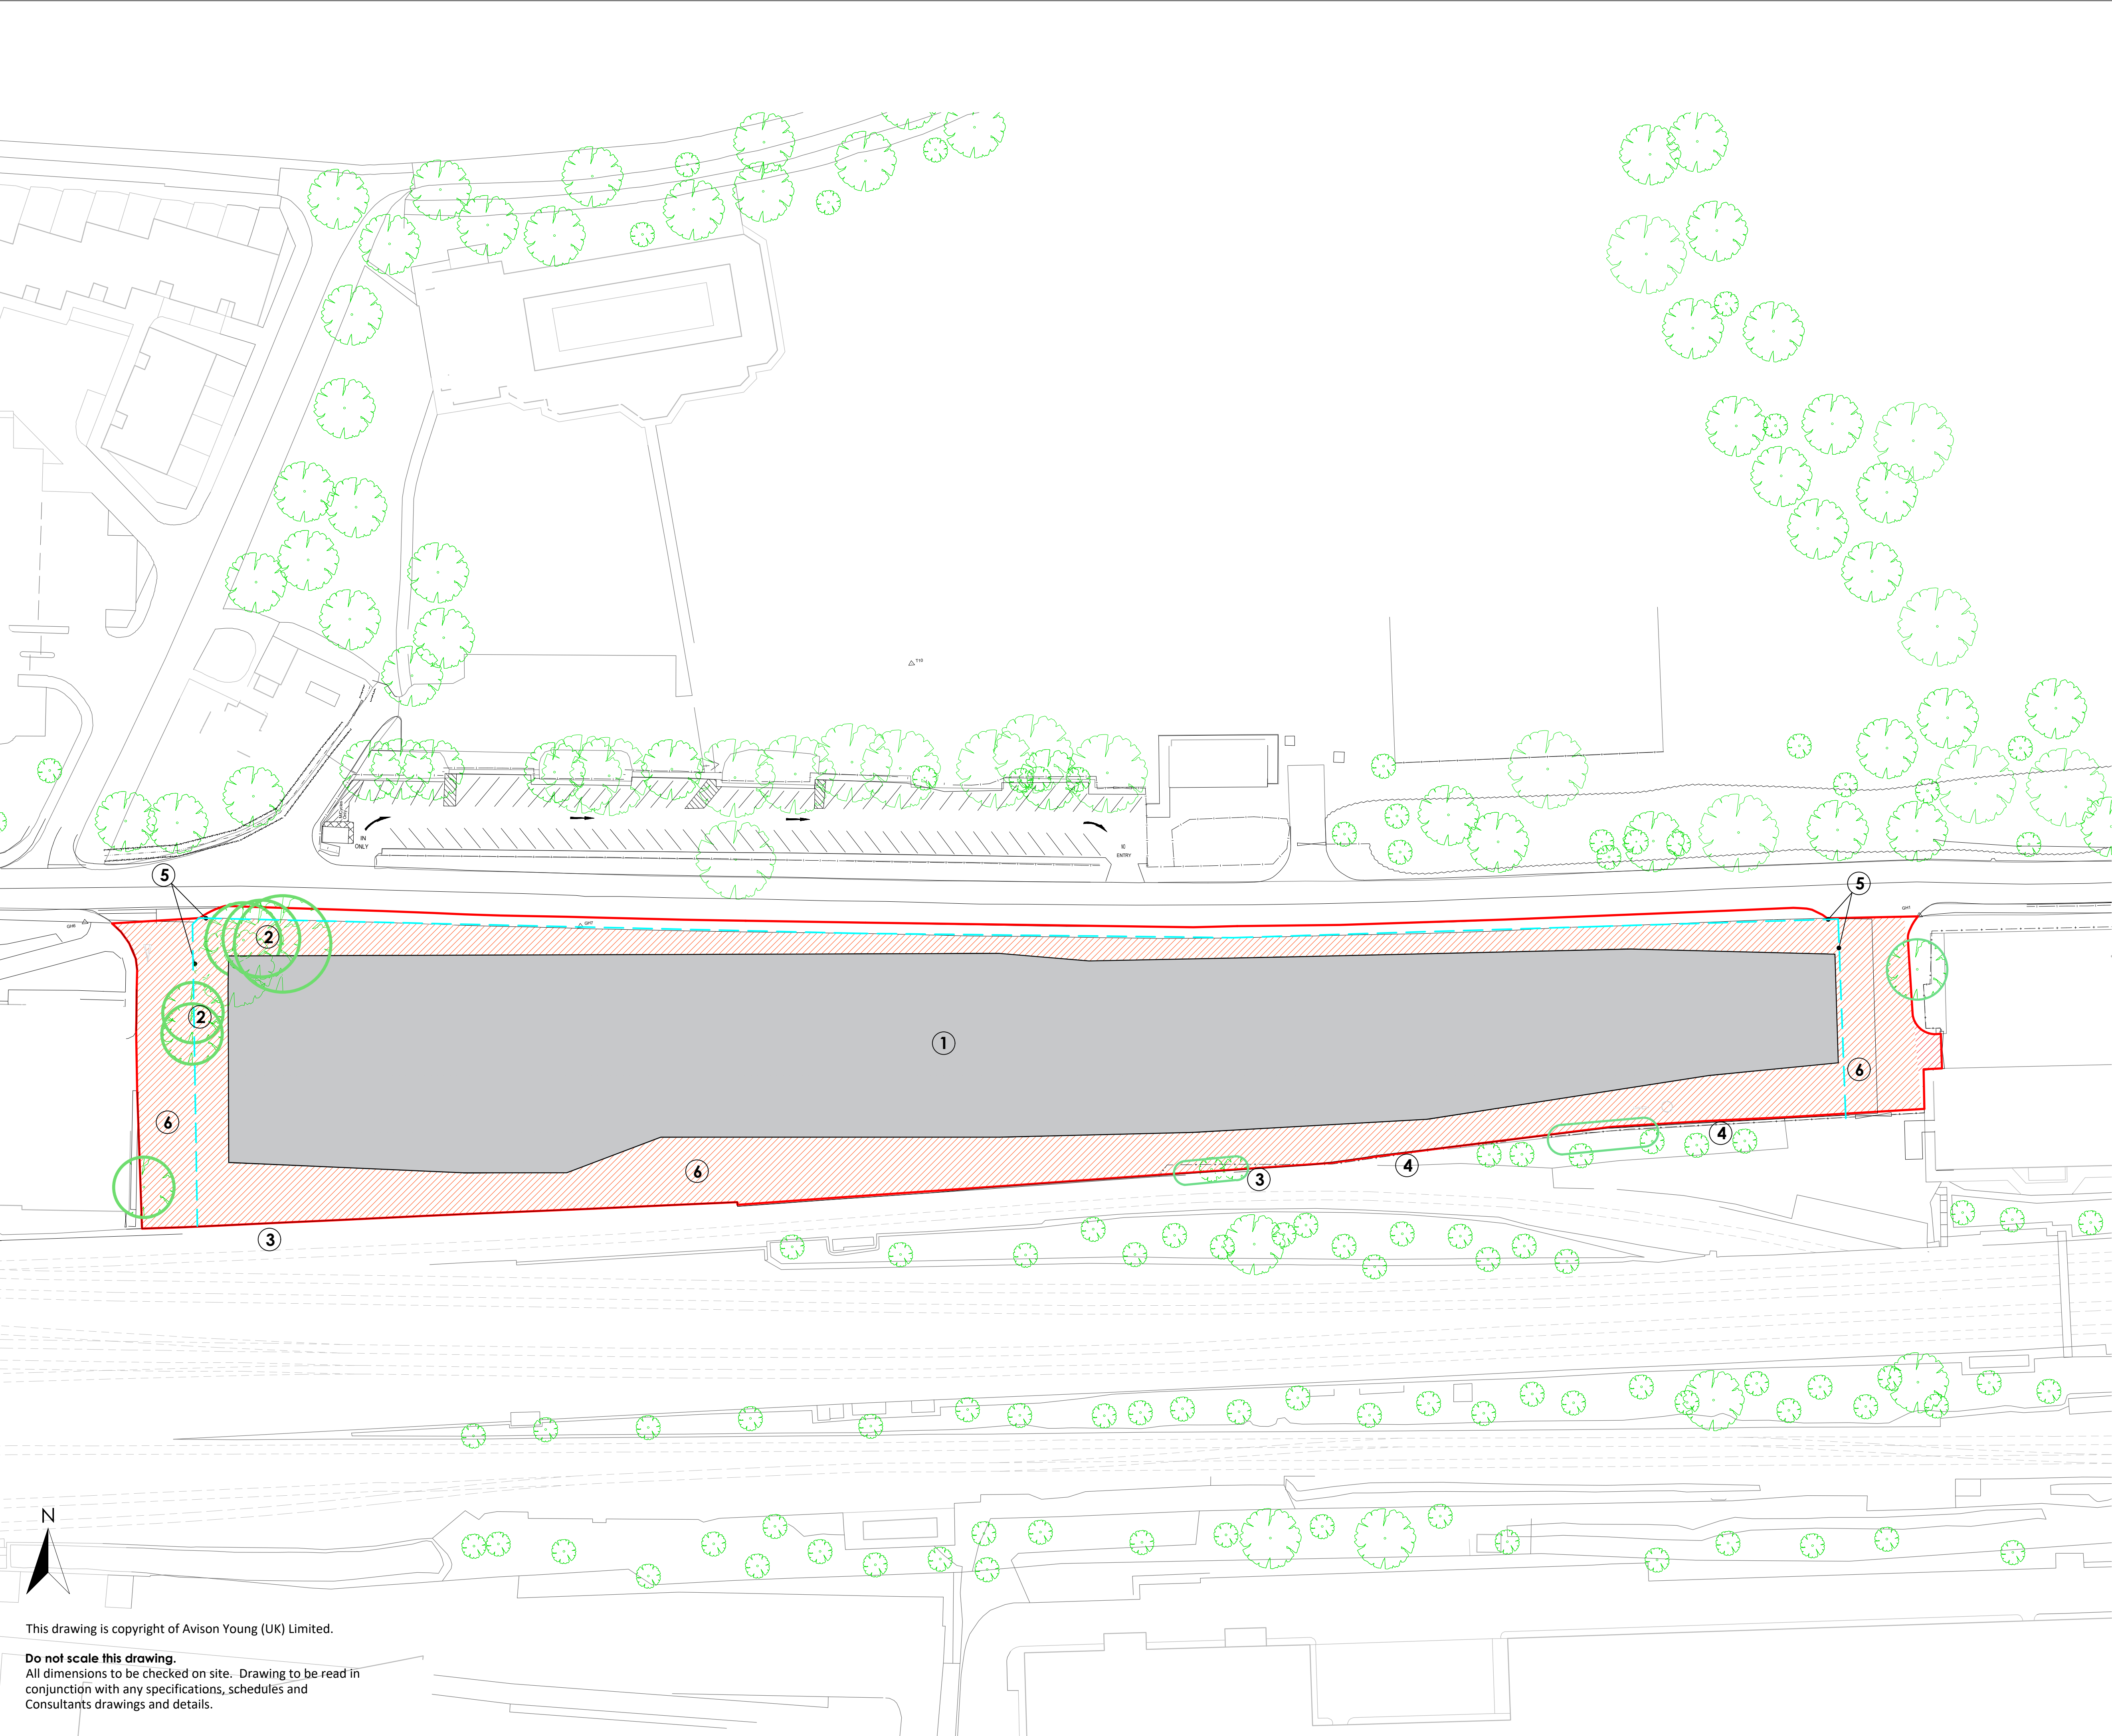

- ① Existing buildings, hardstandings, foundations to be removed to a depth of circa 2m below existing ground level. Site-won material to be processed on site and backfilled to area shown, with a nominal depth below ground level of 750mm. Edge of excavation to be battered as required as temporary health and safety measure.
- ② TPO Trees to be retained.
- ③ Retaining wall to remain.
- ④ Palisade fence to remain.
- ⑤ 2.4m height Heras fence to be installed. ----
- ⑥ Existing site levels to be retained.

**AVISON
YOUNG**

Central Square, Forth Street, Newcastle,
NE1 3PJ
www.avisonyoung.com

Project Name
Napier Court
Reading

Client
Pevril Securities

Drawing Title
Demolition Proposed Plan

Drawn By CA	Chk'd By GTH	Scale @ A1 1:500	Date AUG 24
----------------	-----------------	---------------------	----------------

Project No. 15C200243	Drawing No. READ-AY-ZZ-ZZ-DR-A-001	Revision /
--------------------------	---------------------------------------	---------------

This drawing is copyright of Avison Young (UK) Limited.

Do not scale this drawing.
All dimensions to be checked on site. Drawing to be read in conjunction with any specifications, schedules and Consultants drawings and details.