


TECHNICAL INFORMATION:

- CONSTRUCTED USING GRP MANUFACTURING PROCESS. DURALITE IS USED FOR THE SURROUND, AND INSET LOGO/LETTERING.

METHOD OF ILLUMINATION:

- LED - ROWS OF LED LIGHTS BEHIND THE TEXT AND TO THE EDGE OF THE BLACK RAISED AREA
- WHITE LETTERING IS TRANSLUCENT
- STATIC ILLUMINATION
- INTERNAL ILLUMINATION
- APPROX. >60 lux @ 1.0 METRE AND WITH AMBIENT LIGHTING >80 lux
- BLACK AND GREEN - PMS 369

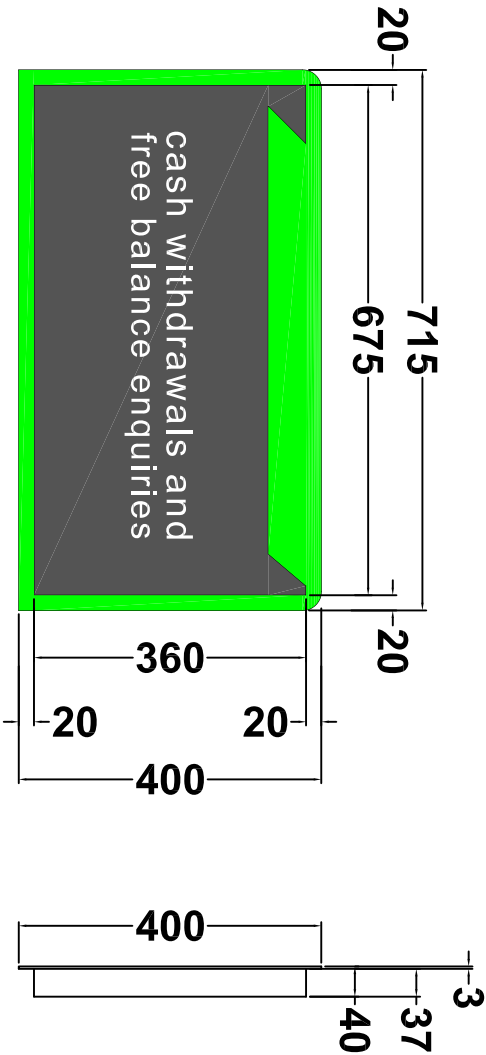

6625 ADV/PTU ILLUMINATED UNIVERSAL TOP SIGN					03				drawing approval	
					02					
DRAWN NG & MK			DATE 01/12/2022	SCALE 1:10 @ A3					NAME:-	
REFORG No. NCRA0029		SHEET SHEET 1	REVISION		01				POSITION:-	APPROVED:-
					REVISION DESCRIPTION			DATE	BY	SIGNED:-
PLANNING ATM SIGNS										