

Tree Protection Areas - Construction Exclusion Zones

INSTALLING PROTECTION Protective barriers and ground protection (as approved), must be installed before any materials or machinery are brought onto the site and before the commencement of any demolition, general site clearance, ground or construction works of any description.

RETENTION OF PROTECTION All protective measures must remain fully intact, vertical (in the case of barriers), , in their approved locations, from the outset of the development and maintained, at all times, until all works have been completed on site, including any earthworks and associated soft landscaping works. Any approved phasing of protective measures must be fully observed and complied with.

RESTRICTIONS Tree Protection Areas/ Construction Exclusion Zones are to remain completely undisturbed for the duration of all development works. No construction activity of any description including but not limited to the following must occur within these areas at any time.

- No excavation of any description.
- No storage, disposal of soil, rubble or materials of any other description.
- No alterations to existing levels or ground conditions.
- No vehicular access, parking or use of any tracked or wheeled machinery of any description.
- No tree works, without the written consent of the Council's Tree Service.
- No erection of temporary structures of any description.
- No fires.
- No storage disposal handling or use of any Chemicals including cement washings.
- No fixtures or fittings of any description _ security lighting, signage etc shall be attached to any part of a tree.


- No fires shall be light within 10 metres of the canopies of any tree or spread of any hedge.

- No chemicals, fuel, liquids/waste residues of any other description to be stored or disposed of within close proximity to or drained towards/ into protection areas.

PROTECTION AREA SIGNAGE - All weather notices as below or similar to be fixed to protective barriers at regular intervals (maximum spacing 5m) throughout site and maintained until completion of all development works



PLANNING COMPLIANCE - The protective measures detailed on this drawing are a legal requirement. Failure to protect the trees/ hedges in full accordance with the approved scheme may lead to enforcement action being taken by the Local Authority.


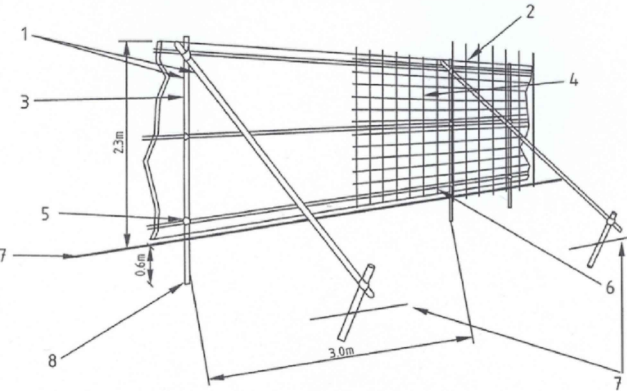


- Standard scaffold poles
- Uprights to be driven into the ground
- Planes secured to uprights with wire ties and, where necessary, standard scaffold clamps
- Weldmesh wired to the uprights and horizontals
- Standard clamps
- Wire hoisted and secured on inside face of fencing to avoid any snagging
- Ground level
- Approx. 0.6m driven into the ground

BS:5837 Figure 2 - Tree Protection Fencing structure around RPA

KEY - TREES

- HIGH-GRADE CATEGORY 'A' TREE
- MEDIUM-GRADE CATEGORY 'B' TREE
- LOW-GRADE CATEGORY 'C' TREE
- CATEGORY 'U' POOR QUALITY TREE - POTENTIALLY HAZARDOUS
- CANOPIES OF TREES IDENTIFIED FOR REMOVAL
- EXISTING HARD LANDSCAPING RETAINED AS TEMPORARY GROUND PROTECTION
- TEMPORARY TREE PROTECTION BARRIER
- EXTENDED TREE PROTECTION FENCING FOLLOWING REMOVAL OF EXISTING HARD LANDSCAPING
- NO-DIG, POROUS HARD LANDSCAPING
- TEMPORARY GROUND PROTECTION
- CONSTRUCTION EXCLUSION ZONE - (SEE NOTES) KEEP OUT !
- RESTORATION OF SOFT LANDSCAPED AREA
- PROPOSED BUILDING FOOTPRINT

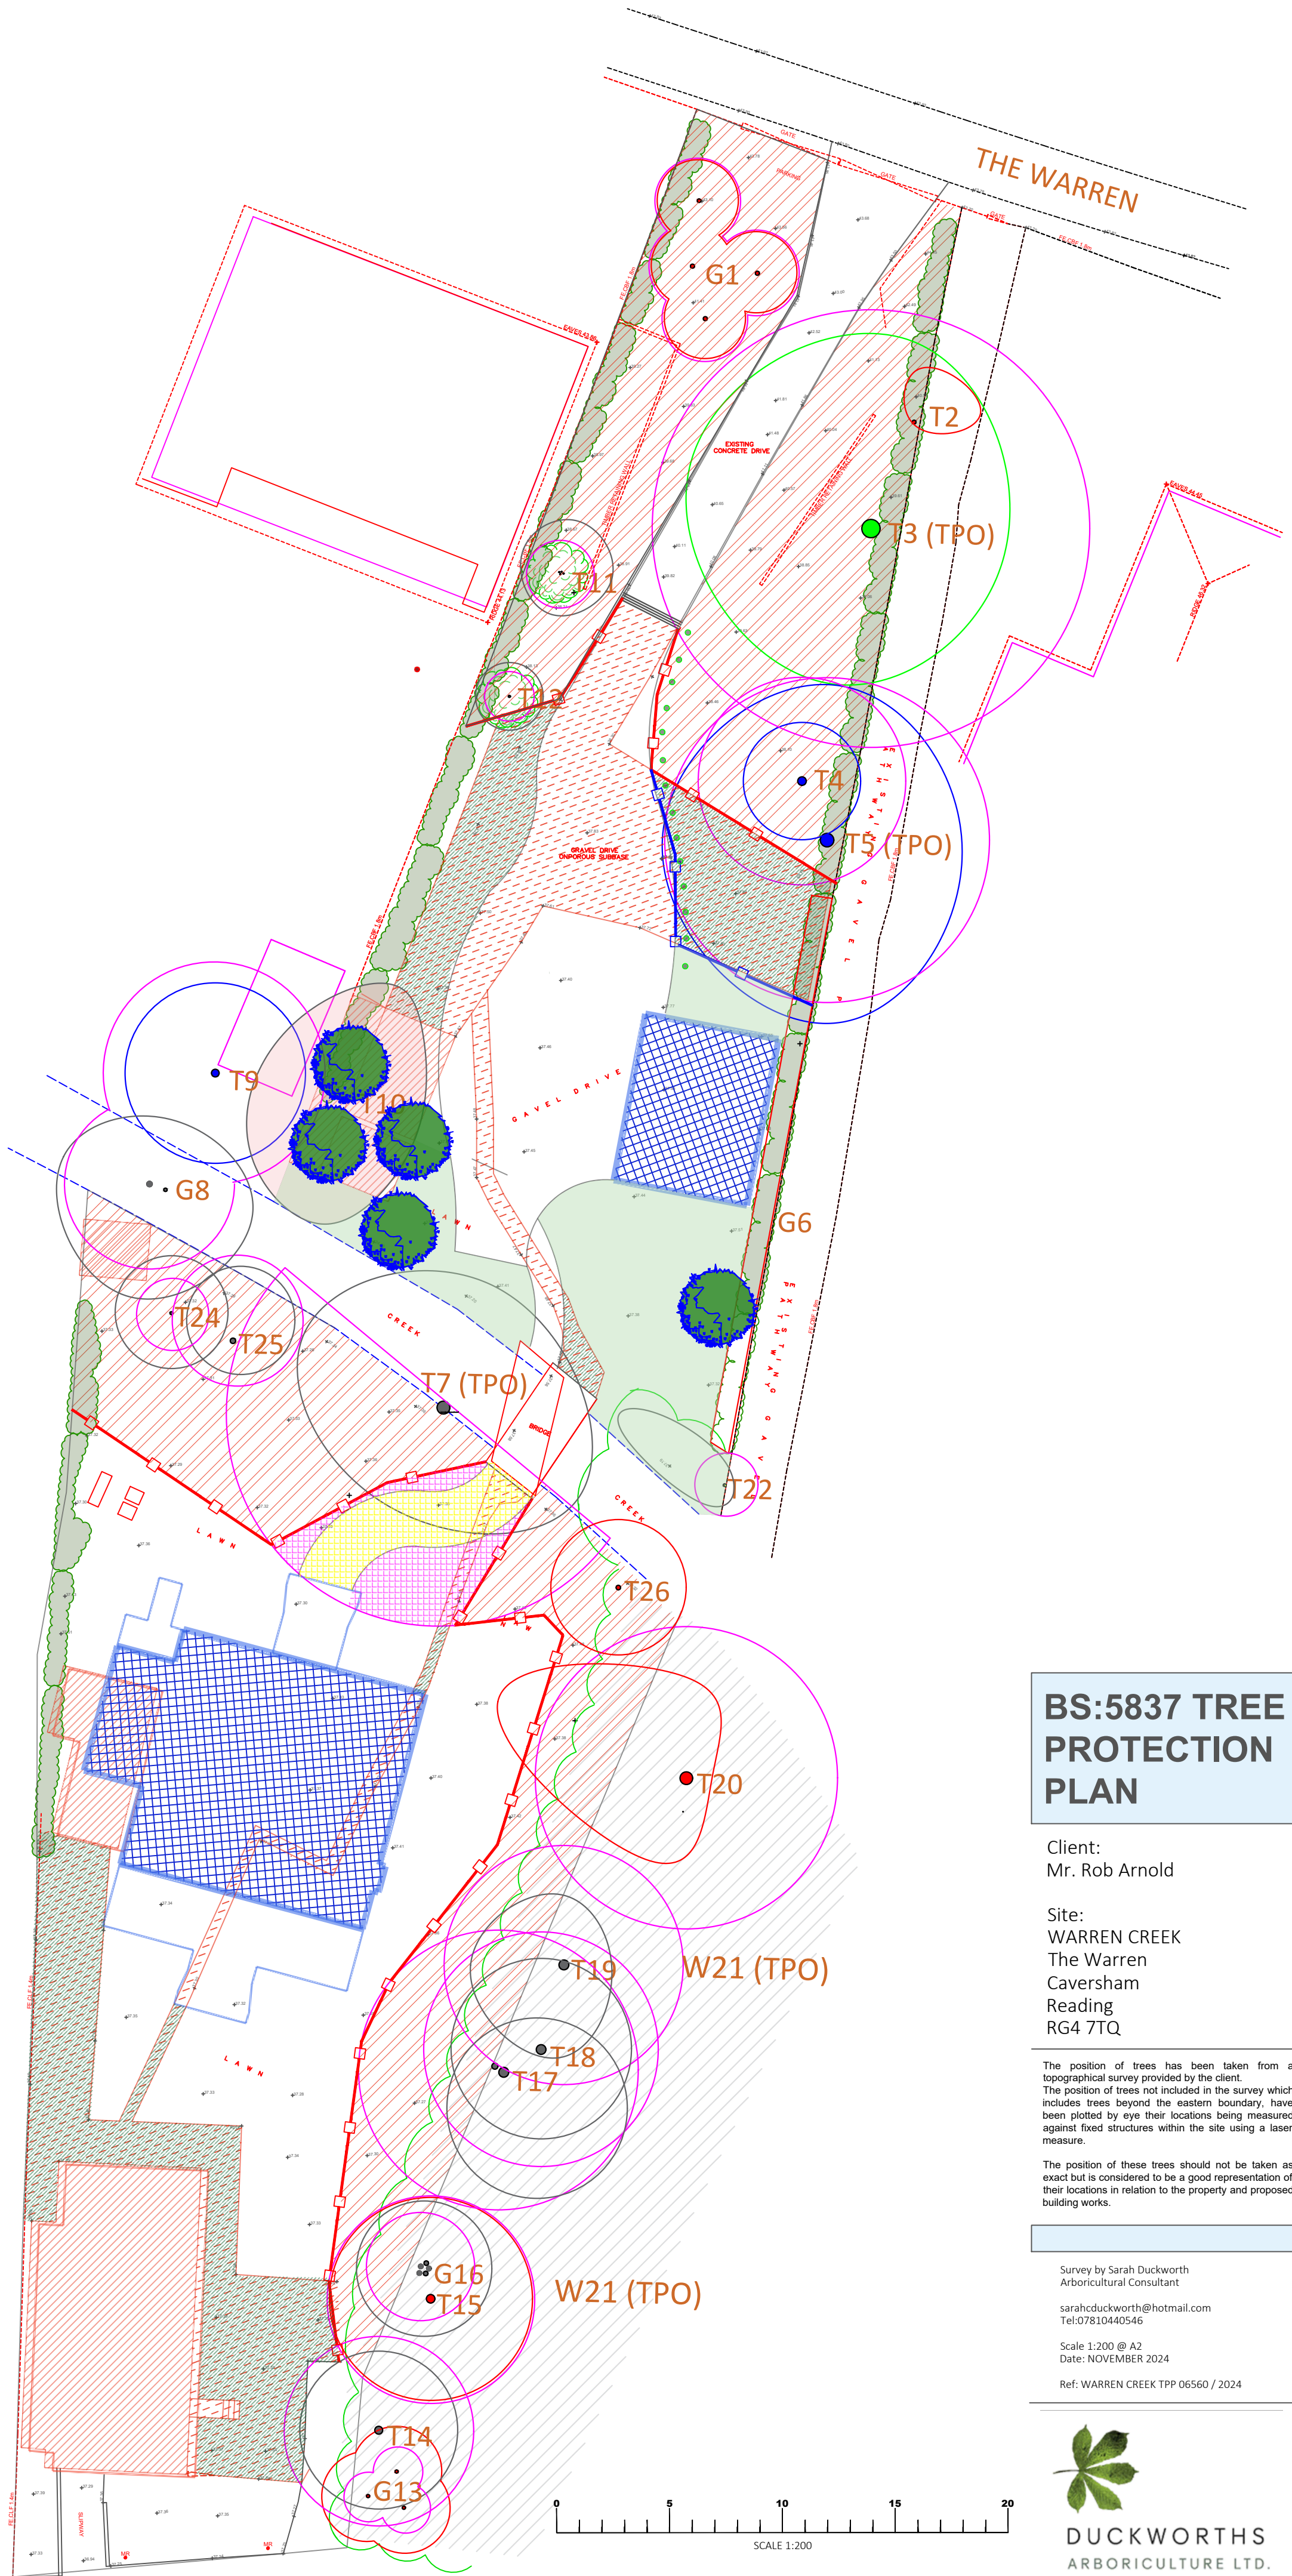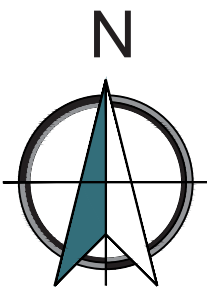

BS:5837 TREE PROTECTION PLAN

Client:
Mr. Rob Arnold

Site:
WARREN CREEK
The Warren
Caversham
Reading
RG4 7TQ

The position of trees has been taken from a topographical survey provided by the client. The position of trees not included in the survey which includes trees beyond the eastern boundary, have been plotted by eye their locations being measured against fixed structures within the site using a laser measure.

The position of these trees should not be taken as exact but is considered to be a good representation of their locations in relation to the property and proposed building works.

Survey by Sarah Duckworth
Arboricultural Consultant

sarahduckworth@hotmail.com
Tel:07810440546

Scale 1:200 @ A2
Date: NOVEMBER 2024

Ref: WARREN CREEK TPP 06560 / 2024



DUCKWORTHS
ARBORICULTURE LTD.