

Trees



Prunus padus




Acer campestre




Acer campestre 'Streetwise'



Prunus avium

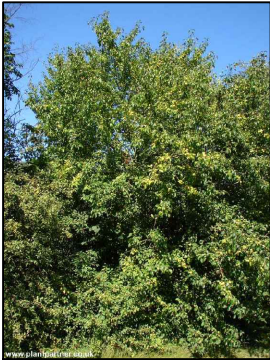

Malus sylvestris

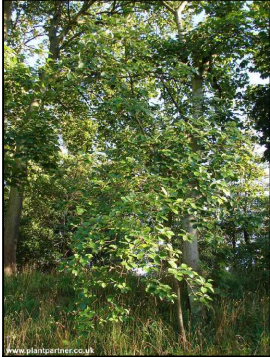

Sorbus aria

Shrubs



Brachyglottis 'Sunshine'



Hebe 'Red Edge'




Skimmia japonica 'Rubella'



Skimmia japonica 'Rubella'

Full Planting Schedule					
Trees					
Species Name	Girth	Height	Density	Specification	No
Acer campestre	80-100cm	0-30ft	Double Staggered at 0.3m offset	1+1 Transplant BR Maintained as hedge Buffer Mix 70	1
Carpinus betulus	80-100cm	0-30ft	Double Staggered at 0.3m offset	1+1 Transplant BR Maintained as hedge Buffer Mix 70	1
Crataegus monogyna	80-100cm	0-30ft	Double Staggered at 0.3m offset	1+1 Transplant BR Maintained as hedge Buffer Mix 70	1
Fagus sylvatica	80-100cm	0-30ft	Double Staggered at 0.3m offset	1+1 Transplant BR Maintained as hedge Buffer Mix 70	1
Carpinus betulus	100-125cm	0-30ft	Double Staggered at 0.3m offset	2+2 Transplant BR Maintained as hedge Buffer Mix 70	1
Sorbus aria	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	8
Corylus avellana	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	2
Pyrus communis	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	1
Malus sylvestris	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	1
Quercus robur	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	2
Sorbus aucuparia	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	1
Crataegus monogyna	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	2
Ilex aquifolium	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	2
Acer campestre	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	2
Acer campestre 'Streetwise'	8-10cm	200-250cm	Counted	Standard Clear Stem 150-175 3/5 brks 2x C	2
Carpinus betulus	8-10cm	250-300cm	Counted	Standard Clear Stem 150-175 RB	2
Betula pendula	8-10cm	250-300cm	Counted	Standard Clear Stem 150-175 RB	3
Quercus ilex	8-10cm	250-300cm	Counted	Standard Clear Stem 150-175 RB	1
Prunus avium	8-10cm	250-300cm	Counted	Standard Clear Stem 150-175 RB	1
Shrubs					
Species Name	Height	Pot Size	Specification	Density	No
Brachyglottis 'Sunshine'	30-40cm	3L	Bushy C	4/m²	22
Cornus sanguinea	40-60cm	4L	Branched 4 brks C	1/m²	16
Corylus avellana	80-100cm	1L	1+1 Transplant BR Maintained as hedge Buffer Mix 70	3x 1/2 Double Staggered at 0.3m offset	13
Cytisus scoparius	80-100cm	4L	Branched 4 brks C	1/m²	8
Euonymus europaeus	80-100cm	2L	Branched 3 brks C	1/m²	8
Hebe 'Red Edge'	30-40cm	3L	Bushy C	5/m²	38
Ligustrum vulgare	80-100cm	4L	Branched 4 brks C	4/m²	22
Skimmia japonica 'Rubella'	40-60cm	4L	Bushy 4 brks C	4/m²	22
Viburnum lantana	40-60cm	3L	Branched 5 brks C	1/m²	12
Climbers					
Species Name	Height	Pot Size	Specification	Density	No
Hedera colchica	100-150cm	10L	Several Shoots 5 brks C	Counted 3	1

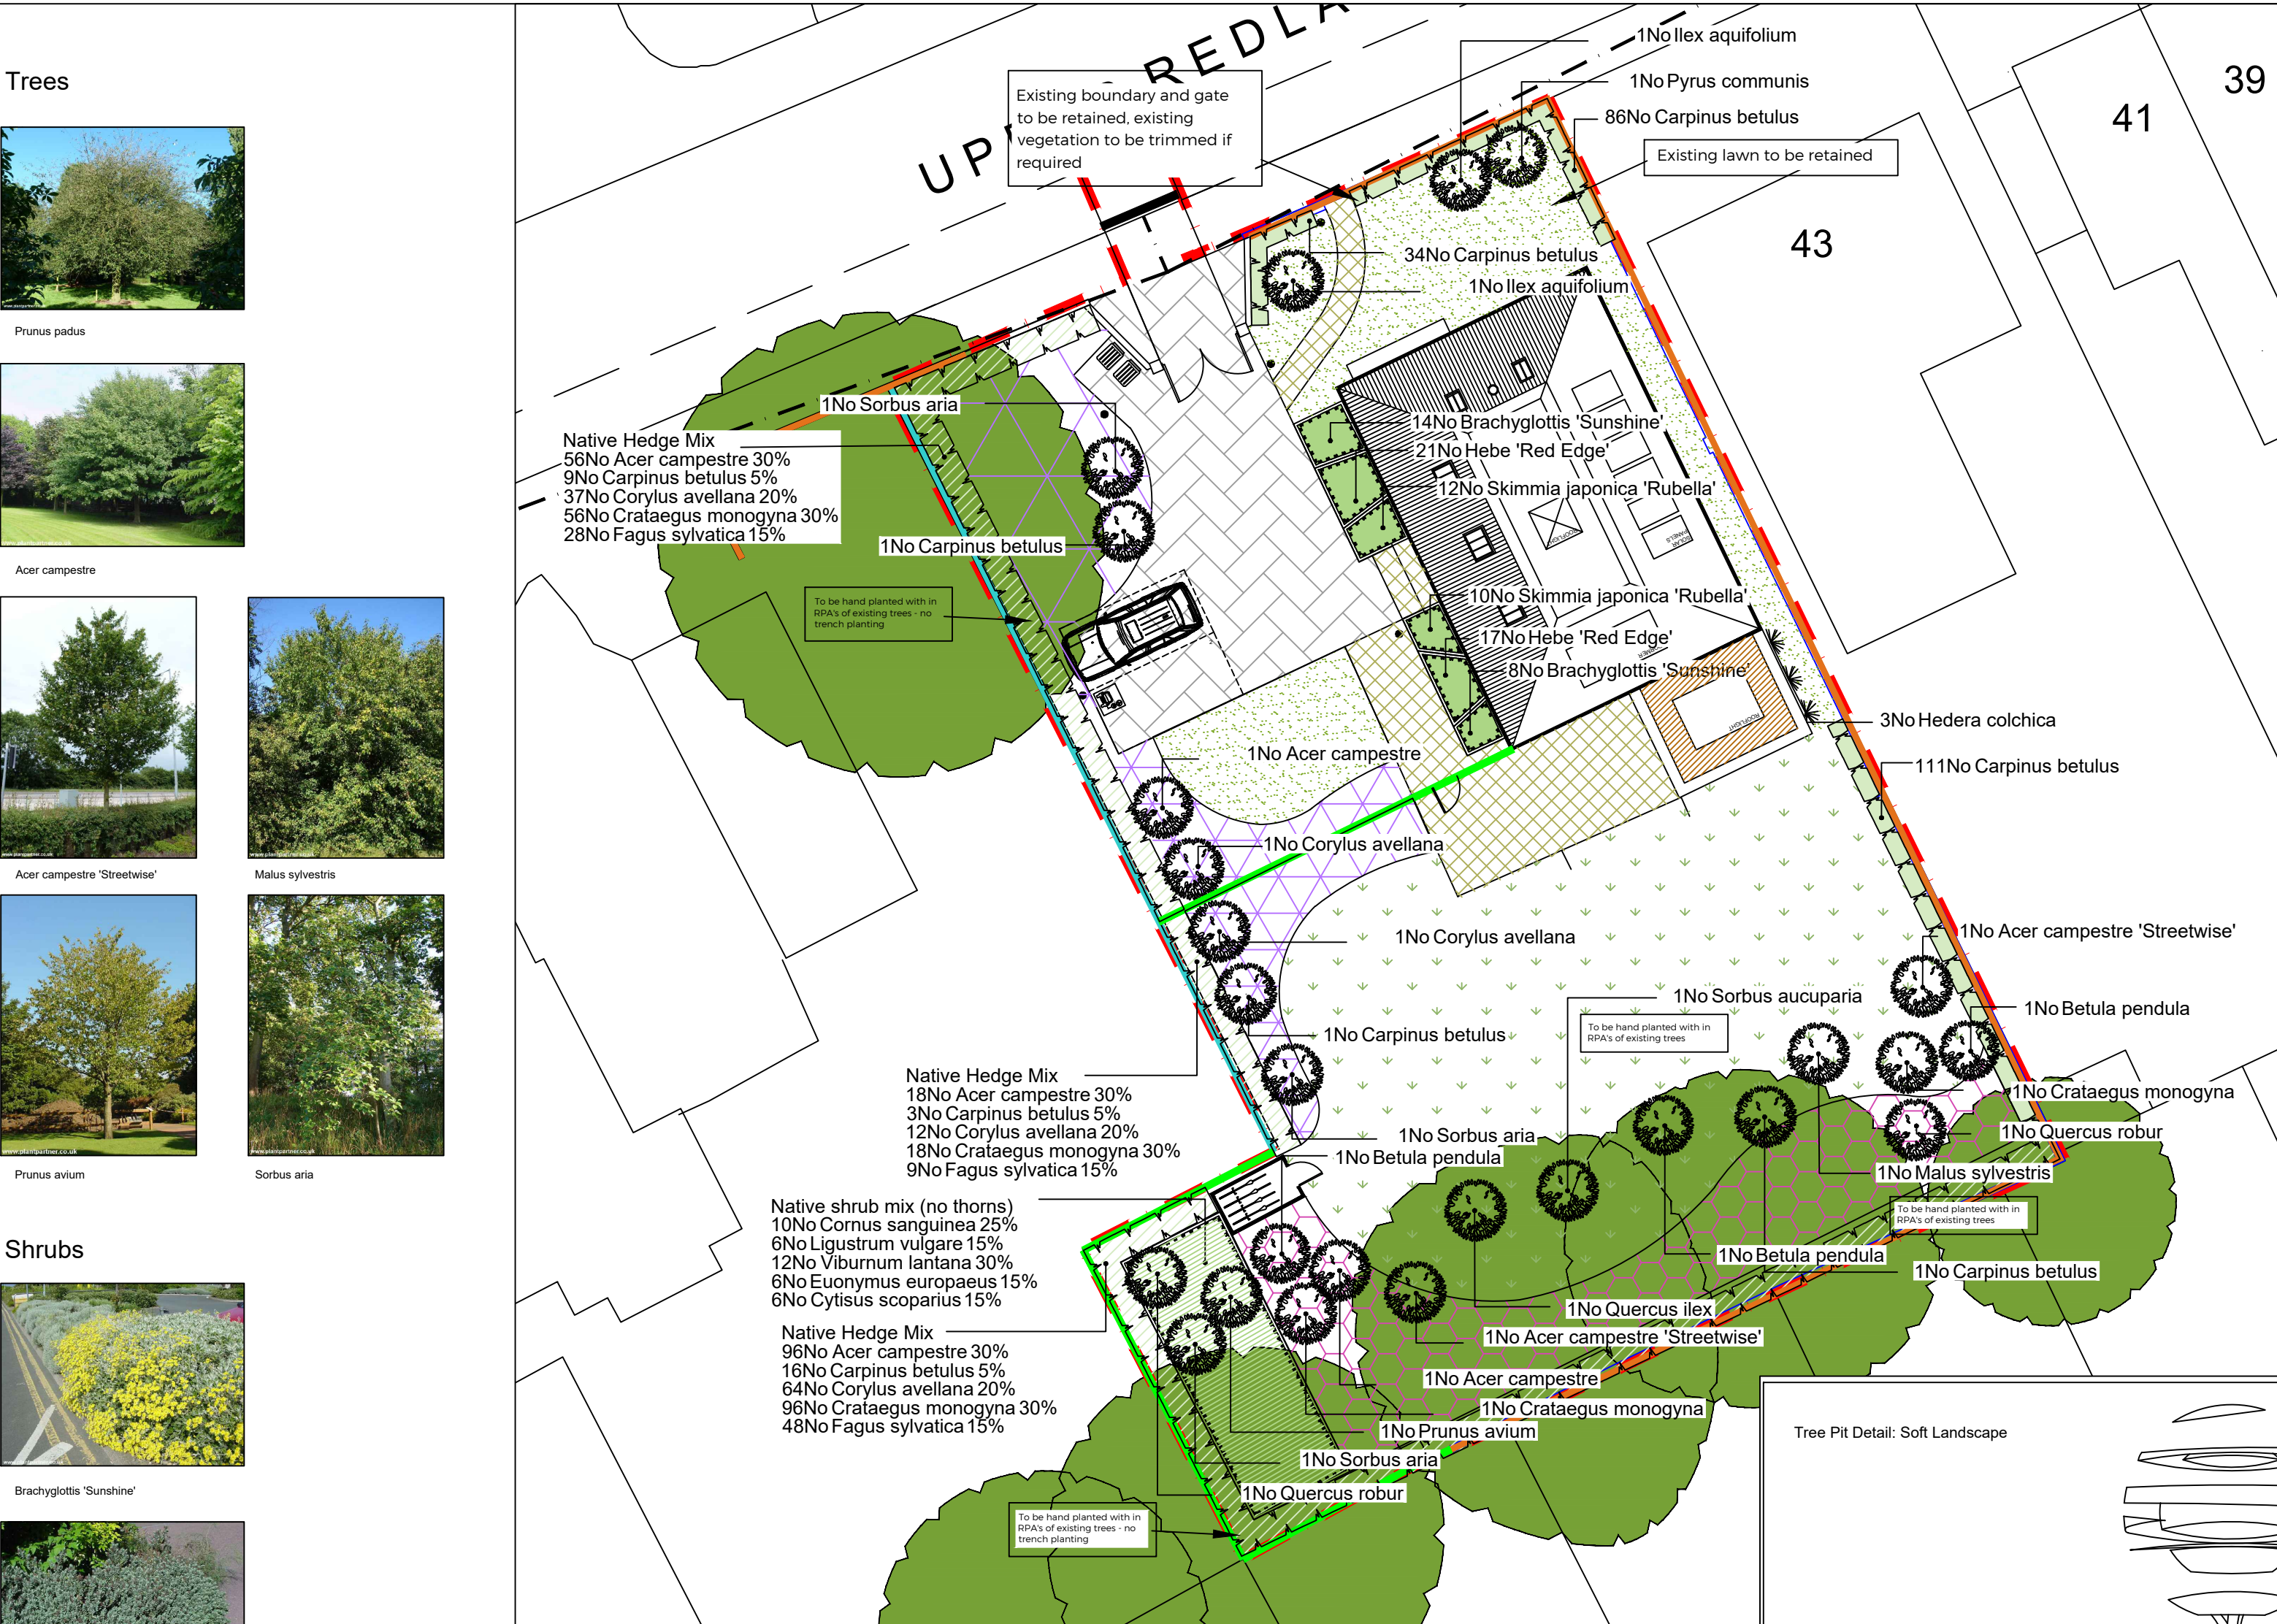


Legend for Soft Landscape

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail below
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed *Carpinus* (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 300mm centres in each row. To be maintained at 1.2 m height in the front garden and 1.8m height in the rear garden.
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 300mm centres in each row. To be maintained at 1.8m height adjacent to site boundaries
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed mix native shrub planting to be planted in groups of each species and to receive no bark mulch
- Existing grass areas to be retained or if required to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed flowering lawns, to be seeded with EL1 Flowers lawn mixture as supplied by Emorsgate or similar and approved
- Proposed wildflower areas, to be seeded with EM2F Standard general purpose wild flowers as supplied by Emorsgate or similar and approved
- Proposed wildflower areas, to be seeded with EH1 Hedgerow Mixture as supplied by Emorsgate or similar and approved
- Proposed areas of flat roofs, to have extensive roof systems, laid with XF301 sedum blanket, as supplied by Bauder, or similar

Legend for Hard Landscape

- Keyblok paving in buff laid in herringbone pattern from Marshalls or similar and approved, with drivesett pennant grey kerbs. Laid in line with engineer's details.
- Proposed riven paving in buff colour and sized 450x450mm. Laid in line with engineer's and supplier's recommendations
- Existing brick walls to be retained
- Proposed 1.8m close board fence with gate
- Existing boundary fence to be retained, and relocated central wall to be sited inside, with lintel design TBC

Tree Pit Detail: Soft Landscape

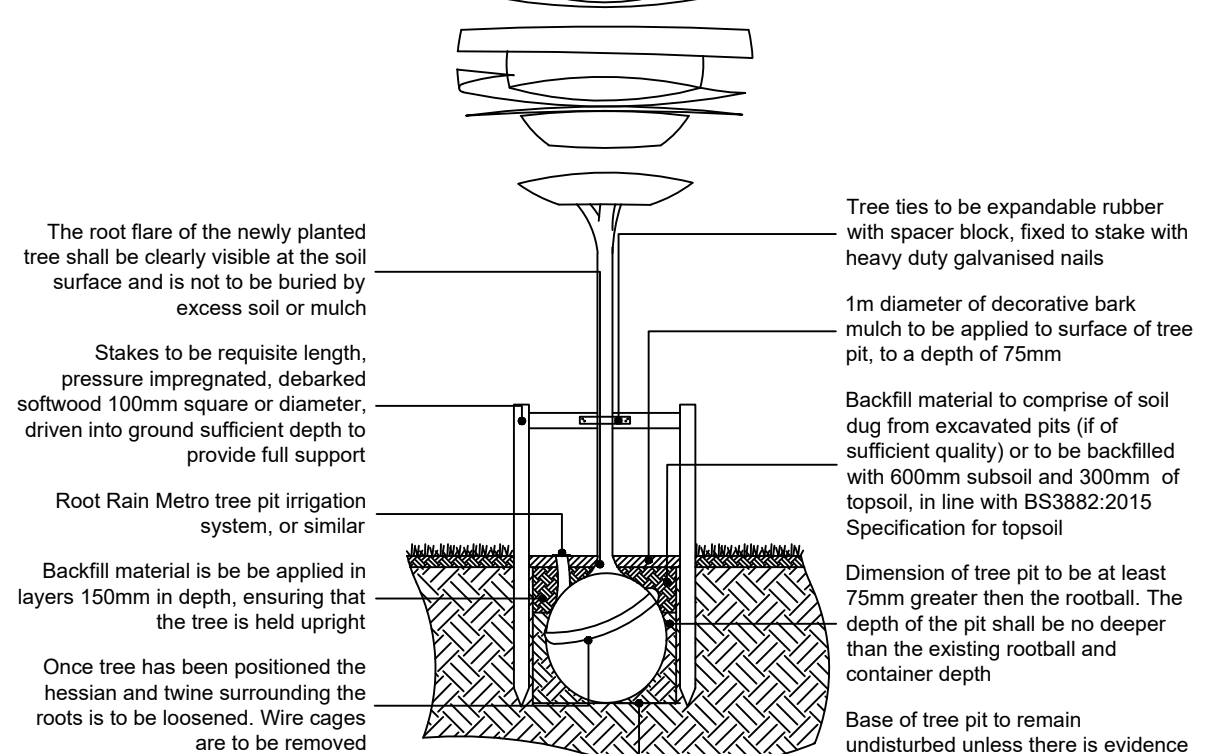

SPECIFICATION

All works generally, to comply with the written Soft Landscape Specification.

In case of quantity discrepancies, the quantities on the plan(s) take precedent over the quantities shown in the planting schedule.

NOTES:

DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY



Rev	Date	Details	Drawn
F	02.07.25	Client comments	ZZ
E	01.07.25	Client comments	ZZ
D	27.06.25	Planning comments	ZZ
C	01.04.25	Layout revision	ZZ
B	12.11.24	Mixture updates	ZZ
A	06.11.24	Client comments	ZZ



HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

4 & 5 The Old Mill, Fry's Yard, Bridge Street,
Godalming, GU7 1HP
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close,
Eastleigh, SO50 9SX
Tel: 02382 026300

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

scheme: Land adjacent to 43 Upper
Redlands Road, Reading

client: Mohammad Saood

drawing: Landscape Proposals

date: October 2024

scale: 1:200@A2

drawing no: PRI24678-11F

drawn: ZZ checked: JC

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2011. Copyright of this plan remains with ACD until all fees have been paid in full.