A1

S3 - Concrete slab paving
Pattern : 450 x 450 x 50 mm
Natural

S3 - Concrete slab paving
Pattern : 450 x 450 x 50 mm
Natural

E3 - Flush pin kerb
Pattern : 50 x 200 x 914 mm
Natural

S3 - Concrete slab paving
Pattern : 450 x 450 x 50 mm
Natural

E3 - Flush pin kerb
Pattern : 50 x 200 x 914 mm
Natural

S6 - Self binding gravel
Pattern : Continuous Surface
Golden Amber

F3

E3 - Flush pin kerb
Pattern : 50 x 200 x 914 mm
Natural

E7 - Straight kerb
Pattern : 125 x 255 x 915 mm
Natural

E8 - 45° kerb
Pattern : 125 x 255 x 915 mm

E3 - Flush pin kerb
Pattern : 50 x 200 x 914 mm
Natural

S8 - Maintenance strip
Pattern : Continuous Surface
White

E3 - Flush pin kerb
Pattern : 50 x 200 x 914 mm
Natural

S3 - Concrete slab paving
Pattern : 450 x 450 x 50 mm
Natural

S8 - Maintenance strip
Pattern : Continuous Surface
White

E3 - Flush pin kerb
Pattern : 50 x 200 x 914 mm
Natural

E5 - Drop kerb
Pattern : 125 x 150 x 915 mm
Natural

E4 - Transition kerb - Left
Pattern : 125 x 255 x 915 mm
Natural

F8

E3 - Flush pin kerb
Pattern : 50 x 200 x 914 mm
Natural

E7 - Straight kerb
Pattern : 125 x 255 x 915 mm
Natural

S11 - Tactile blister
Pattern : 400x400x50 mm
Natural

E7 - Straight kerb
Pattern : 125 x 255 x 915 mm
Natural

E7 - Straight kerb
Pattern : 125 x 255 x 915 mm
Natural

E7 - Straight kerb
Pattern : 125 x 255 x 915 mm
Natural

E7 - Straight kerb
Pattern : 125 x 255 x 915 mm
Natural

S11 - Tactile blister
Pattern : 400x400x50 mm
Natural

S10 - Tar spray and chip
Pattern : Continuous Surface
Buff, to match existing

S10 - Tar spray and chip
Pattern : Continuous Surface
Buff, to match existing

EXISTING BIKE SHELTER


Refer to drawing: 1004_PL_102

HARD LANDSCAPE

- S1 — EXISTING MACADAM — to be retained and made good where required.
- S2 — EXISTING CONCRETE SLAB PAVING — to be retained, steam clean and where required slabs replaced to make good.
- S3 — CONCRETE SLAB PAVING — 450 x 450 x 50 mm, Saxon Paving, Natural, by Marshalls
- S6 — SELF BINDING GRAVEL — to match the existing self binding gravel, Breedon Golden amber gravel, by Breedon
- S7 — EXISTING PEBBLE MAINTENANCE STRIP — to be retained, clean and made good where required.
- S8 — MAINTENANCE STRIP — 40-20mm, Aegean White Cobbles & Pebbles, by CED Stone
- S10 — TAR SPRAY AND CHIP — Buff, to match existing
- S11 — BLISTER TACTILE — 400 x 400 x 50 mm, Blister tactile, Standard Natural, by Marshalls
- E3 — FLUSH PIN KERB — 50 x 200 x 914 mm, Flat top edging, Natural, by Marshalls
- E4 — TRANSITION KERB - LEFT & RIGHT — 125 x 255 x 915 mm, British standard kerb, Half Battered Kerb, Natural, by Marshalls
- E5 — DROP KERB — 125 x 150 x 915 mm, British standard kerb, Bullnosed Drop kerb centre, Natural, by Marshalls
- E6 — EXISTING KERB — to be retained and made good where required
- E7 — STRAIGHT KERB — 125 x 255 x 915 mm, British standard kerb, Bullnosed Kerb, Natural, by Marshalls
- 45° SPLAYED STRAIGHT KERB — 125 x 225 x 915 mm, British standard kerb, 45° straight Channel, Natural, by Marshalls

FURNITURE

- F3 — CIRCULAR BENCH — (R)1250 x (H) 450 mm, x6 Railroad Mid Radius 1.25 Left, Iroko timber, by Furnitubes
- F8 — BEE POSTS — 3 no. Reuse site won (ø)100-150 mm x (H)1500-2000 mm logs and drill (ø)5-10 mm holes randomly spread on the posts

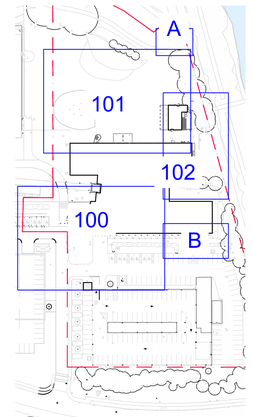

100 Navigation map
Scale: 1:1500

DO NOT SCALE FROM DRAWING

Drawing Information

Copyright of Place Design Ltd. 2024
All Rights Reserved

PLEASE NOTE: Figured dimensions take precedent over scale, do not scale from drawings.

Inform Place Design Ltd of any discrepancies before works commence on site.

All dimensions to be checked on site

SIGNIFICANT HEALTH, SAFETY & ENVIRONMENTAL INFORMATION RELATING TO CDM

HEALTH:

SAFETY:

ENVIRONMENTAL:

IT IS ASSUMED ALL WORKS WILL BE CARRIED OUT BY A COMPETANT CONTRACTOR WORKING, WHERE APPROPRIATE , TO AN AGREED METHOD STATEMENT

No.	Revision	date	by	checked
T00	First issue	01.01.25	CHC	GH
T01	Tender issue	19.03.25	CC	GH

NOTE:
All new external paving is to be designed by the Contractor to meet the loads that would be exerted by the use of the following client equipment, including maximum number of batteries where applicable, and fully laden with driver/passengers, plus an allowance of an additional 20%.
a) Genie S-85 XC self-propelled telescopic boom
b) Yamaha YDREX5 electric golf buggy
c) Cushman Shuttle 8 electric golf buggy
d) E-Z-GO 2020 RXV Shuttle 2+2 electric golf buggy
The Contractor is to inspect the client's equipment on site and procure all necessary data from the manufacturers (including required third-party batteries where applicable) to establish maximum loads.

Client
Green Park (Reading) No.1 Limited
Mapletree UK Management Limited
4th Floor - WestWorks
White City Place
195 Wood Lane
London, W12 7FQ

Project Title
300 Brook Drive

Drawing Title
Hardwork plans (1 of 3)

Project Stage
Stage 3+

PLACE DESIGN

Place Design
16 West Barnes Lane
London, SW20 0BU, UK
+44 208944 1940

scale 1:100 at A1 date 06/02/24 drw by CHC ch by GH
drw no. 1004_PL_100 rev no. T01