
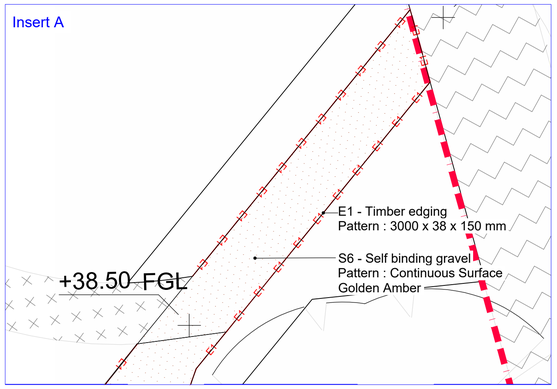


HARD LANDSCAPE

- S3 — CONCRETE SLAB PAVING — 450 x 450 x 50 mm, Saxon Paving, Natural, by Marshalls
- S4 — COMPOSITE DECKING — 200 x 32 x 3600 mm, Weathered Oak, Driftwood, by Millboard
- S6 — SELF BINDING GRAVEL — to match the existing self binding gravel, Breedon Golden amber gravel, by Breedon
- S7 — EXISTING PEBBLE MAINTENANCE STRIP — to be retained, clean and made good where required.
- S8 — MAINTENANCE STRIP — 40-20mm, Aegean White Cobbles & Pebbles, by CED Stone
- GEOCELL — for mounding. HDPE Geocell, TG356, 150mm, by Terram
- E1 — TIMBER EDGING — 3000 x 150 x 38 mm, Gravel board, by Timberstore
- E3 — FLUSH PIN KERB — 50 x 200 x 914 mm, Flat top edging, Natural, by Marshalls
- E6 — EXISTING KERB — to be retained and made good where required

FURNITURE

- F1 — LOG BENCH — (L) 1500-2000mm x (ø)700 mm, Site won or FSC tree trunk with flat sanded top to provide seat
- F2 — SEAT TOP ON GABION WALL — (L) 1000 x (D) 440 mm, Lapa Wall-top, Iroko timber, by Furnitubes
- F5 — COFFEE TABLE & CHAIRS — 8 sets of cafe tables & chairs for End Of Journey Facility and under pergola. Bloc chair & Lounge table, by Vestre
- F6 — BIKE REPAIR STATION — Public bike repair stand with pump, RAL 7016, by Turvec
- F7 — BIRD NEST BOXES — 6 no. 1B Schwegler Nest Box
- F8 — BEE POSTS — 3 no. Reuse site won (ø)100-150 mm x (H)1500-2000 mm logs and drill (ø)5-10 mm holes randomly spread on the posts
- F9 — BAT NESTING BOXES — 2 no. 2F Schwegler Bat Box

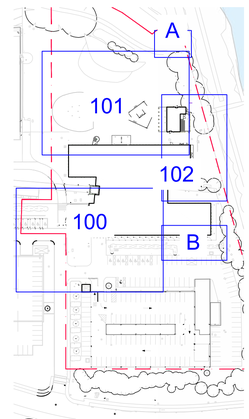

101 Navigation map
Scale: 1:1500

DO NOT SCALE FROM DRAWING

Drawing Information

Copyright of Place Design Ltd. 2024
All Rights Reserved

PLEASE NOTE: Figured dimensions take precedent over scale, do not scale from drawings.

Inform Place Design Ltd of any discrepancies before works commence on site.

All dimensions to be checked on site

SIGNIFICANT HEALTH, SAFETY & ENVIRONMENTAL INFORMATION RELATING TO CDM

HEALTH:

SAFETY:

ENVIRONMENTAL:

IT IS ASSUMED ALL WORKS WILL BE CARRIED OUT BY A COMPETANT CONTRACTOR WORKING, WHERE APPROPRIATE , TO AN AGREED METHOD STATEMENT

No.	Revision	date	by	checked
T00	First issue	09.01.25	CHC	GH
T01	Tender issue	19.03.25	CC	GH

NOTE:
All new external paving is to be designed by the Contractor to meet the loads that would be exerted by the use of the following client equipment, including maximum number of batteries where applicable, and fully laden with driver/passengers, plus an allowance of an additional 20%:
a) Genie S-85 XC self-propelled telescopic boom
b) Yamaha YDREX5 electric golf buggy
c) Cushman Shuttle 8 electric golf buggy
d) E-Z-GO 2020 RXV Shuttle 2+2 electric golf buggy
The Contractor is to inspect the client's equipment on site and procure all necessary data from the manufacturers (including required third-party batteries where applicable) to establish maximum loads.

Client
Green Park (Reading) No.1 Limited

Mapletree UK Management Limited
4th Floor - WestWorks
White City Place
195 Wood Lane
London, W12 7FQ

Project Title
300 Brook Drive

Drawing Title
Hardwork plans (2 of 3)

Project Stage
Stage 3+

Place Design
16 West Barnes Lane
London, SW20 0BU, UK
+44 208944 1940

scale 1:100 at A1 date 06/02/24 drw by CHC ch by GH
drw no. 1004_PL_101 rev no. T01