



Southampton Street

Landscaping Schedule

Residential Renovations

144 Southampton Street
Reading
RG1 2RD


24 September 2025
Reference: 2449-P611-P1



External Finishes

Parking Area – The existing grass area and concrete path to be carefully removed to suit Arboricultural report. The new finish will be a Cellweb, suitable for car parking, allowing for the grass to grow in between and provide a permeable paving finish.

This product works with the Geotextile membrane, laid on the ground, ready for the grid to be installed on top. It is proposed that it will then be filled with soil and grass seed.

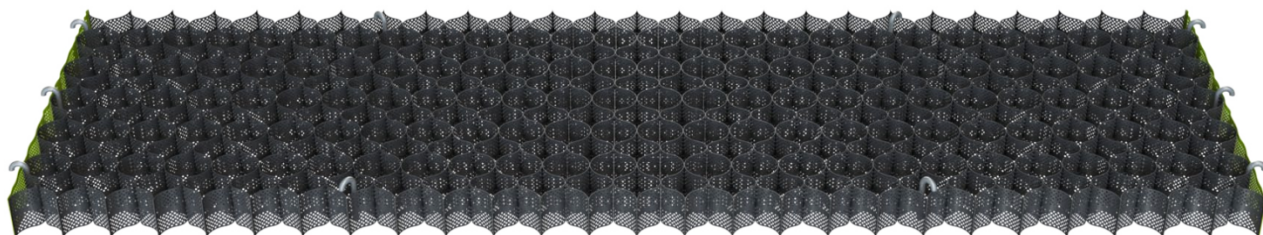

There is a change of level between the site and the pavement, (approx. 150mm) a kerb edge, suitable for parking areas is proposed to be installed to slope from the pavement up onto the site to maintain the existing levels. Brett Landscaping offer a mobility kerb in Brindle, for this location.





Pathway – Existing concrete ramp is to be carefully removed and a new subbase of sand is to be laid, ready for a new path. The proposed finish is to be a gavel finish, the same Cellweb to the parking will be laid and filled with gravel, to provide a permeable paving finish. Laid to suit the natural fall of the site at the front of the house.



Soft Landscaping

Photos show that the only existing soft landscaping to the front boundary is the hedge directly behind the brick wall. The wall is not due to be cut back any further, therefore this hedge is to remain in place. As noted above the ground levels will also remain with the surface finish altering to gravel for the parking space only.





The bush/shrub shown below, is positioned approx. 6m back from the front boundary and is to remain. This has also been updated on the latest layout plan.

