

PLANTING NOTES

1. Implementation of soft landscape proposals to be undertaken following completion of main construction works during the 1st available planting season (October to March).

2. Plant material to conform to the National Plant Specification. All plant stock to originate from within the UK. All plant stock, plant handling and planting to be undertaken in accordance with the following British Standard Specifications and Codes of Practice:

- BS 3936:1992 Part1 Nursery Stock – Specification for trees and shrubs;
- BS 3936:1981 Part10 Nursery Stock – Specification for ground cover plants;
- BS 4428:1989 – Code of Practice for General Landscape Operations (excluding hard surfaces);
- BS8545:2014+A1:2026 – Trees from Nursery to Independence in the Landscape – Recommendations; and
- The Code of Practice 2002 (HTA).

3. Topsoil to be fertile with maximum 35% clay content and 5% minimum organic content, pH 5.8 - 7.5 and to be free of perennial weeds, weed seeds and contamination. Maximum stone content 20% (20mm+ particle size), maximum size of stones 50mm in any direction.

- Existing topsoil to be ameliorated and/or screened, if necessary; to achieve this specification.
- Imported topsoil to be to BS 3882: Multi-Purpose Grade, from an approved source, and to accord with the above specification.

4. Cultivation of all planting areas within the root protection areas of existing trees beneath the canopies of existing trees is to be undertaken by hand using handheld tools only, taking care to avoid ground compaction or damage to tree roots. The use of tracked or wheeled machinery (including rotovators), must not be used and any time. Levels must not be raised (particularly by the addition / spreading of topsoil associated with any turfing or grass seeding works) or lowered, in any way unless specially approved by the Local Authority.

TREES:

5. Trees to be planted at correct depth in square pits 2 to 3 times width of root ball / root spread and at shallow depth same as depth of root ball / root spread with spiked bottom full depth of fork (but not cultivated) to relieve any compaction and assist drainage backfilled with local topsoil and if required, mixed with peat free organic tree planting compost and slow release fertiliser. Trees to be supported by 1 no. 100mm x 3000mm softwood timber stake and 1 No. adjustable tree tie

6. As appropriate, all trees are to be fitted with 'Greenleaf "Root-rain Urban" irrigation pipe and inlet, or similar approved, sized as appropriate to aid watering operations.

7. . No trees are to be planted within 3m of sewers or services (or other easement recommended by the relevant statutory undertaker) without the use of tree root barriers, e.g. 'Greenleaf' Reroot 600 /100 placed between the tree and services. The Contractor is to ascertain the location of all sewers and services prior to carrying out any tree planting to avoid these routes or existing services and to place the root barrier(s) adjacent to the sewer / services route to maximise tree root area.

PLANTING BEDS:

8. Planting beds to have a minimum depth of 450mm topsoil over 150mm broken up ground with all stones over 50mm removed. Soil conditioner: Sanitized and stabilised compost, to BS1 PAS 100. Apply 50mm depth even coverage and incorporate into topsoil during cultivation operations, to a minimum depth of 150mm. Compost to be Compost Association certified, or from an approved supplier conforming to this specification. If no local supplies are available alternative organic peat free compost may be specified, subject to the Landscape Architect's approval.

9. Hedgerow plants to be planted in pits 150mm wider and deeper than root spread backfilled with excavated topsoil/compost, mixed with 'SierraBlas Flora' slow release fertiliser, quantity in accordance with manufacturer's recommendations. Hedge plants to be planted in staggered rows 500 mm apart at centres specified in schedule.

10. All planting beds (apart from marginal plants) to be mulched with matured coniferous bark, with an even particle size between 15 - 65mm, to a minimum depth of 75mm over weed free soil after completion of all planting and watering operations. Bark mulch is to be free from pests, diseases, fungus and weeds; and with no fines or dust. Source and sample of bark mulch to be approved.

GRASS AREAS

11. Grass areas are to have a minimum depth of 150mm topsoil brought to a fine tilth all stones over 40mm (25mm for lawns), in any direction removed. Areas should be uniformly firmed. Apply pre-seeding fertiliser (e.g. British Seed Houses BSH2), prior to grass seeding, in accordance with manufacturer's recommendations.

- Grass seed mix to rear garden areas to be: GSS Cottage Lawn with micro clover mix, sown at a rate of 23g/m sq in equal sowing in transverse directions
- Turf to be good quality lawn turves, to conform to BS 3936: 1998, free from undesirable grasses and weeds. Turfing operations to be carried out in accordance with the NBS Landscape Specification, Q30 - Seeding/Turfing, Clauses 430 and 440, the dressing to joints to be finely screened compost sand / topsoil.

ONGOING MANAGEMENT AND MAINTENANCE NOTES:

1. Maintenance operations to be carried out as specified until planting becomes established (year 5 after planting).


2. Trees - Check stakes and ties and adjust if necessary, in summer and winter. Remove stakes when no longer required, i.e. after 3 years. Prune out damaged branches or deadwood, cutting back so as not to affect branch collar. Progressively raise canopies of new trees to provide clearance for vehicles and pedestrians.

3. Shrubs - Weed control measures to continue until canopy of shrubs is closed. Weeds are to be cleared by hand or by application of translocated herbicide, with inspections made regularly through the growing season. Prune back any badly damaged shrubs to sound growth. Cut back plants adjacent to paths and access ways where necessary, retaining a balanced shape. Clear litter and debris from planted areas and cut leggy growth hard back to promote bushy growth.

4. Watering – Trees to be watered on weekly basis during growing season (April – October) for first two years. Watering to be from above and via pipe to ensure soaking of ground until field capacity of the soils is reached. After which, during periods of dry weather apply sufficient water to maintain healthy growth. Allow, at each operation, watering to field capacity.

5. Re-firming - Ensure that all trees and shrubs are firmly bedded in the ground after strong winds, frost heave or other disturbances.

6. Protection/Reinstatement - Regularly inspect all planting and grassed areas, e.g. once a month, for any pest damage or vandalism/damage caused by others. Any damaged to be reported to the Employer and rectified in the next available season by replacement planting or reseeded/ turfing and protective measures if required.

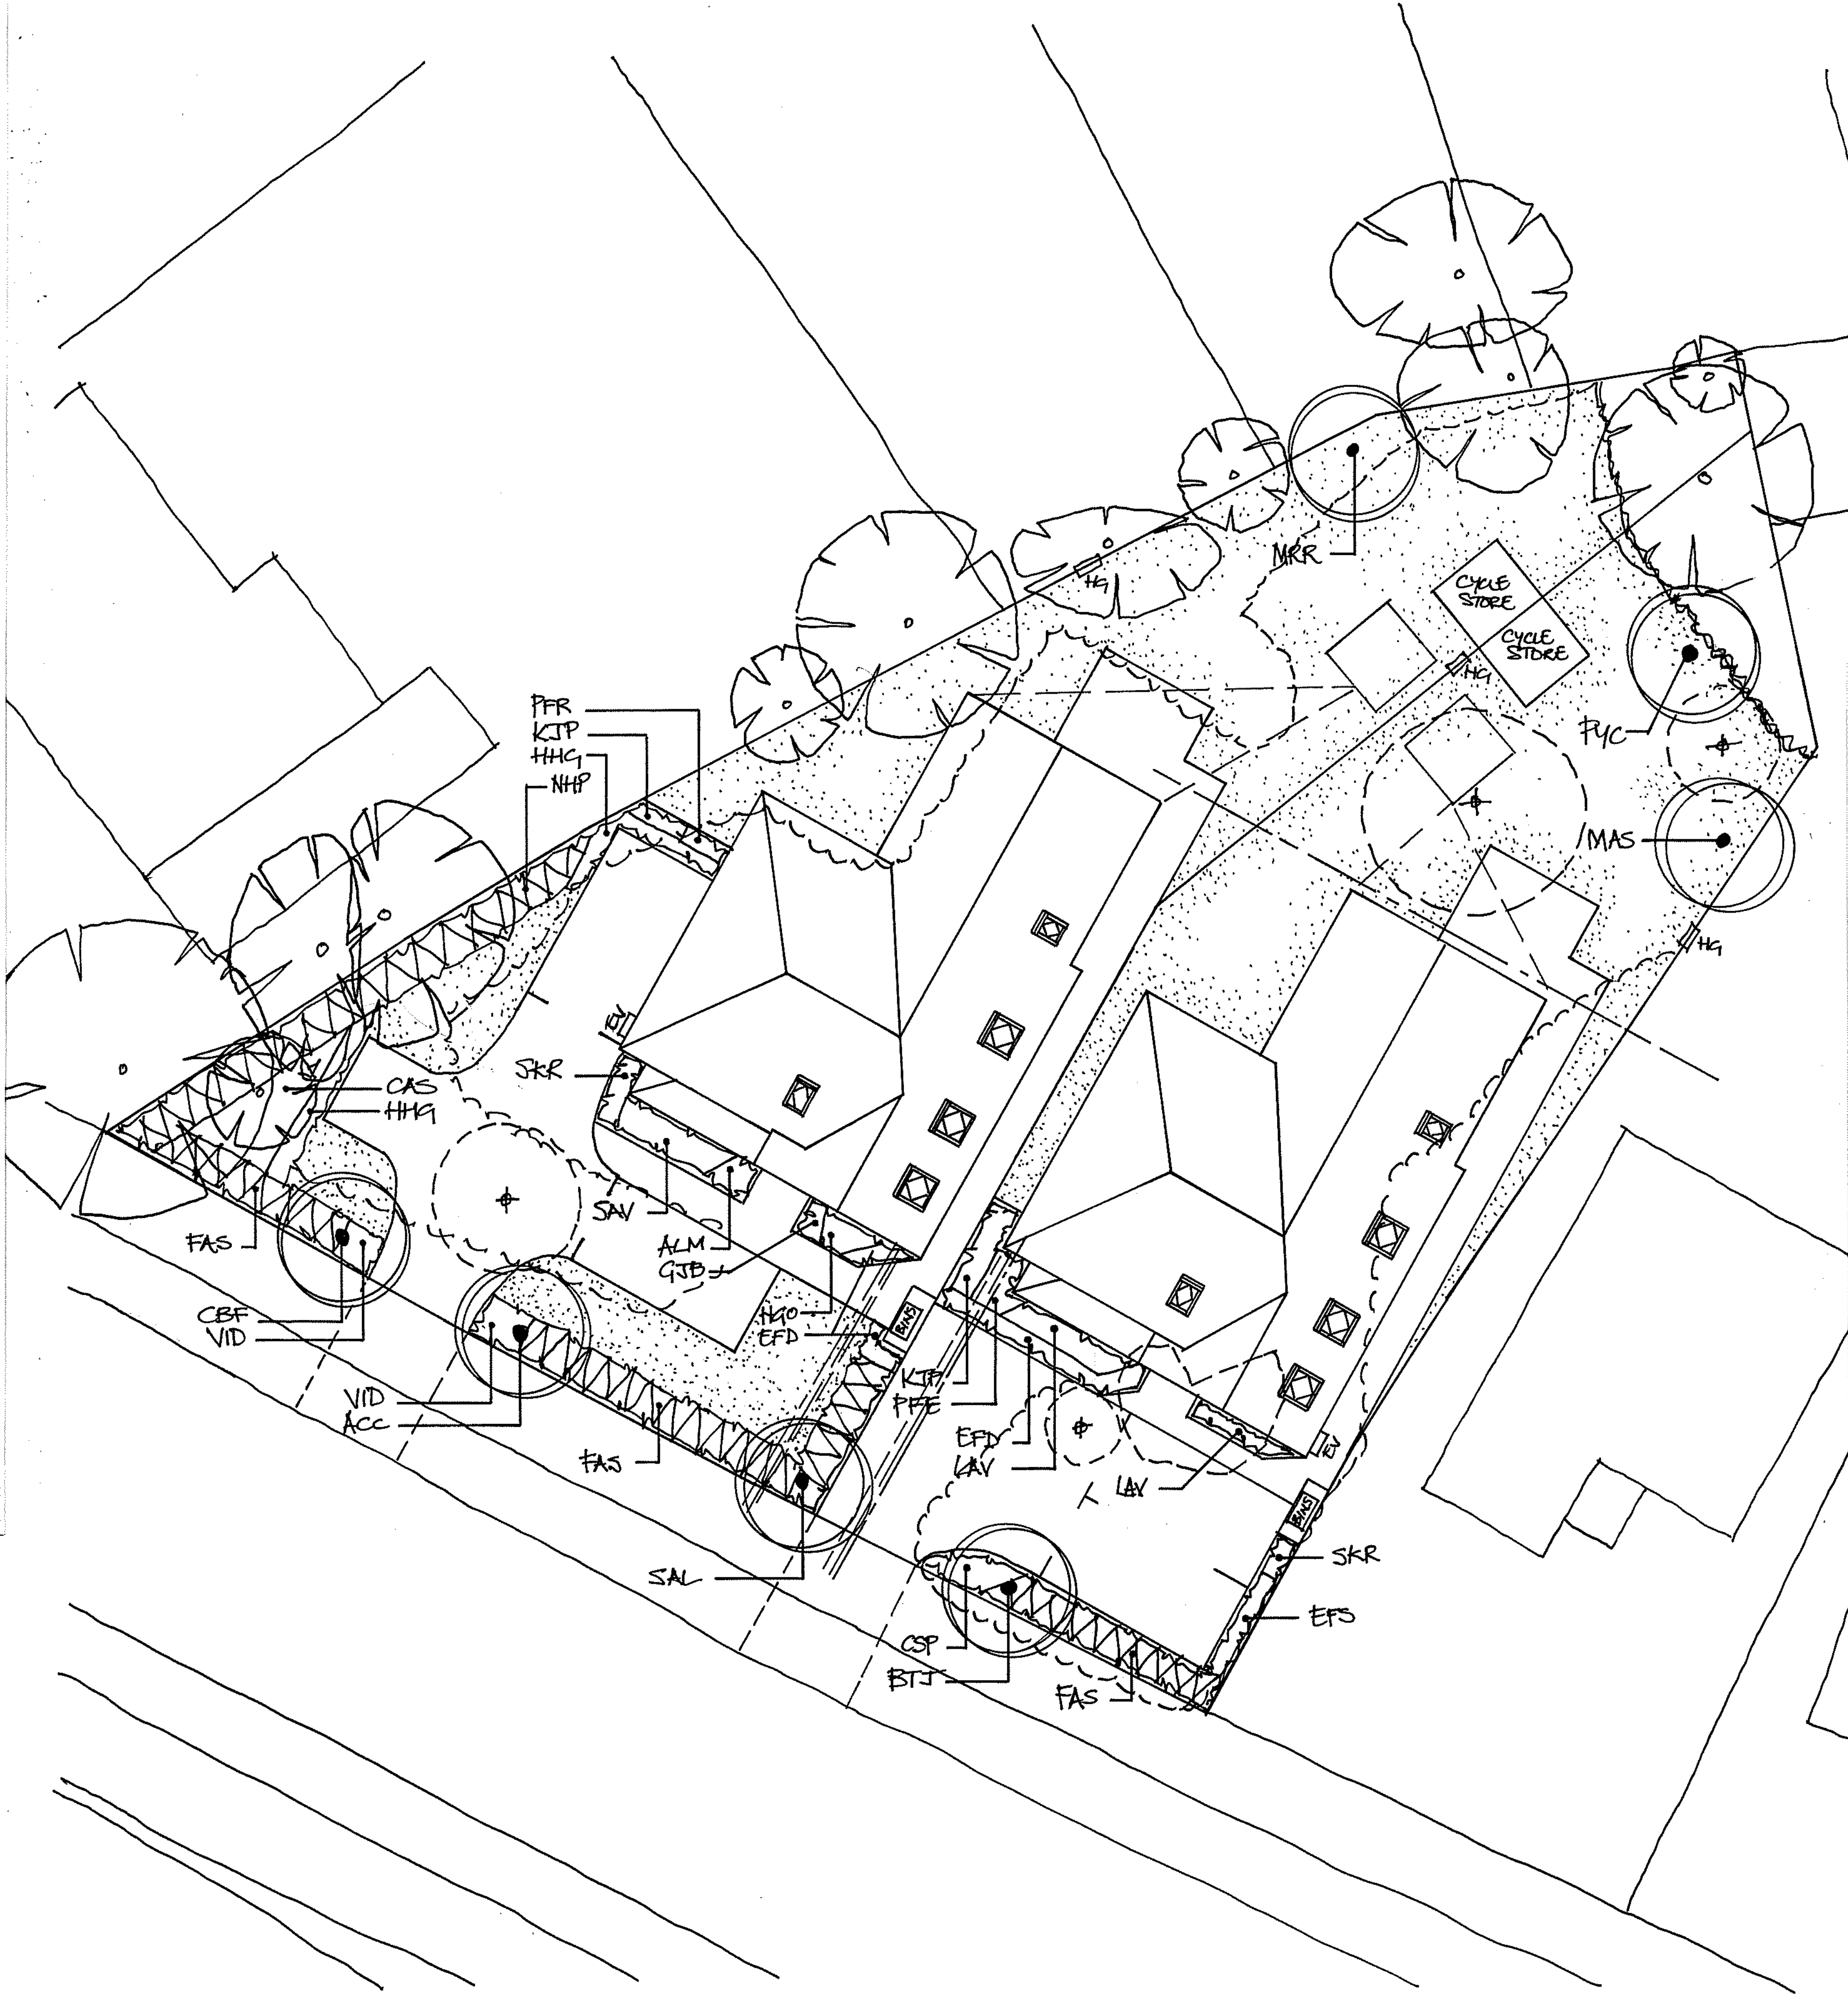

Note: Drawing remains the property of David Williams Landscape Consultancy and should not be copied without prior written consent.

Revision	Date	Initial
A – Cycle store(s) added and soakaways moved	2026-06-19	DHW
B – Planting updated to reflect LPA comments	2026-07-07	DHW

LEGEND




EXISTING TREES RETAINED



EXTENT OF EXISTNG GARDEN VEGETATION RETAINED




EXISTING TREES / VEGETATION TO BE REMOVED



PROPOSED TREE PLANTING




PROPOSED SHRUB PLANTING




PROPOSED HEDGE PLANTING



PROPOSED GRASSED AREAS



PROPOSED HEDGEHOG GAPS



PROPOSED SERVICE / DRAINAGE ROUTES

PLANTING SCHEDULE

TREE PLANTING

Abbr.	Species	Girth/Size (cm)	Centres
ACC	Acer campestre 'Streetwise'	H' Std	12 – 14 cm
BTJ	Betula utilis 'Jacquemontii'	H' Std	12 – 14 cm
CBF	Carpinus betulus 'Frans Fontaine'	H' Std	12 – 14 cm
MAS	Malus sylvestris	H' Std	10 – 12 cm
MRR	Malus x robusta 'Red Sentinel'	Std	8 – 10 cm
PYC	Pyrus calleryana	H' Std	12 – 14 cm
SAL	Sorbus aria 'Lutescens'	H' Std	12 – 14 cm

SHRUBS / HERBACEOUS/GROUND COVER PLANTING

Abbr.	Species	Type/Size (cm)	Centres
ALM	Alchemilla mollis	3-4L Pot	20 – 30 cm
CSP	Cistus 'Silver Pink'	3L Pot	30 – 40 cm
CAS	Cornus alba 'Sibirica'	3L Pot	40-60 cm
EFD	Euonymus fortunei 'Darts Blanket'	2L Pot	20 – 30 cm
EFS	Euonymus fortunei 'Silver Queen'	2L Pot	20 – 30 cm
GJB	Geranium 'Johnson Blue'	1 – 2L Pot	15 – 20 cm
HGO	Hebe 'Great Orme'	3L Pot	30 – 40 cm
HNG	Hedera helix 'Glacier'	1L Pot	20 – 30 cm
KJP	Kerria japonica 'Pleniflora'	3L Pot	50 – 60 cm
LAV	Lavandula angustifolia 'Munstead'	3L Pot	25 – 30 cm
PFE	Potentilla fruticosa 'Elizabeth'	3L Pot	30 – 40 cm
PFR	Photinia x fraseri 'Red Robin'	5L Pot	60 – 80 cm
SAV	Santolina viren	3L Pot	25 – 30 cm
SKR	Skimmia japonica 'Rubella'	3L Pot	40 – 60 cm
VID	Viburnum davidii	3L Pot	20 – 30 cm

HEDGE PLANTING Planted in 2 rows 600mm apart and at staggered centres 500mm apart

Abbr.	Species	Type/Size (cm)	Centres
FAS	Fagus sylvatica	TS 1+1	40 – 60 cm

NATIVE HEDGE PLANTING

Abbr.	Species	%	Type / Size (cm)	Centres
NHP	Acer campestre	10	1 + 0 Br	40 – 60 cm
	Cornus sanguinea	10	1 + 1 Br	60 – 80 cm
	Corylus avellana	20	1 + 1 Br	40 – 60 cm
	Crataegus monogyna	30	1 + 0 Br	40 – 60 cm
	Euonymus europaeus	10	1 + 1 Br	50 – 60 cm
	Lonicera periclymenum	2	2L Pot	25 – 30 cm
	Rosa canina	8	1 + 1 Br	40 – 50 cm
	Viburnum opulus	10	1 + 1 Br	40 – 60 cm

NOTE:

H' Std	= Heavy Standard Tree stock
Std	= Standard Tree stock
Br	= Transplant / Bare Root Stock
Pot	= Container grown plants

Project:

**DEVELOPMENT AT No.26 NEW LANE HILL,
READING BERKSHIRE RG30 4JP.**

Drawing Title:

LANDSCAPE PROPOSALS PLAN

Status: **PLANNING**

Date: 07-04-2026	Scale: 1:100 @ A1 size 1:200 @ A3 size	Drawn by: DHW
Project No: 0563	Drawing No: L1	Revision: B

David Williams
Landscape
Consultancy



Dyers
East Pufford
Holsworthy
Devon
EX22 7UG

e: david.williams@dwlc.co.uk
t: (01409) 240 278 m: (07826) 270 368
www.dwlc.co.uk