


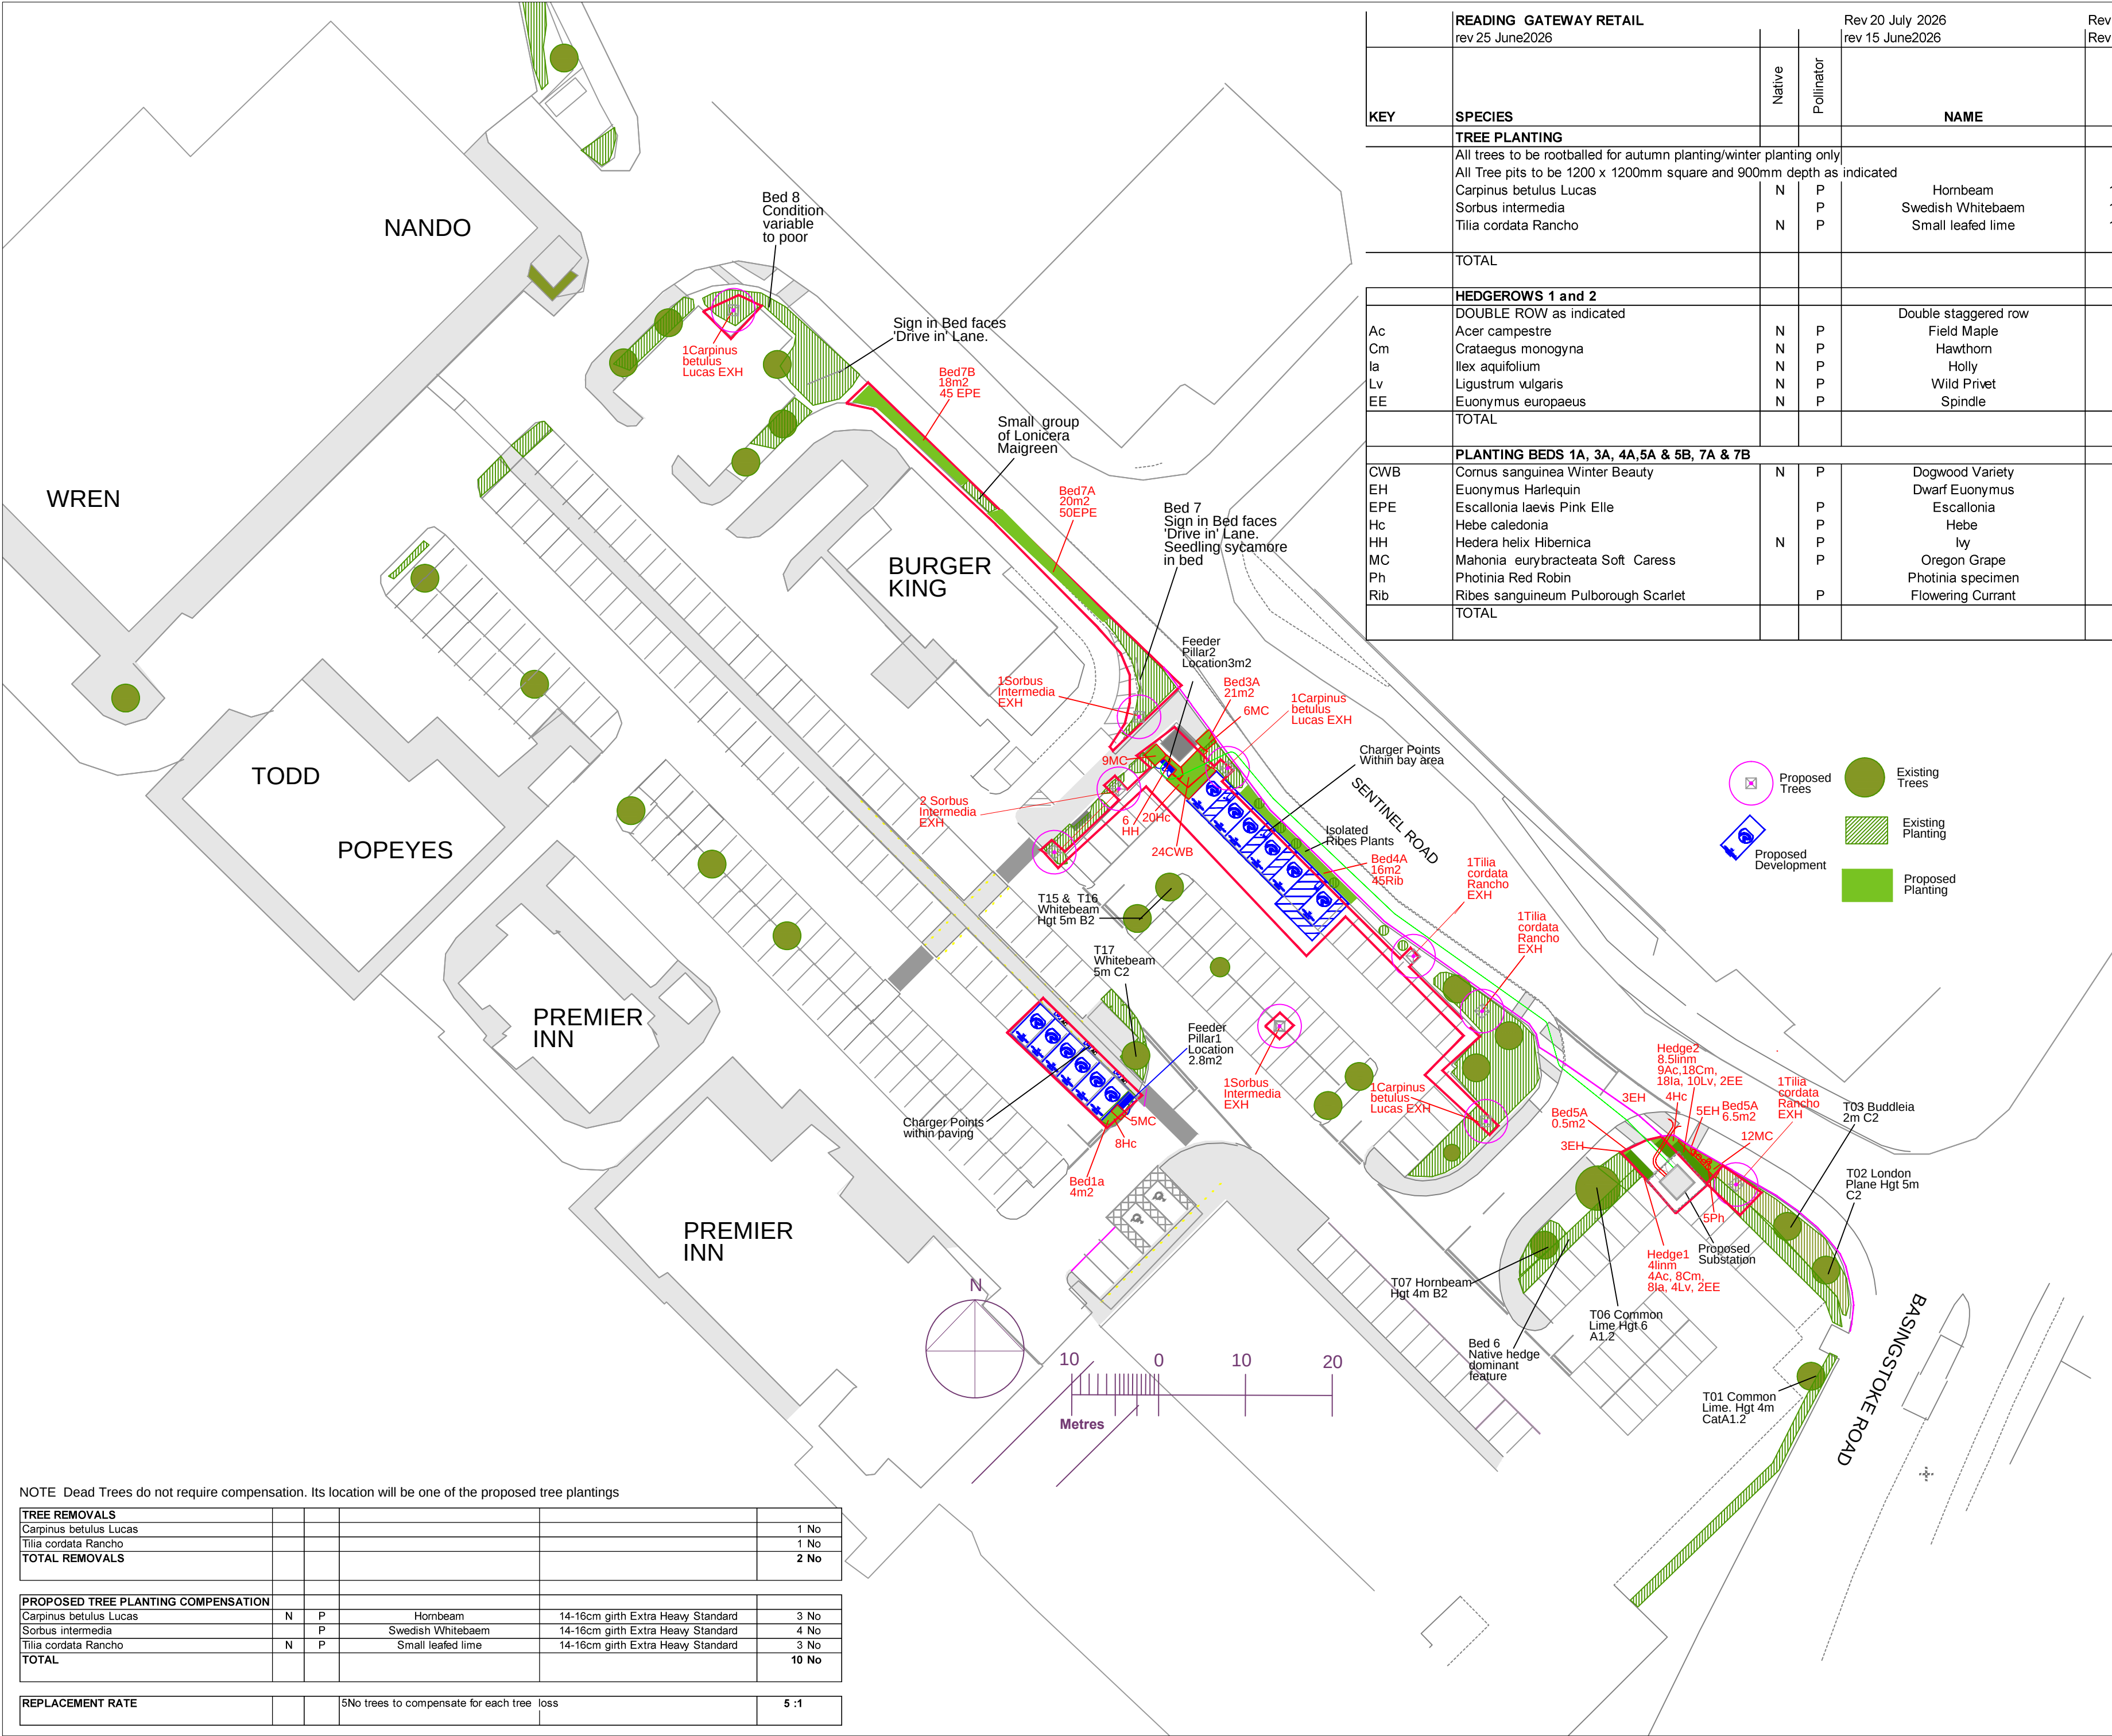

	READING GATEWAY RETAIL			Rev 20 July 2026	Rev 31 March 2026	
	rev 25 June2026			rev 15 June2026	Rev 5 June 2026	
KEY	SPECIES	Native	Pollinator	NAME	SIZE	QTY
TREE PLANTING						
All trees to be rootballed for autumn planting/winter planting only						
All Tree pits to be 1200 x 1200mm square and 900mm depth as indicated						
	Carpinus betulus Lucas	N	P	Horbeam	14-16cm girth Extra Heavy Standard	3 No
	Sorbus intermedia		P	Swedish Whitebaem	14-16cm girth Extra Heavy Standard	4 No
	Tilia cordata Rancho	N	P	Small leaved lime	14-16cm girth Extra Heavy Standard	3 No
TOTAL						10 No
HEDGEROWS 1 and 2						
	DOUBLE ROW as indicated			Double staggered row	Plant at 0.30m cts	12.5 linm
Ac	Acer campestre	N	P	Field Maple	60-90cm 1+1	13 No
Cm	Crataegus monogyna	N	P	Hawthorn	60-90cm 1+1	26 No
la	Ilex aquifolium	N	P	Holly	60-90cm 1+1	26 No
Lv	Ligustrum vulgare	N	P	Wild Privet	60-90cm 1+1	14 No
EE	Euonymus europaeus	N	P	Spindle	60-90cm 1+1	4 No
TOTAL						83 No
PLANTING BEDS 1A, 3A, 4A,5A & 5B, 7A & 7B						
CWB	Cornus sanguinea Winter Beauty	N	P	Dogwood Variety	20-30cm 2Lpot	24 No
EH	Euonymus Harlequin			Dwarf Euonymus	20-30cm 2Lpot	11 No
EPE	Escallonia laevis Pink Elle		P	Escallonia	40-60cm 3Lpot	95 No
Hc	Hebe caledonia		P	Hebe	20-30cm 2Lpot	32 No
HH	Hedera helix Hibernica	N	P	Ivy	60-90cm 2Lpot	6 No
MC	Mahonia eurybracteata Soft Caress		P	Oregon Grape	40-60cm 3Lpot	32 No
Ph	Photinia Red Robin			Photinia specimen	30Lpot height minimum 1.80m	5 No
Rib	Ribes sanguineum Pulborough Scarlet		P	Flowering Currant	40-60cm 3Lpot	45 No
TOTAL						250 No

CA- RGW-2026-03 Rev A

19 Feb 2026
Trees 6no replacemnet
3:1 for losses

CA- RGW-2026-03 Rev B

31 March 2026
Site Boundary
added

CA- RGW-2026-03 Rev C

4 May 2026
Additional works added

CA- RGW-2026-03 Rev D

11 May 2026
Possible substation
locations

CA- RGW-2026-03 Rev E

6 June 2026
Revised substation
location

CA- RGW-2026-03 Rev F

14 June 2026
Revised substation
location

CA- RGW-2026-03 Rev G

25 June2026
Revised planting

CA- RGW-2026-03 Rev H

20 July 2026
Full Check add Tree info

Corscadden Associates
77 Fairleigh Road
Pontcanna, Cardiff. CF11 9JW
Tel 07966 423074
email ca@corscaddenassociates.com

READING GATEWAY
GATEWAY PROCTOR
END SOUTH
READING
RG2 0GG

Drawing Title

LANDSCAPE
PROPOSALS

Scale
1: 500 at A2

Date
29 Jan 2026
Drawing No

CA- RGW-2026-03 Rev H

NOTE Dead Trees do not require compensation. Its location will be one of the proposed tree plantings

TREE REMOVALS					
Carpinus betulus Lucas					1 No
Tilia cordata Rancho					1 No
TOTAL REMOVALS					2 No
PROPOSED TREE PLANTING COMPENSATION					
Carpinus betulus Lucas	N	P	Horbeam	14-16cm girth Extra Heavy Standard	3 No
Sorbus intermedia		P	Swedish Whitebaem	14-16cm girth Extra Heavy Standard	4 No
Tilia cordata Rancho	N	P	Small leaved lime	14-16cm girth Extra Heavy Standard	3 No
TOTAL					10 No
REPLACEMENT RATE					
			5No trees to compensate for each tree loss		5 :1