


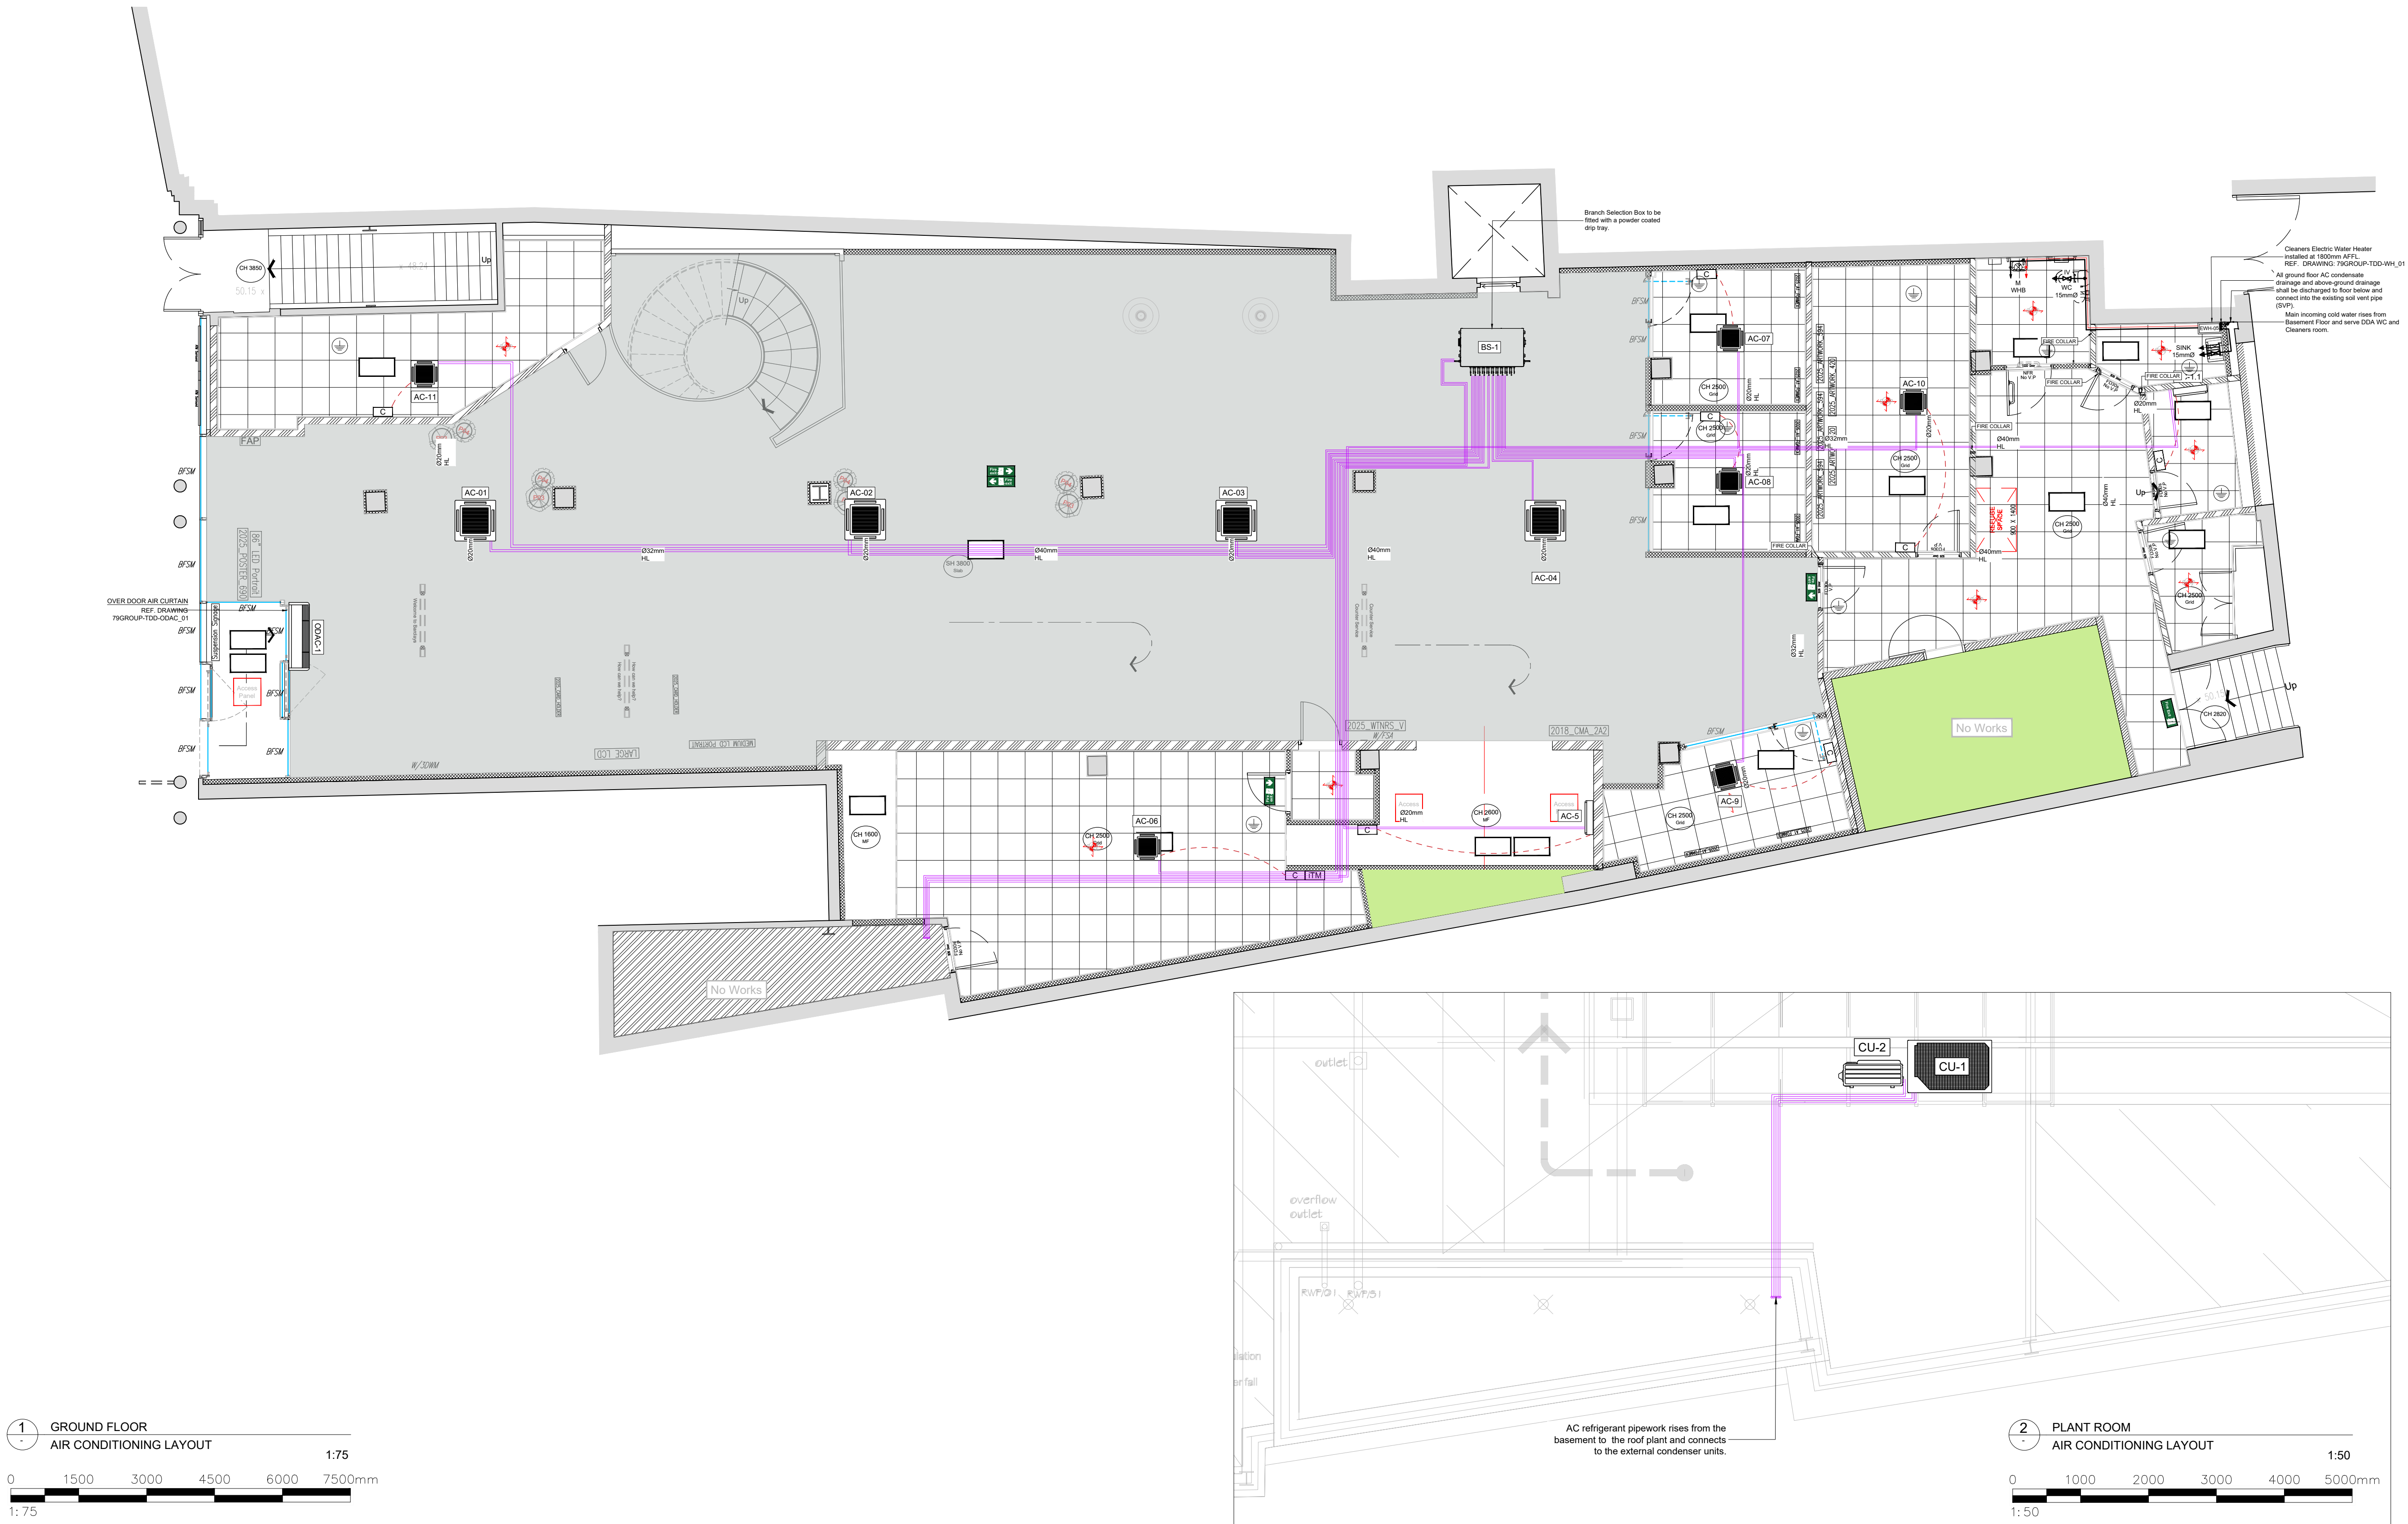

- General Notes:
- The FoH open plan should have a clear separate schedule from any offices schedule and should be set for on/off control as per the hours specified for the sites trading hours. However the "ON" instruction should also include to set the units to 20 deg C Heating mode.
 - At the ITM the set point range for Offices (both BoH FoH) should be set to 20 to 24 deg C limit in both heating and cooling.
 - If the open plan area units have remote controllers, for R32 alarm purposes, then these should be fully locked down (either at the ITM or at the remote controller via the Madoka Assistant App).
 - The comms room Madoka remote controller can be restricted either at the ITM or at the controller itself (using the Madoka Assistant app).

Symbol	Description
	CASSETTE AIR CONDITIONING UNIT
	WALL MOUNTED AIR CONDITIONING UNIT
	REFRIGERANT PIPE
	WIRING
	REMOTE AIR SENSOR
	AC CONTROLLER
	VRF UNIT
	SPLIT UNIT
	BRANCH SELECTOR

P02	15.07.26	CP Issue	AK	MC
P01	30.06.26	Initial Issue	AK	MC
Rev	Date	Revision Notes	BY	CH

Client: **M&S**

Project: **BARCLAYS READING**
90-93 BROAD STREET
RG1 2AP

Status: **PRELIMINARY**
All dimensions in mm except where otherwise stated. Dimensions up to 1 metre +/- 0.5mm. Dimensions 1 metre to 5 metres +/- 1mm. Except where otherwise stated. © Copyright drawing.

79group
enlightened environments
01753 444444 | 01753 444444 | 01753 444444

Drawing Title:	GROUND FLOOR POWER AIR CONDITIONING LAYOUT	Revision No.	P02
Drawing No.	RPT5773_2026	Reading Broad	
ST_MBR_3FSD_GFL_MECH_HVAC_002			
Drawn:	AA	Checked:	MC
Scale:	@A1	Originated Date:	30.06.26