

Reading Borough Council
Roadside Advertising Estate
PAVEMENT REINSTATEMENT

Forum Unit Proposals



Installation Process

FOUNDATION ASSEMBLY and INSTALLATION SEQUENCE

- Careful excavation of the site to a depth of 150mm and paved material carefully stored
- Installation of base plate & reinstatement of paving material
- Installation of unit out of hours to avoid disruption

Process is typically undertaken within a 2-3 days

The foundation base plate is designed to enable installation and re-instatement of the foundation in one operation, allowing for mains electrical supply and meter installation prior to screen installation

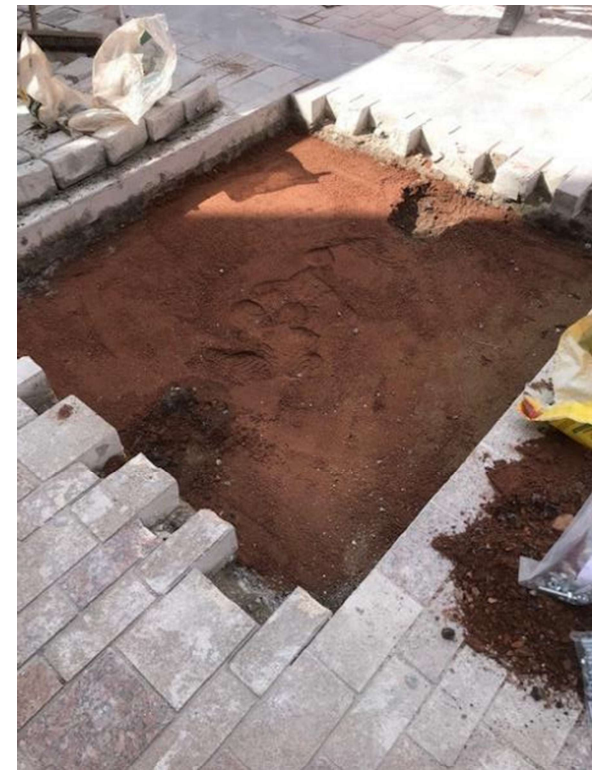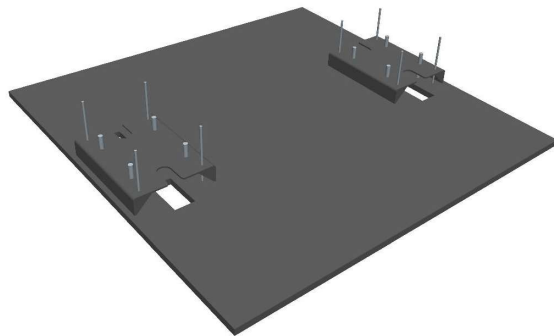

Forum Unit Proposals

Examples of Works to Highways



The images below show recent installations into the centre of Bradford and Hull with the use of local York stone paving and block paviours in the pavement reinstatement. The narrow strip foundation is confined to a minimalist above ground stainless steel plate around which the surrounding surfaces are cut to fit and form level surface. Where, as in the case of the Peterborough estate, column units with a larger footprint are removed, the reinstatement will be in the same materials and the highest standards.

