West

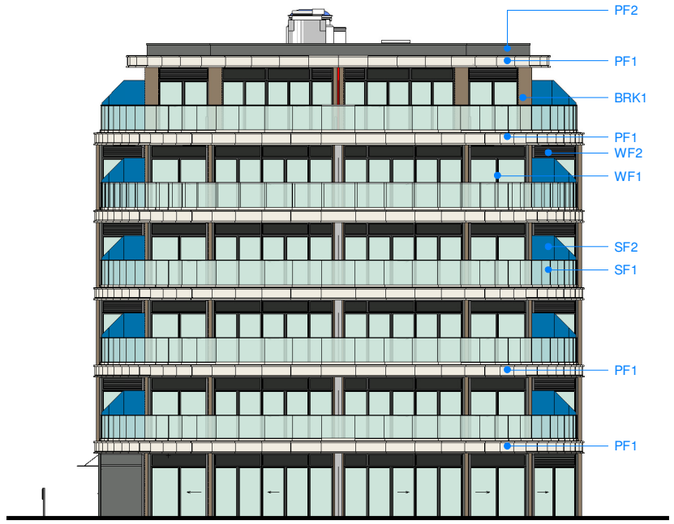

South

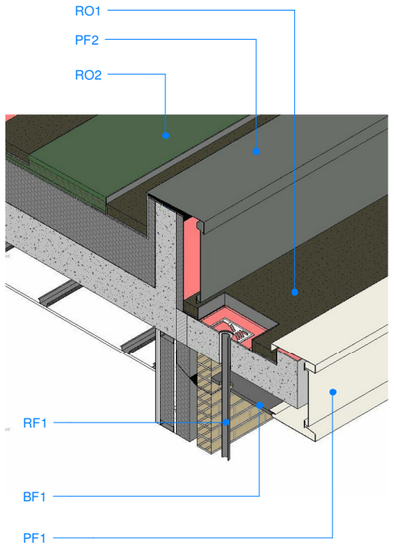

TOPMOST ROOF

East

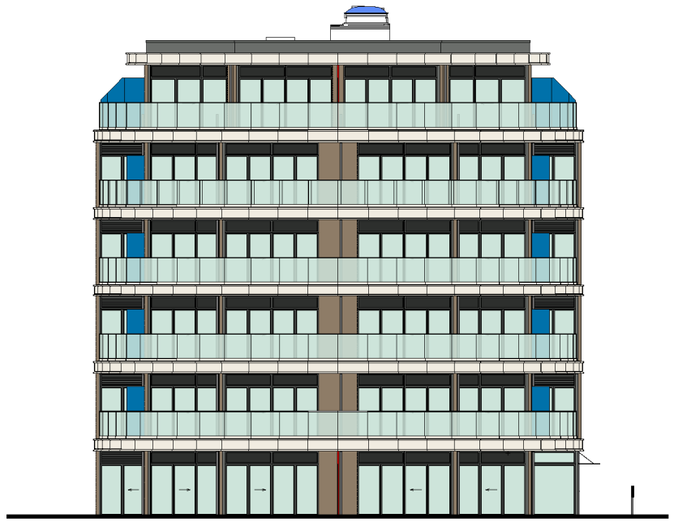

North

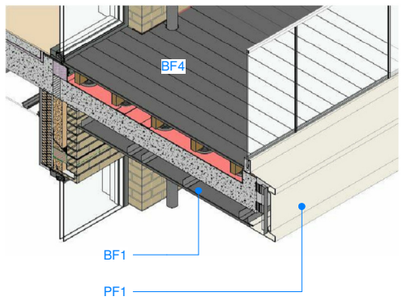

TYPICAL BALCONY

Ibstock Bradgate Medium Grey 0032 with
CPI Euromix mortar colour 091:
BRK1 - Brick Type 1 (Blocks 1)

PPC Aluminium RAL 7005 Mouse Grey:
WF1 - Window frames and Back painted spandrel panels
WF2 - Window Loured Panels
DF1 - External door frames
DF2 - External Louvred doors and panels
RS1 - Metal Rainscreen panels
PF2 - Pressed metal flashings
RW1 - Rainwater pipes

PPC Aluminium RAL 9010 Pure White:
PF1 - Balcony fascia

Sealed exposed concrete
CF1 - Circular concrete columns on balcony

Hardie Panel - Colour Cobble Stone - riveted with matching rivets
BF1 - Balcony soffits

RAL 7039 Quartz Grey:
BF4 - MyDek Balcony decking

Glass (Laminated) with brushed stainless steel fixing channel and top channel:
SF1 - Balcony balustrades

Glass (Heavily Frosted safety glazing)with brushed stainless steel posts:
SF2 - Balcony privacy screens

Grey Gravel Ballast:
RO1 - Roof finish to top floor slab canopy and top roof edges

Extensive Brown Roof:
RO2 - Top Roof finish

Waterproofing Capsheet on insulation -
Manufacturer's standard grey:
RO3 - Finish to A.O.V and rooflight upstand

BrookesArchitects

Upstairs at The Grange, Bank Lane,
London SW15 5JT

T 020 8487 1223
F 020 8876 4172
E info@brookesarchitects.co.uk

www.brookesarchitects.co.uk

GREEN PARK VILLAGE PHASE 6, READING: TYPICAL BLOCK 1, 2 and 3 EXTERNAL MATERIALS SCHEDULE

EAST

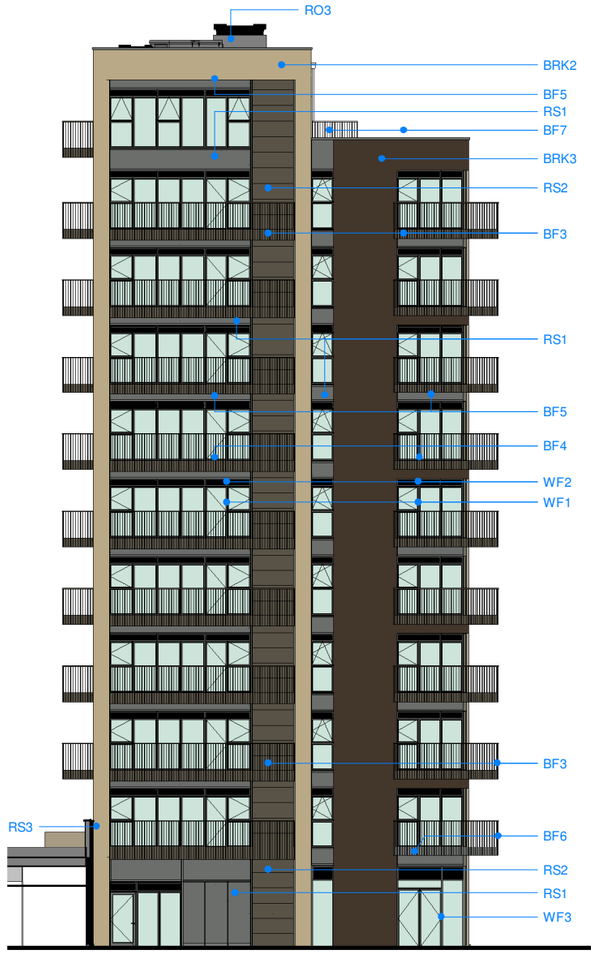

NORTH

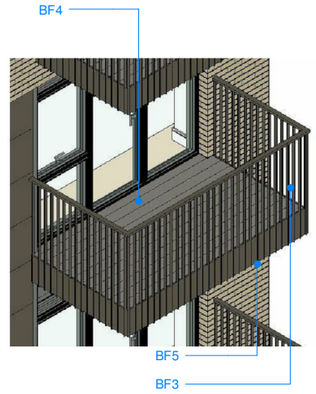

SAPPHIRE BOLT ON BALCONY

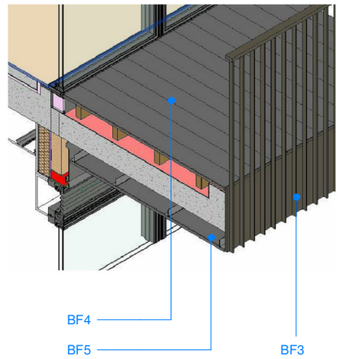

CONCRETE BALCONY

Taylor Maxwell Vandersanden Corum Code 164 with CPI Euromix mortar colour 092:
BRK2 - Brick Type 2 (Light side)

The Bespoke Brick Company Fuji with CPI Euromix mortar colour 091:
BRK3 - Brick Type 3 (Dark side)

RAL 7039 Quartz Grey:
BF4 - MyDek Balcony decking

PPC Aluminium RAL 7005 Mouse Grey:
WF1 - Window frames, cills and Back painted spandrel panels
WF2 - Window louvred Panels
WF3 - Curtain wall shopfront and backpainted panels
DF1 - External door frames
DF2 - External louvred doors and panels
RS1 - Metal rainscreen panels
PF2 - Pressed metal flashings and copings
SF4 - Metal railing to Podium and car park
BF6 - Balcony fascia, metal railing and soffit - Block 4 1st floor corners
RW1 - Rainwater pipes and hoppers

PPC Aluminium RAL 7013 Brown Grey:
RS2 - Metal Rainscreen panels
BF3 - Sapphire and concrete balcony fascia + metal balustrades
BF5 - Balcony soffit metal panels
BF7 - Balustrades to top floor terrace areas
SF5 - Metal Louvred screen to front of car park
SF6 - Metal gates to front of car park

Metal Panel screen RAL 7013:
SC1 - Balcony privacy screens

High security mesh partitioning (manufacturer's standard colour):
SF4 - Bike and Bin store enclosures

Fairing Coat Render:
CF2 - Upstand to podium front edges

Standard Concrete finish:
CF3 - Exposed stairs and concrete walls

Grey Gravel Ballast:
RO1 - Roof finish to top floor slab canopy and top roof edges

Extensive Brown Roof:
RO2 - Top Roof finish

Waterproofing Capsheet on insulation - Manufacturer's standard grey:
RO3 - Finish to A.O.V and rooflight upstand

Fairfaced Medium Density Blockwork - Painted:
BLK1 - Ground floor walls facing the car park

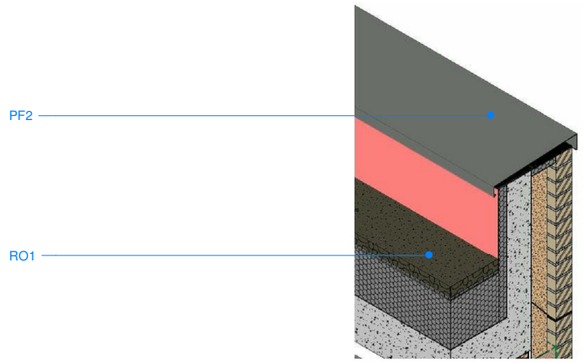

TERRACE

BrookesArchitects

Upstairs at The Grange, Bank Lane,
London SW15 5JT

T 020 8487 1223
F 020 8876 4172
E info@brookesarchitects.co.uk

www.brookesarchitects.co.uk

GREEN PARK VILLAGE PHASE 6, READING: TYPICAL BLOCK 4 and 5 EXTERNAL MATERIALS SCHEDULE

WEST

SOUTH

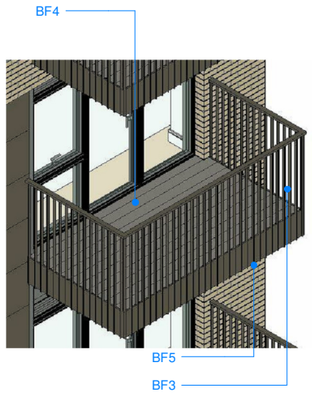

SAPPHIRE BOLT ON BALCONY

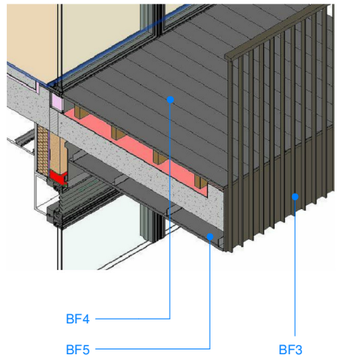

CONCRETE BALCONY

Taylor Maxwell Vandersanden Corum Code 164 with CPI Euromix mortar colour 092:
BRK2 - Brick Type 2 (Light side)

The Bespoke Brick Company Fuji with CPI Euromix mortar colour 091:
BRK3 - Brick Type 3 (Dark side)

RAL 7039 Quartz Grey:
BF4 - MyDek Balcony decking

PPC Aluminium RAL 7005 Mouse Grey:
WF1 - Window frames, cills and Back painted spandrel panels
WF2 - Window louvred Panels
WF3 - Curtain wall shopfront and backpainted panels
DF1 - External door frames
DF2 - External louvred doors and panels
RS1 - Metal rainscreen panels
PF2 - Pressed metal flashings and copings
SF4 - Metal railing to Podium and car park
BF6 - Balcony fascia, metal railing and soffit - Block 4 1st floor corners
RW1 - Rainwater pipes and hoppers

PPC Aluminium RAL 7013 Brown Grey:
RS2 - Metal Rainscreen panels
BF3 - Sapphire and concrete balcony fascia + metal balustrades
BF5 - Balcony soffit metal panels
BF7 - Balustrades to top floor terrace areas
SF5 - Metal Louvred screen to front of car park
SF6 - Metal gates to front of car park

Metal Panel screen RAL 7013:
SC1 - Balcony privacy screens

High security mesh partitioning (manufacturer's standard colour):
SF4 - Bike and Bin store enclosures

Fairing Coat Render:
CF2 - Upstand to podium front edges

Standard Concrete finish:
CF3 - Exposed stairs and concrete walls

Grey Gravel Ballast:
RO1 - Roof finish to top floor slab canopy and top roof edges

Extensive Brown Roof:
RO2 - Top Roof finish

Waterproofing Capsheet on insulation - Manufacturer's standard grey:
RO3 - Finish to A.O.V and rooflight upstand

Fairfaced Medium Density Blockwork - Painted:
BLK1 - Ground floor walls facing the car park

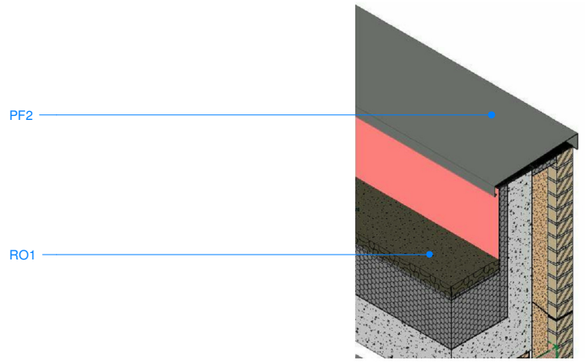

TERRACE

BrookesArchitects

Upstairs at The Grange, Bank Lane,
London SW15 5JT

T 020 8487 1223
F 020 8876 4172
E info@brookesarchitects.co.uk

www.brookesarchitects.co.uk

GREEN PARK VILLAGE PHASE 6, READING: TYPICAL BLOCK 4 and 5 EXTERNAL MATERIALS SCHEDULE