

Product 4 (Detailed Flood Risk) for Duke Street, Reading, RG1 4SA

Our Ref: **THM121205**

Product 4 is designed for developers where Flood Risk Standing Advice FRA (Flood Risk Assessment) Guidance Note 3 Applies. This is:

- i) "all applications in Flood Zone 3, other than non-domestic extensions less than 250 sq metres; and all domestic extensions", and
- ii) "all applications with a site area greater than 1 ha" in Flood Zone 2.

Product 4 includes the following information:

Ordnance Survey 1:25k colour raster base mapping;
Flood Zone 2 and Flood Zone 3;
Relevant model node locations and unique identifiers (for cross referencing to the water levels, depths and flows table);
Model extents showing *defended* scenarios;
FRA site boundary (where a suitable GIS layer is supplied);
Flood defence locations (where available/relevant) and unique identifiers; (supplied separately)
Flood Map areas benefiting from defences (where available/relevant);
Flood Map flood storage areas (where available/relevant);
Historic flood events outlines (where available/relevant, not the Historic Flood Map) and unique identifiers;
Statutory (Sealed) Main River (where available within map extents);

A table showing:

- i) Model node X/Y coordinate locations, unique identifiers, and levels and flows for *defended* scenarios.
- ii) Flood defence locations unique identifiers and attributes; (supplied separately)
- iii) Historic flood events outlines unique identifiers and attributes; and
- iv) Local flood history data (where available/relevant).

Please note:

If you will be carrying out computer modelling as part of your Flood Risk Assessment, please request our guidance which sets out the requirements and best practice for computer river modelling.

This information is based on that currently available as of the date of this letter. You may feel it is appropriate to contact our office at regular intervals, to check whether any amendments/ improvements have been made. Should you re-contact us after a period of time, please quote the above reference in order to help us deal with your query.

This information is provided subject to the enclosed notice which you should read.

This letter is not a Flood Risk Assessment. The information supplied can be used to form part of your Flood Risk Assessment. Further advice and guidance regarding Flood Risk Assessments can be found on our website at:


<https://www.gov.uk/guidance/flood-risk-assessment-local-planning-authorities>

If you would like advice from us regarding your development proposals you can complete our pre application enquiry form which can be found at:


<https://www.gov.uk/government/publications/pre-planning-application-enquiry-form-preliminary-opinion>

Flood Map for Planning centred on Duke Street, Reading, RG1 4SA

Created on 25/03/19 REF: THM121205

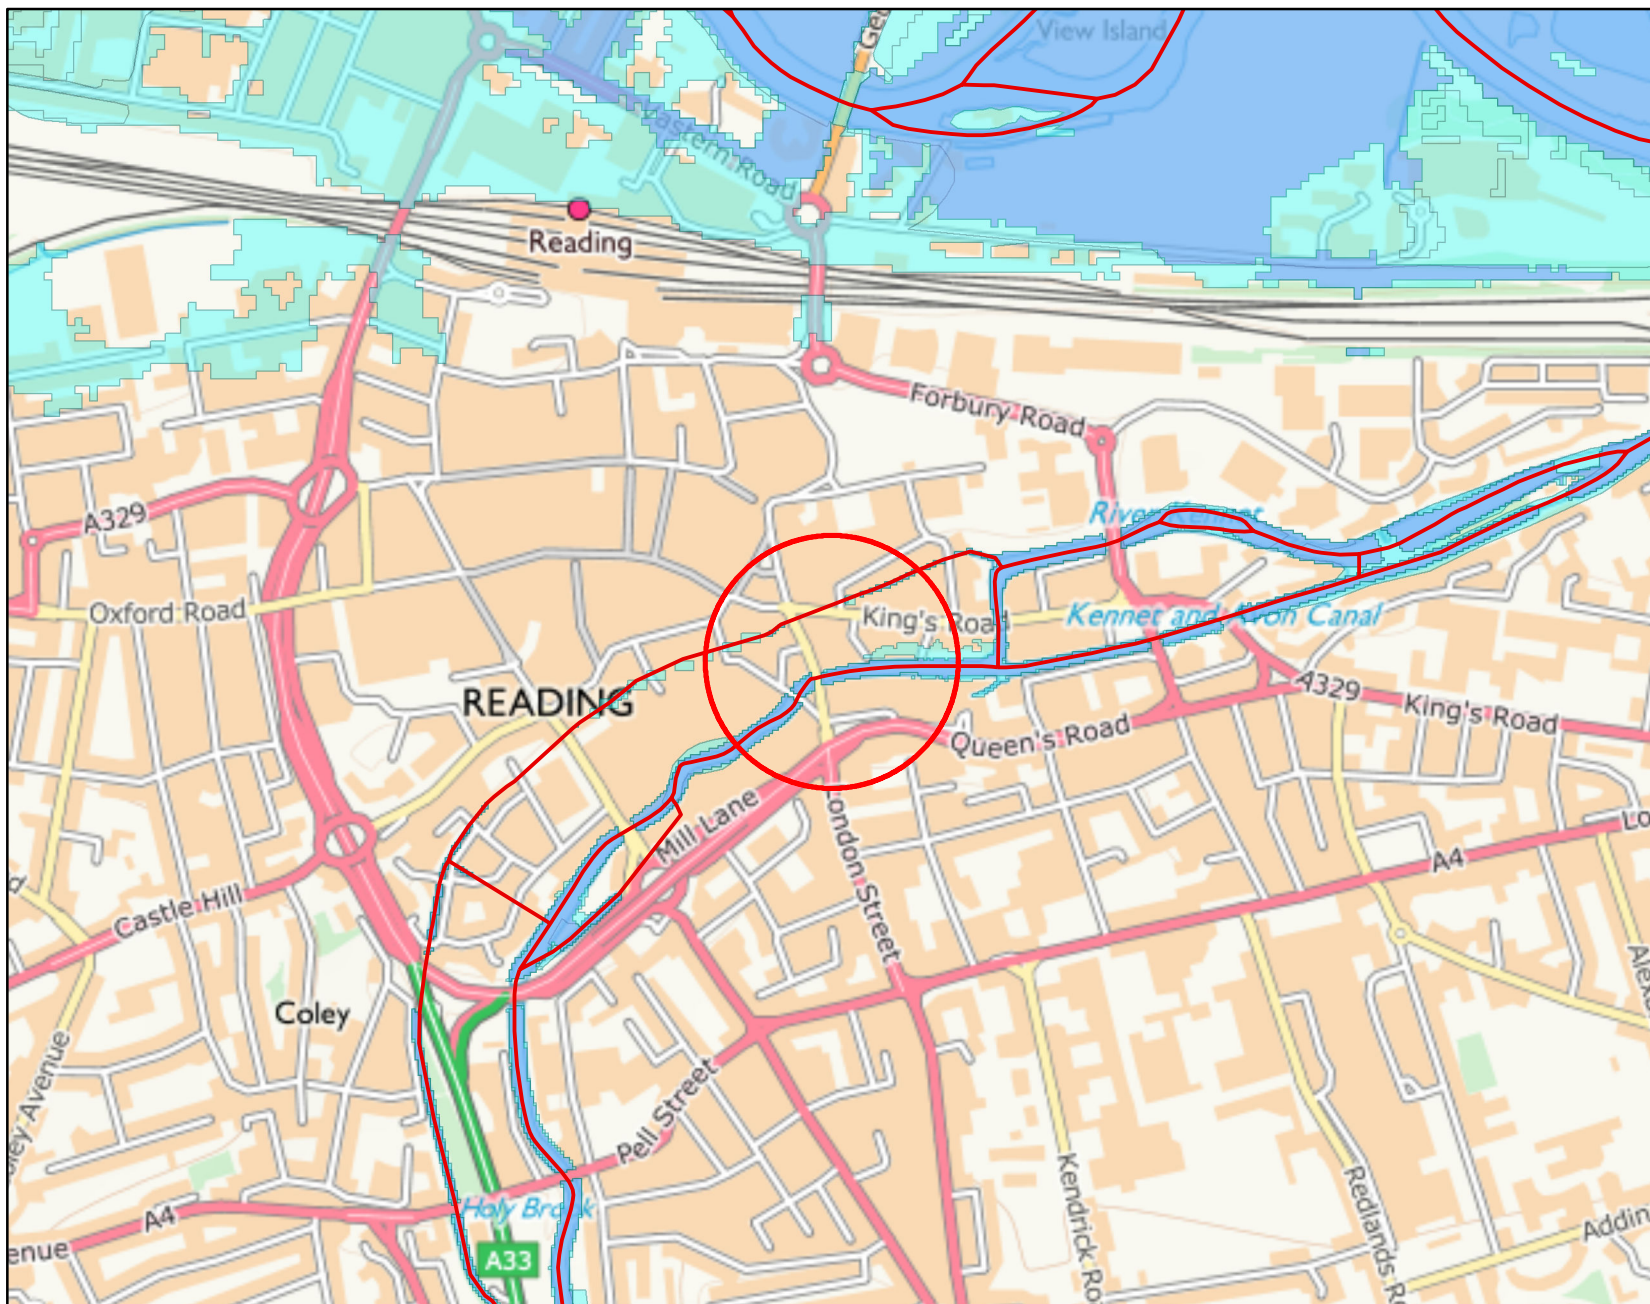

Kilometres



Legend

- Main River
- Flood defences
- Areas benefiting from flood defences
- Flooding from rivers or sea (FZ3)
- Extent of extreme flood (FZ2)
- Flood Map - flood storage areas

Flooding from rivers or sea without defences (Flood Zone 3) shows the area that could be affected by flooding:

- from the sea with a 1 in 200 or greater chance of happening each year
- or from a river with a 1 in 100 or greater chance of happening each year.

The Extent of an extreme flood (Flood Zone 2) shows the extent of an extreme flood from rivers or the sea with up to a 1 in 1000 chance of occurring each year.

Defence information

Defence Location: No defences on Main River

Description: This location is not currently protected by any formal defences and we do not currently have any flood alleviation works planned for the area. However we continue to maintain certain watercourses and the schedule of these can be found on our internet pages.

Model information

THM121205

Model: Kennet (Tyle Mill to Thames Confluence) 2018

Description: The information provided is taken from the Kennet (Tyle Mill to Thames confluence) 2018. The study was carried out using 1D-2D modelling software (Flood modeller-Tuflow).

Model design runs:


1 in 2/ 50% AEP; 1 in 5 / 20% AEP; 1 in 20 / 5% AEP; 1 in 30/ 3.3% AEP; 1 in 75 / 1.3% AEP; 1 in 100 / 1% AEP; 1 in 100+15% / 1% + 15% AEP with climate change; 1 in 100+25% / 1% + 25% AEP with climate change; 1 in 100+35% / 1% + 35% AEP with climate change; 1 in 100+70% / 1% + 70% AEP with climate change; and 1 in 1000 / 0.1% AEP.

Mapped Outputs:


1 in 2/ 50% AEP; 1 in 5 / 20% AEP; 1 in 20 / 5% AEP; 1 in 30/ 3.3% AEP; 1 in 75 / 1.3% AEP; 1 in 100 / 1% AEP; 1 in 100+15% / 1% + 15% AEP with climate change; 1 in 100+25% / 1% + 25% AEP with climate change; 1 in 100+35% / 1% + 35% AEP with climate change; 1 in 100+70% / 1% + 70% AEP with climate change; and 1 in 1000 / 0.1% AEP.

Detailed FRA centred on Duke Street, Reading, RG1 4SA

Created on 25/03/19 REF: THM121205

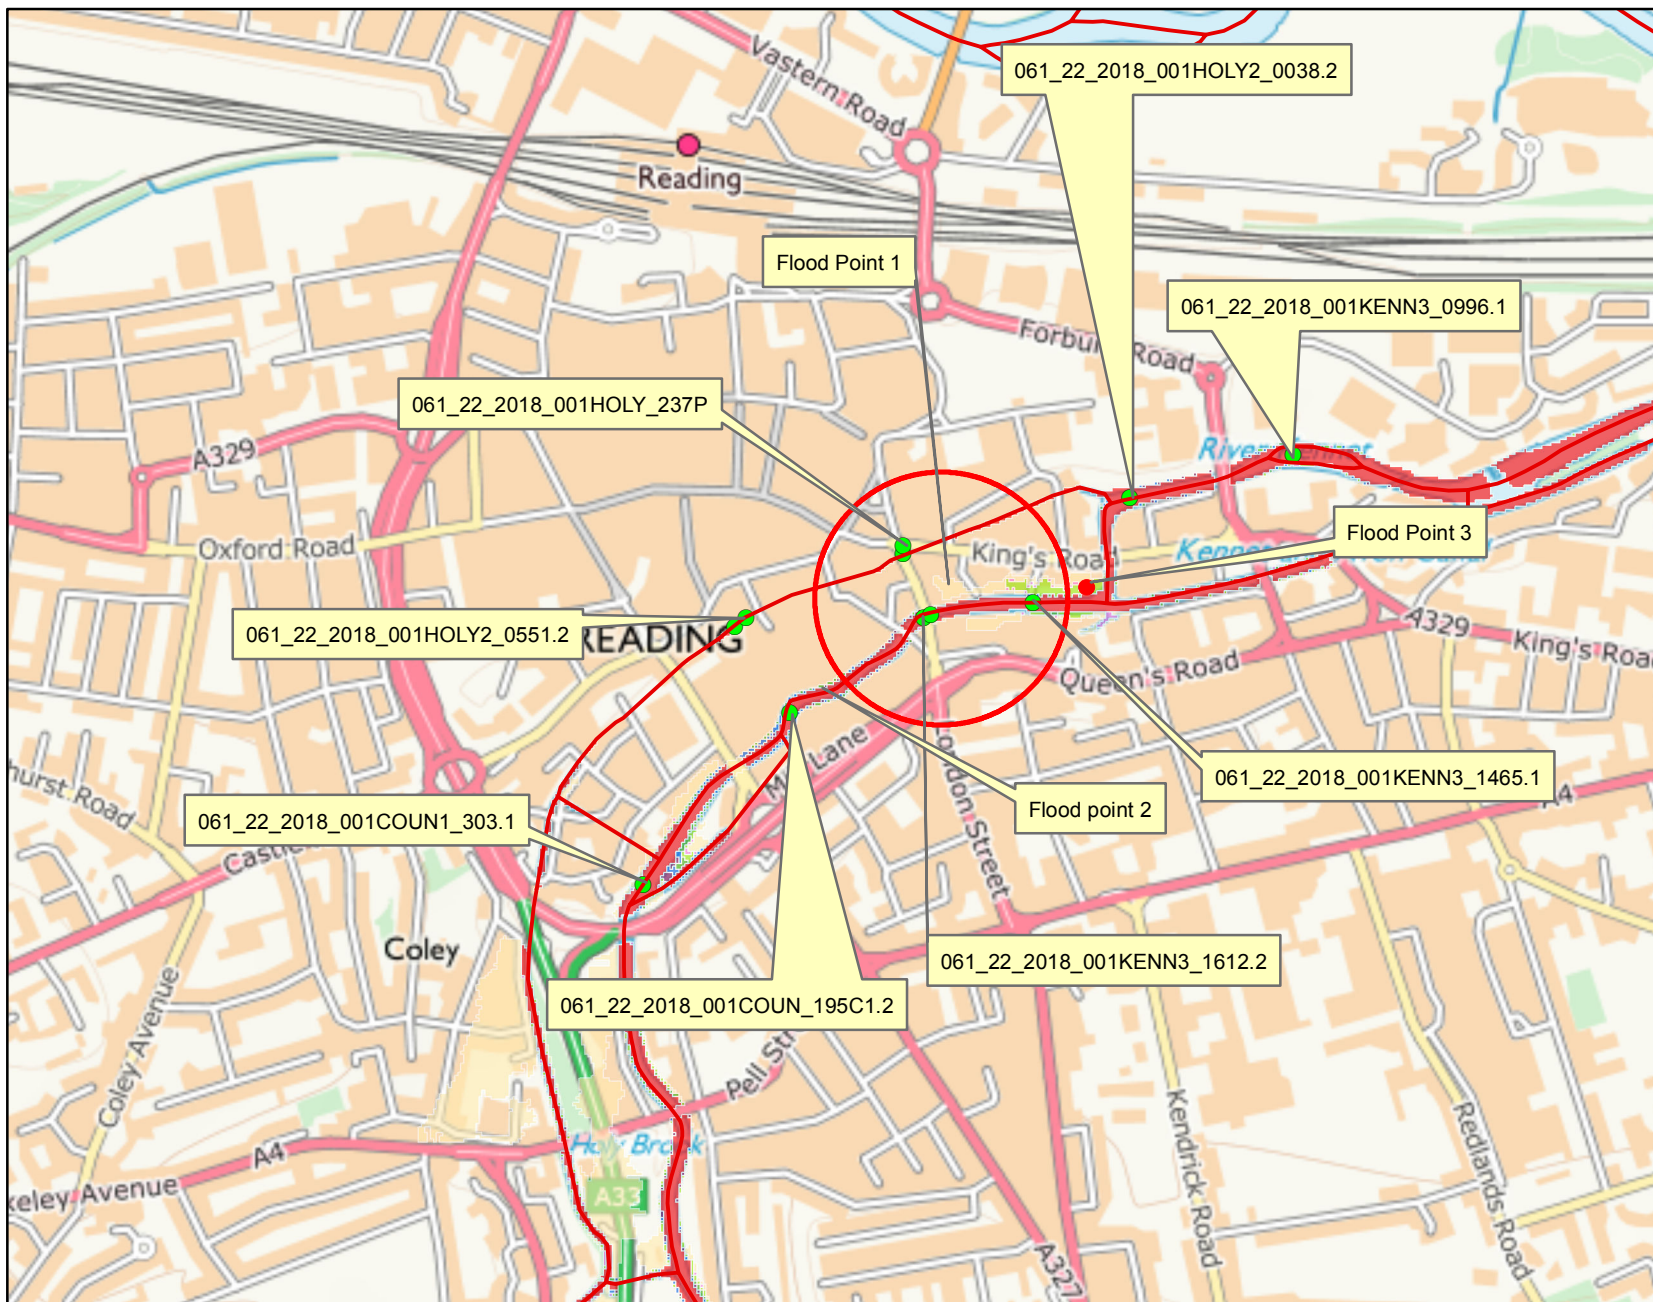

Kilometres



Legend

- Main River
- THM Model Node Data selection
- 50% AEP Flood Outline
- 20% AEP Flood Outline
- 5% AEP Flood Outline
- 1% AEP Flood Outline
- 1%+25% CC AEP Flood Outline
- 1%+35% CC AEP Flood Outline
- 1%+70% CC AEP Flood Outline
- 0.1% AEP Flood Outline

AEP = Annual Exceedance Probability
The probability of a flood of a particular magnitude, or greater, occurring in any given year

Where available climate change extents have been calculated with an additional flow added to an AEP event. An example of how this is written is 1%+20% AEP.

Modelled in-channel flood flows and levels

THM121205

The modelled flood levels and flows for the closest most appropriate model node points for your site that are within the river channel are provided below:

Node label	Model	Easting	Northing	Flood Levels (mAOD)						
				20% AEP	5% AEP	1% AEP	1% AEP (+25% increase in flows)	1% AEP (+35% increase in flows)	1% AEP (+70% increase in flows)	0.1% AEP
061_22_2018_001KENN3_0996.1	Kenet (Tyle Mill to Thames Confluence) 2018	472246	173511	36.61	36.73	36.83	36.98	37.02	37.19	37.05
061_22_2018_001HOLY2_0038.2	Kenet (Tyle Mill to Thames Confluence) 2018	472031	173454	36.66	36.79	36.91	37.08	37.12	37.31	37.15
061_22_2018_001KENN3_1465.1	Kenet (Tyle Mill to Thames Confluence) 2018	471903	173315	36.75	36.91	37.06	37.27	37.33	37.55	37.36
061_22_2018_001HOLY_237P	Kenet (Tyle Mill to Thames Confluence) 2018	471731	173380	37.15	37.15	37.16	37.23	37.30	37.49	37.34
061_22_2018_001KENN3_1612.2	Kenet (Tyle Mill to Thames Confluence) 2018	471767	173300	36.81	36.99	37.16	37.39	37.45	37.70	37.49
061_22_2018_001HOLY2_0551.2	Kenet (Tyle Mill to Thames Confluence) 2018	471524	173295	37.45	37.46	37.47	37.56	37.64	37.81	37.68
061_22_2018_001COUN_195C1.2	Kenet (Tyle Mill to Thames Confluence) 2018	471581	173169	36.92	37.13	37.33	37.61	37.68	37.98	37.73
061_22_2018_001COUN1_303.1	Kenet (Tyle Mill to Thames Confluence) 2018	471388	172943	37.47	37.64	37.81	38.03	38.09	38.36	38.13

Node label	Model	Easting	Northing	Flood Flows (m3/s)						
				20% AEP	5% AEP	1% AEP	1% AEP (+25% increase in flows)	1% AEP (+35% increase in flows)	1% AEP (+70% increase in flows)	0.1% AEP
061_22_2018_001KENN3_0996	Kenet (Tyle Mill to Thames Confluence) 2018	472246	173511	27.22	34.80	42.44	53.98	57.14	70.79	59.27
061_22_2018_001HOLY2_0038	Kenet (Tyle Mill to Thames Confluence) 2018	472031	173454	27.22	34.80	42.44	53.98	57.14	70.79	59.27
061_22_2018_001KENN3_1465	Kenet (Tyle Mill to Thames Confluence) 2018	471903	173315	51.72	66.35	81.17	102.54	107.87	131.93	111.53
061_22_2018_001HOLY_237P	Kenet (Tyle Mill to Thames Confluence) 2018	471731	173380	2.50	2.56	2.60	3.14	3.63	4.57	3.95
061_22_2018_001KENN3_1612	Kenet (Tyle Mill to Thames Confluence) 2018	471767	173300	51.72	66.35	81.17	102.68	108.16	133.01	111.90
061_22_2018_001HOLY2_0551	Kenet (Tyle Mill to Thames Confluence) 2018	471524	173295	2.50	2.56	2.60	3.14	3.61	4.57	3.85
061_22_2018_001COUN_195C	Kenet (Tyle Mill to Thames Confluence) 2018	471581	173169	51.72	66.35	81.17	102.65	108.17	133.01	111.91
061_22_2018_001COUN1_303	Kenet (Tyle Mill to Thames Confluence) 2018	471388	172943	50.32	65.07	80.00	101.68	107.17	131.55	110.75

Note:

Due to changes in guidance on the allowances for climate change, the 20% increase in river flows should no longer to be used for development design purposes. The data included in this Product can be used for interpolation of levels as part of an intermediate level assessment.

For further advice on the new allowances please visit
<https://www.gov.uk/guidance/flood-risk-assessments-climate-change-allowances>

Modelled floodplain flood levels

THM121205

The modelled flood levels for the closest most appropriate model grid cells for your site are provided below:

2D grid cell reference	Model	Easting	Northing	flood levels (mAOD)						
				20% AEP	5% AEP	1% AEP	1% AEP (+25% increase in flows)	1% AEP (+35% increase in flows)	1% AEP (+70% increase in flows)	0.1% AEP
Flood Point 1	Kennet (Tyle Mill to Thames Confluence) 2018	471,974	173,336						37.48	
Flood Point 2	Kennet (Tyle Mill to Thames Confluence) 2018	471,717	173,262	36.85	37.04	37.23	37.49	37.55	37.84	37.60
Flood Point 3	Kennet (Tyle Mill to Thames Confluence) 2018	471,979	173,331				37.21	37.26	37.47	37.29

This flood model has represented the floodplain as a grid.
The flood water levels have been calculated for each grid cell.

Note:


Due to changes in guidance on the allowances for climate change, the 20% increase in river flows should no longer be used for development design purposes. The data included in this Product can be used for interpolation of levels as part of an intermediate level assessment.

For further advice on the new allowances please visit


<https://www.gov.uk/guidance/flood-risk-assessments-climate-change-allowances>

Historic Flood Map centred on Duke Street, Reading, RG1 4SA

Created on 25/03/19 REF: THM121205

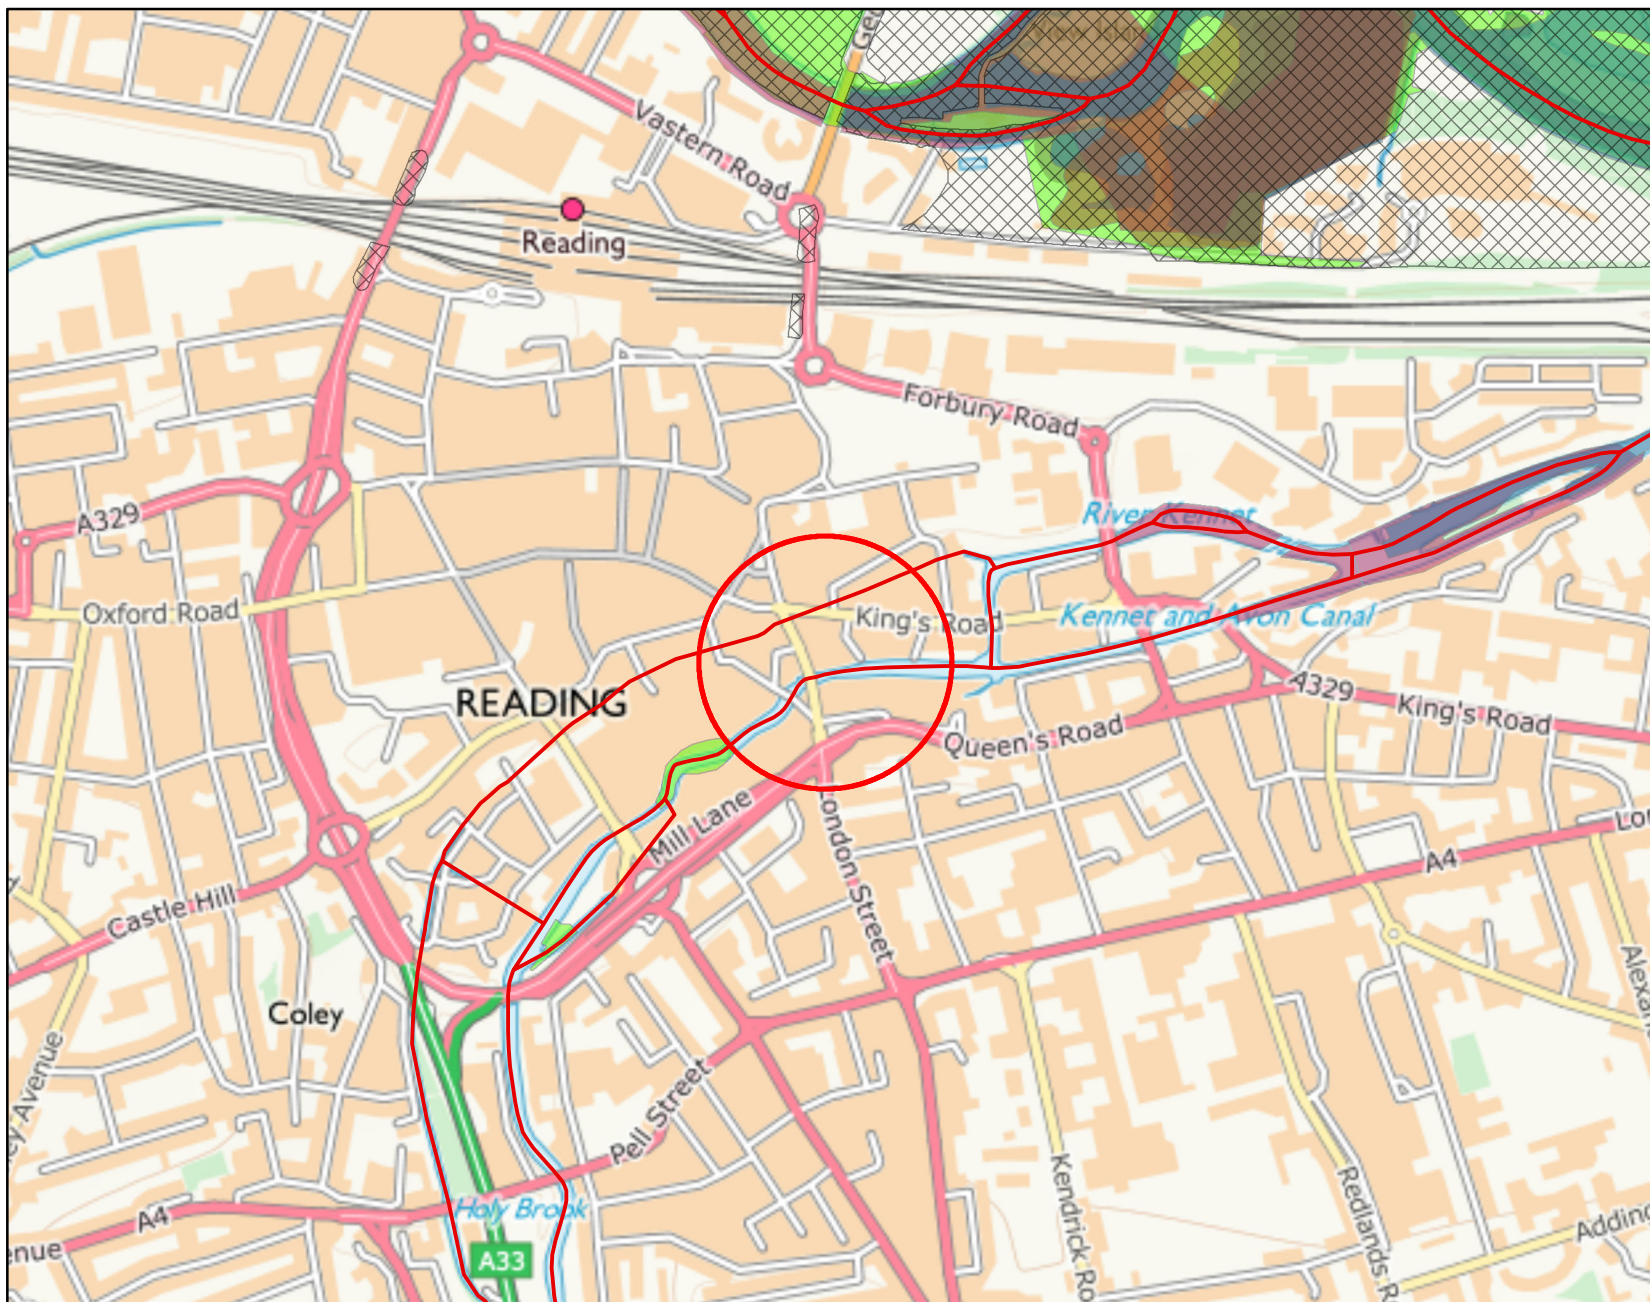


Kilometres



Legend

— Main River

year



Flooding from rivers or sea without defences (Flood Zone 3) shows the area that could be affected by flooding:

- from the sea with a 1 in 200 or greater chance of happening each year
- or from a river with a 1 in 100 or greater chance of happening each year.

The Extent of an extreme flood (Flood Zone 2) shows the extent of an extreme flood from rivers or the sea with up to a 1 in 1000 chance of occurring each year.

Historic flood data

THM121205

Our records show that the area of your site has been affected by flooding.
Information on the floods that have affected your site is provided in the table below:


Flood Event Code	Flood Event Name	Start Date	End Date	Source of Flooding	Cause of Flooding
EA0619470300429	06MarchSpring1947	01/01/1947	12/12/1947	main river	channel capacity exceeded (no raised defences)
EA0619741100405	06NovemberAutumn1974	01/01/1974	12/12/1974	main river	channel capacity exceeded (no raised defences)
EA0619770800238	06AugustSummer1977	01/01/1977	12/12/1977	main river	channel capacity exceeded (no raised defences)
EA0620001200995	06DecemberWinter2000	01/01/2000	12/12/2000	main river	channel capacity exceeded (no raised defences)
EA0620030101899	06JanuaryNewYear2003	23/12/2002	12/01/2003	main river	channel capacity exceeded (no raised defences)
ea061231477	Shiplake CP_Fluvial Wate	19/07/2007	29/07/2007	main river	channel capacity exceeded (no raised defences)

Please note the Environment Agency maps flooding to land not individual properties. Floodplain extents are an indication of the geographical extent of a historic flood. They do not provide information regarding levels of individual properties, nor do they imply that a property has flooded internally.

Start and End Dates shown above may represent a wider range where the exact dates are not available.

Breach Hazard Map centred on Duke Street, Reading, RG1 4SA

Created on 25/03/19 REF: THM121205

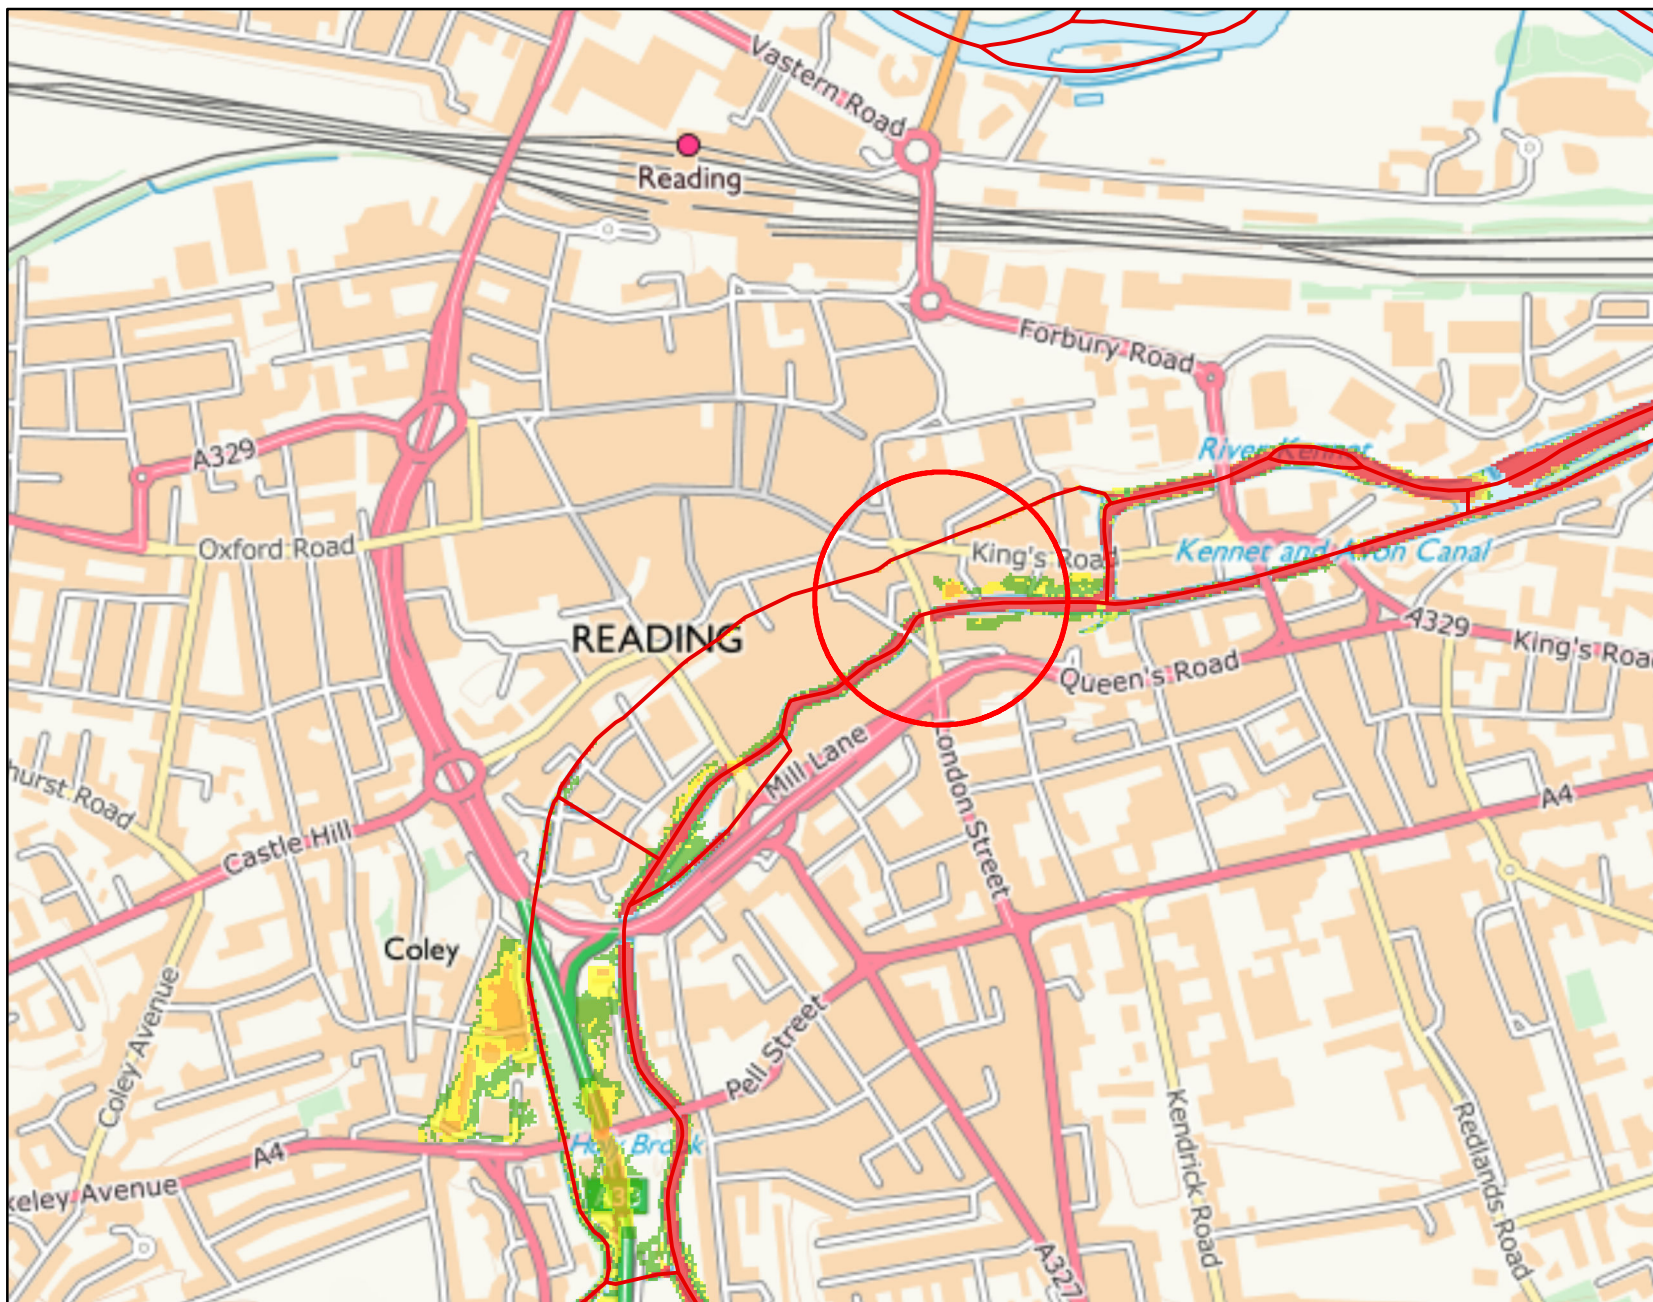

Kilometres

0 0.25 0.5

AEP = Annual Exceedance Probability
The probability of a flood of a particular magnitude, or greater, occurring in any given year

Where available climate change extents have been calculated with an additional flow added to an AEP event. An example of how this is written is 1%+20% AEP.

Hazard Mapping

Hazard Mapping methodology:

To calculate flood hazard with the debris factor we have used the supplementary note to Flood Risk to People Methodology (see below).

The following calculation is used:

$$HR = d \times (v+0.5) + DF$$

Where HR = flood hazard rating

d = depth of flooding (m)

v = velocity of floodwaters (m/sec)

DF = debris factor calculated (0, 0.5, 1 depending on probability that debris will lead to a hazard)

The resultant hazard rating is then classified according to:

Flood Hazard	Colour	Hazard to People Classification
Less than 0.75	Green	Very low hazard - Caution
0.75 to 1.25	Yellow	Danger for some - includes children, the elderly and the infirm
1.25 to 2.0	Orange	Danger for most - includes the general public
More than 2.0	Red	Danger for all - includes the emergency services

REF: HR Wallingford and Environment Agency (May 2008) Supplementary note of flood hazard ratings and thresholds for development planning and control purpose – Clarification of the Table 113.1 of FD2320/TR2 and Figure 3.2 of FD2321/TR1