

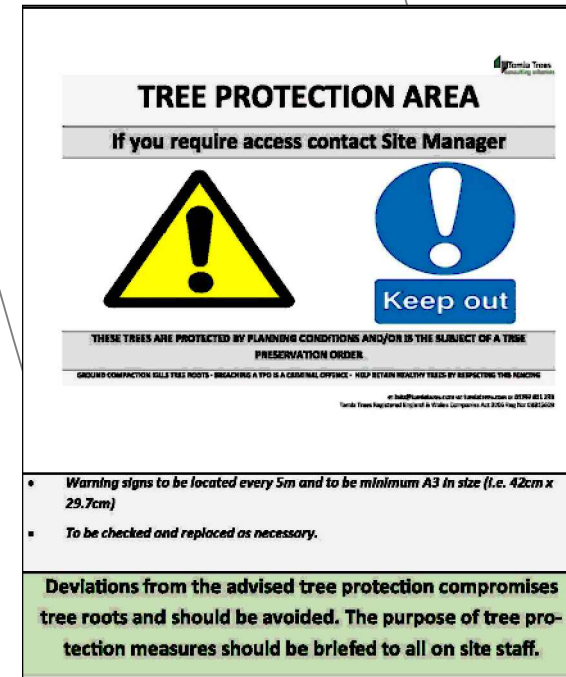


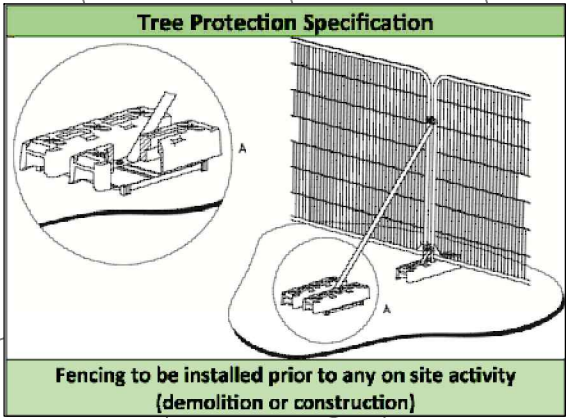

- Stage 1**
- Install Tree Protective Fencing.
 - Install Temporary Ground Protection.
- Stage 2**
- Include tree protection in site induction briefing.
 - Undertake & Record Weekly Check.
 - Remove garage floor slab - install screw piles & new slab.
- Stage 3**
- Maintain protection until all site works complete.
 - Remove Fencing.
 - BS3882 compliant topsoil to 'make good'.

11

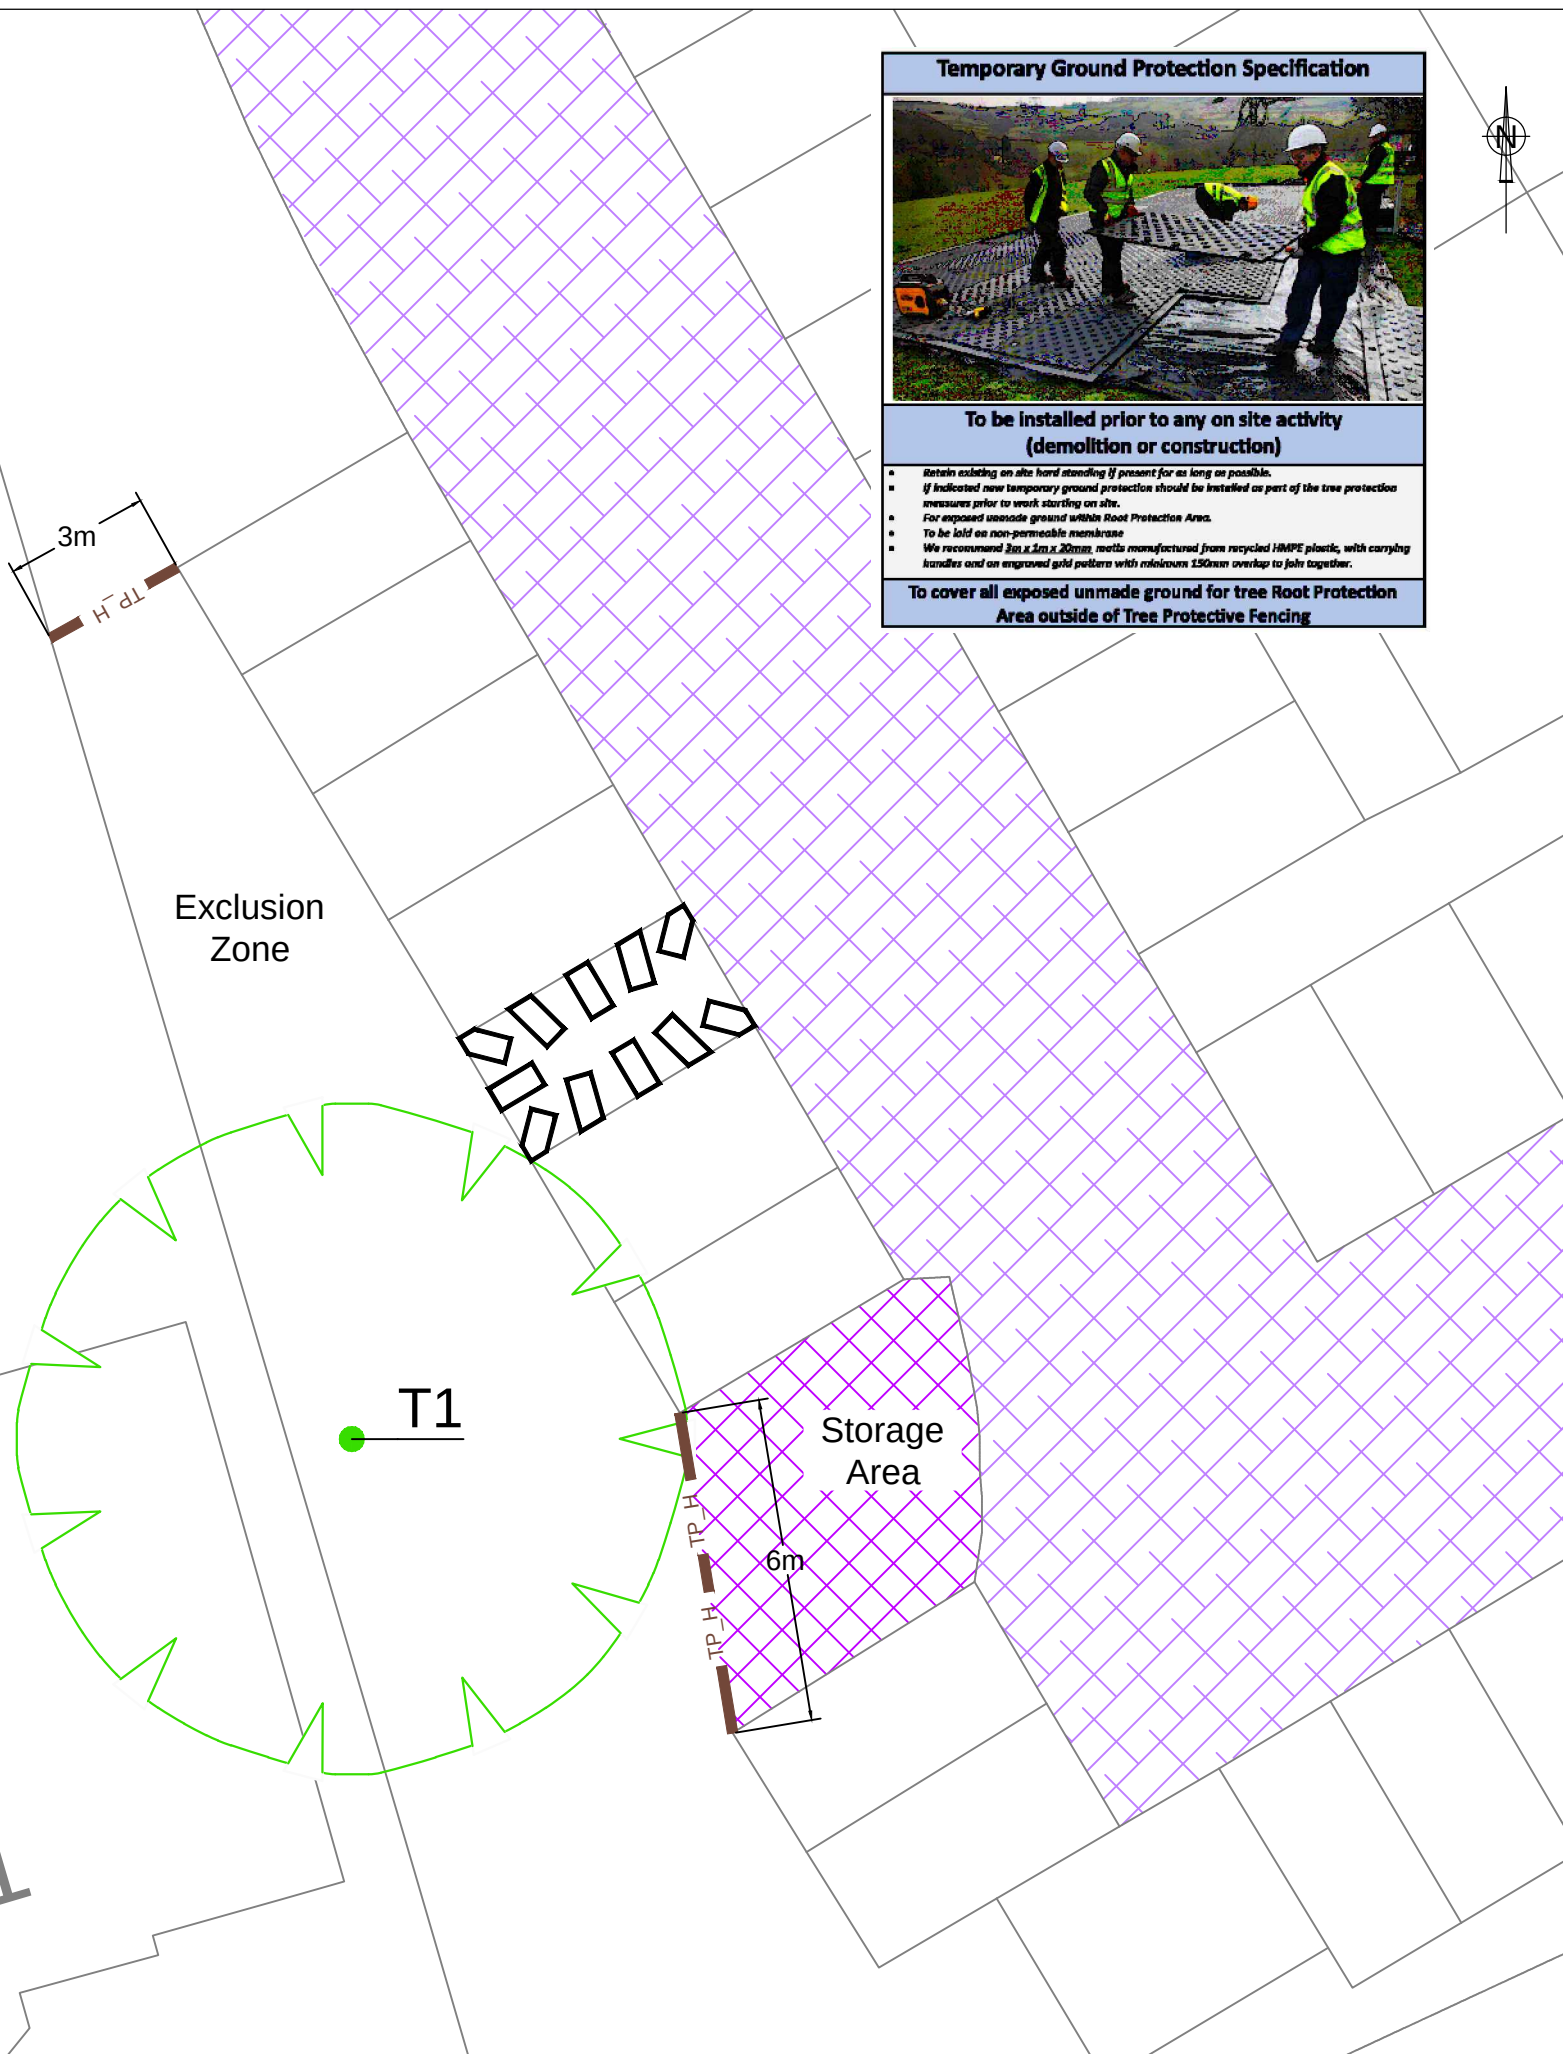

KEY

- TP_H Location of protective fencing - BS 5837 Herras Fence (or similar)
- Temporary Ground Protection to be utilised where existing hard standing is not in place
- Approximate area of existing hard standing
- Internal screwpile raft underpinning

NOTE # Tree positions indicatively mapped due to lack of detailed topographical plan

REV AMENDMENTS DRAWN DATE AUTH'D

PROJECT

**11 Hollins Walk (Garage),
Reading,
RG30 2BU**

CLIENT
William Hunt Consulting


TITLE
**Tree Protection Plan (TPP)
Underpinning Installation**

Job	05503R	Scale	1:150 @ A3	DRG NO		Revision	
Date	11/02/2026	Type	a	05503P_TPP_01		-	

Tel: 01252 811 233
Email: info@tamlatrees.com
Web: www.tamlatrees.com

Tamla Trees
consulting arborists

Tree Protection Specification

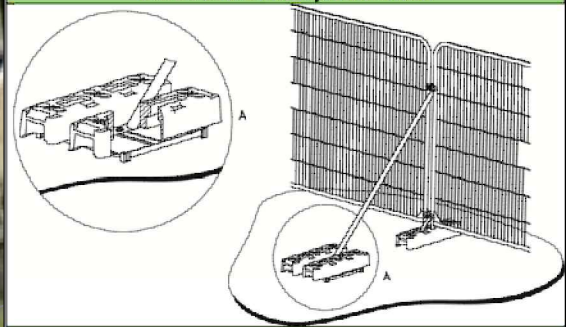

Fencing to be installed prior to any on site activity (demolition or construction)

TREE PROTECTION AREA
If you require access contact Site Manager



THESE TREES ARE PROTECTED BY PLANNING CONDITIONS AND/OR IS THE SUBJECT OF A TREE PRESERVATION ORDER.

GROUND COMPACTION WILL HARM ROOTS - BREACHING A TPO IS A CRIMINAL OFFENCE - KEEP RETAIN HEALTHY TREES BY RESPECTING THIS FENCING

at Tamlatrees.com or 01252 811 233
Tamlatrees Registered Supplier to the UK's Forestry Commission since 2004

- Warning signs to be located every 5m and to be minimum A3 in size (i.e. 42cm x 29.7cm)
- To be checked and replaced as necessary.

Deviations from the advised tree protection compromises tree roots and should be avoided. The purpose of tree protection measures should be briefed to all on site staff.

Stage 1


- Install Tree Protective Fencing.
- Install Temporary Ground Protection.

Stage 2

- Include tree protection in site induction briefing.
- Undertake & Record Weekly Check.
- Remove garage floor slab - install screw piles & new slab.

Stage 3

- Maintain protection until all site works complete.
- Remove Fencing.
- BS3882 compliant topsoil to 'make good'.

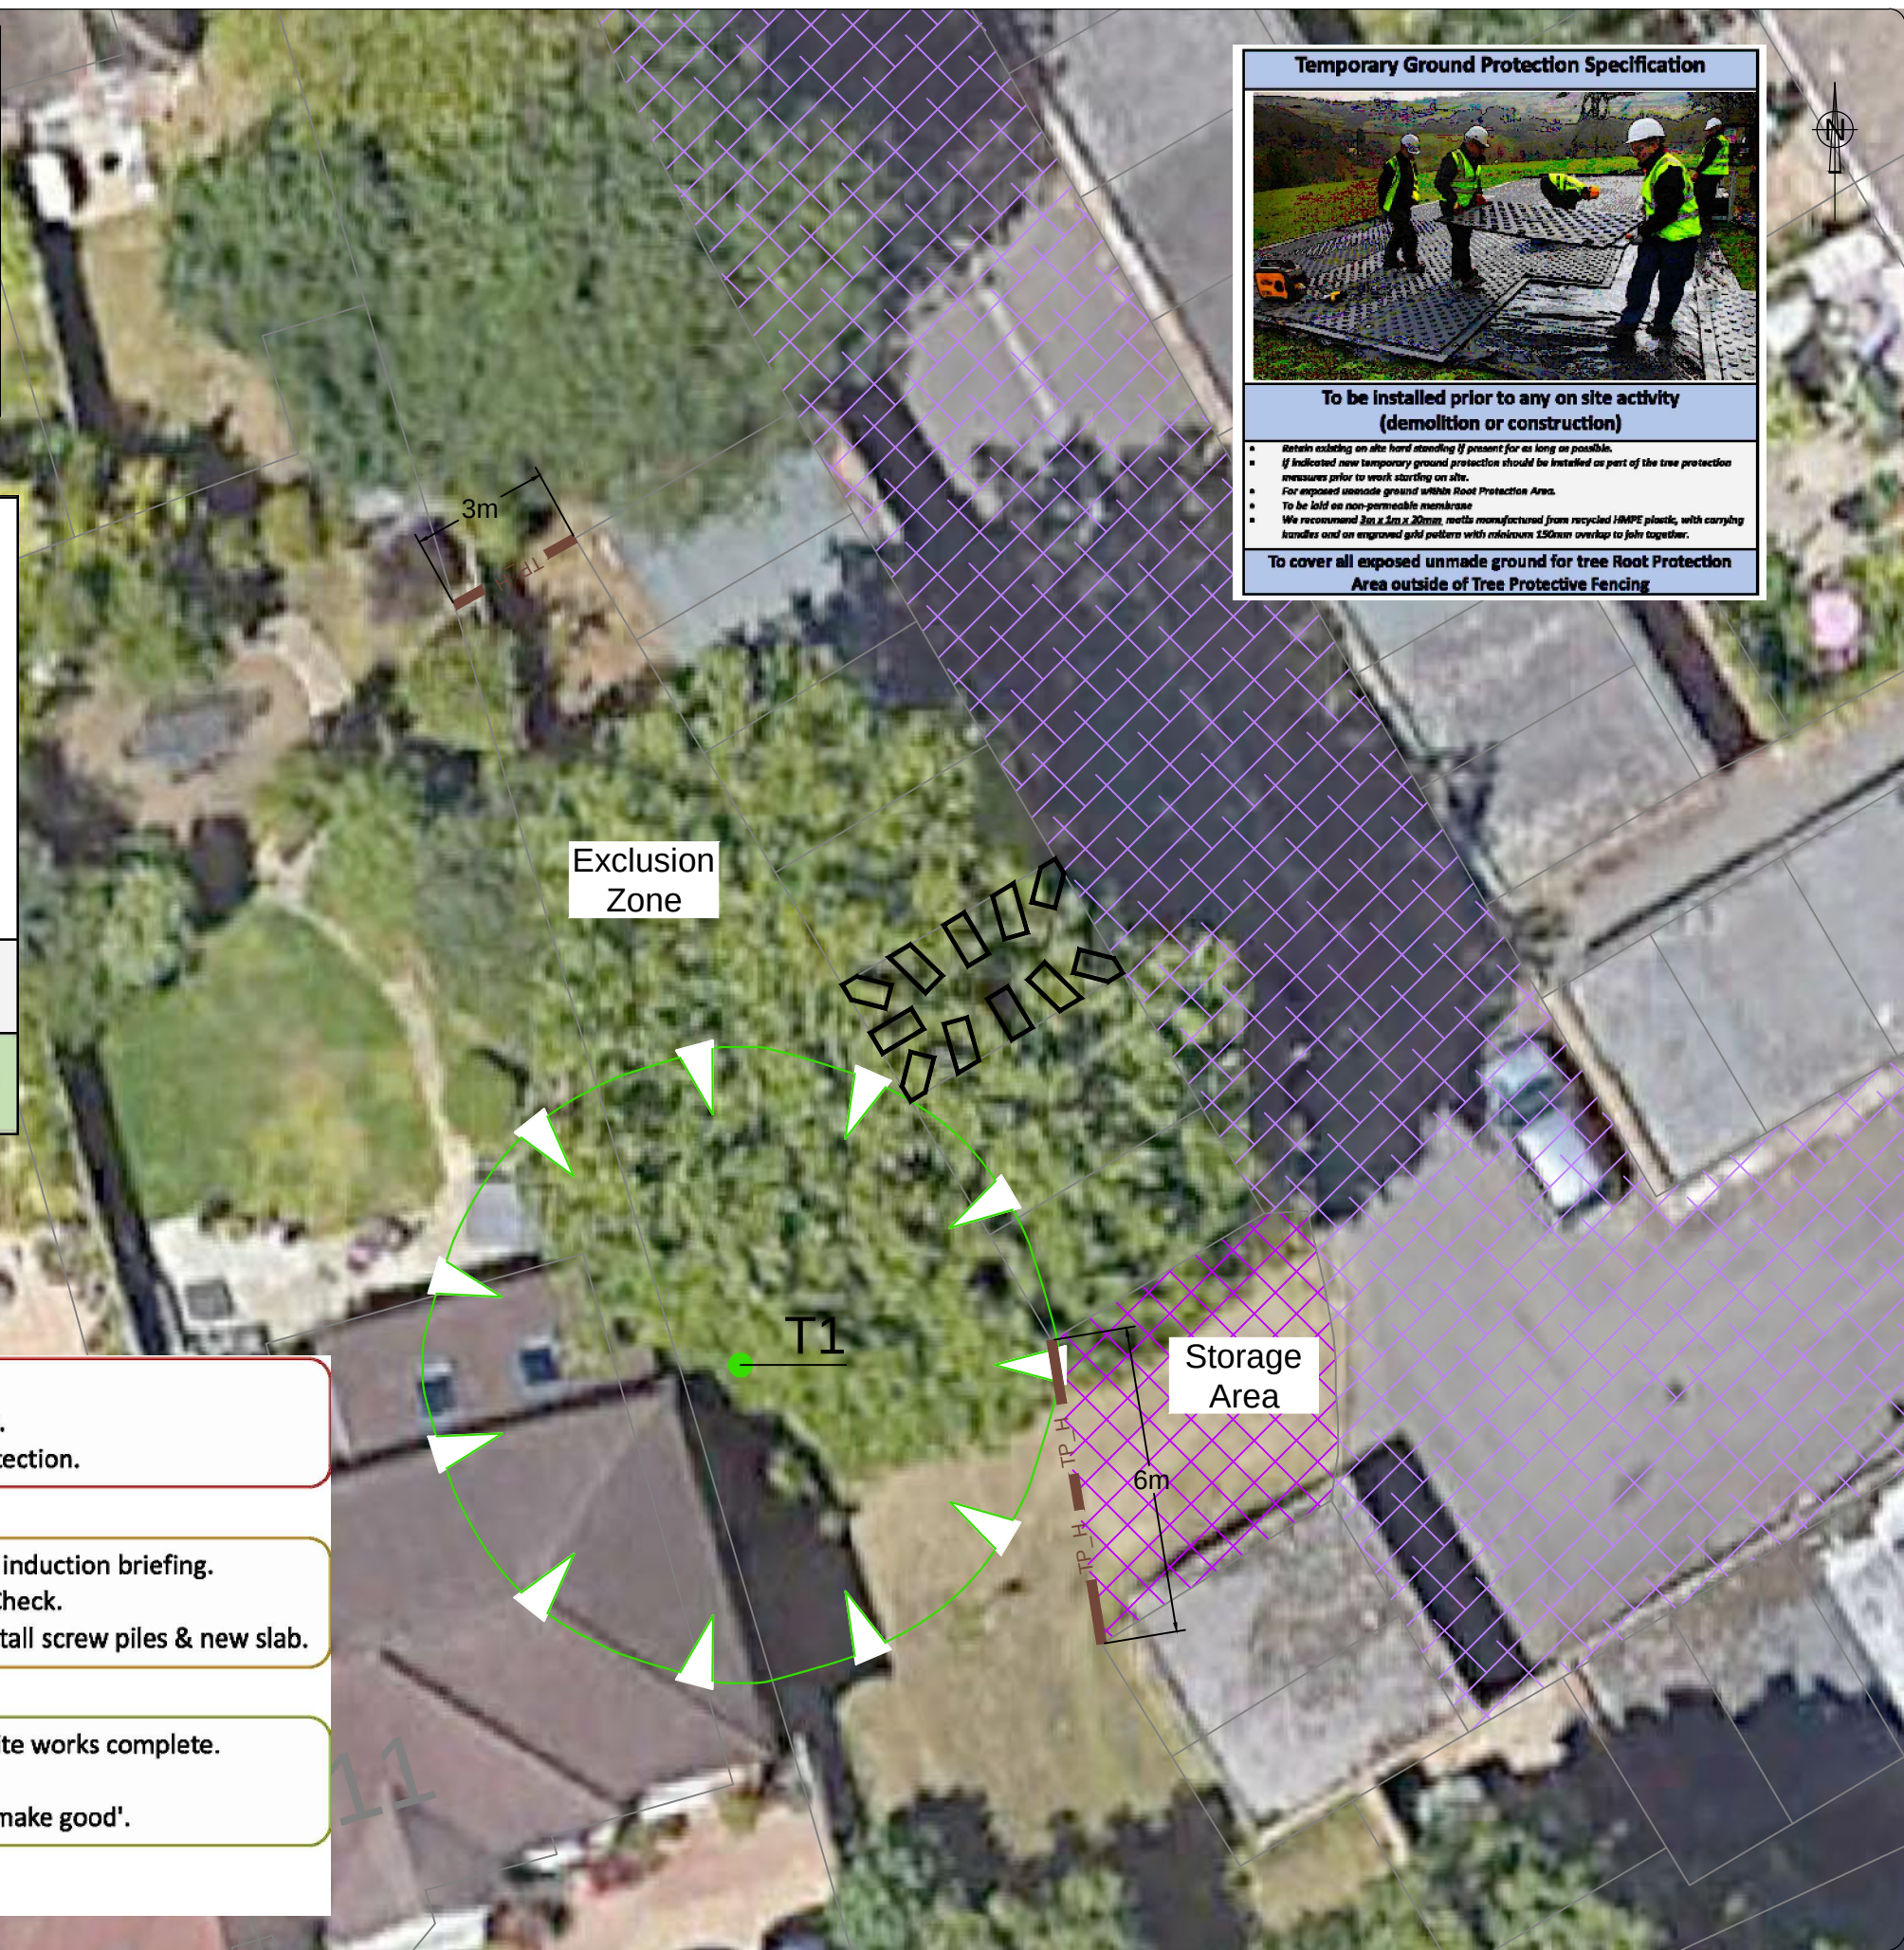

Temporary Ground Protection Specification



To be installed prior to any on site activity (demolition or construction)

- Retain existing on site hard standing if present for as long as possible.
- If indicated new temporary ground protection should be installed as part of the tree protection measures prior to work starting on site.
- For exposed unmade ground within Root Protection Area.
- To be laid on non-permeable membrane
- We recommend 2m x 2m x 20mm, mats manufactured from recycled HMPE plastic, with carrying handles and an engraved grid pattern with minimum 150mm overlap to join together.

To cover all exposed unmade ground for tree Root Protection Area outside of Tree Protective Fencing

COPYRIGHT RESERVED
DO NOT SCALE FROM THIS DRAWING

KEY

- TP_H Location of protective fencing - BS 5837 Herras Fence (or similar)
- Temporary Ground Protection to be utilised where existing hard standing is not in place
- Approximate area of existing hard standing
- Internal screwpile raft underpinning

NOTE # Tree positions indicatively mapped due to lack of detailed topographical plan

REV	AMENDMENTS	DRAWN	DATE	AUTH'D

PROJECT
11 Hollins Walk (Garage), Reading, RG30 2BU

CLIENT
William Hunt Consulting

TITLE
Tree Protection Plan (TPP) Underpinning Installation

Job	Scale	DRG NO	Revision
05503R	1:150 @ A3	05503P_TPP_02	-
Date	Type		
11/02/2026	a		

Tel: 01252 811 233
Email: info@tamlatrees.com
Web: www.tamlatrees.com

Tamla Trees
consulting arborists