




OCTANS P10

Octans P10 lamp is a perfect replacement for the standard 36 W 2D CFL, consuming 18W of power, offering at least 50% saving in energy. This luminaire is aesthetically pleasing, is strong, durable, weather resistant and with an IP54 body is suitable for certain outdoor environments. The emergency version of the lamp (-EM) is fitted with a built-in emergency kit to enable it to operate as an emergency light when required.

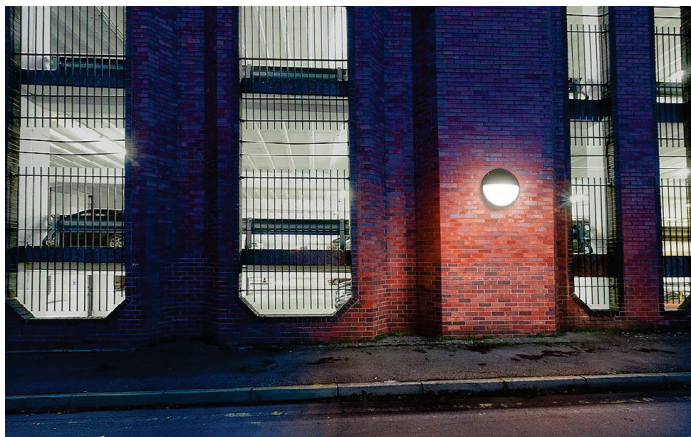

APPLICATIONS

- Certain outdoor settings
- Corridors
- Stairwells
- General residential or commercial lighting

40,000
hours
lifespan

50%
less
energy

£9.1
energy
saved

35kg
less
CO₂

0 light
changes
in 9 yrs



Calculations assume:

- 1 year comparison period
- 12 hrs / day, 7 days / week operation
- comparison with 36W 2D CFL fluorescent lamp
- energy cost: 11.5 p / kWh
- carbon conversion factor: 1 kWh = 0.445 kg CO₂

¹ The guarantee period for the emergency version battery (-EM versions only) is 1 year

SPECIFICATIONS

PRODUCT CODE	CASE COLOUR	CASE TYPE	POWER CONSUMPTION	COLOUR TEMPERATURE	LUMEN OUTPUT	LIGHT SOURCE	LIFETIME
LY-OCP10-18W-40-BCTE-CBL *	Black	“Eyelid”	18 W	4000 K	1080 lm (open type)	Epistar SMD LED	40.000 hrs **
LY-OCP10-18W-40-BCTE-CGR *	Grey						
LY-OCP10-18W-40-BCTO-CBL *	Black	“Open”					
LY-OCP10-18W-40-BCTO-CGR *	Grey						
VOLTAGE	OPERATING TEMPERATURE	AMBIENT TEMP. FOR MAX. PERF.	MATERIAL	IP RATING	DIMENSIONS		
110-240V, 50/60Hz	-20 °C – 40 °C	25 °C	Body: aluminium die cast; diffuser: polycarbonate	IP54	Ø275 x 85mm		

* Please indicate, optionally:
-EM (emergency version)

** 70% lumen maintenance at Ta = 25 °C

CE IP54 RoHS

DIMENSIONS

