



38mm PITCH LOUVRES

38mm PITCH LOUVRES

Series WG38 with its 38mm Pitch fixed Blades represents the smallest Louvre profile available in this system. This unit was designed to provide a neat and compact appearance for smaller Louvre applications combined with a convenient low size to weight ratio for easy handling. The profile of the Louvre ensures it offers good resistance to the ingress of rain even with its high 50% free area. Both flanged and recessed channel frame options can be selected along with standard bird guard, insect screen and weather cill accessories.

SERIES OPTIONS

WGF/38: Comprises of 16 SWG Louvres on 38mm centres in a 32mm wide Flanged Frame.

WGC/38: Comprises of 16 SWG Louvres on 38mm centres in a 38mm deep Channel Frame.

SIZE RANGE

Available sizes range from 100mm square up to 1750mm square in one unit. Above this size Louvres are supplied as multiple units with a continuous appearance for assembly on site.

(NB: On multiple assemblies the Frame/Flange size increases to 50mm angle).

FIXING

WGF/38: Flange screw fixing using the pre-drilled 4mm countersunk holes. Flanges can be supplied un-drilled upon request.

WGC/38: Rear fixing cleats mounted off the housing frame to facilitate screw fixing into adjacent timber, masonry or duct.


FINISH

The standard Louvre finish is mill finish (ie: un-treated). Polyester Powder Coatings, PVF and Anodised Finishes are also available on request.

LENGTH OF BLADE	VERTICAL MULLION WHEN REQUIRED
Up to 750	None
Over 750 - 1500	One
Over 1500	One every 750 pitch


NB: If Louvre is powder coated, Mullion pitch must be 500mm

FLANGE FACE FIXING DETAILS	
W-H Dim.	A Dim.
Up to 500	75.0
500 to 1750	150.0
1800 & over 150 & centre fixing holes	


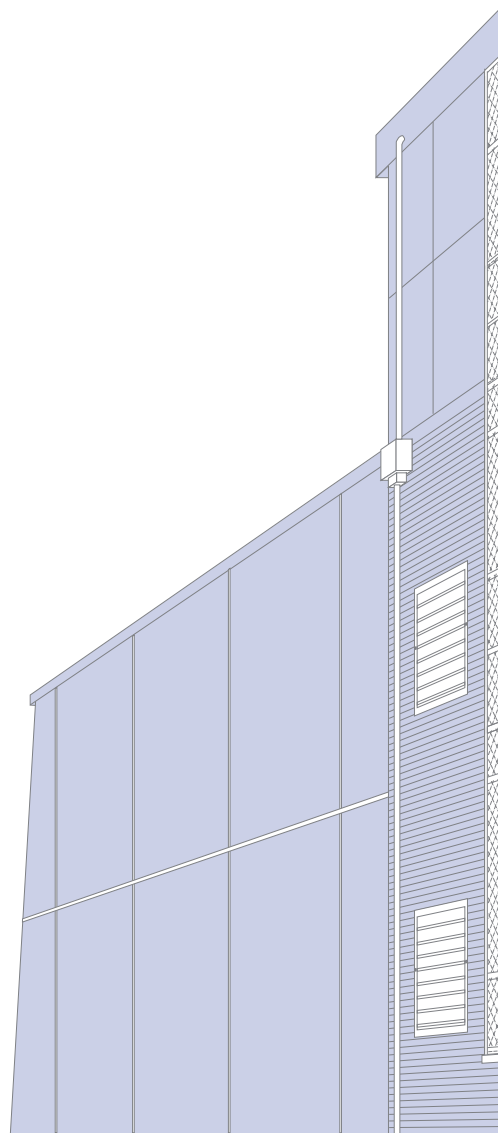


WG-38 SERIES


WGF -38

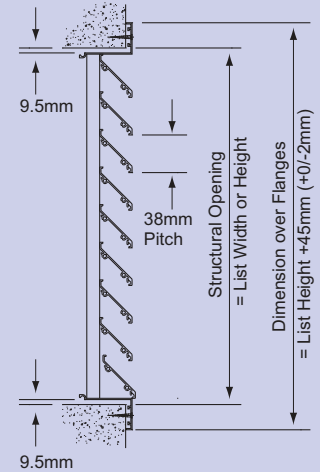


WGC -38

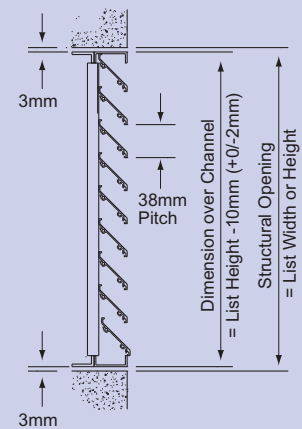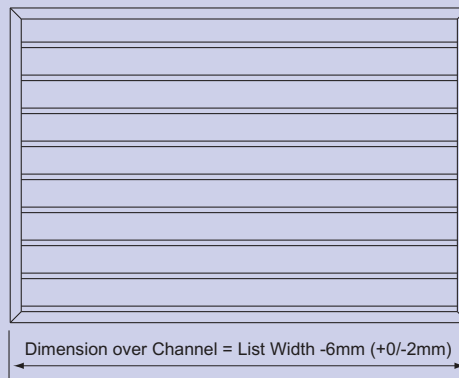

WGF -38



WGC -38

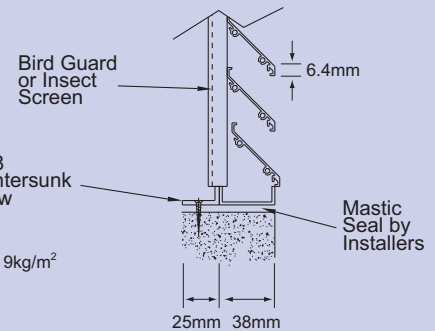

WEIGHT 9kg/m²

SERIES:	Flanged - WGF Channel Frame - WGC	WGC
BLADE PITCH:	38mm	38
SIZE:	(mm Width x Height)	1200 x 800
OPTIONS:	Birdguard - BG Insect Screen - IS	BG
EXTRA OPTIONS:	Weather Cill - WC	WC
SPECIAL FIXING OPTIONS:	Rear Lug Fixing - RLF	RLF
BLANKING PLATE OPTIONS:	Standard - SBP Insulated - IBP	SBP
FINISH:	(Please Specify)	Mill Finish (Standard Finish)
NUMBER REQUIRED:		15