

AFP534

127-0812

1/7



Description



IP55, Class I. IK10. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gaskets. Polycarbonate main lens. Anodised aluminium reflector, for beam efficiency and glare control. Recommended mounting height 3,0-4,5 m, depending on lamp type selected. Brackets to be ordered seperately.

Beam Type	asymmetric, side throw beam
Lamp Type	HIE-CE 70W/m/830 E27
Gear Type	HPF
Nominal Lumen (lm)	6700

AFP534

127-0812

2/7

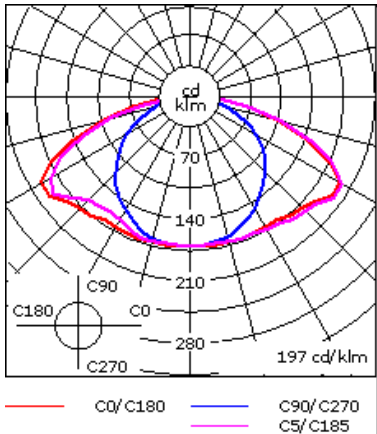

Material Specification

Body:	Marine-grade die-cast aluminium alloy
Weight (kg):	8.00
Lens:	Polycarbonate
Gasket:	Silicone rubber gasket
Fasteners:	PCS Polymer Coated Stainless Steel Hardware
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Finish:	Powdercoat finish in RAL 7016, RAL 9004, RAL 9006, RAL 9007 and RAL 9016
Windage (EPA):	0.0898 m ²

Electrical Specification


Power supply:	220-240V / 50-60 Hz
Ballast:	Integral HPF or ECG control gear

Mounting Accessories


Wall and pole brackets BA

Wall and pole mounted brackets for pendant luminaires. Corrosion resistant all aluminium construction.


	D x L	C1	H1	Weight (kg)
■ 300-0099 BA1-420 Pole bracket, single	76 x 80	420	1000	4.00



	D x L	C1	H1	Weight (kg)
■ 300-0104 BA2-420 Pole bracket, double	76 x 80	500	1000	8.00



	D x L	C1	H1	Weight (kg)
■ 300-0109 BA3-420 Pole bracket, triple	76 x 80	500	1000	10.00




AFP534

127-0812

4/7

we-ef


	C1	H1	H2	M1	Weight (kg)
■ 300-0152 BA0-420 Wall bracket, single	460	1000	300	9	2.00




Wall and pole brackets BC

Wall and pole mounted brackets for pendant luminaires. Corrosion resistant all aluminium construction.


	C1	H1	H2	M1	Weight (kg)
■ 300-0767 BC2-420 Pole bracket, double	500	1230	300	8	4.60



	C1	H1	H2	M1	Weight (kg)
■ 300-0768 BC1-420 Pole bracket, single	500	1230	300	8	2.30



	C1	H1	H2	M1	Weight (kg)
■ 300-0808 BC0-420 Wall bracket, single	460	1230	132	8	2.30



AFP534

127-0812


we-ef

5/7


Wall and pole brackets DA

Wall and pole mounted brackets for pendant luminaires. Corrosion resistant all aluminium construction.


		D x L	C1	H1	Weight (kg)
■ 300-0138	DA1-500 Pole bracket, single	76 x 80	510	700	5.70




		D x L	C1	H1	Weight (kg)
■ 300-0141	DA2-500 Pole bracket, double	76 x 80	510	700	8.30



		D x L	C1	H1	Weight (kg)
■ 300-0144	DA3-500 Pole bracket, triple	76 x 80	510	700	10.90



		C2	C1	H1	Weight (kg)
■ 300-0146	DA0-500 Wall bracket, single	70	510	650	5.70



AFP534

127-0812


6/7

we-ef


Wall and pole brackets DB

Wall and pole mounted brackets. Corrosion resistant all aluminium construction.


	C2	C1	H1	Weight (kg)
■ 300-0169 DB0-500 Wall bracket, single	70	510	650	5.50




	D x L	C1	H1	Weight (kg)
■ 300-0190 DB1-500 Pole bracket, single	76 x 80	510	700	5.50



	D x L	C1	H1	Weight (kg)
■ 300-0192 DB3-500 Pole bracket, triple	76 x 80	510	700	10.30



	D x L	C1	H1	Weight (kg)
■ 300-0191 DB2-500 Pole bracket, double	76 x 80	510	700	7.90



AFP534

127-0812


7/7

we-ef


Wall and pole brackets DS

Wall and pole mounted brackets. Corrosion resistant all aluminium construction.


		D x L	C1	H1	Weight (kg)
■ 300-0063	DS1-500 Pole bracket, single	76 x 80	510	725	3.90



		C2	C1	H1	Weight (kg)
■ 300-0064	DS0-500 Wall bracket, single	70	510	650	2.50



		D x L	C1	H1	Weight (kg)
■ 300-0066	DS2-500 Pole bracket, double	76 x 80	510	725	5.30



		D x L	C1	H1	Weight (kg)
■ 300-0069	DS3-500 Pole bracket, triple	76 x 80	510	725	6.70

